US012388498B2

(12) **United States Patent**
Li et al.

(10) **Patent No.:** **US 12,388,498 B2**
(45) **Date of Patent:** **Aug. 12, 2025**

(54) **METHOD, APPARATUS, AND COMPUTER READABLE MEDIA FOR ACKNOWLEDGEMENT IN WIRELESS NETWORKS**

(71) Applicant: **AX Wireless, LLC**, Austin, TX (US)

(72) Inventors: **Guoqing C. Li**, Portland, OR (US); **Robert J. Stacey**, Portland, OR (US)

(73) Assignee: **AX Wireless, LLC**, Austin, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/730,545**

(22) Filed: **Apr. 27, 2022**

(65) **Prior Publication Data**

US 2022/0255594 A1 Aug. 11, 2022

Related U.S. Application Data

(63) Continuation of application No. 16/256,842, filed on Jan. 24, 2019, now abandoned, which is a
(Continued)

(51) **Int. Cl.**
H04B 7/0452 (2017.01)
H04L 1/1607 (2023.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04B 7/0452** (2013.01); **H04L 1/1614** (2013.01); **H04L 1/18** (2013.01);
(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,466,964 B2 12/2008 Sondur
7,809,020 B2 10/2010 Douglas et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101166080 A 4/2008
CN 101207597 A 6/2008
(Continued)

OTHER PUBLICATIONS

Chinese Application Serial No. 201910217247.1, Office Action mailed May 6, 2021, With English translation, 12 pages.
(Continued)
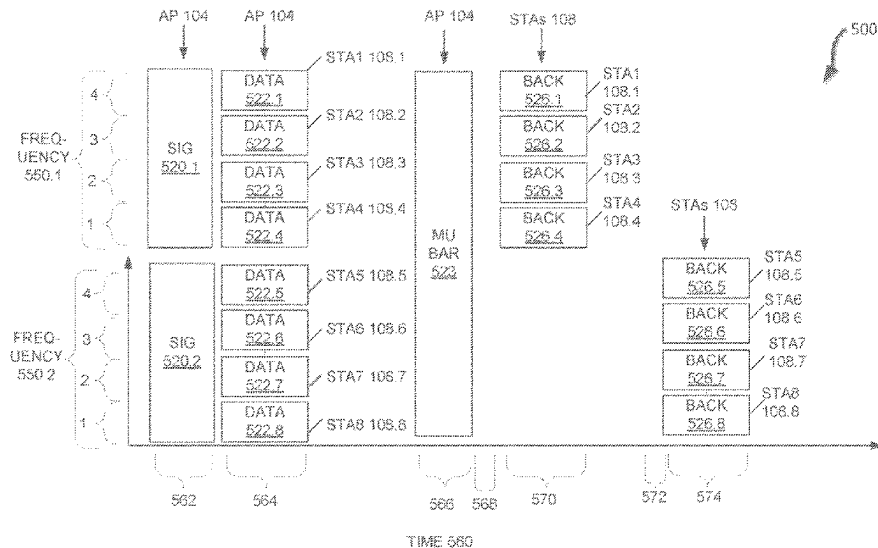
Primary Examiner — Mariela Vidal Carpio
(74) *Attorney, Agent, or Firm* — Sughrue Mion, PLLC

(57) **ABSTRACT**
Embodiments of a system and method for communicating acknowledgments in a wireless network are generally described herein. In some embodiments, a method of wirelessly communicating acknowledgements includes receiving a first signal on a first subchannel from a second wireless device. The method may include transmitting a block acknowledgement of the first signal on a subchannel. The first wireless communication device may not receive a block acknowledgement request to transmit the block acknowledgement. In some embodiments, a method of communicating block acknowledgements includes transmitting a first transmission to a first wireless device on a first subchannel and a second transmission to a second wireless device on a second subchannel The method may include receiving a first block acknowledgement from the first wireless device and a second block acknowledgement from second wireless device. The first and second block acknowledgement may be received on one of the first and second subchannels.

12 Claims, 10 Drawing Sheets

Related U.S. Application Data

continuation of application No. 14/498,385, filed on Sep. 26, 2014, now abandoned.

(60) Provisional application No. 61/990,414, filed on May 8, 2014.

(51) **Int. Cl.**

H04L 1/18	(2023.01)
H04L 1/1829	(2023.01)
H04L 1/1867	(2023.01)
H04L 5/00	(2006.01)
H04W 28/12	(2009.01)
H04W 72/1268	(2023.01)
H04W 72/1273	(2023.01)

(52) **U.S. Cl.**

CPC *H04L 1/1854* (2013.01); *H04L 1/1861* (2013.01); *H04L 1/1896* (2013.01); *H04L 5/0055* (2013.01); *H04W 28/12* (2013.01); *H04W 72/1268* (2013.01); *H04L 1/1664* (2013.01); *H04L 1/1685* (2013.01); *H04L 5/0007* (2013.01); *H04W 72/1273* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,320,252	B2 *	11/2012	Derom	H04L 1/1832
				370/235
8,395,997	B2	3/2013	Banerjea et al.	
8,509,323	B2	8/2013	Nangia et al.	
8,560,009	B2	10/2013	Etemad	
8,948,064	B2	2/2015	Shahar	
8,976,741	B2 *	3/2015	Wentink	H04W 72/23
				370/329
8,989,158	B2	3/2015	Seok	
9,160,503	B2	10/2015	Kim et al.	
9,271,241	B2	2/2016	Kenney et al.	
9,325,463	B2	4/2016	Azizi et al.	
9,450,725	B2	9/2016	Azizi et al.	
9,462,504	B2	10/2016	Stephens et al.	
9,544,914	B2	1/2017	Azizi et al.	
9,615,291	B2	4/2017	Kenney et al.	
9,648,620	B2	5/2017	Tandra	
9,668,243	B1 *	5/2017	Gong	H04W 74/0825
9,680,603	B2	6/2017	Azizi et al.	
9,705,643	B2	7/2017	Li et al.	
9,838,961	B2	12/2017	Kenney et al.	
9,853,784	B2	12/2017	Azizi et al.	
9,867,210	B2	1/2018	Azizi	
9,882,695	B2	1/2018	Azizi et al.	
10,819,471	B2 *	10/2020	Merlin	H04W 4/06
2004/0054820	A1	3/2004	Karaoguz et al.	
2004/0146117	A1	7/2004	Subramaniam et al.	
2005/0015703	A1	1/2005	Terry et al.	
2005/0063336	A1	3/2005	Kim et al.	
2005/0135410	A1	6/2005	Stephens	
2005/0276347	A1	12/2005	Mujtaba et al.	
2006/0018249	A1	1/2006	Shearer et al.	
2006/0030322	A1	2/2006	Kim et al.	
2006/0062314	A1	3/2006	Palin et al.	
2006/0067415	A1	3/2006	Mujtaba	
2006/0105764	A1	5/2006	Krishnaswamy et al.	
2006/0107166	A1 *	5/2006	Nanda	H04L 1/1887
				714/748
2006/0153060	A1	7/2006	Cho	
2007/0014375	A1	1/2007	Nakao	
2007/0042715	A1	2/2007	Salo et al.	
2007/0060161	A1	3/2007	Chindapol et al.	
2007/0147226	A1	6/2007	Khandekar et al.	
2007/0147521	A1	6/2007	Horng et al.	
2007/0153929	A1	7/2007	Ballentin et al.	
2007/0202816	A1	8/2007	Zheng	
2007/0207742	A1	9/2007	Kim et al.	

2007/0242600	A1	10/2007	Li et al.	
2008/0013496	A1	1/2008	Dalmases et al.	
2008/0049851	A1	2/2008	Nangia et al.	
2008/0188232	A1	8/2008	Park et al.	
2008/0212612	A1 *	9/2008	Singh	H04L 1/1685
				370/310
2008/0232339	A1	9/2008	Yang et al.	
2008/0240018	A1	10/2008	Xue et al.	
2008/0240275	A1	10/2008	Cai	
2008/0304430	A1 *	12/2008	Zhuyan	H04L 1/1887
				370/278
2009/0007185	A1	1/2009	Nix et al.	
2009/0122882	A1	5/2009	Mujtaba	
2009/0270109	A1	10/2009	Wang Helmersson et al.	
2009/0279470	A1 *	11/2009	Seok	H04L 12/189
				370/312
2009/0310692	A1	12/2009	Kafle et al.	
2010/0046671	A1	2/2010	Ali et al.	
2010/0067480	A1	3/2010	Wang et al.	
2010/0080312	A1	4/2010	Moffatt et al.	
2010/0091673	A1	4/2010	Sawai et al.	
2010/0098181	A1	4/2010	Jacobsen et al.	
2010/0107042	A1	4/2010	Sawai et al.	
2010/0110804	A1	5/2010	Yeh	
2010/0157956	A1	6/2010	Takahashi	
2010/0157970	A1	6/2010	Gotman et al.	
2010/0172316	A1	7/2010	Hwang et al.	
2010/0220678	A1	9/2010	Wentink	
2010/0220679	A1	9/2010	Abraham et al.	
2010/0246375	A1	9/2010	Orlik et al.	
2010/0246539	A1	9/2010	Guillouard et al.	
2010/0260114	A1 *	10/2010	Vermani	H04L 5/0055
				370/329
2010/0260159	A1	10/2010	Zhang et al.	
2010/0309834	A1	12/2010	Fischer et al.	
2010/0322166	A1	12/2010	Sampath et al.	
2011/0002219	A1	1/2011	Kim et al.	
2011/0013608	A1	1/2011	Lee et al.	
2011/0026623	A1	2/2011	Srinivasa et al.	
2011/0032850	A1	2/2011	Cai	
2011/0032875	A1	2/2011	Erceg et al.	
2011/0038441	A1	2/2011	Shi	
2011/0063991	A1	3/2011	Sampath et al.	
2011/0075625	A1	3/2011	Nystrom et al.	
2011/0085513	A1	4/2011	Chen et al.	
2011/0096685	A1	4/2011	Lee et al.	
2011/0096710	A1 *	4/2011	Liu	H04L 1/1614
				370/312
2011/0110454	A1 *	5/2011	Sampath	H04L 1/02
				375/267
2011/0116401	A1	5/2011	Banerjea et al.	
2011/0149882	A1	6/2011	Gong et al.	
2011/0158159	A1	6/2011	Gong et al.	
2011/0188598	A1	8/2011	Lee et al.	
2011/0194544	A1	8/2011	Yang et al.	
2011/0206156	A1	8/2011	Lee et al.	
2011/0222486	A1	9/2011	Hart	
2011/0235593	A1	9/2011	Gong et al.	
2011/0243025	A1	10/2011	Kim et al.	
2011/0243073	A1 *	10/2011	Gong	H04L 5/0055
				370/329
2011/0249660	A1	10/2011	Noh et al.	
2011/0261708	A1	10/2011	Grandhi	
2011/0261742	A1 *	10/2011	Wentink	H04L 1/1854
				370/312
2011/0261769	A1	10/2011	Ji et al.	
2011/0268094	A1	11/2011	Gong et al.	
2011/0299474	A1	12/2011	Li et al.	
2011/0305176	A1 *	12/2011	Wentink	H04W 28/12
				370/310
2011/0305296	A1	12/2011	Van Nee	
2012/0002756	A1	1/2012	Zhang et al.	
2012/0063433	A1 *	3/2012	Wentink	H04W 74/0816
				370/338
2012/0106481	A1	5/2012	Cho et al.	
2012/0127940	A1	5/2012	Lee et al.	
2012/0155424	A1	6/2012	Kim et al.	
2012/0155444	A1	6/2012	Chiueh et al.	

(56) **References Cited**

U.S. PATENT DOCUMENTS

2012/0170563 A1	7/2012	Abraham et al.	
2012/0201213 A1	8/2012	Banerjea et al.	
2012/0218983 A1*	8/2012	Noh	H04W 72/20
			370/338
2012/0243485 A1	9/2012	Merlin et al.	
2012/0269124 A1	10/2012	Porat	
2012/0275446 A1	11/2012	Stacey et al.	
2012/0314697 A1	12/2012	Noh et al.	
2012/0314786 A1	12/2012	Atungsiri et al.	
2012/0320890 A1	12/2012	Zhang et al.	
2012/0324315 A1	12/2012	Zhang et al.	
2012/0327870 A1	12/2012	Grandhi et al.	
2012/0327915 A1	12/2012	Kang et al.	
2013/0044743 A1*	2/2013	Zhang	H04L 69/22
			370/338
2013/0070642 A1	3/2013	Kim et al.	
2013/0088983 A1	4/2013	Pragada et al.	
2013/0136075 A1	5/2013	Yu et al.	
2013/0142155 A1	6/2013	Trainin et al.	
2013/0172035 A1*	7/2013	Wentink	H04L 5/0055
			455/517
2013/0177090 A1	7/2013	Yang et al.	
2013/0188567 A1	7/2013	Wang et al.	
2013/0188572 A1	7/2013	Cheong et al.	
2013/0215993 A1	8/2013	Taghavi Nasrabadi et al.	
2013/0229996 A1	9/2013	Wang et al.	
2013/0230035 A1	9/2013	Grandhi et al.	
2013/0235720 A1	9/2013	Wang et al.	
2013/0235773 A1*	9/2013	Wang	H04W 52/0203
			370/311
2013/0235943 A1*	9/2013	Tong	H04L 5/0007
			375/259
2013/0250940 A1	9/2013	Parlamas	
2013/0258975 A1	10/2013	Krishnamurtby et al.	
2013/0265907 A1	10/2013	Kim et al.	
2013/0286925 A1*	10/2013	Fischer	H04L 1/0071
			370/312
2013/0286959 A1*	10/2013	Lou	H04L 5/003
			370/329
2013/0301551 A1	11/2013	Ghosh et al.	
2013/0301563 A1	11/2013	Gupta et al.	
2013/0301569 A1*	11/2013	Wang	H04L 1/1864
			370/329
2014/0010196 A1	1/2014	Shapira	
2014/0016607 A1	1/2014	Hart	
2014/0045514 A1*	2/2014	Lee	H04W 16/14
			455/454
2014/0098724 A1*	4/2014	Park	H04W 72/23
			370/330
2014/0112274 A1	4/2014	Moon et al.	
2014/0169245 A1	6/2014	Kenney et al.	
2014/0169356 A1	6/2014	Noh et al.	
2014/0205029 A1	7/2014	Srinivasa et al.	
2014/0211775 A1	7/2014	Sampath et al.	
2014/0269544 A1	9/2014	Zhu et al.	
2014/0307650 A1	10/2014	Vermani et al.	
2014/0328265 A1*	11/2014	Sampath	H04W 72/541
			370/329
2014/0328333 A1*	11/2014	Seo	H04L 1/1854
			370/336
2014/0369276 A1	12/2014	Porat et al.	
2015/0023335 A1	1/2015	Vermani et al.	
2015/0043414 A1	2/2015	Han et al.	
2015/0063255 A1	3/2015	Tandra et al.	
2015/0063318 A1	3/2015	Merlin et al.	
2015/0071051 A1*	3/2015	Zhu	H04W 72/121
			370/216
2015/0085836 A1	3/2015	Kang et al.	
2015/0117428 A1	4/2015	Lee et al.	
2015/0124689 A1*	5/2015	Merlin	H04W 4/06
			370/312
2015/0124690 A1*	5/2015	Merlin	H04L 5/0055
			370/312
2015/0124745 A1	5/2015	Tandra et al.	

2015/0131517 A1*	5/2015	Chu	H04L 5/0037
			370/312
2015/0131756 A1	5/2015	Suh et al.	
2015/0139090 A1	5/2015	Stephens et al.	
2015/0139091 A1	5/2015	Azizi et al.	
2015/0139118 A1	5/2015	Azizi et al.	
2015/0139119 A1	5/2015	Azizi et al.	
2015/0139205 A1	5/2015	Kenney et al.	
2015/0139206 A1	5/2015	Azizi et al.	
2015/0146648 A1*	5/2015	Viger	H04L 1/1685
			370/329
2015/0146808 A1	5/2015	Chu et al.	
2015/0207599 A1	7/2015	Kim et al.	
2015/0208394 A1	7/2015	Seo et al.	
2015/0237531 A1	8/2015	Hao et al.	
2015/0250003 A1*	9/2015	Seok	H04L 1/0008
			370/329
2015/0271002 A1*	9/2015	Oh	H04L 27/2626
			370/329
2015/0288489 A1	10/2015	Azizi et al.	
2015/0304011 A1*	10/2015	Ponnuswamy	H04B 7/0617
			370/329
2015/0326351 A1	11/2015	Kim et al.	
2015/0326408 A1	11/2015	Vermani et al.	
2015/0327121 A1	11/2015	Li et al.	
2015/0351102 A1*	12/2015	Trainin	H04W 72/20
			370/329
2015/0365972 A1*	12/2015	Seok	H04W 74/0891
			370/336
2016/0020885 A1	1/2016	Li et al.	
2016/0080115 A1*	3/2016	Josiam	H04L 5/0055
			370/329
2016/0081010 A1	3/2016	Seok	
2016/0087775 A1*	3/2016	Hedayat	H04L 5/0055
			370/329
2016/0112899 A1	4/2016	Kenney et al.	
2016/0197704 A1*	7/2016	Liu	H04L 1/1621
			370/329
2016/0211944 A1	7/2016	Kenney et al.	
2016/0211961 A1	7/2016	Azizi et al.	
2016/0212748 A1*	7/2016	Yang	H04L 1/1874
2016/0227572 A1	8/2016	Li et al.	
2016/0241366 A1	8/2016	Azizi et al.	
2016/0242173 A1	8/2016	Li et al.	
2016/0330742 A1*	11/2016	Li	H04L 5/0037
2016/0337100 A1*	11/2016	Yang	H04L 5/0037
2016/0344531 A1	11/2016	Li et al.	
2017/0005709 A1*	1/2017	Li	H04L 1/00
2017/0019916 A1	1/2017	Azizi et al.	
2017/0078107 A1*	3/2017	Itagaki	H04L 1/1854
2017/0111154 A1	4/2017	Azizi et al.	
2017/0135035 A1	5/2017	Azizi et al.	
2017/0149547 A1*	5/2017	Kim	H04L 1/1685
2017/0201359 A1	7/2017	Li et al.	
2017/0359152 A1*	12/2017	Li	H04L 5/0094
2018/0076860 A1*	3/2018	Chu	H04L 1/1854
2018/0184374 A1*	6/2018	Yang	H04W 52/0216
2018/0241531 A1*	8/2018	Wang	H04L 1/1854
2019/0238353 A1*	8/2019	Choi	H04B 7/0452
2024/0080076 A1*	3/2024	Gong	H04B 7/0617

FOREIGN PATENT DOCUMENTS

CN	101208895 A	6/2008
CN	101433018 A	5/2009
CN	102090024 A	6/2011
CN	102428672 A	4/2012
CN	102577493 A	7/2012
CN	103703711 A	4/2014
CN	105379217 A	3/2016
CN	105637968 A	6/2016
CN	105659656 A	6/2016
CN	105659681 A	6/2016
CN	105706407 A	6/2016
CN	105900511 A	8/2016
CN	105917611 A	8/2016
CN	105917730 A	8/2016
CN	106100807 A	11/2016

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

CN	106464638	A	2/2017
CN	106464652	A	2/2017
CN	106465360	A	2/2017
CN	106899385	A	6/2017
CN	106105080	B	8/2019
CN	110098907		8/2019
CN	106464634	B	3/2020
EP	2362580	A2	8/2011
EP	2499872	A1	9/2012
EP	3072255	A1	9/2016
EP	3072270	A1	9/2016
EP	3072324	A1	9/2016
EP	3072344	A1	9/2016
EP	3072345	A1	9/2016
EP	3072347	A1	9/2016
EP	3072254	B1	12/2019
EP	3182635	B1	4/2020
JP	2007074689	A	3/2007
KR	1020110044938	A	5/2011
KR	1020120127676	A	11/2012
TW	200539601	A	12/2005
TW	201044815	A	12/2010
TW	201141288	A	11/2011
TW	201234880	A	8/2012
TW	201251382	A	12/2012
TW	201301827	A	1/2013
TW	201306533	A2	2/2013
TW	201322786	A	6/2013
TW	201349815	A	12/2013
TW	201406107	A	2/2014
TW	201534073	A	9/2015
TW	201534074	A	9/2015
TW	201538023	A	10/2015
TW	201540029	A	10/2015
TW	201540118	A	10/2015
TW	201541889	A	11/2015
TW	201541890	A	11/2015
TW	201547248	A	12/2015
TW	201547313	A	12/2015
TW	201605191	A	2/2016
TW	201605271	A	2/2016
TW	201608863	A	3/2016
TW	201622458	A	6/2016
TW	201632022	A	9/2016
TW	I572160	B	2/2017
TW	I572173	B	2/2017
TW	I573413	B	3/2017
TW	I578733	B	4/2017
TW	I578837	B	4/2017
TW	I578838	B	4/2017
TW	I586120	B	6/2017
TW	I590692	B	7/2017
TW	201728116	A	8/2017
TW	I642281	B	11/2018
TW	I642292	B	11/2018
WO	2005053198	A2	6/2005
WO	2008118429	A1	10/2008
WO	2010118383	A1	10/2010
WO	2011025146	A2	3/2011
WO	2011068387	A2	6/2011
WO	2011153507	A2	12/2011
WO	2012057547	A2	5/2012
WO	2012106635	A1	8/2012
WO	2013055117	A2	4/2013
WO	2013058512	A1	4/2013
WO	2013077653	A1	5/2013
WO	2013089404	A1	6/2013
WO	2013165582	A1	11/2013
WO	2013191609	A1	12/2013
WO	2014066785	A1	5/2014
WO	2015031323	A1	3/2015
WO	2015076917	A1	5/2015
WO	2015076923	A1	5/2015
WO	2015076932	A1	5/2015
WO	2015077040	A1	5/2015
WO	2015077042	A1	5/2015
WO	2015077049	A1	5/2015
WO	2015077056	A1	5/2015
WO	2015077068	A1	5/2015
WO	2015077096	A1	5/2015
WO	2015077223	A1	5/2015
WO	2015113218	A1	8/2015
WO	2015127777	A1	9/2015
WO	2015130335	A1	9/2015
WO	2015130341	A1	9/2015
WO	2015171243	A1	11/2015
WO	2015195460	A1	12/2015
WO	2016010651	A1	1/2016
WO	2018010578	A1	1/2016

OTHER PUBLICATIONS

Jinyoung, Chun, "11-12-1388-00-0hew-ul-mu-transmission", IEEE Draft, (Nov. 11, 2013), 18 pgs.

Final Office Action issued in parent U.S. Appl. No. 16/256,842 on Oct. 27, 2021.

Office Action issued in parent U.S. Appl. No. 16/256,842 on May 13, 2021.

Office Action issued in parent U.S. Appl. No. 16/256,842 on Feb. 10, 2021.

Final Office Action issued in parent U.S. Appl. No. 16/256,842 on Nov. 12, 2020.

Office Action issued in parent U.S. Appl. No. 16/256,842 on Aug. 17, 2020.

Office Action issued in parent U.S. Appl. No. 16/256,842 on Apr. 17, 2020.

"ACKProtocol and Backoff Procedure for MU-MIMO", doc.: IEEE 802.11-10/1092r0, (Sep. 14, 2010), 15 pgs.

"Chinese Application Serial No. 201580018612.6, Office Action mailed Feb. 19, 2019", w/o English translation, 11 pgs.

"Uplinkmuiti-usertransmission", doc.: IEEE 11-13/1388r0, (Nov. 11, 2013), 18 pgs.

"Chinese Application Serial No. 201580018612.6, Response filed Nov. 19, 2019 to Office Action mailed Sep. 9, 2019", w English Claims, 11 pgs.

"Chinese Application Serial No. 201910217247, Voluntary Amendment filed Nov. 26, 2019", w English Claims, 18 pgs.

"Chinese Application Serial No. 201580018612.6, Response to Examiners Telephone Interview filed Dec. 5, 2019", w English Claims, 14 pgs.

"Chinese Application Serial No. 201710063899.5, Response filed Jan. 13, 2020 to Office Action mailed Aug. 27, 2019", w English Claims, 10 pgs.

Robert, Stacey, "Proposed TGac Draft Amendment; 11-10-1361-13-00ac-proposed-tgac-draft-amendment", IEEESA Mentor;11-10-1361-O3-00AC-Proposed-TGAC-Draft-Amendment, IEEE-SA Mentor, Piscataway, NJ USA,, (Jan. 19, 2011), 154 pgs.

Sean, Coffey, et al., "WWiSE complete proposal presentation; 11-04-0935-04-00n-wwise-complete-proposal presentation", (Nov. 16, 2004), 66 pgs.

Simone, Merlin, "ACK protocol and backoff procedure for MU-MIMO; 11-10-1092-00-00ac-ack-protocol-and-backoff-procedure-for mu-mimo", IEEE Draft; 11-10-1 092-00-00AC-ACK-Protocol-And-Backoff-Procedure-For-MU-MIMO, IEEE-SA Mentor, Piscataway, NJ USA, val. 802.11 ac, (Sep. 14, 2010), 1-15.

Yunoki, Katsuo, et al., "Access Control Enhancement; 11-13-1073-01-Ohew-access-3control-enhancement", IEEE Draft; 11-13-1073-01-0HEW-Access-Control-Enhancement. IEEE-SA Mentor. Piscataway. NJ USA. Vol. 802.11 HEW. No. 1, [Online], Retrieved from the internet :<https://mentor.ieee.org/802.11/documents?is_dcn=1073>, (Sep. 18, 2013), 1-9.

"Chinese Application Serial No. 201580018612.6, Response filed Jul. 5, 2019 to Office Action mailed Feb. 19, 2019", w English Claims, 27 pgs.

"Chinese Application Serial No. 201710063899.5, Office Action mailed Aug. 27, 2019", w Concise Statement of Relevance, 12 pgs.

"Chinese Application Serial No. 201580018612.6, Office Action mailed Sep. 9, 2019", w English Translation, 21 pgs.

(56) **References Cited**

OTHER PUBLICATIONS

(Discussion on potential techniques for HEW, IEEE 802.11-130871 rO), (Jul. 15, 2013), 13 pgs.
"U.S. Appl. No. 14/458,000, Final Office Action mailed May 9, 2016", 11 pgs.
"U.S. Appl. No. 14/458,000, Non Final Office Action mailed Dec. 3, 2015", 16 pgs.
"U.S. Appl. No. 14/458,000, Notice of Allowance mailed Aug. 24, 2016", 11 pgs.
"U.S. Appl. No. 14/458,000, Response filed Mar. 3, 2015 to Non Final Office Action mailed Dec. 3, 2015", 15 pgs.
"U.S. Appl. No. 14/458,000, Response filed Aug. 8, 2016 to Final Office Action mailed May 9, 2016", 12 pgs.
"U.S. Appl. No. 14/459,385, Response filed May 4, 2016 to Non Final Office Action mailed Jan. 14, 2016", 9 pgs.
"U.S. Appl. No. 14/498,385, Advisory Action mailed Jan. 25, 2018", 3 pgs.
"U.S. Appl. No. 14/498,385, Advisory Action mailed Dec. 10, 2018", 3 pgs.
"U.S. Appl. No. 14/498,385, Examiner interview Summary mailed Jan. 19, 2018", 3 pgs.
"U.S. Appl. No. 14/498,385, Examiner Interview Summary mailed Jan. 20, 2017", 3 pgs.
"U.S. Appl. No. 14/498,385, Examiner interview Summary mailed Jul. 19, 2018", 3 pgs.
"U.S. Appl. No. 14/498,385, Examiner interview Summary mailed Aug. 2, 2017", 3 pgs.
"U.S. Appl. No. 14/498,385, 1131011106 Action mailed Aug. 11, 2016", 20 pgs.
"U.S. Appl. No. 14/498,385, Final Office Action mailed Sep. 5, 2018", 24 pgs.
"U.S. Appl. No. 14/498,385, Final Office Action mailed Nov. 15, 2017", 16 pgs.
"U.S. Appl. No. 14/498,385, Non Final Office Action mailed Jan. 14, 2016", 19 pgs.
"U.S. Appl. No. 14/498,385, Non Final Office Action mailed Mar. 9, 2017", 12 pgs.
"U.S. Appl. No. 14/498,385, Non Final Office Action mailed Apr. 6, 2018", 23 pgs.
"U.S. Appl. No. 14/498,385, Response filed Jan. 15, 2018 to Final Office Action mailed Nov. 15, 2017", 9 pgs.
"U.S. Appl. No. 14/498,385, Response filed Feb. 13, 2017 to Final Office Action mailed Aug. 11, 2016", 9 pgs.
"U.S. Appl. No. 14/498,385, Response filed Jul. 6, 2018 to Non Final Office Action mailed Apr. 6, 2018", 9 pgs.
"U.S. Appl. No. 14/498,385, Response filed Jul. 10, 2017 to Non Final Office Action mailed Mar. 9, 2017", 8 pgs.
"U.S. Appl. No. 14/498,385, Response filed Nov. 5, 2018to Final Office Action mailed Sep. 5, 2018", 10 pgs.
"U.S. Appl. No. 15/280,782, Corrected Notice of Allowance mailed Sep. 27, 2017", 2 pgs.
"U.S. Appl. No. 15/280,782, Examiner interview Summary mailed Jul. 26, 2017", 3 pgs.
"U.S. Appl. No. 15/280,782, Non Final Office Action mailed May 12, 2017", 25 pgs.
"U.S. Appl. No. 15/280,782, Notice of Allowance mailed Sep. 8, 2017", 9 pgs.
"U.S. Appl. No. 15/280,782, Response filed Aug. 11, 2017 to Non Final Office Action mailed May 12, 2017", 12 pgs.
"U.S. Appl. No. 15/394,069, Examiner interview Summary mailed Jul. 28, 2017", 3 pgs.
"U.S. Appl. No. 15/394,069, Non Final Office Action mailed May 26, 2017", 18 pgs.
"U.S. Appl. No. 15/394,069, Notice of Allowance mailed Sep. 22, 2017", 8 pgs.
"U.S. Appl. No. 15/394,069, Response filed Aug. 23, 2017 to Non Final Office Action mailed May 26, 2017", 12 pgs.
"European Application No. 14864664.9, Extended European Search Report mailed Aug. 14, 2017", 6 pgs.

"European Application No. 14864664.9, Response filed Feb. 27, 2018 to Extended European Search Report mailed Aug. 14, 2017", 13 pgs.
"European Application Serial No. 14864664.9, Response filed Dec. 22, 2016 to Communication pursuant to Rules 161(2) and 162 EPC mailed Jun. 28, 2016", 4 pgs.
"European Application Serial No. 15789579.8, Response filed Jun. 12, 2018 to Extended European Search Report mailed Nov. 24, 2017", 10 pgs.
"European Application Serial No. 17153414.2, Extended European Search Report mailed May 3, 2017", 8 pgs.
"International Application Serial No. PCT/US2014/065166, International Preliminary Report on Patentability mailed Jun. 2, 2016", 8 pgs.
"International Application Serial No. PCT/US2014/085166, International Search Report mailed Jan. 22, 2015", 3 pgs.
"International Application Serial No. PCT/US2014/065188, Written Opinion mailed Jan. 22, 2015", 6 pgs.
"International Application Serial No. PCT/US2015/024889, International Preliminary Report on Patentability mailed Nov. 17, 2016", 13 pgs.
"International Application Serial No. PCT/US2015/024889, International Search Report mailed Jun. 29, 2015", 3 pgs.
"International Application Serial No. PCT/US2015/024889, Written Opinion mailed Jun. 29, 2015", 11 pgs.
"Taiwanese Application Serial No. 104108807, Office Action mailed May 26, 2016",W/English Search Report, 10 pgs.
"Taiwanese Application Serial No. 104108807, Response filed Nov. 25, 2016 Office Action mailed May 26, 2016", W/English Claims, 65 pgs.
"Taiwanese Application Serial No. 104110914, Response filed Sep. 10, 2016 to Office Action mailed Mar. 28, 2016", W/English Claims, 98 pgs.
"Taiwanese Application Serial No. 105139521, Office Action mailed Apr. 27, 2018", w/English Translation, 4 pgs.
"Taiwanese Application Serial No. 105139522, Response filed May 11, 2018 to Office Action mailed Jan. 5, 2018", W/English Claims, 73 pgs.
Choi, Jinsoo, Discussion on OFDMA in HEW, in: IEEE P802.11—High Efficiency WLAN Study Group, [Online] Retrieved from the internet: <http://www.ieee802.org/11/Reports/hew_update.htm>, (Nov. 11, 2013), 11 pgs.
Chun, Jinyoung, et al., "Legacy Support on HEW frame structure", IEEE 11-13/1057rO, (Sep. 16, 2013), 8 pgs.
Jinyoung, Chun, et al., "Legacy Support on HEW frame structure", IEEE, 11-13/1 G57r0, [Online] Retrieved from the Internet: <http://www.ieee802.org/11/Reports/hew_update.html>, (Sep. 16, 2013), 8 pgs.
Koskela, Timo, et al., Discussion on Potential Techniques for HEW, In: IEEE P802.11—High Efficiency WLAN Study Group, [Online] Retrieved from the Internet: <http://www.ieee802.org/11/Reports/hew_update.html>, (Jul. 15, 2013), 13 pgs.
"11ah Preamble for 2Mhz and Beyond", IEEE Submission No. IEEE 802. 1-11/1483r2, 1-24.
"U.S. Appl. No. 14/304,041, Notice of Allowance mailed Oct. 8, 2015", 8 pgs.
"U.S. Appl. No. 14/304,041, Supplemental Notice of Allowability mailed Nov. 4, 2015", 5 pgs.
"U.S. Appl. No. 14/315,562, Examiner interview Summary mailed Jun. 20, 2016", 2 pgs.
"U.S. Appl. No. 14/315,562, Final Office Action mailed Mar. 21, 2016", 16 pgs.
"U.S. Appl. No. 14/315,562, Non Final Office Action mailed Sep. 25, 2015", 14 pgs.
"U.S. Appl. No. 14/315,562, Notice of Allowability mailed Jun. 20, 2016", 7 pgs.
"U.S. Appl. No. 14/315,562, Notice of Allowance mailed Jun. 6, 2016", 12 pgs.
"U.S. Appl. No. 14/315,562, Response filed May 16, 2016 to Final Office Action mailed Mar. 21, 2016", 10 pgs.
"U.S. Appl. No. 14/315,562, Response filed Dec. 28, 2015 to Non Final Office Action mailed Sep. 25, 2015", 9 pgs.

(56) **References Cited**

OTHER PUBLICATIONS

"U.S. Appl. No. 14/338,137, Corrected Notice of Allowance mailed Jan. 22, 2016", 10 pgs.

"U.S. Appl. No. 14/338,137, Notice of Allowance mailed Nov. 25, 2015", 14 pgs.

"U.S. Appl. No. 14/341,055, Examiner Interview Summary mailed Apr. 18, 2017", 3 pgs.

"U.S. Appl. No. 14/341,055, Non Final Office Action mailed Nov. 14, 2016", 10 pgs.

"U.S. Appl. No. 14/341,055, Notice of Allowance mailed Jul. 25, 2017", 10 pgs.

"U.S. Appl. No. 14/341,055, Response filed Apr. 14, 2017 to Non Final Office Action mailed Nov. 14, 2016", 11 pgs.

"U.S. Appl. No. 14/447,254, Advisory Action mailed Feb. 13, 2017", 4 pgs.

"U.S. Appl. No. 14/447,254, Examiner Interview Summary mailed Jan. 18, 2017", 3 pgs.

"U.S. Appl. No. 14/447,254, Examiner interview Summary mailed Jul. 22, 2016", 4 pgs.

"U.S. Appl. No. 14/447,254, Final Office Action mailed Sep. 14, 2016", 13 pgs.

"U.S. Appl. No. 14/447,254, Non Final Office Action mailed Mar. 31, 2016", 13 pgs.

"U.S. Appl. No. 14/447,254, Response filed Jan. 17, 2017 Final Office Action mailed Sep. 14, 2016", 11 pgs.

"U.S. Appl. No. 14/447,254, Response filed Aug. 1, 2016 to Non Final Office Action mailedMar. 31, 2016", 12 pgs.

"U.S. Appl. No. 14/563,406, Advisory Action mailed Jan. 23, 2017", 3 pgs.

"U.S. Appl. No. 14/563,406, Corrected Notice of Allowance mailed Jun. 14, 2017", 2 pgs.

"U.S. Appl. No. 14/563,406, Examiner Interview Summary mailed Jan. 18, 2017", 3 pgs.

"U.S. Appl. No. 14/563,406, Examiner interview Summary mailed Jul. 26, 2016", 3 pgs.

"U.S. Appl. No. 14/563,406, Final Office Action mailed Aug. 9, 2016", 15 pgs.

"U.S. Appl. No. 14/563,406, Non Final Office Action mailed Apr. 26, 2016", 12 pgs.

"U.S. Appl. No. 14/563,406, Notice of Allowance mailed Mar. 7, 2017", 7 pgs.

"U.S. Appl. No. 14/563,406, Response filed Jan. 9, 2017 to Final Office Action mailed Aug. 9, 2016", 9 pgs.

"U.S. Appl. No. 14/563,406, Response filed Jul. 26, 2016 to Non Final Office Action mailed Apr. 26, 2016", 9 pgs.

"U.S. Appl. No. 14/573,912, Non Final Office Action mailed Jun. 16, 2016", 7 pgs.

"U.S. Appl. No. 14/573,912, Notice of Allowability mailed Jan. 13, 2017", 4 pgs.

"U.S. Appl. No. 14/573,912, Notice of Allowability mailed May 11, 2017", 2 pgs.

"U.S. Appl. No. 14/573,912, Notice of Allowability mailed Dec. 9, 2016", 2 pgs.

"U.S. Appl. No. 14/573,912, Notice of Allowance mailed Nov. 3, 2016", 7 pgs.

"U.S. Appl. No. 14/573,912, Response filed Oct. 17, 2016 to Non Final Office Action mailed Jun. 16, 2016", 11 pgs.

"U.S. Appl. No. 14/977,405, Examiner interview Summary mailed Jul. 25, 2016", 3 pgs.

"U.S. Appl. No. 14/977,405, Final Office Action mailed Aug. 24, 2016", 8 pgs.

"U.S. Appl. No. 14/977,405, Non Final Office Action mailed Feb. 26, 2016", 7 pgs.

"U.S. Appl. No. 14/977,405, Notice of Allowance mailed Nov. 18, 2016", 8 pgs.

"U.S. Appl. No. 14/977,405, Preliminary Amendment filed Dec. 22, 2015", 11 pgs.

"U.S. Appl. No. 14/977,405, Response filed Jul. 20, 2016 to Non Final Office Action mailed Feb. 26, 2016", 11 pgs.

"U.S. Appl. No. 14/977,405, Response filed Oct. 24, 2016 to Final Office Action mailed Aug. 24, 2016", 11 pgs.

"U.S. Appl. No. 15/023,262, Examiner interview Summary mailed Oct. 11, 2017", 3 pgs.

U.S. Appl. No. 15/023,262, Non Final Office Action mailed Jul. 11, 2017, 14 pgs.

"U.S. Appl. No. 15/023,262, Notice of Allowance mailed Dec. 21, 2017", 8 pgs.

"U.S. Appl. No. 15/023,262, Response filed Oct. 10, 2017 to Non Final Office Action mailed Jul. 11, 2017", 11 pgs.

"U.S. Appl. No. 15/023,581, Non Final Office Action mailed Jan. 17, 2017", 10 pgs.

"U.S. Appl. No. 15/023,581, Notice of Allowance mailed Jul. 27, 2017", 8 pgs.

"U.S. Appl. No. 15/023,581, Preliminary Amendment filed Mar. 21, 2016", 3 pgs.

"U.S. Appl. No. 15/023,581, Response filed Apr. 11, 2017 to Non Final Office Action mailed Jan. 17, 2017", 15 pgs.

"U.S. Appl. No. 15/025,634, Response filed Jan. 25, 2018 to Non Final Office Action mailed Oct. 27, 2017", 13 pgs.

"U.S. Appl. No. 15/025,634, Non Final Office Action mailed Oct. 27, 2017", 21 pgs.

"U.S. Appl. No. 15/025,634, Preliminary Amendment filed Mar. 29, 2016", 9 pgs.

"U.S. Appl. No. 15/026,022, Corrected Notice of Allowance mailed Dec. 13, 2017", 2 pgs.

"U.S. Appl. No. 15/026,022, Examiner interview Summary mailed Sep. 7, 2017", 3 pgs.

"U.S. Appl. No. 15/026,022, Non Final Office Action mailed Jul. 18, 2017", 7 pgs.

"U.S. Appl. No. 15/026,022, Notice of Allowance mailed Oct. 11, 2017", 5 pgs.

"U.S. Appl. No. 15/026,022, Preliminary Amendment mailed Mar. 30, 2016", 9 pgs.

"U.S. Appl. No. 15/026,022, Response filed Sep. 7, 2017 to Non Final Office Action mailed Jul. 18, 2017", 9 pgs.

"U.S. Appl. No. 15/052,600, Corrected Notice of Allowance mailed Jun. 24, 2016", 7 pgs.

"U.S. Appl. No. 15/052,600, Corrected Notice of Allowance mailed Aug. 5, 2016", 7 pgs.

"U.S. Appl. No. 15/052,600, Notice of Allowance mailed May 20, 2016", 10 pgs.

"U.S. Appl. No. 15/052,600, Preliminary Amendment filed Apr. 1, 2016", 10 pgs.

"U.S. Appl. No. 15/113,214, Non Final Office Action mailed Nov. 2, 2017", 11 pgs.

U.S. Appl. No. 15/113,214, Response filed Jan. 26, 2018 to Non Final Office Action.

"U.S. Appl. No. 15/113,214, Response filed Oct. 6, 2017 to Restriction Requirement mailed Aug. 10, 2017", 9 pgs.

"U.S. Appl. No. 15/113,214, Restriction Requirement mailed Aug. 10, 2017", 6 pgs.

"U.S. Appl. No. 15/263,864, Corrected Notice of Allowance mailed Dec. 14, 2017", 6 pgs.

"U.S. Appl. No. 15/263,864, Final Office Action mailed Sep. 21, 2017", 19 pgs.

"U.S. Appl. No. 15/263,864, Non Final Office Action mailed Mar. 10, 2017", 4 pgs.

"U.S. Appl. No. 15/263,864, Notice of Allowance mailed Nov. 9, 2017", 7 pgs.

"U.S. Appl. No. 15/263,864, Response filed Jun. 9, 2017 to Non Final Office Action mailed Mar. 10, 2017", 9 pgs.

"U.S. Appl. No. 15/263,864, Response Filed Oct. 18, 2017 to Final Office Action mailed Sep. 21, 2017", 11 pgs.

"U.S. Appl. No. 15/280,782, Corrected Notice of Allowance mailed Nov. 3, 2017", 2 pgs.

"U.S. Appl. No. 15/394,069, Corrected Notice of Allowance mailed Nov. 9, 2017", 2 pgs.

"U.S. Appl. No. 15/644,937, Preliminary Amendment filed Aug. 30, 2017", 8 pgs.

"U.S. Appl. No. 15/801,680, Preliminary Amendment filed Dec. 21, 2017", 10 pgs.

(56)   **References Cited**

OTHER PUBLICATIONS

"Chinese Application Serial No. 201480056246.9, Office Action mailed Sep. 29, 2018", W/English Translation, 23 pgs.
"Chinese Application Serial No. 201480056246.9, Response Filed Feb. 14, 2019 to Office Action mailedSep. 29, 2018", w/English Claims, 19 pgs.
"Chinese Application Serial No. 201580025791.6, Voluntary Amendment filed on Jun. 21, 2017", (W English Claims), 16 pgs.
"Chinese Application Serial No. 201580079973.7, Voluntary Amendment filed on Jun. 15, 2017", (W/ English Translation), 12 pgs.
"Chinese Application Serial No. 201710063899.5, Voluntary Amendment Filed on Oct. 20, 2017", (W English Claims), 23 pgs.
"European Application Serial No. 14863133.6, Extended European Search Report mailed Jul. 3, 2017", 10 pgs.
"European Application Serial No. 14863133.6, Response Filed Jan. 17, 2018to Extended European Search Report mailed Jul. 3, 2017", 12 pgs.
"European Application Serial No. 14863142.7, Extended European Search Report mailed May 3, 2017", 7 pgs.
"European Application Serial No. 14863142.7, Response Filed Nov. 15, 2017 to Extended European Search Report mailed May 3, 2017", 13 pgs.
"European Application Serial No. 14863362.1, Extended European Search Report mailed Jul. 18, 2017", 8 pgs.
"European Application Serial No. 14863362.1, Response filed Dec. 20, 2016 to Communication pursuant to Rules 161 (2) and 162 EPC mailed Jun. 28, 2016", 21 pgs.
"European Application Serial No. 14864107.9, Extended European Search Report, mailed Jul. 27, 2017", 13 pgs.
"European Application Serial No. 14864636,7, Extended European Search Report mailed Jul. 21, 2017", 8 pgs.
"European Application Serial No. 148646 8 0.5, Extended European Search Report mailed Jul. 18, 2017", 11 pgs.
"European Application Serial No. 14883581.2, Extended European Search Report mailed Sep. 29, 2017", 9 pgs.
"European Application Serial No. 14883772,7, Communication of European publication number and information on the application of Article 67(3) mailed Dec. 7, 2016", 1 pg.
"European Application Serial No. 14883772.7, Extended European Search Report mailed Oct. 12, 2017", 7 pgs.
"European Application Serial No. 15789579.8, Communication Pursuant to Article 94(3) EPC mailed Nov. 2, 2018", 4 pgs.
"European Application Serial No. 15789579.8, Extended European Search Report mailed Nov. 24, 2017", 6 pgs.
"European Application Serial No. 15821605.1, Response Filed Sep. 4, 2017 to Communication Pursuant to Rules 161 (2) and 162 EPC", 11 pgs.
"European Application Serial No. 16168650.6, Communication Pursuant to Article 94(3) EPC mailed Aug. 2, 2017", 5 pgs.
"European ApplicationSerial No. 16168650.6, Extended European Search Report mailed Sep. 7, 2016", 12 pgs.
"European Application Serial No. 16168650.6, Response Filed Nov. 13, 2017 to Communication Pursuant to Articie 94(3) EPC mailed Aug. 2, 2017", 10pgs.
"Further evaluation on outdoor Wi-Fi; 11-13-0843-00-0hew-further-evaluation-on-outdoor-wi-fi", Wookbong Lee (LG Electronics): IEEE SA Mentor; 11-13-0843-00-0HEW-Further-Evaluation-On-Outdoor-Wi-Fi, IEEE-SA Mentor, Piscataway, NJ USA, (Jul. 15, 2013), 18 pgs.
"Guard interval estimation considering switch time and propagation delay", R1-134362 3GPP TSG RAN WG1 Meeting #74bis, (Oct. 2013), 4 pgs.
"HEWSG PHY Considerations for Outdoor Environment; 11-13-0536-00-0hew-hew-sg-phy-considerations-for-outdoor-environment", Wookbong Lee (LG Electronics): IEEE SA Mentor; 11-13-0536-00-0HEW-HEW-SG-PHY-C0nsiderations-For-Outdoor-Environment, IEEE-SA Mentor, Piscataway, NJ USA,, (May 13, 2013), 21 pgs.
"IEEE Standard 802.11b-1999", (1999), 1-89.

"IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications", IEEE Computer Society, (2009), 538 pgs.
"IEEE Standard for information technology—Telecommunications and information exchange between systems—Local and metropolitan area network—Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications", IEEE Computer Society, (2013), 425 pgs.
"Indian Application Serial No. 201647013626, Voluntary Amendment filed Aug. 4, 2016", 15 pgs.
"Indian Application Serial No. 201647013652, Preliminary Amendment mailed Aug. 4, 2016", 11 pgs.
"Indian Application Serial No. 201647013653, Preliminary Amendment filed Aug. 8, 2016", 18 pgs.
"Indian Application Serial No. 201647039642, Preliminary Amendment filed Jan. 5, 2017", 5 pgs.
"International Application Serial No. PCT/CN2014/086532, International Search Report mailed Dec. 17, 2014", 4 pgs.
"International Application Serial No. PCT/CN2014/086532, Written Opinion mailed Dec. 17, 2014", 4 pgs.
"International Application Serial No. PCT/US2014/044881, International Preliminary Report on Patentability mailed Sep. 9, 2016", 9 pgs.
"International Application Serial No. PCT/US2014/044881, International Search Report mailed Nov. 24, 2014", 3 pgs.
"International Application Serial No. PCT/US2014/044881, Written Opinion mailed Nov. 24, 2014", 7 pgs.
"International Application Serial No. PCT/US2014/053451, International Preliminary Report on Patentability mailed Sep. 9, 2016", 6 pgs.
"International Application Serial No. PCT/US2014/053451, International Search Report mailed Dec. 10, 2014", 3 pgs.
"International Application Serial No. PCT/US2014/053451, Written Opinion mailed Dec. 10, 2014", 4 pgs.
"International Application Serial No. PCT/US2014/055996, International Preliminary Report on Patentability mailed Jun. 2, 2016", 7 pgs.
"International Application Serial No. PCT/US2014/055996, International Search Report mailed Dec. 17, 2014", 3 pgs.
"International Application Serial No. PCT/US2014/055996, Written Opinion mailed Dec. 17, 2014", 5 pgs.
"International Application Serial No. PCT/US2014/056819, International Preliminary Report on Patentability mailed Jun. 2, 2016", 8 pgs.
"International Application Serial No. PCT/US2014/056819, International Search Report mailed Dec. 31, 2014", 3 pgs.
"International Application Serial No. PCT/US2014/056819, Written Opinion mailed Dec. 31, 2014", 6 Pgs.
"International Application Serial No. PCT/US2014/057751, International Preliminary Report on Patentability mailed Jun. 2, 2016", 7 pgs.
"International Application Serial No. PCT/US2014/057751, International Search Report mailed Jan. 5, 2015", 3 pgs.
"International Application Serial No. PCT/US2Q14/057751, Written Opinion mailed Jan. 5, 2015", 5 pgs.
"International Application Serial No. PCT/US2014/064340, International Preliminary Report on Patentability mailed Jun. 2, 2016", 8 pgs.
"International Application Serial No. PCT/US2Q14/064340, International Search Report mailed Feb. 16, 2015", 3 pgs.
"International Application Serial No. PCT/US2014/064340, Written Opinion mailed Feb. 16, 2015", 6 pgs.
"International Application Serial No. PCT/US2014/064350, International Preliminary Report on Patentability mailed Jun. 2, 2016", 7 pgs.
"International Application Serial No. PCT/US2014/064350, International Search Report mailed Feb. 6, 2015", 4 pgs.
"International Application Serial No. PCT/US2014/064350, Written Opinion mailed Feb. 6, 2015", 5 pgs.

(56) **References Cited**

OTHER PUBLICATIONS

"International Application Serial No. PCT/US2014/064509, International Preliminary Report on Patentability mailed Jun. 2, 2016", 10 pgs.

"International Application Serial No. PCT/US2014/064509, International Search Report mailed Feb. 11, 2015", 3 pgs.

"International Application Serial No. PCT/US2014/064509, Written Opinion mailed Feb. 11, 2015", 8 pgs.

"International Application Serial No. PCT/US2014/064599, International Preliminary Report on Patentability mailed Jun. 2, 2016", 9 pgs.

"International Application Serial No. PCT/US2014/064599, International Search Report mailed Feb. 26, 2015", 3 pgs.

"International Application Serial No. PCT/US2014/084599, Written Opinion mailed Feb. 26, 2015", 7 pgs.

"International Application Serial No. PCT/US2014/064787, International Preliminary Report on Patentability mailed Aug. 2, 2018", 10 pgs.

"International Application Serial No. PCT/US2014/084767, International Search Report mailed Feb. 26, 2015", 8 pgs.

"International Application Serial No. PCT/US2014/064787, Written Opinion mailed Feb. 26, 2015", 8 pgs.

"International Application Serial No. PCT/US2014/066133, International Preliminary Report on Patentability mailed Jun. 2, 2016", 9 pgs.

"International Application Serial No. PCT/US2014/086133, International Search Report mailed Feb. 24, 2015", 3 pgs.

"International Application Serial No. PCT/US2014/068133, Written Opinion mailed Feb. 24, 2015", 7 pgs.

"International Application Serial No. PCT/US2014/071942, International Preliminary Report on Patentability mailed Feb. 2, 2017", 9 pgs.

"International Application Serial No. PCT/US2014/071942, International Search Report mailed Apr. 17, 2015", 3 pgs.

"International Application Serial No. PCT/US2014/071942, Written Opinion mailed Apr. 17, 2015", 7 pgs.

"International Application Serial No. PCT/US2015/035114, International Preliminary Report on Patentability mailed Jan. 26, 2017", 10 pgs.

"International Application Serial No. PCT/US2015/035114, International Search Report mailed Oct. 19, 2015", 3 pgs.

"International Application Serial No. PCT/US2015/035114, Written Opinion mailed Oct. 19, 2015", 8 pgs.

"International Application Serial No. PCT/US2015/035313, International Search Report mailed Sep. 25, 2015", 4 pgs.

"International Application Serial No. PCT/US2015/035313, Written Opinion mailed Sep. 25, 2015", 8 pgs.

"Mexican Application Serial No. MX/a/2016/018738", W/Concise Statement of Relevance, 9 pgs.

"Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications Part 1 of 2". IEEE Computer Society IEEE Std 802.11-2016 (Revision of IEEE Std 802.11-2012), (2016), 2000.

"Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications Part 2 of 2", IEEE Computer Society IEEE Std 802.11-2016 (Revision of IEEE Std 802.11-2012), (2016), 1535.

"Taiwanese Application Serial No. 104101656, Office Action mailed Mar. 21, 2016" W/English Search Report, 7 pgs.

"Taiwanese Application Serial No. 104101656, Response filed Sep. 22, 2016 to Office Action mailed Mar. 21, 2016", W/ English Claims, 43 pgs.

"Taiwanese Application Serial No. 104101789, Office Action mailed Mar. 25, 2016", w/English Claims, 18 pgs.

"Taiwanese Application Serial No. 104101789, Response filed Sep. 23, 2016 to Office Action mailed Mar. 25, 2016", w/English Claims, 61 pgs.

"Taiwanese Application Serial No. 104101790, Office Action mailed Apr. 21, 2016", w/English Claims, 12 pgs.

"Taiwanese Application Serial No. 104101790, Response filed Jul. 22, 2016 to Office Action mailed Apr. 21, 2016", W/English Claims, 10 pgs.

"Taiwanese Application Serial No. 104106272, Office Action mailed Apr. 18, 2016",w/ English Claims, 15 pgs.

"Taiwanese Application Serial No. 104106272, Response filed Oct. 14, 2016 to Office Action mailed Apr. 18, 2016", W/English Claims, 45 pgs.

"Taiwanese Application Serial No. 104106275, Office Action mailed Jun. 8, 2016", W/Machine Translation, 5 pgs.

"Taiwanese Application Serial No. 104106275, Response filed Sep. 6, 2016 to Office Action mailed Jun. 8, 2016", W/English Claims, 80 pgs.

"Taiwanese Application Serial No. 104108803, Office Action mailed Jul. 1, 2016", w/English Claims, 16 pgs.

"Taiwanese Application Serial No. 104108803, Response filed Jan. 3, 2017 to Office Action mailed Jul. 1, 2016", w/English Claims, 8 pgs.

"Taiwanese Application Serial No. 104110914, Office Action mailed Mar. 28, 2016", w/English Claims, 14 pgs.

"Taiwanese Application Serial No. 104113863, Office Action mailed Jun. 6, 2016", W/Concise Statement of Relevance, 6 pgs.

"Taiwanese Application Serial No. 104113863, Response filed Aug. 30, 2016 to Office Action mailed Jun. 6, 2016", W/English Claims, 76 pgs.

"Taiwanese Application Serial No. 104117983, Office Action mailed Jul. 28, 2016", w/Concise Statement of Relevance, 6 pgs.

"Taiwanese Application Serial No. 104117983, Response filed Jan. 16, 2017 to Office Action mailed Jul. 28, 2016", (W/English Translation), 87 pgs.

"Taiwanese Application Serial No. 104118345, Office Action mailed May 10, 2017", W/English Translation, 9 pgs.

"Taiwanese Application Serial No. 104118345, Response filed Nov. 10, 2017 to Office Action mailed May 10, 2017", (W/English Claims), 68 pgs.

"Taiwanese Application Serial No. 104118345, Response filed Dec. 22, 2017 to Examiner Interview", (W/English Claims), 52 pgs.

"Taiwanese Application Serial No. 104118504, Office Action mailed Apr. 21, 2017", W/English Claims, 19 pgs.

"Taiwanese Application Serial No. 104118504, Office Action mailed Jul. 21, 2016", W/English Translation, 18 pgs.

"Taiwanese Application Serial No. 104118504, Response Filed Jul. 20, 2017 to Office Action mailed Apr. 21, 2017", (W/English Claims), 13 pgs.

"Taiwanese Application Serial No. 104118504, Response filed Oct. 18, 2016 to Office Action mailed Jul. 21, 2016", W/English Claims, 104 pgs.

"Taiwanese Application Serial No. 104122567, Office Action mailed Jun. 27, 2017", (W/English Translation), 5 pgs.

"Taiwanese Application Serial No. 104122567, Office Action mailed Oct. 13, 2016", W/English Search Report, 8 pgs.

"Taiwanese Application Serial No. 104122567, Response Filed Apr. 13, 2017 to Office Action mailed Oct. 13, 2016", w/Concise Statement of Relevance, 10 pgs.

"Taiwanese Application Serial No. 104122567, Response Filed Dec. 22, 2017 to Office Action mailed Jun. 27, 2017", (W/English Claims), 134 pgs.

Taiwanese Application Serial No. 105113980, Office Action mailed Jul. 21, 2016n,W/English Claims, 18 pgs.

"Taiwanese Application Serial No. 105113980, Response filed Oct. 24, 2016 to Office Action mailed Jul. 21, 2016", W/English Claims, 80 pgs.

"Taiwanese Application Serial No. 105139521, Response filed Jul. 31, 1810 Office Action mailed Apr. 27, 2018", W/English Claims, 55 pgs.

"Taiwanese Application Serial No. 105139522, Office Action mailed Jan. 5, 2018", w/English Translation, 4 pgs.

"VHDL Implementation of Reconfigurable Multimode Block Interleaver for OFDM Based WLAN", IJARECE, vol. 1, [Online]. Retrieved from the Internet: <http://ijarece.org/>, (Oct. 2012), 82-84 pgs.

Chun, Jinyoung. et al . . . "Uplinkmuiti-usertransmission", In: IEEEP802.11—High Efficiency WLAN Study Group, (Nov. 11, 2013), 18 pgs.

(56) **References Cited**

OTHER PUBLICATIONS

Dave, Hedberg. et al., "Adjacent Channel Interference and Filtering for 56-carrier Signals; 11-04-1579-01-000n-11-04-1579-00-000n-aci-results", (Jan. 17, 2005), 1-26 pgs.

Hiertz, Guido R, et al., Proposed direction and priorities for HEW, In: IEEE P802.11—High Efficiency WLAN Study Group, (Nov. 12, 2013), 17 pgs.

Hongyuan, Zhang, "11ah preamble for 2MHz and beyond ;11-11-1483-02-00ah-11ah-preamble-for-2 mhzand-beyond", IEEE Draft; 11-11-1483-02-00AH-11AH-Preamble-For-2MHZAND-Beyond, IEEE-SA Mentor, Piscataway, NJ USA, vol. 802.11 ah, No. 2, (Jan. 16, 2012), 1-24.

Jianhan, Liu, "Summary and Discussions of Proposals on Potential PHY Technologies in HEW 11-13-1375-01-Ohew-summary-and-discussions-of-proposals-on-potential-phytechnologies-in-hew", IEEE Draft: 11-13-1375-01-OHEW-Summary-And-Discussions-Of-Proposals-On-Potential-PHY-Technologies-In-HEW, IEEE-SA Mentor, Piscataway, NJ USA, vol. 802.11 HEW, No. 1,, (Nov. 12, 2013), 1-15.

Jinsoo, Choi, "Discussion on OFDMA in HEW; 11-13-1382-00-0hew-discussion-on-ofdma-inhew". (LG Electronics): IEEE Draft; 11-13-1382-00-0HEW-Discussion-On-OFDMA-In-HEW, IEEE-SA Mentor, Piscataway, NJ USA vol. 802.11 HEW, (Nov. 12, 2013), 1-11.
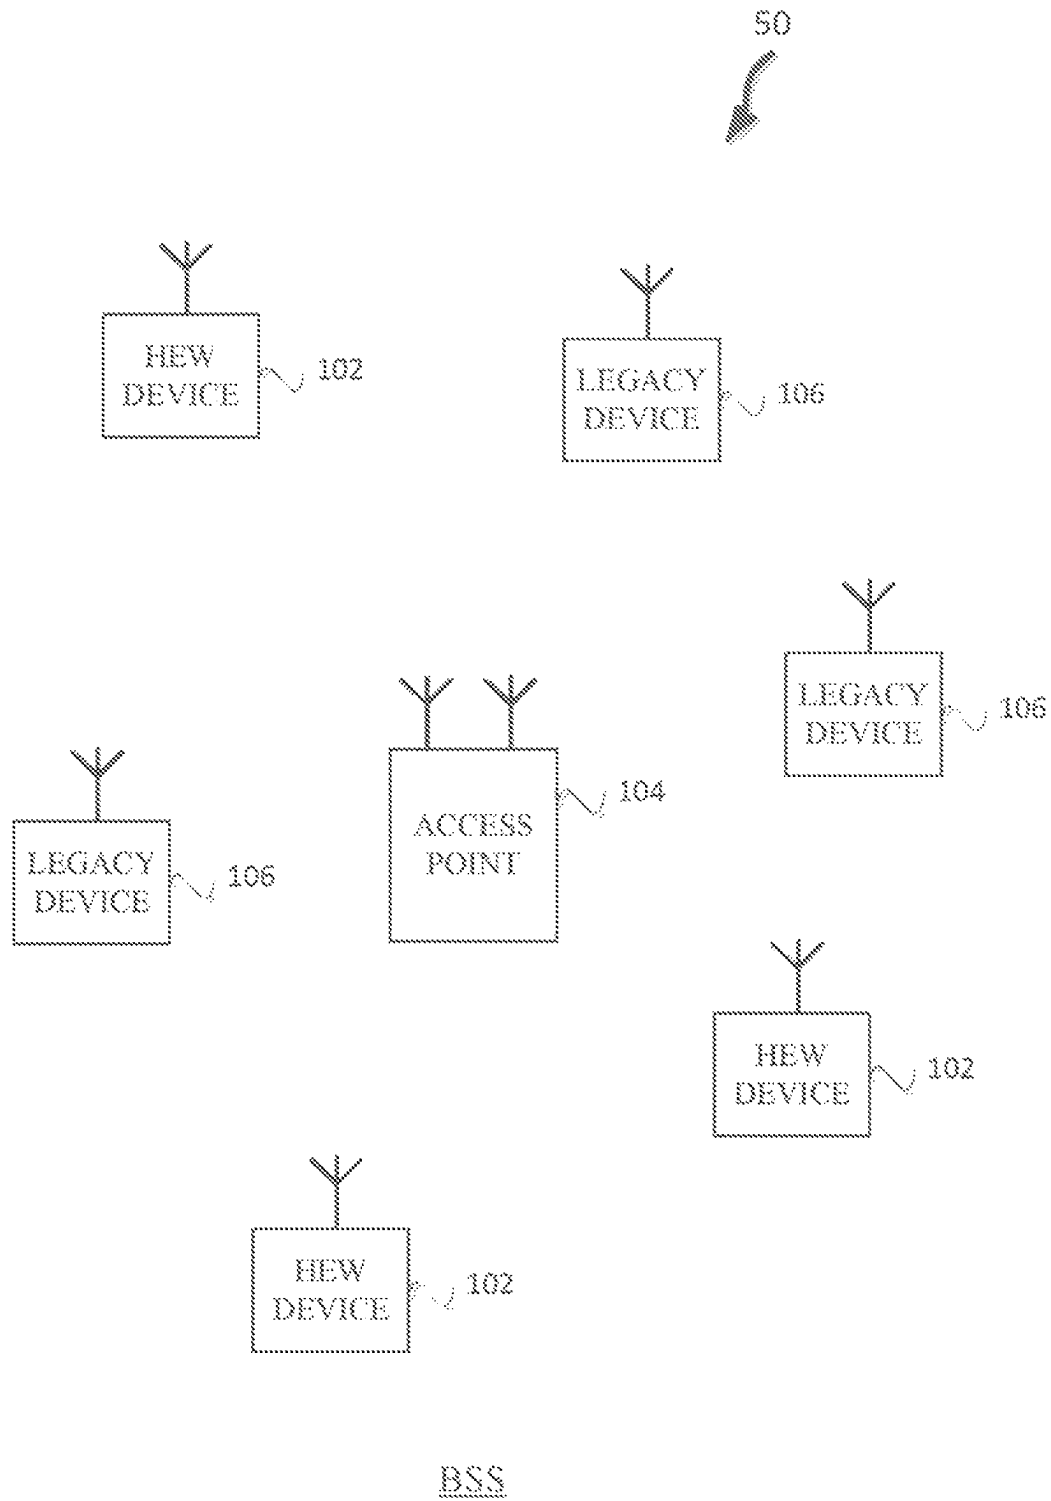
Jinyoung, Chun, "UL MU transmission 11-13-1388-00-Ohew-ul-mu-transmission", IEEE Draft; 11-13-1388-OO-OHEW-UL-MU-Transmission, IEEE-SA. Mentor, Piscataway, NJ USA. val. 802.11 HEW, (Nov. 11, 2013), 1-18.

Oh, Jinhyung, et al., "Distributed implicit interference alignment in 802.11 ac WLAN network", International Conference on ICT Convergence (ICTC), Oct. 2013), 421-426.

Raja, Banerjea, "A simplified STR Mechansim—MAC 11-14-0340-00-0hew-a-simplified-str-mechansim mac", IEEE Draft, 11-14-0340-00-OHEW-A-Simplified-STR-Mechanism-MAC, IEEE-SAMentor, Piscataway, NJ USA, vol. 802.11 HEW, (Mar. 16, 2014), 13 pgs.

Robert, Stacey, "Proposed Specification Framework for TGac; 11-09-0992-21-00ac proposed-specification-framework for tgac", IEEE SA Mentor, 11-09-0992-21-00AC-Proposed-Specificationframework-For-TGac,IEEE-SAMentor, Piscataway, NJ USA, vol. 802.11ac, No. 21, (Dec. 9, 2009), 1-5 pgs.
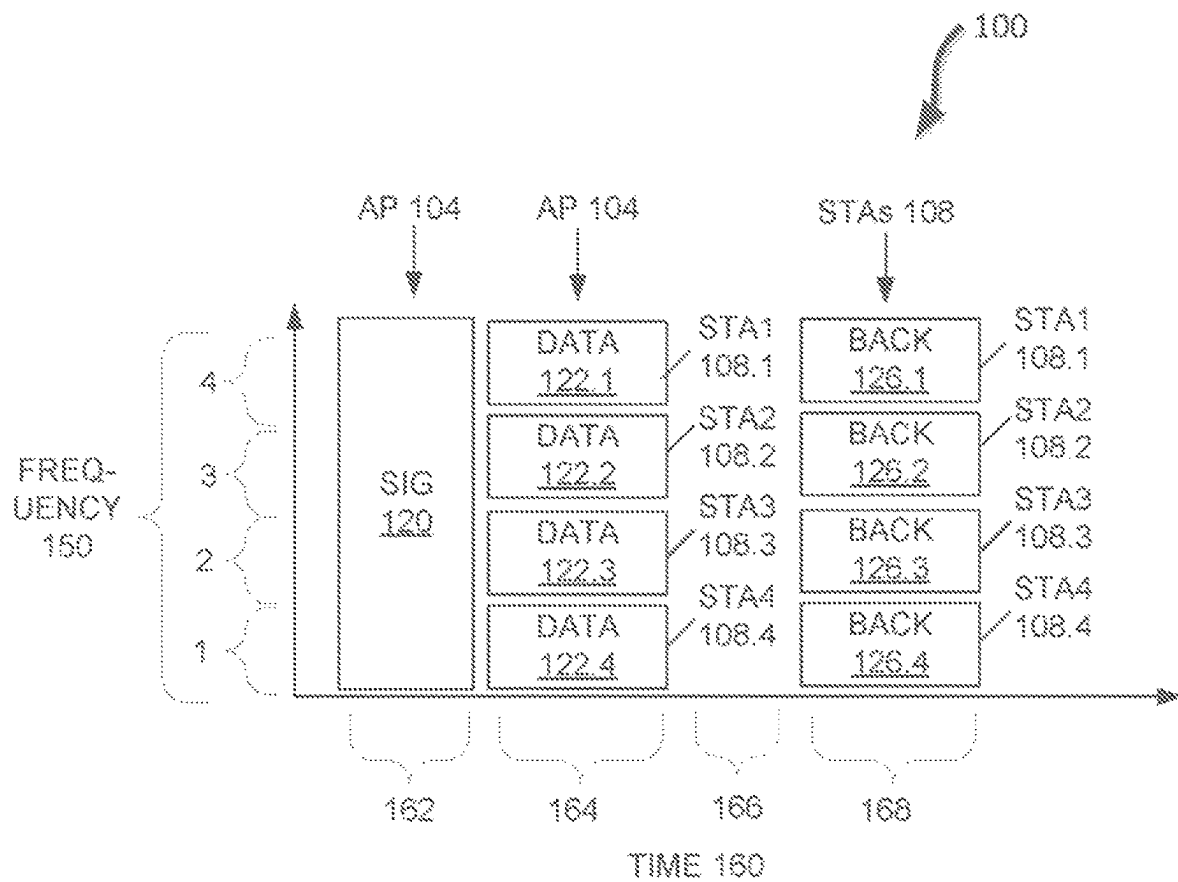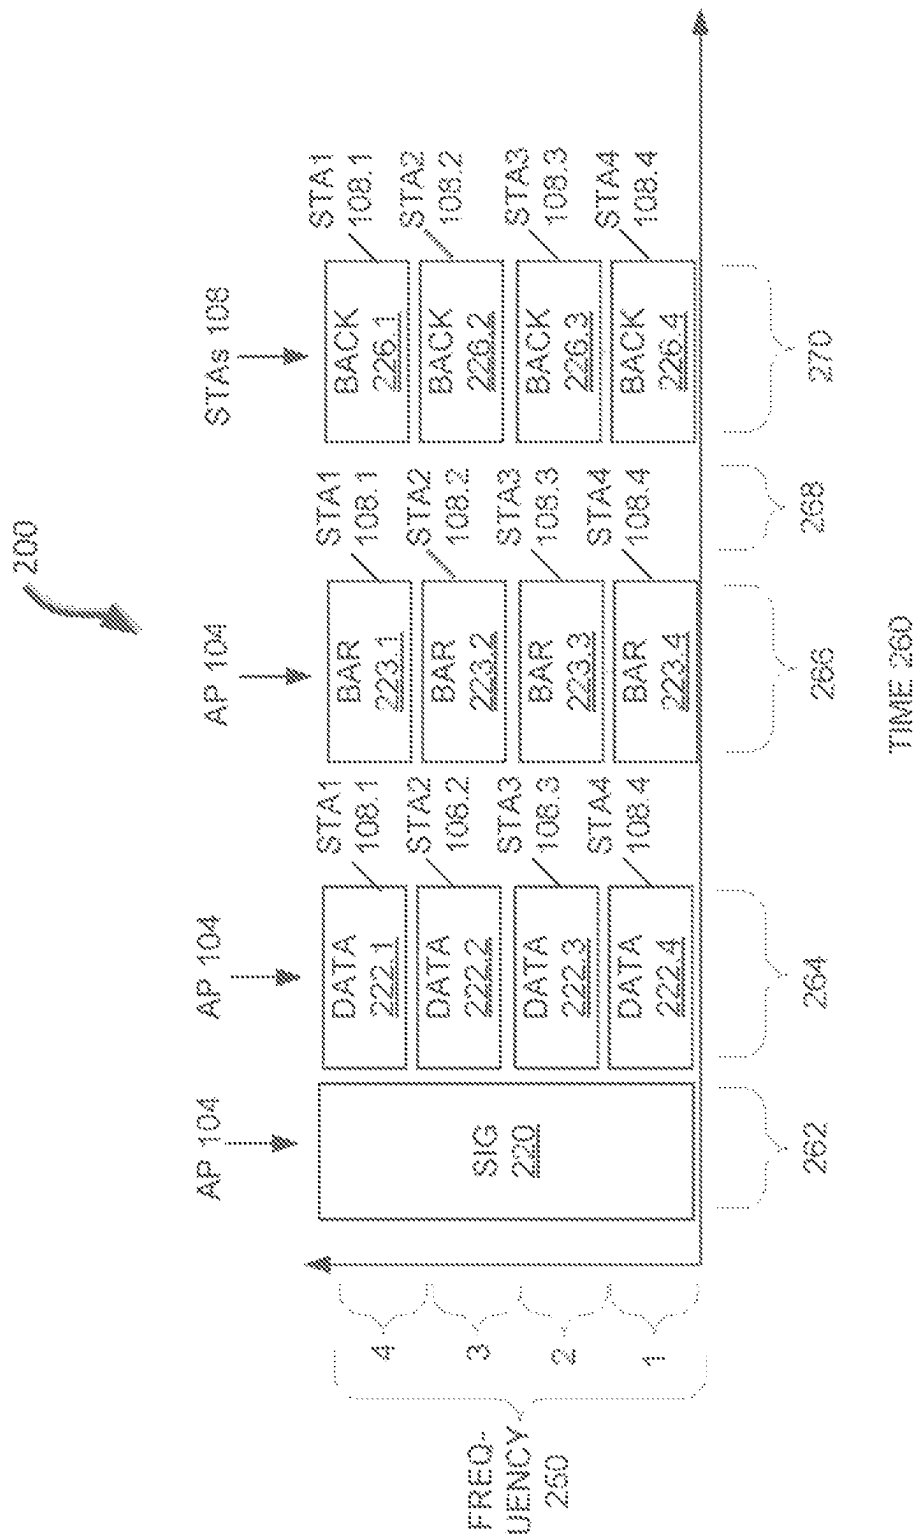
* cited by examiner

BSS

FIG. 1

FIG. 2
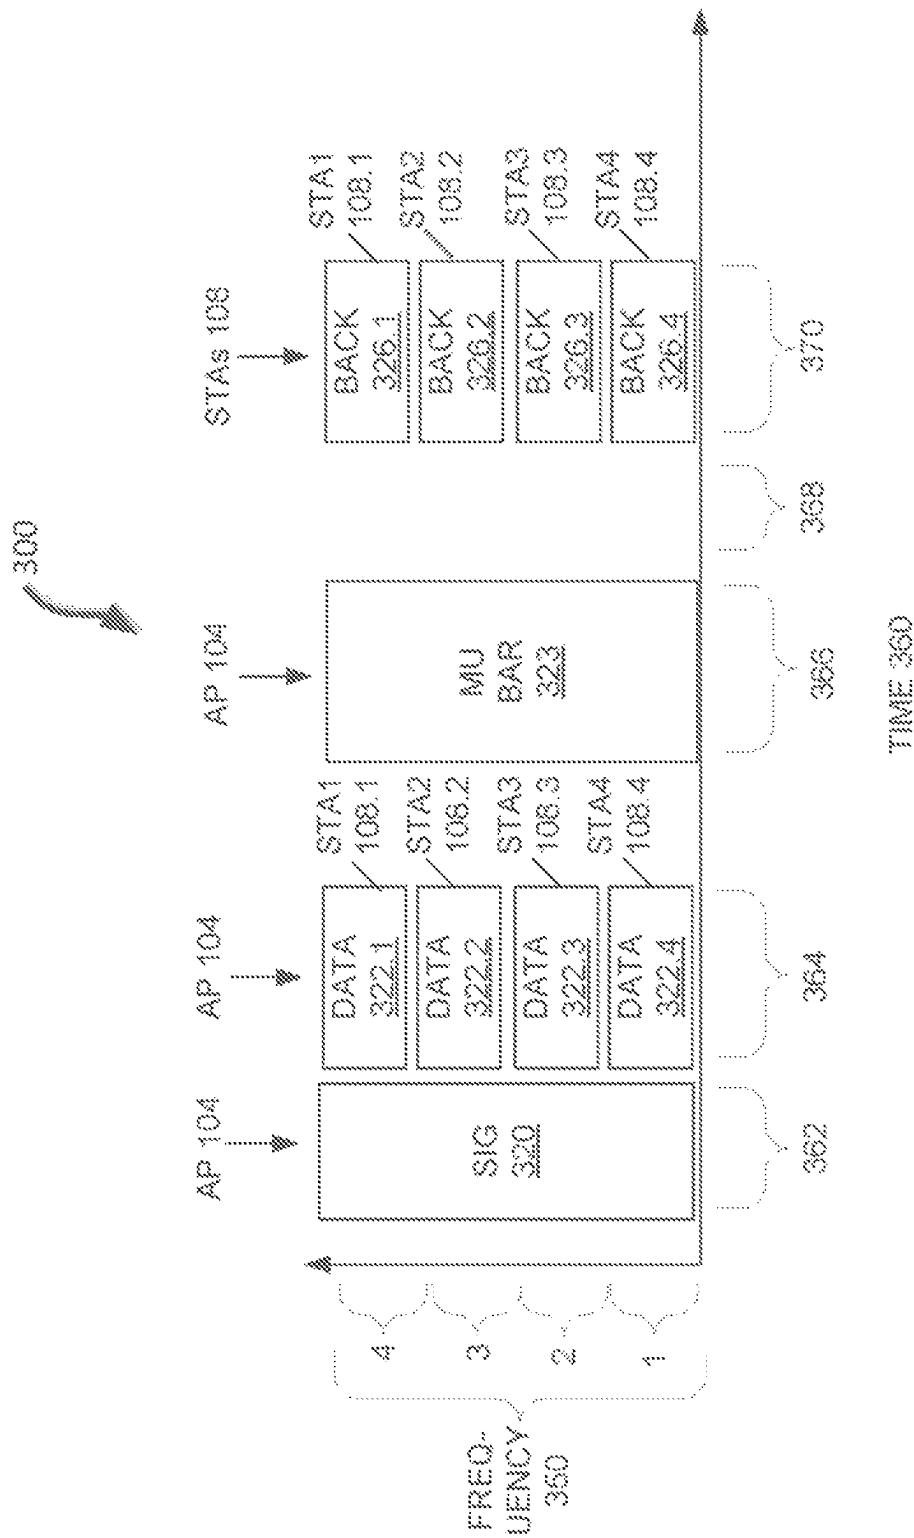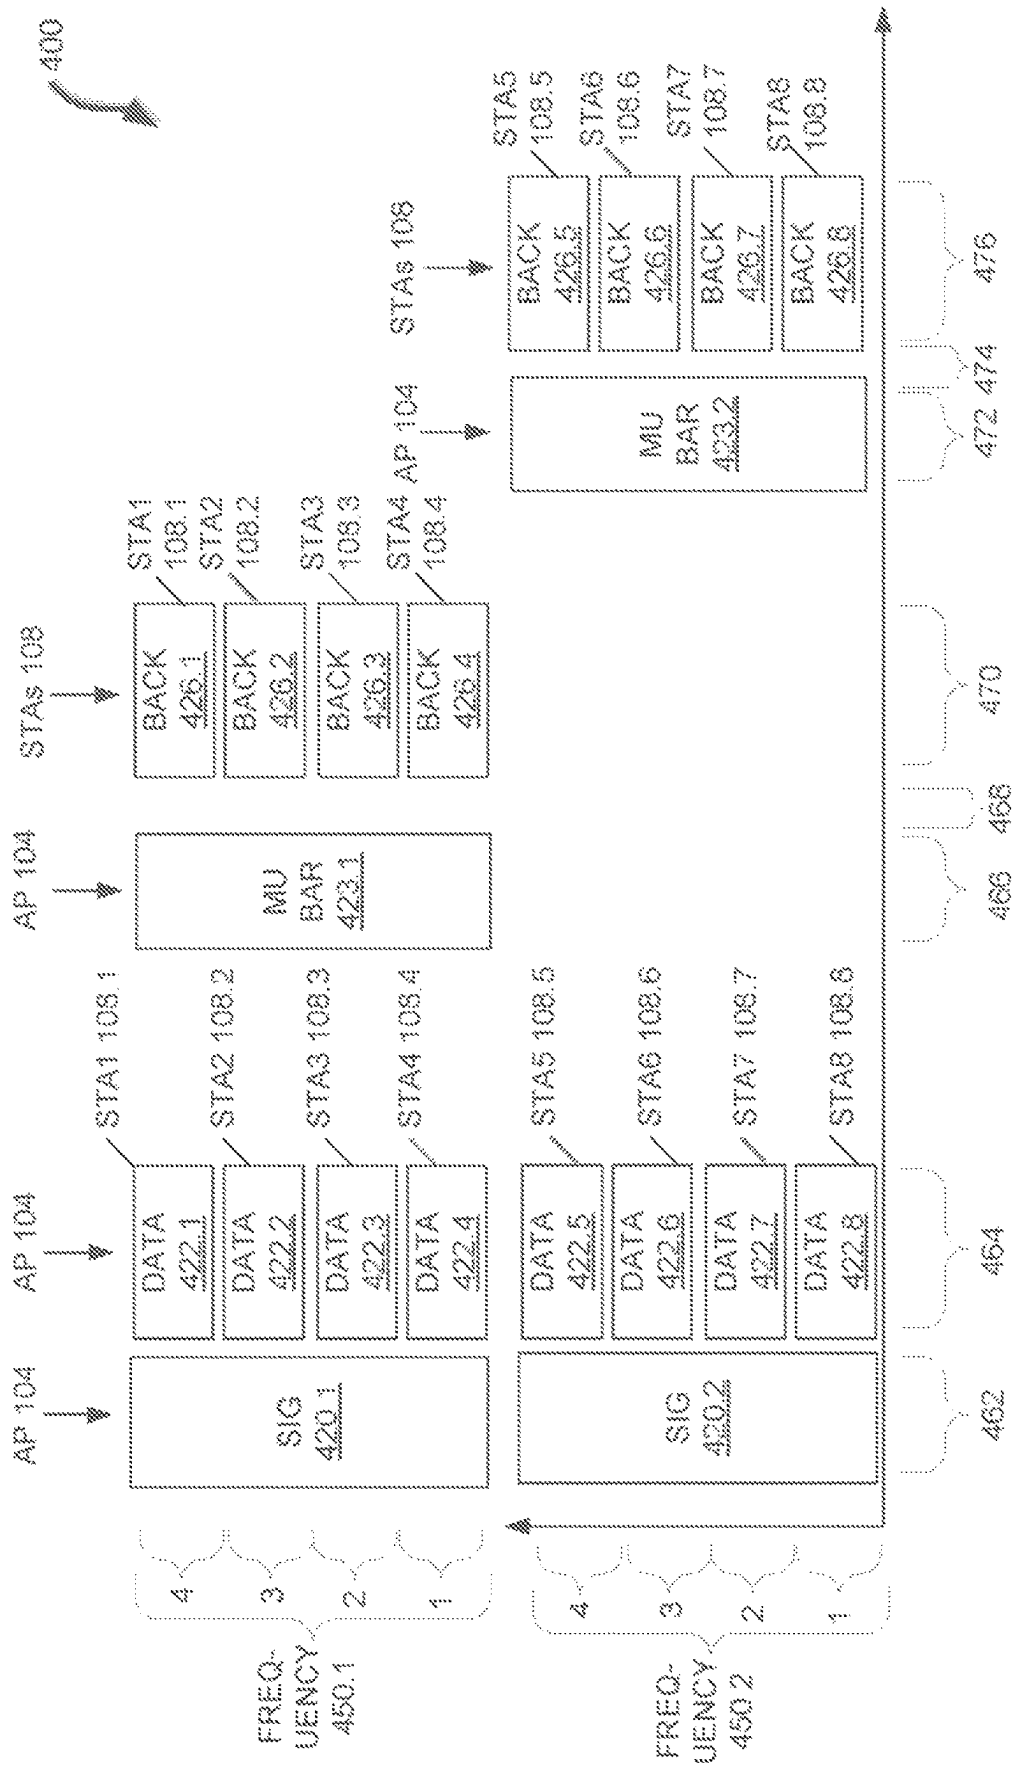
FIG. 3

FIG. 4

FIG. 5

500

STAs 108 →

| STA1 108.1 | STA2 108.2 | STA3 108.3 | STA4 108.4 |
| BACK 526.1 | BACK 526.2 | BACK 526.3 | BACK 526.4 |

STAs 108 →

| STA5 108.5 | STA6 108.6 | STA7 108.7 | STA8 108.8 |
| BACK 526.5 | BACK 526.6 | BACK 526.7 | BACK 526.8 |

570   572   574

AP 104 →

MU BAR 523

566   568   569

TIME 560

AP 104 →

STA1 108.1 → DATA 522.1
STA2 108.2 → DATA 522.2
STA3 108.3 → DATA 522.3
STA4 108.4 → DATA 522.4
STA5 108.5 → DATA 522.5
STA6 108.6 → DATA 522.6
STA7 108.7 → DATA 522.7
STA8 108.8 → DATA 522.8

AP 104 → SIG 520.1

AP 104 → SIG 520.2

562   564

FREQUENCY 550.1
4 3 2 1
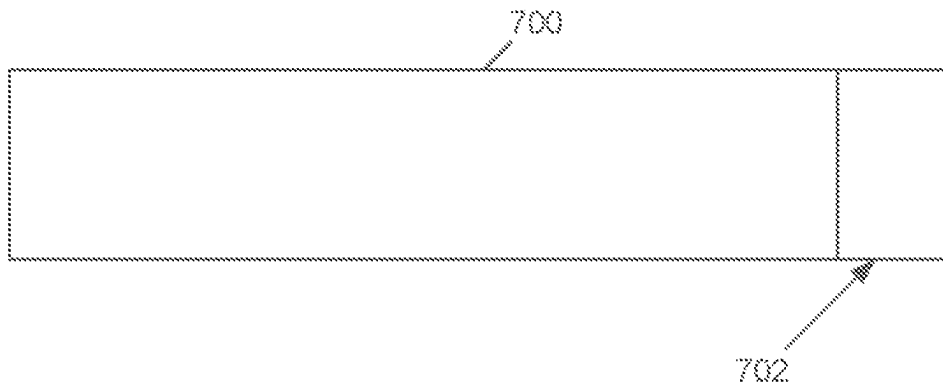
FREQUENCY 550.2
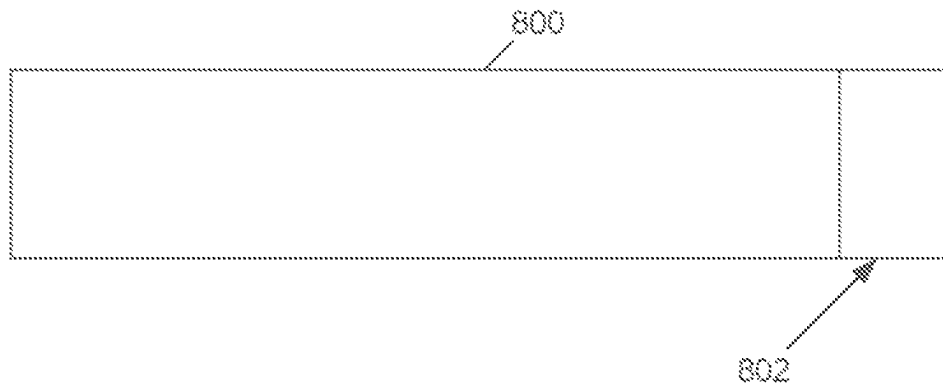4 3 2 1

FIG. 6

600

602

FIG. 7

700

702

FIG. 8

800
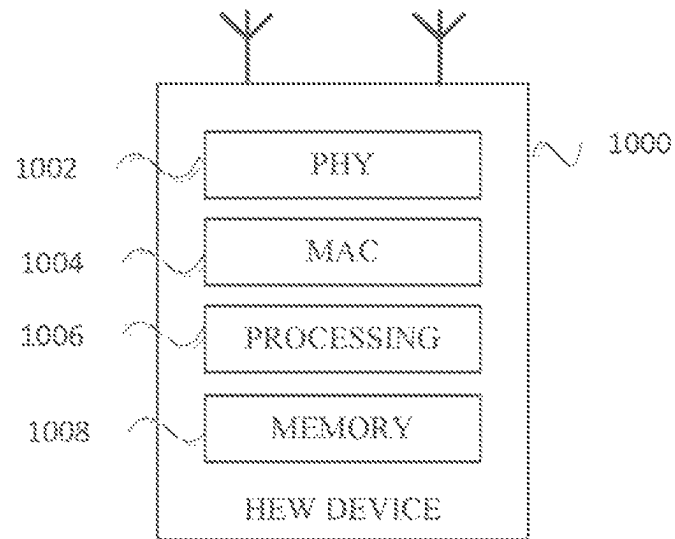
802

FIG. 9

FIG. 10

METHOD, APPARATUS, AND COMPUTER READABLE MEDIA FOR ACKNOWLEDGEMENT IN WIRELESS NETWORKS

PRIORITY CLAIM

This application is a continuation of U.S. application Ser. No. 16/256,842 filed on Jan. 24, 2019, which is a continuation of U.S. patent application Ser. No. 14/498,385, filed Sep. 26, 2014 (abandoned), which claims priority under 35 U.S.C. 119(e) to United States Provisional Patent Application Ser. No. 61/990,414, filed May 8, 2014, each of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

Embodiments pertain to wireless communications. Some embodiments relate to block acknowledgements in wireless networks.

BACKGROUND

One issue with communicating data over a wireless network is acknowledging received data. Often acknowledging received data consumes bandwidth. Moreover, with the use of some protocols, a large number of stations may be transmitting simultaneously in both the spatial domain and time domain. Additionally, consumers often demand more and more bandwidth for their applications.

Thus, there are general needs for systems, apparatus, and methods that reduce signaling, bandwidth, and delay associated with communicating smaller amounts of data.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a wireless network, in accordance with some embodiments;

FIG. 2 illustrates a time sequence diagram of an acknowledgement, in accordance with some example embodiments;

FIG. 3 illustrates a time sequence diagram of an acknowledgement, in accordance with some example embodiments;

FIG. 4 illustrates a time sequence diagram of an acknowledgement, in accordance with some example embodiments;

FIG. 5 illustrates a time sequence diagram of an acknowledgement, in accordance with some example embodiments;

FIG. 6 illustrates a time sequence diagram of an acknowledgement, in accordance with some example embodiments;

FIG. 7 illustrates a frame with a field for acknowledgement, in wireless networks according to example embodiments;

FIG. 8 illustrates a frame with a field for acknowledgement, in wireless networks according to example embodiments;

FIG. 9 illustrates a frame with a field for acknowledgement, in wireless networks according to example embodiments; and

FIG. 10 illustrates a high-efficiency wireless HEW device, in accordance with some embodiments.

DETAILED DESCRIPTION

The following description and the drawings sufficiently illustrate specific embodiments to enable those skilled in the art to practice them. Other embodiments may incorporate structural, logical, electrical, process, and other changes. Portions and features of some embodiments may be included

in, or substituted for, those of other embodiments. Embodiments set forth in the claims encompass all available equivalents of those claims.

FIG. 1 illustrates a wireless network, in accordance with some embodiments. The wireless network may comprise a basis service set (BSS) 50 that may include an access point (AP) 104, a plurality of high-efficiency wireless or Wi-Fi (HEW) (e.g., Institute of Electrical and Electronics Engineers IEEE 802.11ax) devices, and a plurality of legacy (e.g., IEEE 802.11n/ac) devices 106.

The AP 104 may be an AP and use 802.11 to transmit and receive. The AP 104 may be a base station. The AP 104 may use other communications protocols as well as the 802.11 protocol. The 802.11 protocol may be 802.11ax. The 802.11 protocol may include using Orthogonal Frequency-Division Multiple Access (OFDMA). The 802.11 may include using multi-user multiple-input and multiple-output (MU-MIMO).

The HEW devices 102 may be wireless transmit and receive devices such as cellular telephones, handheld wireless devices, wireless glasses, wireless watches, wireless personal devices, tablets, or another devices that may be transmitting and receiving using an 802.11 protocol such as 802.11ax or another wireless protocol.

The BSS 50 may operate on a primary channel and one or more secondary channels or sub-channels. The BSS 50 may include one or more APs 104. In accordance with embodiments, the AP 104 may communicate with one or more of the HEW devices 102 on one or more of the secondary channels or sub-channels or the primary channel. In example embodiments, the AP 104 communicates with the legacy devices 106 on the primary channel. In example embodiments, the AP 104 may be configured to communicate concurrently with one or more of the HEW devices 102 on one or more of the secondary channels and a legacy device 106 utilizing only the primary channel and not utilizing any of the secondary channels.

The AP 104 may communicate with legacy devices 106 in accordance with legacy IEEE 802.11 communication techniques. In example embodiments, the AP 104 may also be configured to communicate with HEW devices 102 in accordance with legacy IEEE 802.11 communication techniques. Legacy IEEE 802.11 communication techniques may refer to any IEEE 802.11 communication technique prior to IEEE 802.11ax.

In some embodiments, HEW frames may be configurable to have the same bandwidth or different bandwidths, and the bandwidth may be one of 20 MHz, 40 MHz, 80 MHz or 160 MHz contiguous bandwidths or an 80+80 MHz non-contiguous bandwidth. In some embodiments, a 320 MHz contiguous bandwidth may be used. In some embodiments, bandwidths of 1 MHz, 1.25 MHz, 2.5 MHz, 5 MHz and 10 MHz or a combination thereof may also be used. In these embodiments, a HEW frame may be configured for transmitting a number of spatial streams.

In example embodiments, referring to FIGS. 2 through 9, the AP 104 is configured to transmit and/or receive signal fields (SIGs) 120, 220, 320, 420, and 520; DATA 122, 222, 322, 422, and 522; (multi-user block acknowledgment requests (MU BAR) 323, 423, and 523; block acknowledgement request (BAR) 223; (block acknowledgement) BACK 226, 326, 426, and 526; frames 600 and 700; and, BACK 126.

In example embodiments the HEW device 102 is configured to transmit and/or receive SIGs 120, 220, 320, 420, and 520; DATA 122, 222, 322, 422, and 522; MU BAR 323, 423, and 523; BAR 223; BACK 226, 326, 426, and 526; frames

3

600 and 700; and, ACK **126**. In example embodiments, the HEW device **102** is station (STA) in 802.11.

In other embodiments, the AP **104**, HEW device **102**, and/or legacy device **106** may implement different technologies such as code-division multiple access (CDMA) 2000, CDMA2000 IX, CDMA2000 EV-DO, Interim Standard 2000 (IS-2000), Interim Standard 95 (IS-95), Interim Standard 856 (IS-856), Global System for Mobile communications (GSM), Enhanced Data rates for GSM Evolution (EDGE), GSM EDGE (GERAN), Long Term Evolution (LTE), IEEE 802.15.1, 802.11ac, IEEE 802.16 (i.e., Worldwide Interoperability for Microwave Access (WiMAX)).

In an OFDMA system (e.g. 802.11ax), an associated HEW device **104** may operate on any 20 MHz sub-channel of the BSS **50** (that can operate, for example, at 80 MHz).

Embodiments pertain to wireless communications. Some embodiments relate to high-efficiency wireless communications including high-efficiency Wi-Fi/wireless local-area network (WEAN) and HEW communications. Some embodiments relate to wireless communications in accordance with one of the IEEE 802.11 standards including the High Efficiency WEAN Study Group (HEW SG) that is now IEEE 802.11ax Task Group.

In accordance with some IEEE 802.11ax (High-Efficiency Wi-Fi) embodiments, AP **104** may operate as a master station, which may be arranged to contend for a wireless medium (e.g., during a contention period) to receive exclusive control of the medium for a HEW control period (i.e., a transmission opportunity (TXOP)). The master station may transmit an HEW master-sync transmission at the beginning of the HEW control period. During the HEW control period, HEW stations may communicate with the master station in accordance with a non-contention based multiple access technique. This is unlike conventional Wi-Fi communications in which devices communicate in accordance with a contention-based communication technique, rather than a multiple access technique. During the HEW control period, the master station may communicate with HEW stations using one or more HEW frames. During the HEW control period, legacy stations refrain from communicating. In some embodiments, the master-sync transmission may be referred to as an HEW control and schedule transmission.

In some embodiments, the multiple-access technique used during the HEW control period may be a scheduled OFDMA technique, although this is not a requirement. In some embodiments, the multiple access technique may be a time-division multiple access (TDMA) technique or a frequency division multiple access (FDMA) technique. In some embodiments, the multiple access technique may be a space-division multiple access (SDMA) technique.

The master station may also communicate with legacy stations in accordance with legacy IEEE 802.11 communication techniques. In some embodiments, the master station may also be configurable to communicate with HEW stations outside the HEW control period in accordance with legacy IEEE 802.11 communication techniques, although this is not a requirement.

FIG. **2** illustrates a time sequence diagram **100** of an acknowledgement, in accordance with some example embodiments. Illustrated in FIG. **1** is a time sequence diagram **100**, AP **104**, STAs **108**, SIG **120**, DATA **122**, and BACK **126**. In example embodiments, the STAs **108** are HEW devices **102**. The time sequence diagram **100** illustrates time **160** along the horizontal axis and frequency **150** along the vertical axis. The transmitter is indicated along the top.

4

The frequency **150** may be divided into four subchannels **1**, **2**, **3**, **4**. In example embodiments, each subchannel **1**, **2**, **3**, **4** may have a bandwidth of 5 MHz. In example embodiments, each subchannel has a bandwidth, and the bandwidths may be different. For example, subchannels **1** and **2** may have a bandwidth of 5 MHz, subchannel **3** may have a bandwidth of 10 MHz, and subchannel **4** may have a bandwidth of 20 MHz. In example embodiments, the subchannels **1**, **2**, **3**, **4** may be in accordance with a wireless standard. As illustrated, there is one AP **104** and four STAs **108**. In example embodiments, there may be more or fewer STAs **108** and more or fewer APs **104**.

In example embodiments, the STAs **108** and AP **104** may be using OFDMA to communicate. In example embodiments, the STAs **108** and AP **104** may be using uplink and downlink multiple-user multiple-input multiple-out (UL MU-MIMO) to communicate. In MU-MIMO, two or more spatial streams may be used that utilize the same frequency. In example embodiments, the STAs **108** and AP **104** may communicate according to a wireless communication standard. In example embodiments, the wireless standard may be 802.11, 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac, 802.11ad, 802.11af, 802.11ah, 802.11ai, 802.11aj, 802.11aq, 802.11ax, Bluetooth, or another wireless standard.

In example embodiments, the STAs **108** are mobile devices. In example embodiments, the STAs **108** are wireless mobile devices. In example embodiments, the AP **104** is an AP. In example embodiments, the AP **104** is a mobile device. In example embodiments, the AP **104** is a wireless device. In example embodiments, the AP **104** is a STA **108**.

In example embodiments, the SIG **120** is a signal that may include information regarding the data **122**. In example embodiments, the SIG **120** may include information regarding the AP **104**. In example embodiments, the SIG **120** may include information regarding an acknowledgement policy. In example embodiments, the SIG **120** may comprise a frame that complies with a wireless standard. In example embodiments, the SIG **120** comprises a control or management frame that complies with a wireless standard.

In example embodiments, the data **122** may be a signal that comprises a data frame that complies with a wireless standard. In example embodiments, the BACK **126** may be a signal that comprises an acknowledgement frame in accordance with a wireless standard. In example embodiments, the BACK **126** may be a block acknowledgment in accordance with a wireless standard. In example embodiments, the data **122** includes an indication of an acknowledgement policy.

The time sequence diagram **100** begins at **162** with the AP **104** transmitting the SIG **120** to the STAs **108**. In an example embodiment, the AP **104** may determine, based on the acknowledge policy being used, to include a bit in the SIG **120** that indicates to the STAs **108** to use an acknowledgement policy where the STAs **108** transmit an BACK **126** to the AP **104** without waiting for a request to transmit the BACK **126**. In example embodiments, the AP **104** may transmit an indication to the STAs **108** of an acknowledgement policy in a previous frame.

The time sequence diagram **100** continues at **164** with the AP **104** transmitting data **122** to the STAs **108**. For example, the AP **104** may transmit data **122.2** to STA2 **108.2** on subchannel **3**.

In an example embodiment, the AP **104** may determine not to transmit a schedule (SCH)/SIG after the data **122** based on the acknowledgement policy of the AP **104**. In an example embodiment, the AP **104** may include an indication of an acknowledge policy in frames of the data **122**.

The time sequence diagram **100** continues at **166** with the STAs **108** waiting to transmit ACKs **126**. In some embodiments, the STAs **108** may wait a short interframe space (SIFS) **166** before transmitting the BACKs **126**. In example embodiments, the STAs **108** may determine to not wait for a SCH and/or a SIG and/or an ACK request from the AP **104** based on an acknowledgement policy. In example embodiments, the STAs **108** may wait SIFs **166** before transmitting the ACKs **126** based on receiving an indication of an acknowledgement policy from the AP **104**. In example embodiments, the STAs **108** may wait a period of time greater than the SIFS **166**. In example embodiments, the AP **104** may transmit to the STAs **108** a pre-determined amount of time the STAs **108** should wait before transmitting. In example embodiments, an indication of the acknowledgement policy may have been sent to the STAs **108** in an earlier frame such as a beacon or other management frame, or in a control or data frame. For example, an indication of the acknowledgement policy may have been sent in the SIG **120** or DATA **122** frames.

The time sequence diagram **100** continues at **168** with the STAs **108** transmitting ACKs **126** to the AP **104**. In example embodiments, the STAs **108** use the same subchannel on which they received the data **122** to transmit the ACK **126**. For example, STA**3 108**.3 received data **122**.3 on subchannel **2** and transmitted an ACK **126**.3 to the AP **104** on subchannel **2**. In example embodiments, the ACKs **126** are ACKs **126**. In example embodiments, the STAs **108** are configured to send the BACKs **126** in response to the DATA **122** without receiving a SCH and/or a (SIG and/or an BACK request from the AP **104** based on an acknowledgement policy.

In example embodiments, the BACKs **126** are transmitted to the AP **104** in response to an implicit request from the AP **104** that is part of an acknowledgement policy. In example embodiments, the STAs **108** may transmit data (not illustrated) prior to or after transmitting the BACKs **126**. In example embodiments, one of the SIG **120** or the DATA **122** includes a schedule, and the STAs transmit data according to the schedule. In example embodiments, the BACK **126** may be part of a data frame (not illustrated).

The STAs **108** transmitting BACKs **126** without receiving additional frames from the AP **104** may have the technical effect of saving time since transmitting a scheduling and/or SIG frame takes time. The scheduling and/or SIG frame may take 100 microseconds.

In some embodiments, the MU-MIMO may be used where one or more subchannels **1, 2, 3, 4** may be shared by more than one STA **108**. For example, subchannel **4** may be shared by a MU-MIMO group such as STA**1 108**.1 and STA**5 108**.5 (not illustrated). In example embodiments, the acknowledgement policy may be based on a pre-determined rule. In example embodiments, the STA **108** may determine when to transmit a BACK **126** based on a spatial stream associated with the STA **108**. In example embodiments, the STA **108** from the MU-MIMO group that the first spatial stream is intended for may be the first STA **108** to transmit the BACK **126** after the data **122** transmission is received.

FIG. **3** illustrates a time sequence diagram **200** of an acknowledgement, in accordance with some example embodiments. Illustrated in FIG. **3** is a time sequence diagram **200**, AP **104**, STAs **108**, SIG **220**, DATA **222**, block acknowledgement request (BAR) **223**, and BACK **226**. The time sequence diagram illustrates time **260** along the horizontal axis and frequency **250** along the vertical axis. The transmitter is indicated along the top.

In example embodiments, the BAR **223** may be a signal that is a block acknowledgement request **223** according to a wireless standard. In example embodiments, the block acknowledgement (BACK) **226** may be a signal that is a block acknowledgement according to a wireless standard.

The time sequence diagram **200** begins at **262** with the AP **104** transmitting the SIG **220** to the STAs **108**. The time sequence diagram **200** continues at **264** with the AP **104** transmitting data **222** to the STAs **108**. For example, the AP **104** may transmit data **222**.2 to STA**2 108**.2 on subchannel **3**.

The time sequence diagram **200** continues at **266** with the AP **104** transmitting BAR **223** to the STAs **108**. The BAR **223** may include an indication that the STAs **108** are to use an acknowledgement policy that indicates that the BACKs **226** are to be transmitted on the same subchannel **1, 2, 3, 4** in which the BAR **223** and/or DATA **222** was transmitted to the STAs **108**. In example embodiments, the indication of the acknowledgement policy may have been sent to the STAs **108** in an earlier frame such as a beacon or other management frame, or in a control or data frame:

The time sequence diagram **200** may continue at **268** with the STAs **108** waiting to transmit BACKs **226**. In example embodiments, the STAs **108** may wait a SIFS **268** before transmitting the BACKs **226**. In example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait SIFs **268** before transmitting the BACKs **226**. In example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait SIFs **268** before transmitting the BACKs **226** based on receiving an indication from the AP **104** that the SCH/SIG would not be sent. In example embodiments, the STAs **108** may wait a different period of time before transmitting the BACK **226**.

The time sequence diagram **200** continues at **270** with the STAs **108** transmitting BACKs **226** to the AP **104**. In some embodiments, the STAs **108** use the same subchannel on which they received the data **222** and/or BAR **223** to transmit the BACK **226**. For example, STA**3 108**.3 received BAR **223**.3 on subchannel **2** and transmitted a BACK **226**.3 to the AP **104** on subchannel **2**. In some embodiments, the STAs **108** are configured to send the BACKs **226** in response to the BAR **223** without receiving a SCH and/or a SIG based on receiving an indication to implement this acknowledgement policy from the AP **104**.

In example embodiments, the MU-M IMO may be used where one or more subchannels **1, 2, 3, 4** may be shared by more than one STA **108**. For example, subchannel **4** may be shared by a MU-MIMO group such as STA**1 108**.1 and SIA**5 108**.5 (not illustrated). In example embodiments, the acknowledgement policy may be based on a pre-determined rule. In example embodiments, the STA **108** may determine when to transmit a BACK **226** based on a spatial stream associated with the STA **108**. In example embodiments, the STA **108** from the MU-MIMO group that the first spatial stream is intended for may be the first STA **108** to transmit the BACK **226** after the DATA **222** transmission is received.

FIG. **4** illustrates a time sequence diagram **300** of an acknowledgement, in accordance with some example embodiments. Illustrated in FIG. **4** is a time sequence diagram **300**, AP **104**, STAs **108**, SIG **320**, DATA **322**, multi-user block acknowledgement request (MU BAR) **323**, and BACK **326**. The time sequence diagram illustrates time **360** along the horizontal axis and frequency **350** along the vertical axis. The transmitter is indicated along the top.

In example embodiments, the MU BAR **323** may be a signal that is a multi-user BACK request according to a wireless standard. In example embodiments, the MU BAR

323 is a BACK request transmitted on subchannels **1, 2, 3, 4** to the STAs **108**. In an example embodiment, the MU-BAR **323** may be a multicast/broadcast frame addressing multiple STAs **108**. In example embodiments, the MU BAR **323** may include an indication that the STAs **108** are to use an acknowledgement policy that indicates on which subchannel **1, 2, 3, 4** that the BACKs **326** are to be transmitted.

The time sequence diagram **300** begins at **362** with the AP **104** transmitting the SIG **320** to the STAs **108**. The time sequence diagram **300** continues at **364** with the AP **104** transmitting data **322** to the STAs **108**. For example, the AP **104** may transmit data **322.2** to STA2 **108.2** on subchannel **3**.

The time sequence diagram **300** continues at **366** with the AP **104** transmitting MU-BAR **323** to the STAs **108**. In example embodiments, the MU BAR **323** may be transmitted on a band of the subchannels **1, 2, 3, 4** that polls two or more of the STAs **108** to transmit BACKs **326**.

In example embodiments, the MU BAR **323** may include an indication that the STAs **108** are to use an acknowledgement policy that indicates that the BACKs **326** are to be transmitted on the same subchannel **1, 2, 3, 4** in which the DATA **622** was transmitted to the STAs **108**. In example embodiments, the indication of the acknowledgement policy may have been sent to the STAs **108** in an earlier frame such as a management or control frame. In an example embodiment, MU-BAR **323** may include subchannel allocation for the uplink BACKs **326**. In example embodiments, the MU-BAR **323** includes one or more of the following information: association identification (AID) of the STAs **108**, subchannel for the STA **108** to use to transmit the BACK **326**, and legacy BAR information that may be included in one or more wireless standards.

The time sequence diagram **300** continues at **368** with the STAs **108** waiting to transmit BACKs **326**. In some embodiments, the STAs **108** may wait a SIFS **368** before transmitting the ACKs **326**. In example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait STAs **366** before transmitting the ACKs **326** based on receiving an indication of an acknowledgement policy in the SIG **320**.

The time sequence diagram **300** continues at **370** with the STAs **108** transmitting BACKs **326** to the AP **104**. In example embodiments, the STAs **108** use the same subchannel on which they received the data **322** to transmit the BACK **326**. For example, STA3 **108.3** received data **322.3** on subchannel **2** and transmitted a BACK **326.3** to the AP **104** on subchannel **2**. In example embodiments, the STAs **108** are configured to send the BACKs **326** in response to the MU BAR **323** without receiving a SCH and/or a SIG based on receiving an indication to implement this acknowledgement policy from the AP **104**. In example embodiments, the STAs **108** are configured to transmit the BACKs **326** on an allocated subchannel **1, 2, 3, 4** based on a subchannel allocation in the MU-BAR **323**.

In some embodiments, the MU-MIMO may be used where one or more subchannels **1, 2, 3, 4** may be shared by more than one STA **108**. For example, subchannel **4** may be shared by a MU-MIMO group such as STA1 **108.1** and STA5 **108.5** (not illustrated). In example embodiments, the acknowledgement policy may be based on a pre-determined rule. In example embodiments, the STA **108** may determine when to transmit a BACK **326** based on a spatial stream associated with the STA **108**. In example embodiments, the STA **108** from the MU-MIMO group for which the first spatial stream is intended may be the first STA **108** to transmit the BACK **326** after the DATA **322** transmission is received.

FIG. **5** illustrates a time sequence diagram **400** of an acknowledgement, in accordance with some example embodiments. Illustrated in FIG. **5** is a time sequence diagram **400**, AP **104**, STAs **108**, SIG **420**, DATA **422**, MU BAR **423.1**, MU BAR **423.2**, and BACK **426**. The time sequence diagram illustrates time **460** along the horizontal axis and frequency **450** along the vertical axis. The transmitter is indicated along the top. As illustrated, the AP **104** and two or more of the STAs **108** may be using MU-MIMO and OFDMA. As illustrated, the frequency **450** is illustrated twice (**450.1** and **450.2**), with **450.1** illustrating a first MU-MIMO group and **450.2** illustrating a second MU-MIMO group.

The time sequence diagram **400** begins at **462** with the AP **104** transmitting the SIG **420.1** and SIG **420.2** to the STAs **108**. The time sequence diagram **400** continues at **464** with the AP **104** transmitting data **422** to the STAs **108**. For example, the AP **104** may transmit data **422.2** to STA2 **108.2** in a first spatial stream and STA6 **108.6** on subchannel **3** in a second spatial stream.

The time sequence diagram **400** continues at **466** with the AP **104** MU-BAR **423.1** to the STAs **108**. In an example embodiment, the MU BAR **423.1** may be transmitted on a band that polls two or more of the STAs **108** to transmit BACKs **426**. For example, MU BAR **423.1** may poll STA1 **108.1** through STA4 **108.4** on subchannels **1, 2, 3, 4** in MU-MIMO group. The MU BAR **423** may include an indication that the STAs **108** are to use an acknowledgement policy that indicates that the BACKs **426** are to be transmitted on the same subchannel **1, 2, 3, 4** in which the DATA **422** was transmitted to the STAs **108**.

In example embodiments, the MU-BAR **423** may indicate which MU-MIMO group should respond. In example embodiments, the MU-BAR **423** may indicate that a MU-MIMO group should respond, and the STAs **108** may determine which group should respond based on a predetermined rule. In example embodiments, the indication of the acknowledgement policy may have been sent to the STAs **108** in an earlier frame such as a management or control frame. In example embodiments, the MU-BAR **423** may be a multicast/broadcast frame addressing multiple STAs **108**. In example embodiments, MU-BAR **423** may include subchannel allocation for the uplink BACKs **426**. The MU-BAR **423** may include one or more of the following information AID of the STAs **108**: subchannel for the STA **108** to use to transmit the BACK **426** and legacy BAR information that may be included in one or more wireless standards.

The time sequence diagram **400** continues at **468** with the STAs **108** waiting to transmit BACKs **426**. In example embodiments, the STAs **108** may wait a short SIFS **468** before transmitting the BACKs **426**. En example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait SIFs **466** before transmitting the BACKs **426**. In example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait SIFs **466** before transmitting the BACKs **426** based on receiving an indication of an acknowledgement policy in the SIG **420**.

The time sequence diagram **400** continues at **470** with the STAs **108** transmitting BACKs **426** to the AP **104**. In an example embodiment, the STAs **108** use the same subchannel on which they received the data **422** to transmit the BACK **426**. For example, STA3 **108.3** received data **423.3** on subchannel **2** and transmitted a BACK **426.3** to the AP **104** on subchannel **2**. In an example embodiment, the STAs **108** are configured to send the BACKs **426** in response to the MU-BAR **423** without receiving a SCH and/or a SIG based

on receiving an indication to implement this acknowledgement policy from the AP **104**. In an example embodiment, the STAs **108** are configured to transmit the BACKs **426** on subchannels **1**, **2**, **3**, **4** based on a subchannel allocation in the MU-BAR **423**.

The time sequence diagram **400** continues at **472** with the AP **104** transmitting a second MU-BAR **423.2**. In an example embodiment, the AP **104** transmits at least one MU-BAR **423** for each MU-MIMO group.

The time sequence diagram **400** continues at **474** with the STAs **108** waiting to transmit BACKs **726**. The time sequence diagram **400** continues at **476** with the STAs **108** transmitting BACKs **426** to the AP **104**. In an example embodiment, the STAs **108** use the same subchannel on which they received the data **422** to transmit the BACK **426**. For example, STA3 **108.3** received data **422.3** on subchannel **2** and transmitted a BACK **426.3** to the AP **104** on subchannel **2**. In an example embodiment, the STAs **108** are configured to send the BACKs **426** in response to the MU-BAR **423** without receiving a SCH and/or a SIG based on receiving an indication to implement this acknowledgement policy from the AP **104**. In an example embodiment, the STAs **108** are configured to transmit the BACKs **426** on subchannels **1**, **2**, **3**, **4** based on a subchannel allocation in the MU-BAR **423**.

As illustrated, STA1 **108.1** and STA5 **108.5** are in different MU-MIMO groups. STA1 **108.1** transmitted a BACK **426.1** to the AP **104** at **470** in response to MU-BAR **423.1** at **466**. STAS **108.5** transmitted a BACK **426.5** to the AP **104** at **476** in response to the MU-BAR **423.2** at **472**.

FIG. **6** illustrates a time sequence diagram **500** of an acknowledgement, in accordance with some example embodiments. Illustrated in FIG. **6** is a time sequence diagram **500**, AP **104**, STAs **108**, SIG **520**, DATA **522**, MU BAR **523**, and BACK **526**. The time sequence diagram illustrates time **560** along the horizontal axis and frequency **550** along the vertical axis. The transmitter is indicated along the top. As illustrated, the AP **104** and two or more of the STAs **108** may be using MU-MIMO and OFDMA. As illustrated, the frequency **550** is illustrated twice (**550.1** and **550.2**), with **550.1** illustrating a first MU-MIMO group and **550.2** illustrating a second MU-MIMO group.

The time sequence diagram **500** begins at **562** with the AP **104** transmitting the SIG **520** to the STAs **108**. In example embodiments, the AP **104** transmits separate SIGS **520** for the two illustrated MU-MIMO groups.

The time sequence diagram **500** continues at **564** with the AP **104** transmitting data **522** to the STAs **108**. For example, the AP **104** may transmit data **522.2** to STA2 **108.2** and data **522.6** to STA6 **108.6** on subchannel **3**. The data **522.2** and data **522.6** may be transmitted on different MU-MIMU groups.

The time sequence diagram **500** continues at **566** with the AP **104** transmitting multi-user block acknowledgement requests (MU-BAR) **523** to the STAs **108**. In example embodiments, the MU BAR **523** may be transmitted on a band that polls two or more of the STAs **108** to transmit BACKs **526**. In example embodiments, the MU BAR **523** may poll multiple MU-MIMO groups.

In example embodiments, the MU BAR **523** may include an indication that the STAs **108** are to use an acknowledgement policy that indicates that the BACKs **526** are to be transmitted on the same subchannels **1**, **2**, **3**, **4** in which the DATA **522** was received by the STAs **108**.

In example embodiments, the MU-BAR **523** may indicate which MU-MIMO group should respond. In an example embodiment, the MU-BAR **523** may indicate that a particular MU-MIMO group should respond. In example embodiments, the STAs **108** may determine which group should respond based on a predetermined rule. In example embodiments, the indication of the acknowledgement policy may have been sent to the STAs **108** in an earlier frame such as a management, data, or control frame.

In example embodiments, the MU-BAR **523** is a multicast/broadcast frame addressing multiple STAs **108**. In example embodiments, MU-BAR **523** may include subchannel allocation for the uplink BACKs **526**. In example embodiments, the MU-BAR **523** includes one or more of the following information AID of the STAs **108**: subchannel for the STA **108** to use to transmit the BACK **526**, order of the STAs **108** to transmit BACKs **826** in the MU group that are following the MU-BAR **823**, and legacy BAR information that may be included in one or more wireless standards. In example embodiments, the MU-BAR **523** is send once for each MU-MIMO group.

The time sequence diagram **500** may continue at **568** with the STAs **108** waiting to transmit BACKs **526**. In some embodiments, the STAs **108** may wait a SIFS **568** before transmitting the BACKs **526**. In example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait SIFs **568** before transmitting the BACKs **526** based on receiving an indication from the AP **104** that the SCH/SIG would not be sent. In example embodiments, the STAs **108** may wait another length of time.

The time sequence diagram **500** continues at **570** with the STAs **108** transmitting BACKs **526** to the AP **104**. In an example embodiment, the STAs **108** use the same subchannel on which they received the data **522** to transmit the BACK **526**. For example, STA3 **108.3** received BAR **523.3** on subchannel **2** and transmitted a BACK **526.3** to the AP **104** on subchannel **2**. In an example embodiment, the STAs **108** are configured to send the BACKs **526** in response to the MU-BAR **523** without receiving a SCH and/or a SIG based on receiving an indication to implement this acknowledgement policy from the AP **104**. In an example embodiment, the STAs **108** are configured to transmit the BACKs **526** on subchannels **1**, **2**, **3**, **4** based on a subchannel allocation in the MU-BAR **523**.

The time sequence diagram **500** may continue at **572** with the STAs **108** waiting to transmit BACKs **526**. In some embodiments, the STAs **108** may wait a SIFS **572** before transmitting the BACKs **526**. In an example embodiments, the STAs **108** may determine to not wait for a SCH/SIG and wait SIFs **572** before transmitting the BACKs **526** based on receiving an indication from the AP **104** that the SCH/SIG would not be sent. In example embodiments, the STAs **108** may wait another length of time.

The time sequence diagram **500** continues at **574** with the STAs **108** transmitting BACKs **526** to the AP **104**. In an example embodiment, the STAs **108** use the same subchannel on which they received the data **522** to transmit the BACK **526**. For example, STA3 **108.3** received BAR **523.3** on subchannel **2** and transmitted a BACK **526.3** to the AP **104** on subchannel **2**. In an example embodiment, the STAs **108** are configured to send the BACKs **526** in response to the MU-BAR **523** without receiving a SCFI and/or a SIG based on receiving an indication to implement this acknowledgement policy from the AP **104**. In an example embodiment, the STAs **108** are configured to transmit the BACKs **526** on subchannel **1**, **2**, **3**, **4** based on a subchannel allocation in the MU-BAR **523**.

As illustrated, STA1 **108.1** and STA5 **108.5** are in different MU-MIMO groups. STA1 **108.1** transmitted a BACK **526.1** to the AP **104** at **570** in response to MU-BAR **523** at

566. STA5 108.5 transmitted a BACK 526.5 to the AP 104 at 574 in response to the MU-BAR 523 at 566.

In example embodiments, the technical effect is achieved of reducing the time to receive BACKs by requesting that BACK be sent in parallel. In example embodiments, the technical effect is achieved of reducing the time to receive BACK by not including a schedule subchannel allocation in a BAR.

FIG. 7 illustrates a frame 600 with a field 602 for acknowledgement in wireless networks, according to example embodiments. In example embodiments, the frame 600 is a signal that is a management, control, or data frame. In example embodiments, the frame 600 is a SIG frame, beacon frame, data frame, or MU BAR frame. In example embodiments, the field 602 may indicate an acknowledgement policy indicating how a STA 108 should acknowledge frames.

In example embodiments, the STA 108 is communicating in accordance with OFDMA and MU-MIMO. In example embodiments, the field 602 may indicate that the STA 108 should use a same subchannel or channel to acknowledge a frame as the frame was received on. In example embodiments, the STA 108 may be configured to use block acknowledgements. In example embodiments, the field 602 may be a single bit indicating that an OFDMA MU-MIMO acknowledgment policy should be used. The acknowledgment policy may be a block acknowledgment policy.

In example embodiments, the frame 600 is a frame transmitted prior to data frames, and the frame 600 includes an indication that data frames should be acknowledged using block acknowledgment on subchannels that were used to transmit the data frames.

In example embodiments, the field 602 may indicate an acknowledgement policy for groups in MU-MIMO. In example embodiments, the field 602 indicates that a STA should block acknowledge based on the order of the MU-MIMO group. In example embodiments, the field 602 indicates that the STA should acknowledge frames in the order of their MU-MIMO group. In example embodiments, the field 602 indicates that the STA should acknowledge frames according to their MU-MIMO group and wait a SIFS before transmitting the block acknowledgement.

In example embodiment, the field 602 may indicate that the STA should wait a SIFS after receiving a block acknowledgement request to transmit a block acknowledgment.

In example embodiments, the field 602 indicates that the STA should use a predetermined rule for a subchannel to transmit a block acknowledgment on and/or a predetermined rule for an order of a MU-MIMO group to transmit a block acknowledgement.

In example embodiments, the frame 600 is a SIG frame and the field 602 indicates that the STAs should acknowledge data frames transmitted after the SIG frame without waiting for an acknowledgement request.

FIG. 8 illustrates a frame 700 with a field 702 for acknowledgement in wireless networks, according to example embodiments. In example embodiments, the frame 700 is a MU BAR signal and the field 702 indicates a subchannel allocation for a STA to use to transmit block acknowledgement of frames transmitted to the STA. In example embodiments, the frame 700 may be used for communications in OFDMA and MU-MIMO. In example embodiments, the frame 700 is a signal that is a block acknowledgement request for OFDMA and MU-MIMO. In example embodiments, the frame 700 is transmitted to poll multiple STAs at once to transmit multiple BACK in parallel back.

FIG. 9 illustrates a frame 800 with a field 802 for acknowledgement in wireless networks, according to example embodiments. The frame 800 may be a signal that is part of a management frame transmitted by the STA where the field 802 indicates one or more acknowledgement policies that are supported by the STA as disclosed herein.

FIG. 10 illustrates a HEW device, in accordance with some embodiments. HEW device 1000 may be an HEW compliant device that may be arranged to communicate with one or more other HEW devices, such as HEW devices 104 (FIG. 1) or AP 104 (FIG. 1) as well as communicate with legacy devices 106 (FIG. 1). HEW devices 104 and legacy devices 106 may also be referred to as HEW STAs and legacy STAs, respectively. HEW device 1000 may be suitable for operating as AP 104 (FIG. 1) or an HEW device 104 (FIG. 1). In accordance with embodiments, HEW device 1000 may include, among other things, physical layer (PHY) circuitry 1002 and medium-access control layer circuitry (MAC) 1004. PHY circuitry 1002 and MAC 1004 may be HEW compliant layers and may also be compliant with one or more legacy IEEE 802.11 standards. MAC 1004 may be arranged to configure physical layer convergence procedure protocol data unit PPDUs and arranged to transmit and receive PPDUs, among other things. HEW device 1000 may also include other hardware processing circuitry 1006 and memory 1008 configured to perform the various operations described herein.

In some embodiments, the MAC 1004 may be arranged to contend for a wireless medium during a contention period to receive control of the medium for the HEW control period and configure an HEW PPDU. The PHY circuitry 1002 may be arranged to transmit the HEW PPDU. The PHY circuitry 1002 may include circuitry for modulation/demodulation, upconversion/downconversion, filtering, amplification, and the like. In some embodiments, the hardware processing circuitry 1006 may include one or more processors. The hardware processing circuitry 1006 may be configured to perform functions based on instructions being stored in a random access memory (RAM) or read-only memory (ROM), or based on special purpose circuitry. In some embodiments, two or more antennas may be coupled to the PHY circuitry 1002 and arranged for sending and receiving signals including transmission of the HEW packets. The HEW device 1000 may include a transceiver (not shown) to transmit and receive data such as HEW PPDU. The memory 1008 may store information for configuring the other circuitry to perform operations for configuring and transmitting HEW packets and performing the various operations described herein including the reception of and transmission of SIGs 120, 220, 320, 420, and 520; DATA 122, 222, 322, 422, and 522; MU BAR 323, 423, and 523; BAR 223; BACK 226, 326, 426, and 526; frames 600 and 700; and, ACK 126. In example embodiments, the circuitry of one or more of the antenna, transceiver, PHY circuitry 1002, MAC 1.004, and processing 1006 may be configured to perform operations for configuring and transmitting HEW packets and performing the various operations described herein including the reception of and transmission of SIGs 120, 220, 320, 420, and 520; DATA 122, 222, 322, 422, and 522; MU BAR 323, 423, and 523; BAR 223; BACK 226, 326, 426, and 526; frames 600 and 700; and, ACK 126.

In some embodiments, the HEW device 1000 may be configured to communicate using OFDM communication signals over a multicarrier communication channel. In some embodiments, HEW device 1000 may be configured to communicate in accordance with one or more specific communication standards, such as the IEEE standards

including IEEE 802.11-2012, 802.11n-2009, 802.11ac-2013, 802.11ax, standards and/or proposed specifications for WLANs, although the scope of the example embodiments is not limited in this respect as they may also be suitable to transmit and/or receive communications in accordance with other techniques and standards.

In some embodiments, an HEW device 1000 may be part of a portable wireless communication device, such as a PDA) a laptop or portable computer with wireless communication capability, a web tablet, a wireless telephone, a smartphone, a wireless headset, a pager, an instant messaging device, a digital camera, an AP, a television, a medical device (e.g., a heart rate monitor, a blood pressure monitor, etc.), a base station, a transmit/receive device for a wireless standard such as 802.11 or 802.16, or other device that may receive and/or transmit information wirelessly. In some embodiments, the mobile device may include one or more of a keyboard, a display, a non-volatile memory port, multiple antennas, a graphics processor, an application processor, speakers, and other mobile device elements. The display may be an LCD screen including a touch screen.

The antennas may comprise one or more directional or omnidirectional antennas, including, for example, dipole antennas, monopole antennas, patch antennas, loop antennas, microstrip antennas or other types of antennas suitable for transmission of RF signals. In some MIMO embodiments, the antennas may be effectively separated to take advantage of spatial diversity and the different channel characteristics that may result.

Although the device 1000 is illustrated as having several separate functional elements, one or more of the functional elements may be combined and may be implemented by combinations of software-configured elements, such as processing elements including DSPs, and/or other hardware elements. For example, some elements may comprise one or more microprocessors, DSPs, FPGAs, ASICs, transmitters, receivers, transceivers, RFICs, and combinations of various hardware and logic circuitry for performing at least the functions described herein. In some embodiments, the functional elements may refer to one or more processes operating on one or more processing elements.

Embodiments may be implemented in one or a combination of hardware, firmware and software. Embodiments may also be implemented as instructions stored on a computer-readable storage device, which may be read and executed by at least one processor to perform the operations described herein. A computer-readable storage device may include any non-transitory mechanism for storing information in a form readable by a machine (e.g., a computer). For example, a computer-readable storage device may include ROM, RAM, magnetic disk storage media, optical storage media, flash-memory devices, and other storage devices and media. Some embodiments may include one or more processors and may be configured with instructions stored on a computer-readable storage device.

The following examples pertain to further embodiments. Example 1 is a station (STA) including hardware processing circuitry configured to: receive data frames on a subchannel from an access point (AP) in accordance with down link (DL) multi-user multiple input and multiple output (MU-MIMO) and orthogonal frequency division multiple access (OFDMA). The hardware circuitry may be configured to: transmit a block acknowledgement of the data frames in accordance with uplink (UL) MU-MIMO and OFDMA, in response to the data frames.

In Example 2, the subject matter of Example 1 can optionally include: where the hardware processing circuitry

is further configured to: transmit the block acknowledgement of the data frames on the subchannel.

In Example 3, the subject matter of Examples 1 and 2 can optionally include: where the hardware processing circuitry is further configured to: transmit the block acknowledgement of the data frames when a block acknowledgement request has not been received by the STA.

In Example 4, the subject matter of Examples 1 through 3 can optionally include: where the hardware processing circuitry is further configured to: receive an indication of an acknowledgment policy from the AP.

In Example 5, the subject matter of Examples 1 through 4 can optionally include: where the hardware processing circuitry is further configured to wait a short interframe space (SIFS) time before the transmit.

In Example 6, the subject matter of Examples 1 through 5 can optionally include: where the hardware processing circuitry is further configured to wait a predetermined time before the transmit, where the predetermined time is longer than a short interframe space (SIFS) time.

In Example 7, the subject matter of Examples 1 through 6 can optionally include: where the hardware processing circuitry is further configured to transmit the block acknowledgement at a time based on a MU-MIMO group identification of the wireless device.

In Example 8, the subject matter of Examples 1 through 7 can optionally include: where the hardware processing circuitry is further configured to: transmit second data frames in accordance with UL MU-MIMO and OFDMA, wherein the second data frames comprises the block acknowledgement of the data frames, in response to the data frames.

In Example 9, the subject matter of Examples 1 through 8 can optionally include: where the hardware processing circuitry is further configured to: transmit second data frames on the subchannel, and transmit the block acknowledgement of the data frames on the subchannel in accordance with UL MU-MIMO and OFDMA, in response to the data frames.

In Example 10, the subject matter of Examples 1 through 9 can optionally include: where the hardware processing circuitry is further configured to: receive a signal frame from the AP prior to the data frames.

In Example 11, the subject matter of Examples 1 through 10 can optionally include: where the data frames or the signal frame comprise an indication of a schedule; and where the second data frames are transmitted according to the schedule.

In Example 12, the subject matter of Examples 1 through 11 can optionally include: where the data frames or the signal frame comprise an indication to transmit the block acknowledgement of the data on the subchannel.

In Example 13, the subject matter of Examples 1 through 8 can optionally include: memory and a transceiver coupled to the processing circuitry.

In Example 14, the subject matter of Example 13 can optionally include: one or more antennas coupled to the transceiver.

Example 15 is a method on a station (STA). The method including receiving data frames on a subchannel from an access point (AP) using multi-user multiple-input multiple-output (MU MIMO). The method may further include transmitting a block acknowledgement of the data frames, wherein the block acknowledgement is transmitted without receiving a block acknowledgement request, in response to receiving the data frames.

US 12,388,498 B2

15

16

In Example 16, the subject matter of Example 15 can optionally include: transmitting the block acknowledgement of the data frames on the subchannel.

In Example 17, the subject matter of Examples 15 and 16 can optionally include: waiting a short interframe space (SIFS) time before transmitting.

In Example 18 is an access point (AP). The AP may include hardware processing circuitry configured to: transmit first data frames to a first station (STA) on a first subchannel and concurrently transmit second data frames to a second STA on a second subchannel in accordance with down link (DL) multi-user multiple input and multiple output (MU-MIMO) and orthogonal frequency division multiple access (OFDMA). The hardware processing circuitry may be further configured to receive a first block acknowledgement from the first STA and concurrently receive a second block acknowledgement from the second STA in accordance with uplink (UL) MU-MIMO and OFDMA, where the first block acknowledgement is received on one of the first and second subchannels, and the second block acknowledgement is received on the other of the first and second subchannels.

In Example 19, the subject matter of Example 18 can optionally include: where the first subchannel and the second subchannel have a first bandwidth and a second bandwidth, respectively; and where the first bandwidth and the second bandwidth are each one of the following group: 1 MHz, 1.25 MHz, 2.5 MHz, 5 MHz, 10 MHz, 20 MHz, 40 Mhz, 80 MHz, and 160 MHz; and where the first subchannel and the second subchannel are different portions of a radio spectrum.

In Example 20, the subject matter of Examples 18 and 19 can optionally include where the hardware processing circuitry is further configured to: transmit the first transmission to the first STA on the first subchannel and a third transmission to a third STA on the first subchannel.

In Example 21, the subject matter of Examples 18 through 20 may option include where the hardware processing circuitry is further configured to: transmit a multi-user (MU) block acknowledgement request (BAR).

In Example 22, the subject matter of Example 21 may optionally include where the MU-BAR comprises a scheduling subchannel allocation.

In Example 23, the subject matter of Example 21 may optionally include where the hardware processing circuitry is further configured to: receive a third block acknowledgement from the third STA after the first block acknowledgement from the first STA is received, wherein the third subchannel and the first subchannel occupy the same portion of the radio spectrum.

Example 24 is a non-transitory computer-readable storage medium that stores instructions for execution by one or more processors to perform operations for block acknowledgement. The instructions configure the one or more processors to: receive data frames on a subchannel from an access point (AP) in accordance with down link (DL) multi-user multiple input and multiple output (MU-MIMO) and orthogonal frequency division multiple access (OFDMA); and transmit a block acknowledgement of the data frames on a subchannel in accordance with uplink (UL) MU-MIMO and OFDMA, in response to the data frames. In Example 25, the subject matter of Example 24 may optionally include where the instructions further configure the one or more processors to: transmit the block acknowledgement when a block acknowledgement request has not been received.

The Abstract is provided to comply with 37 C.F.R. Section 1.72(b) requiring an abstract that will allow the

reader to ascertain the nature and gist of the technical disclosure. It is submitted with the understanding that it will not be used to limit or interpret the scope or meaning of the claims. The following claims are hereby incorporated into the detailed description, with each claim standing on its own as a separate embodiment.

What is claimed is:

1. A method performed by a first station, the method comprising:
   receiving a signal field from an access point, the signal field including a first schedule;
   receiving a first downlink data frame from the access point on a first sub-channel according to the first schedule, wherein a second downlink data frame from the access point is received by a second station on a second sub-channel simultaneously according to downlink multi-user multiple input multiple output (DL MU-MIMO) and/or orthogonal frequency division multiple access (OFDMA), wherein the first station is included in a first group and the second station is included in a second group;
   receiving a multi-user block acknowledgement request (MU BAR) from the access point, wherein the MU BAR polls a first response of one or more stations in the first group and a second response of one or more stations in the second group with different response timing, and wherein the MU BAR indicates a resource allocation for a first uplink block acknowledgement for the first downlink data frame to be transmitted by the first station, and
   transmitting, to the access point, the first uplink block acknowledgement for the first downlink data frame at a first response timing in response to the MU BAR based on the resource allocation, while a second uplink block acknowledgement for the second downlink data frame being transmitted to the access point from the second station at a second response timing after a short inter-frame space (SIFS) interval following the first response timing, in response to the MU BAR.

2. The method of claim 1, wherein the MU BAR is a group based request for the first group and the second group.

3. The method of claim 1 further comprising:
   waiting for the SIFS interval before transmitting the first uplink block acknowledgement for the first downlink data frame.

4. The method of claim 1 further comprising:
   waiting for a predetermined time before transmitting the first uplink block acknowledgement for the first downlink data frame, wherein the predetermined time is longer than the SIFS interval.

5. The method of claim 1, wherein the first uplink block acknowledgement is transmitted by being included in a first uplink data frame.

6. The method of claim 1, wherein a bandwidth for each of the first sub-channel and the second sub-channel is one of the following bandwidths: 1 MHz, 1.25 MHZ, 2.5 MHz, 5 MHz, 10 MHz, 20 MHz, 40 MHz, 80 MHz, and 160 MHz.

7. A method performed by an access point, the method comprising:
   transmitting a signal field to a first station and a second station, the signal field including a first schedule and a second schedule;
   transmitting a first downlink data frame to the first station on a first sub-channel according to the first schedule and simultaneously transmitting a second downlink data frame to the second station on a second sub-channel according to the second schedule, the first

downlink data frame and the second downlink data frame are transmitted based on downlink multi-user multiple input multiple output (DL MU-MIMO) and/or orthogonal frequency division multiple access (OFDMA), wherein the first station is included in a first group and the second station is included in a second group;

transmitting a multi-user block acknowledgement request (MU BAR) to the first station and the second station, wherein the MU BAR polls a first response of one or more stations in the first group and a second response of one or more stations in the second group with different response timing, and wherein the MU BAR indicates a resource allocation for a first uplink block acknowledgement for the first downlink data frame to be transmitted from the first station, and

receiving the first uplink block acknowledgement for the first downlink data frame at a first response timing in response to the MU BAR and receiving a second uplink block acknowledgement for the second downlink data frame at a second response timing after a short inter-

frame space (SIFS) interval following the first response timing, in response to the MU BAR.

8. The method of claim 7, wherein the MU BAR is a group based request for the first group and the second group.

9. The method of claim 7 further comprising:
waiting for the SIFS interval before receiving the first uplink block acknowledgement for the first downlink data frame.

10. The method of claim 7 further comprising:
waiting for a predetermined time before receiving the first uplink block acknowledgement for the first downlink data frame, wherein the predetermined time is longer than the SIFS interval.

11. The method of claim 7, wherein the first uplink block acknowledgement is received by being included in a first uplink data frame.

12. The method of claim 7, wherein a bandwidth for each of the first sub-channel and the second sub-channel is one of the following bandwidths: 1 MHz, 1.25 MHZ, 2.5 MHz, 5 MHz, 10 MHz, 20 MHz, 40 MHz, 80 MHz, and 160 MHz.

* * * * *