


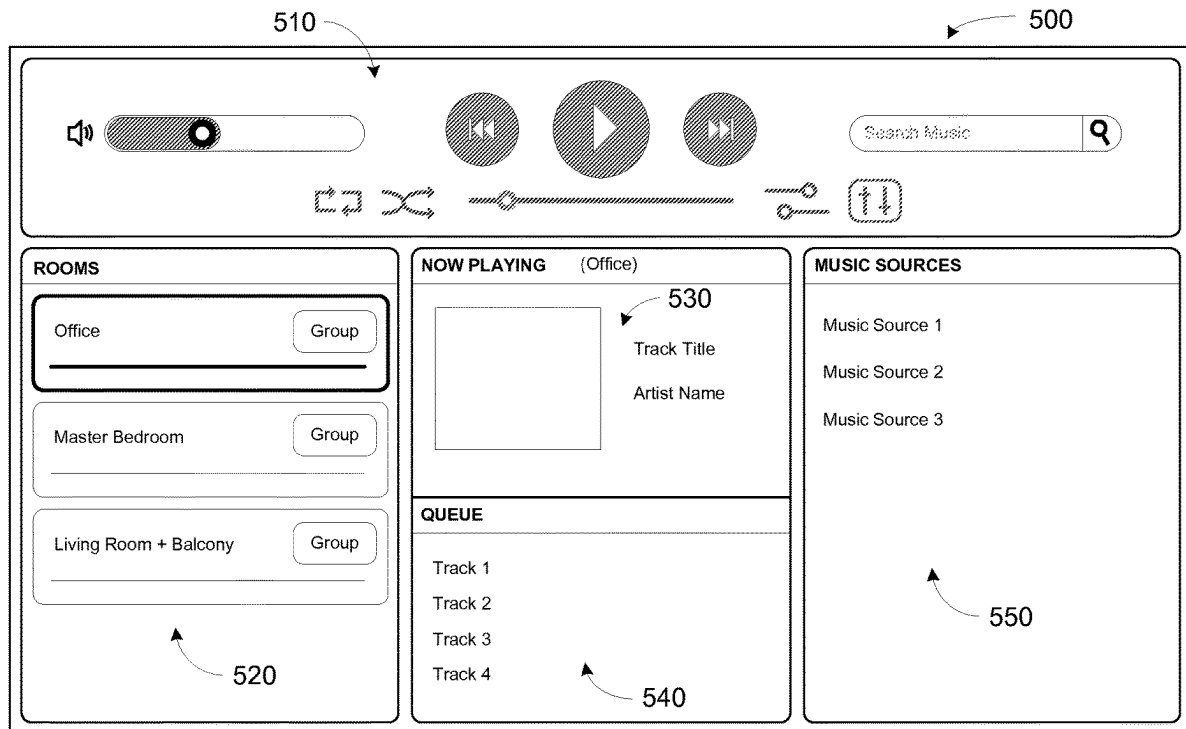

US 20250260729A1

(19) **United States**(12) **Patent Application Publication**
Corbin et al.(10) **Pub. No.: US 2025/0260729 A1**(43) **Pub. Date: Aug. 14, 2025**(54) **SOCIAL MEDIA CONNECTION
RECOMMENDATIONS BASED ON
PLAYBACK INFORMATION**(71) Applicant: **Sonos, Inc.**, Goleta, CA (US)(72) Inventors: **Keith Corbin**, Santa Barbara, CA (US);
Abhishek Kumar, Santa Barbara, CA
(US); **Ron Kuper**, Arlington, MA (US);
Gregory Paul Ramsperger,
Somerville, MA (US); **Andrej Sarkic**,
Cambridge, MA (US)(21) Appl. No.: **19/053,724**(22) Filed: **Feb. 14, 2025****Related U.S. Application Data**(63) Continuation of application No. 18/067,720, filed on
Dec. 18, 2022, now Pat. No. 12,231,477, which is a
continuation of application No. 17/569,008, filed on
Jan. 5, 2022, now Pat. No. 11,539,767, which is a
continuation of application No. 15/664,634, filed on
Jul. 31, 2017, now Pat. No. 11,223,661, which is a
continuation of application No. 14/495,684, filed on
Sep. 24, 2014, now Pat. No. 9,723,038.**Publication Classification**(51) **Int. Cl.**
H04L 65/403 (2022.01)
G06F 3/0482 (2013.01)
G06F 3/04842 (2022.01)
G06F 3/16 (2006.01)**G06F 16/435** (2019.01)
G06Q 10/101 (2023.01)
G06Q 50/00 (2024.01)
H04L 65/612 (2022.01)
H04L 67/10 (2022.01)
H04L 67/12 (2022.01)
H04L 67/125 (2022.01)
H04L 67/306 (2022.01)(52) **U.S. Cl.**
CPC **H04L 65/403** (2013.01); **G06F 3/0482**
(2013.01); **G06F 3/04842** (2013.01); **G06F**
3/165 (2013.01); **G06F 16/435** (2019.01);
G06Q 10/101 (2013.01); **G06Q 50/01**
(2013.01); **H04L 65/612** (2022.05); **H04L**
67/10 (2013.01); **H04L 67/12** (2013.01);
H04L 67/125 (2013.01); **H04L 67/306**
(2013.01)**ABSTRACT**(57) Embodiments are described herein that involve a computing
device initiating playback of a particular media item on a
media playback system that is registered to a particular
account of a social media service. The computing device
may query the social media service for one or more accounts
of the social media service that are registered to respective
media playback systems that have played the particular
media item on at least a threshold number of occasions and
have not yet been connected to the particular account of the
social media service within the social network. The com-
puting device may receive the queried one or more accounts
of the social media service and cause a graphical interface to
display one or more respective selectable indications of the
received one or more accounts of the social media service.

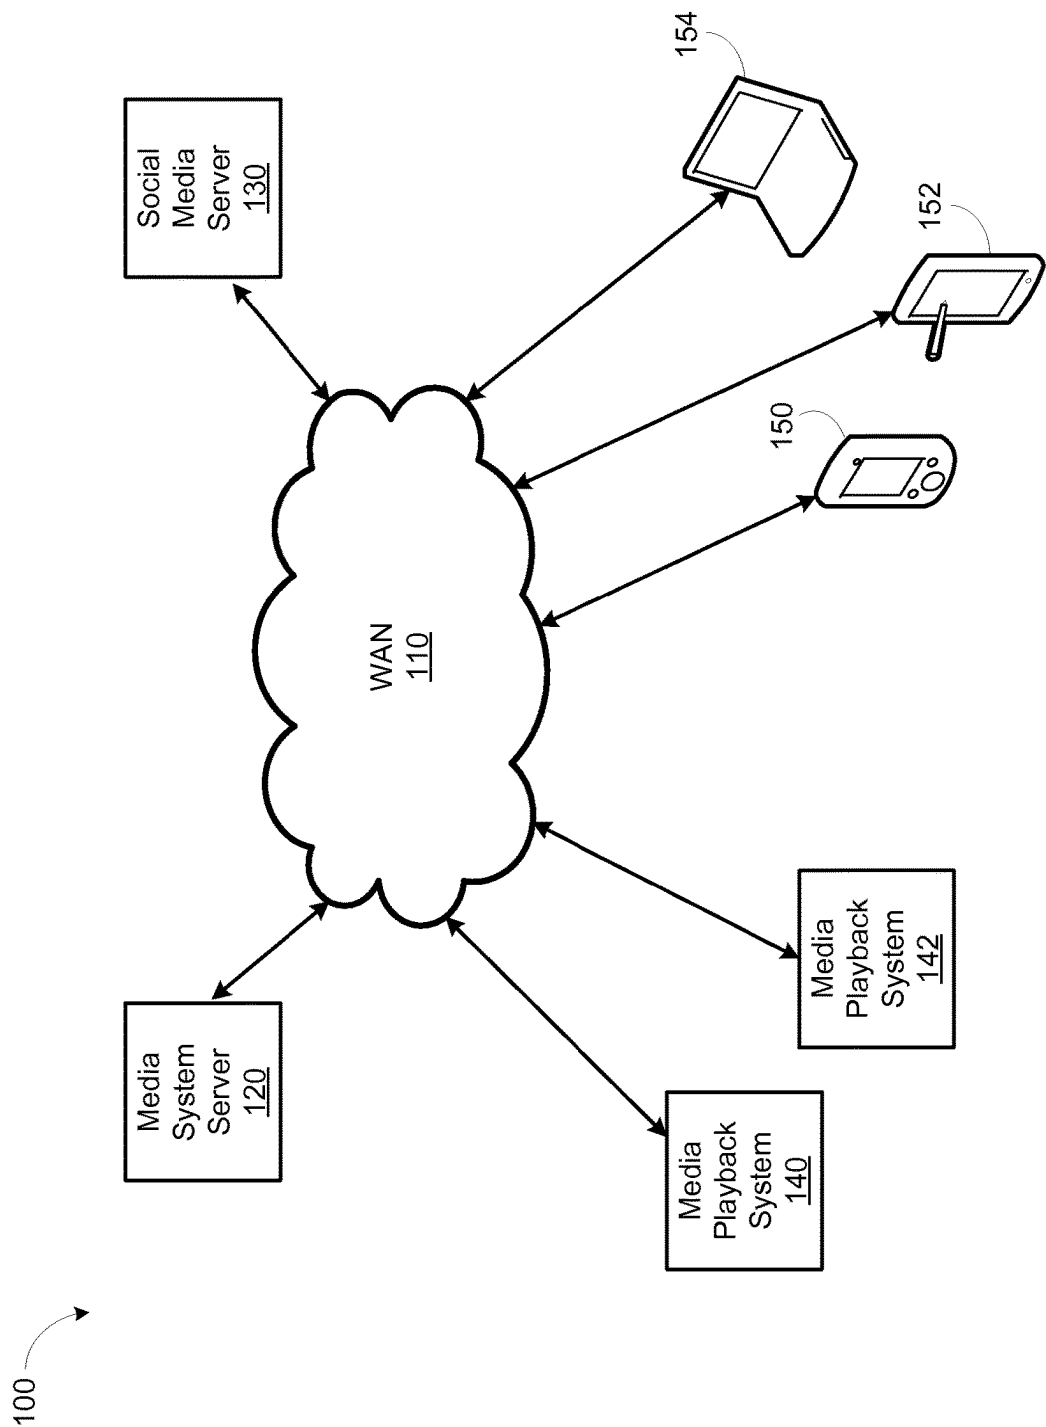


FIGURE 1

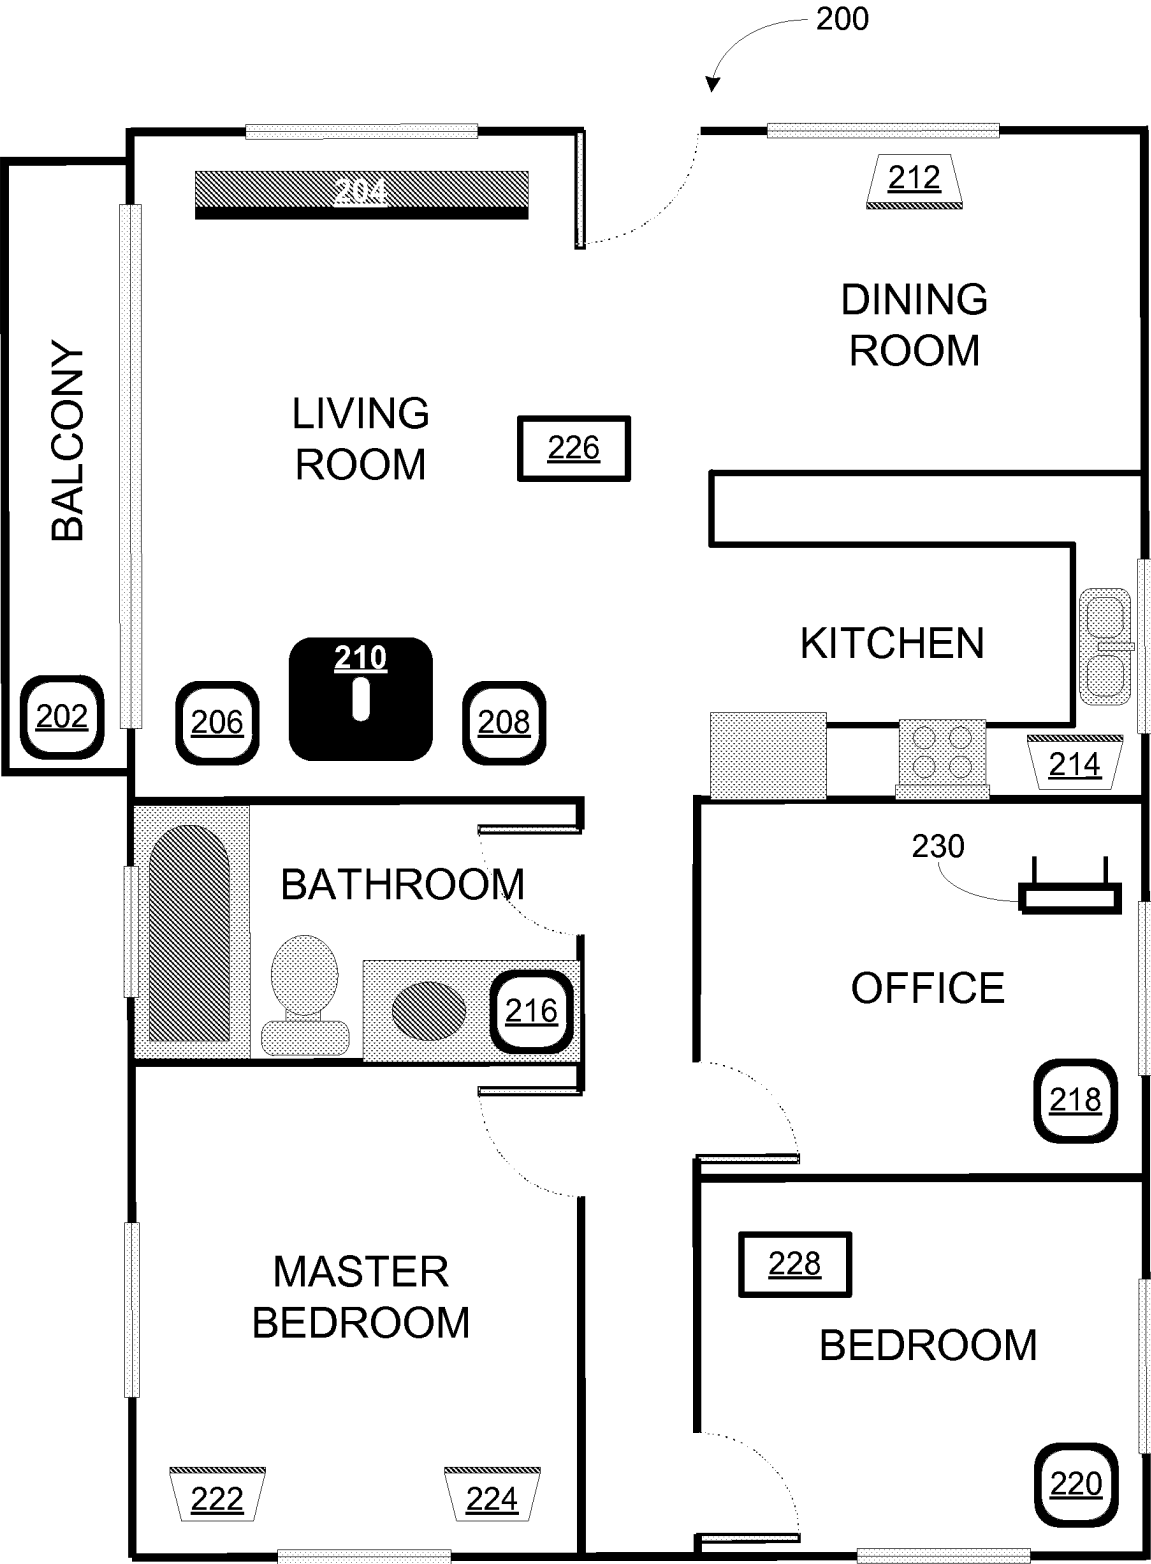


FIGURE 2

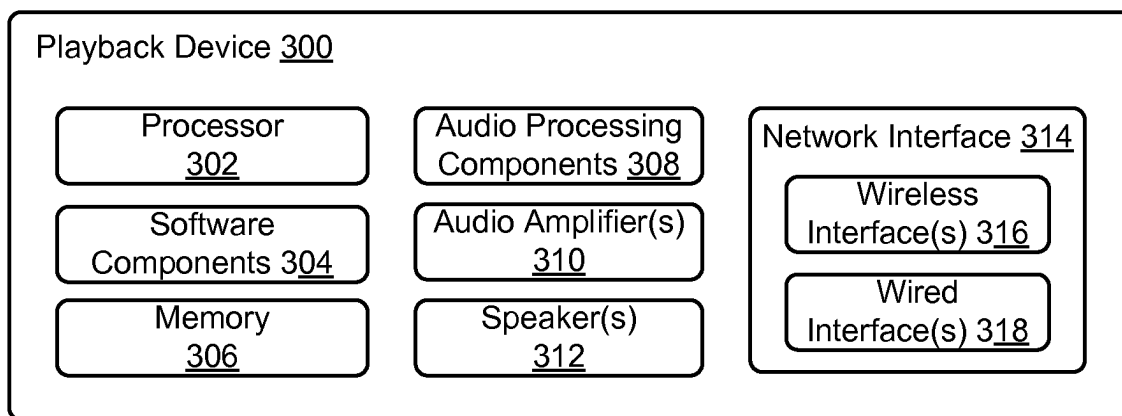


FIGURE 3

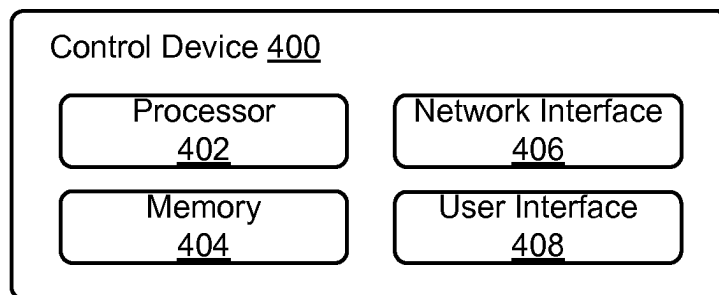


FIGURE 4

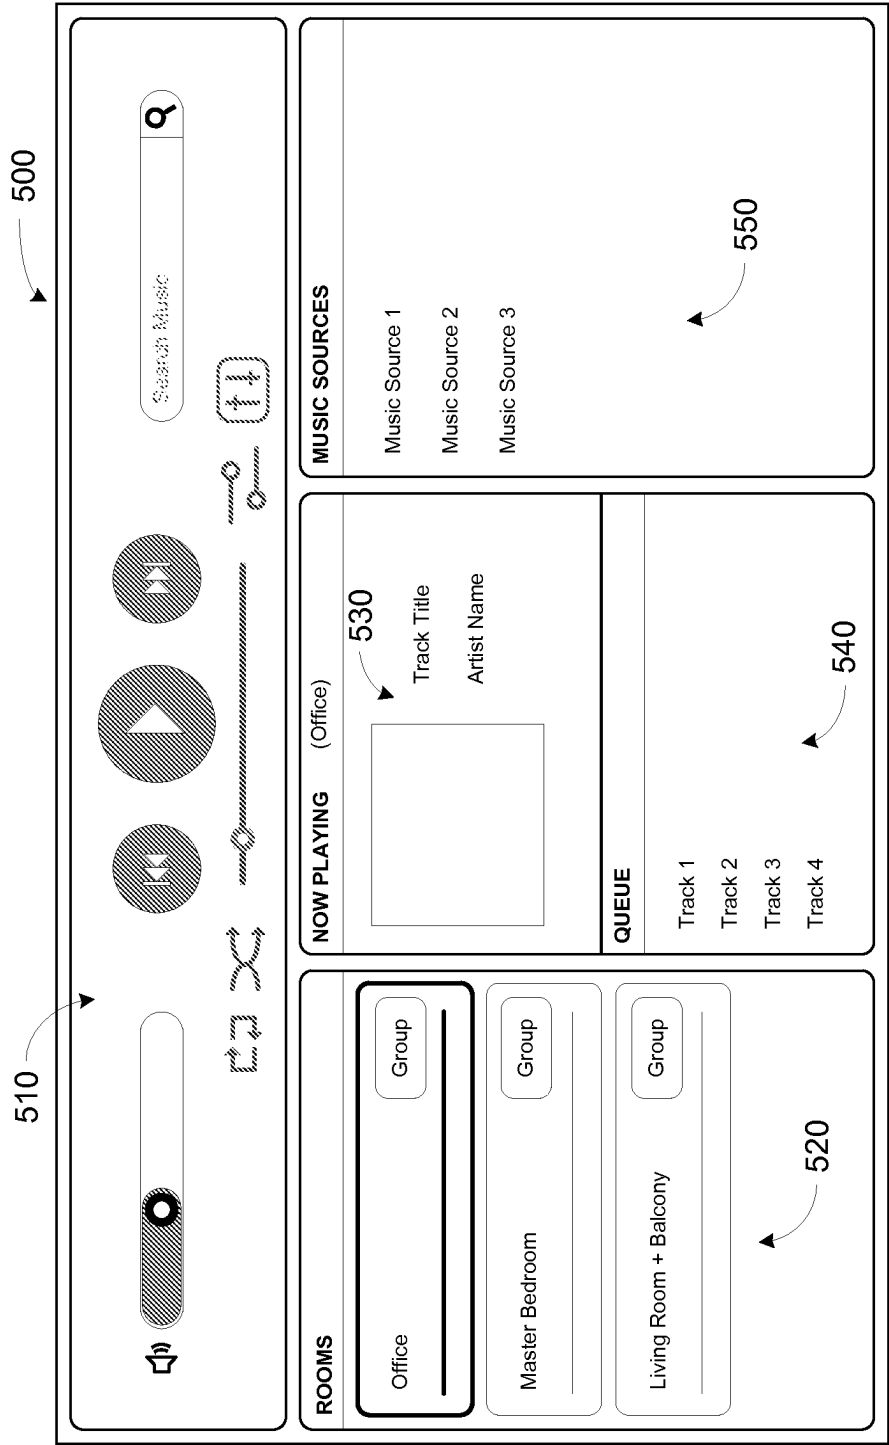


FIGURE 5

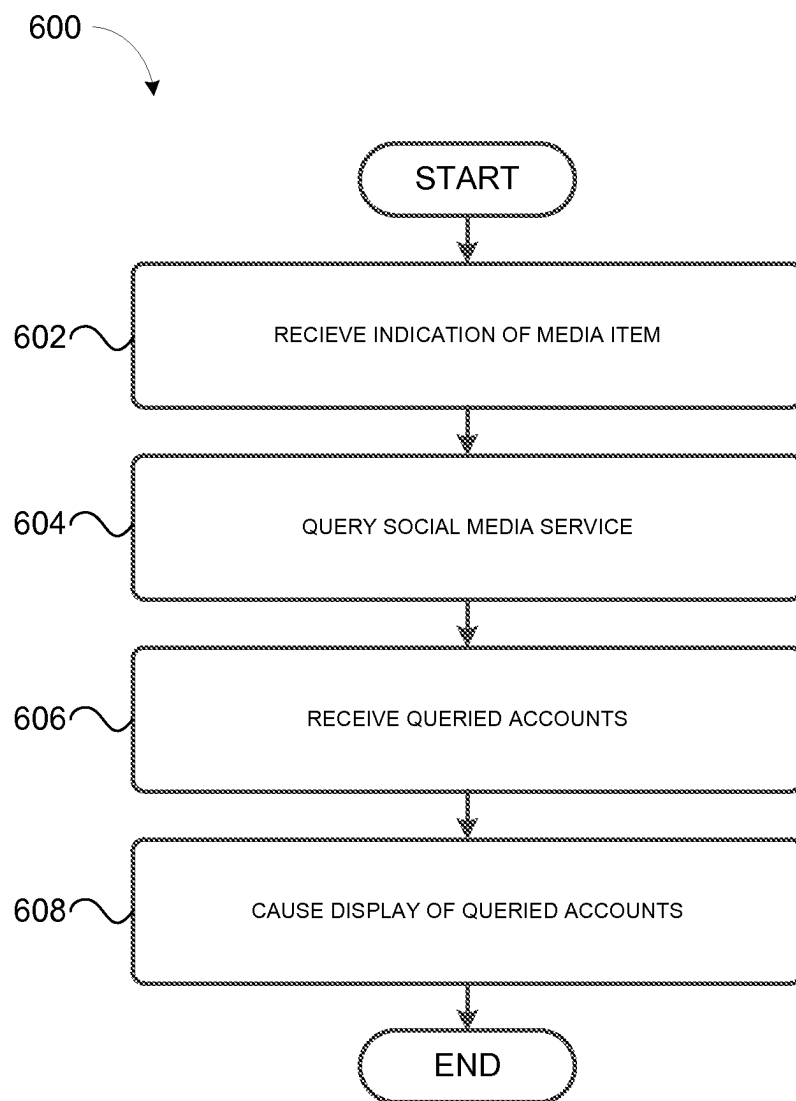


FIGURE 6

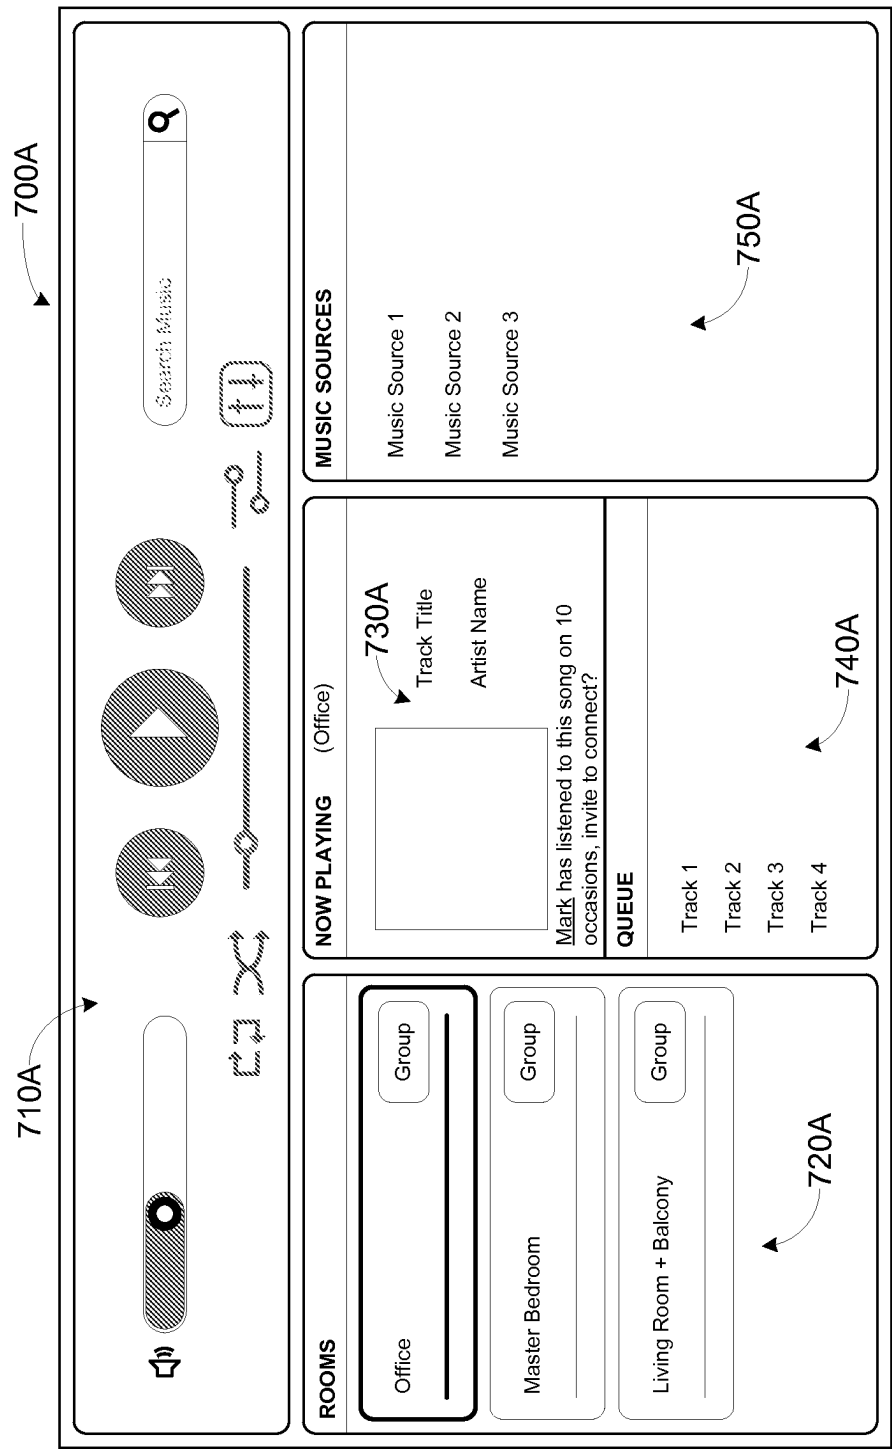


FIGURE 7A

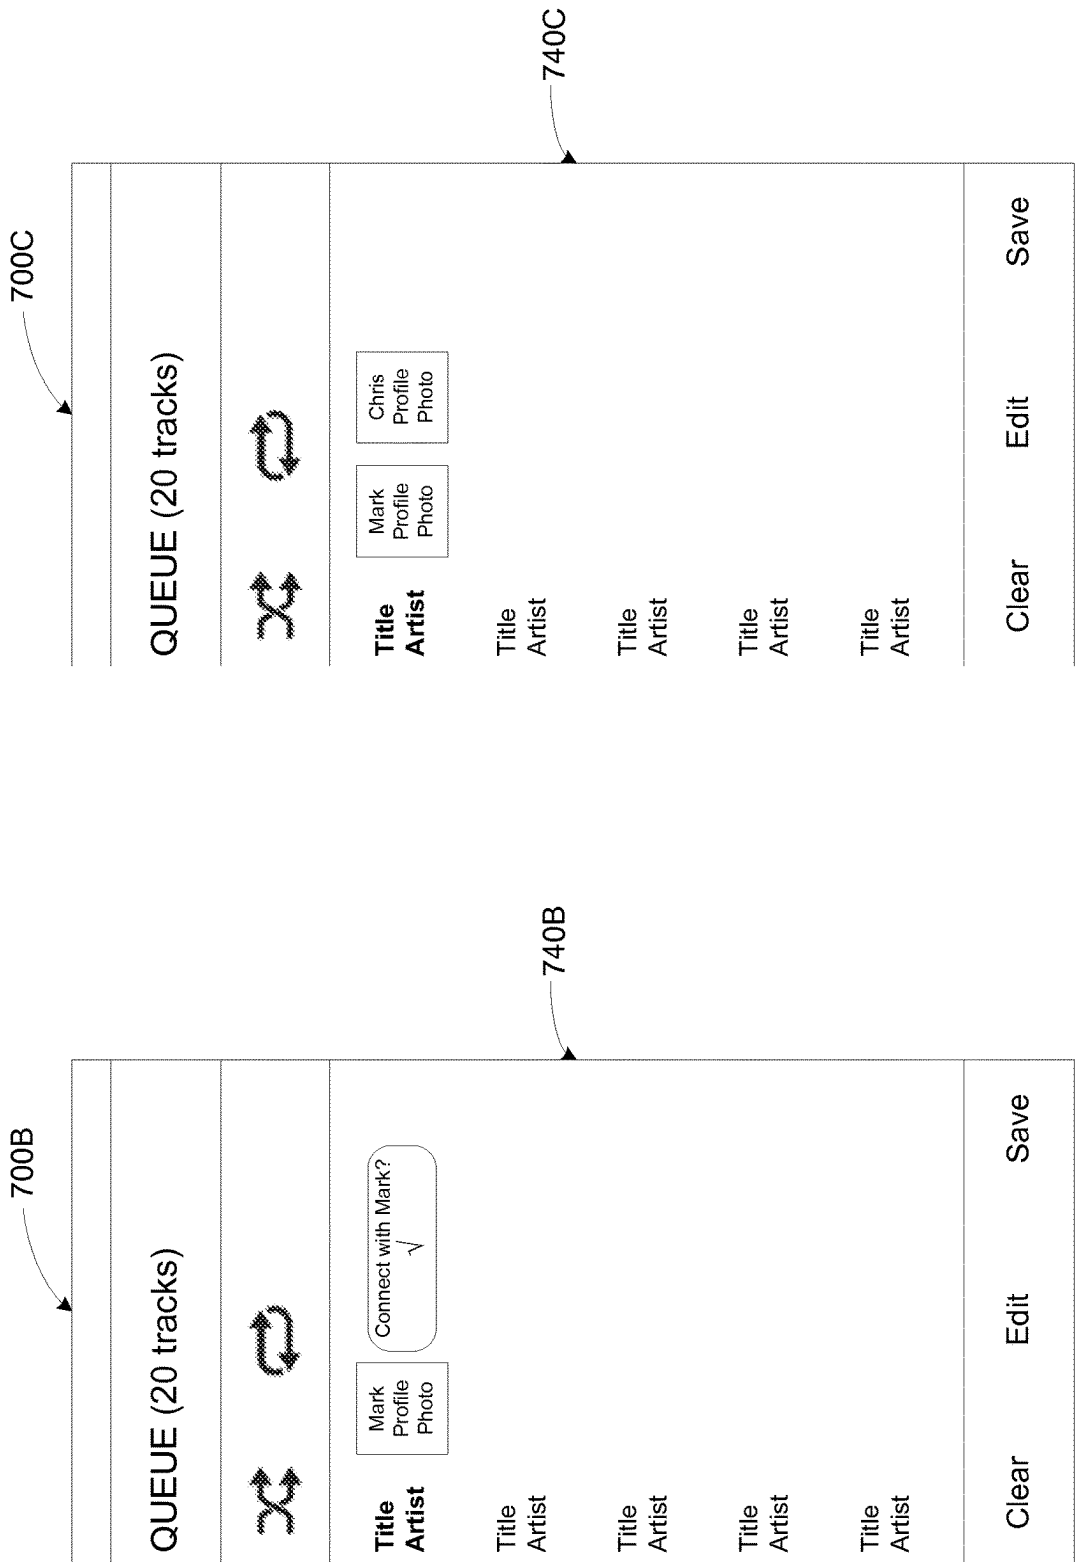


FIGURE 7B

FIGURE 7C

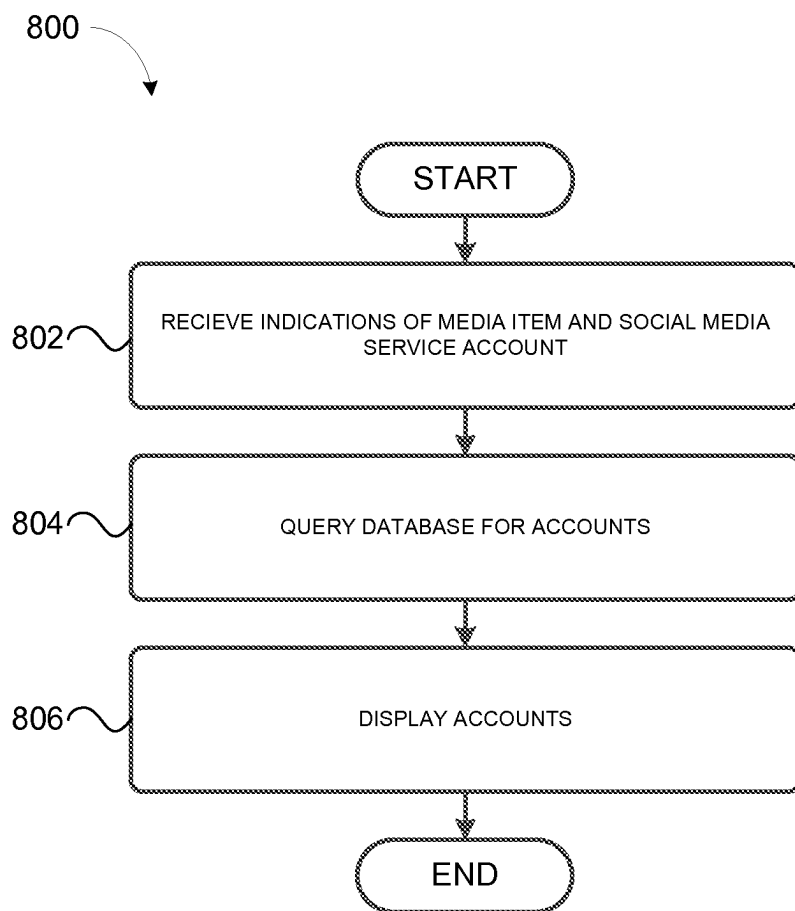


FIGURE 8

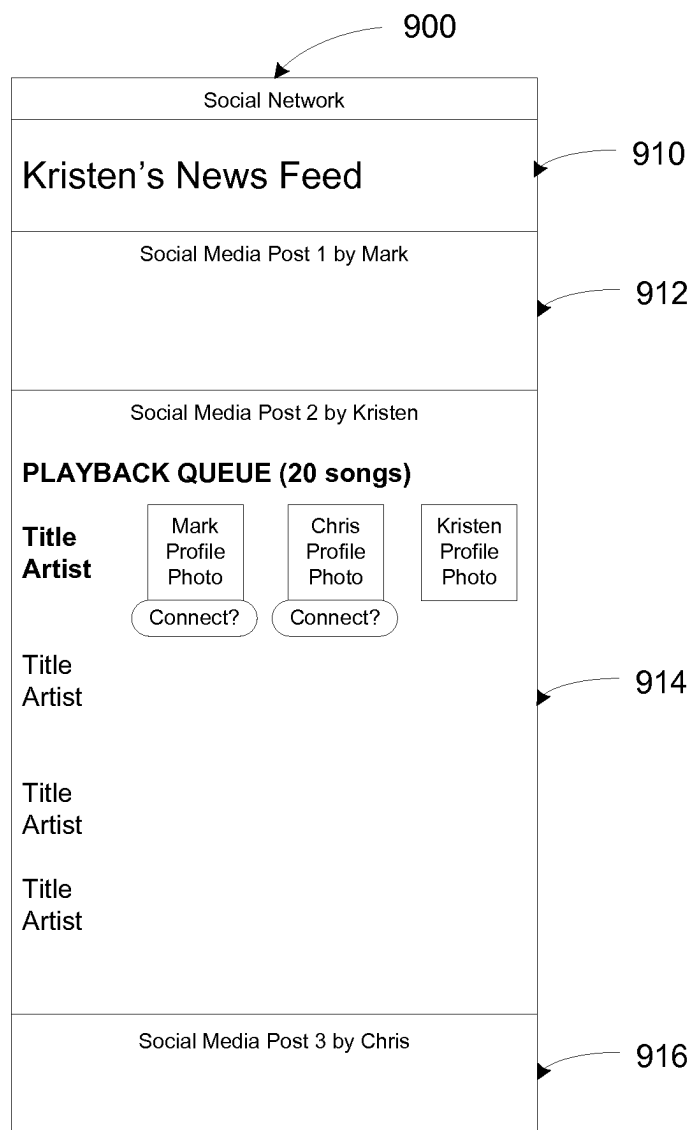


FIGURE 9

SOCIAL MEDIA CONNECTION RECOMMENDATIONS BASED ON PLAYBACK INFORMATION

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 18/067,720 titled “Social Media Connection Recommendations Based On Playback Information,” filed Dec. 18, 2022, and currently pending; U.S. application Ser. No. 18/067,720 is a continuation of U.S. application Ser. No. 17/569,008 titled “Social Media Connection Recommendations Based On Playback Information,” filed Jan. 5, 2022, and issued Dec. 27, 2022, as U.S. Pat. 11,539,767; U.S. application Ser. No. 17/569,008 is a continuation U.S. application Ser. No. 15/664,634 titled “Social Media Connection Recommendations Based On Playback Information,” filed Jul. 31, 2017, and issued Jan. 11, 2022 as U.S. Pat. 11,223,661; U.S. application Ser. No. 15/664,634 is a continuation of U.S. application Ser. No. 14/495,684 titled “Social Media Connection Recommendations Based On Playback Information,” filed Sep. 24, 2014, and issued Aug. 1, 2017 as U.S. Pat. 9,723,038. The entire contents of U.S. applications Ser. No. 18/067,720; 17/569,008; 15/664,634; and 14/495,684 are incorporated by reference herein.

[0002] This application is also related to and incorporates the entire contents of: (i) U.S. application Ser. No. 14/495,595 titled “Social Media Queue” (Docket No. 14-0904), filed Sep. 24, 2014, and issued Jun. 27, 2017, as U.S. Pat. 9,690,540; (ii) U.S. application Ser. No. 14/495,633 titled “Playback Updates” (Docket No. 14-0905), filed Sep. 24, 2014, and issued May 5, 2020, as U.S. Pat. 10,645,130; (iii) U.S. application Ser. No. 14/495,706 titled “Indicating an Association Between a Social-Media Account and a Media Playback System” (Docket No. 14-0906), filed Sep. 24, 2014, and issued May 30, 2017, as U.S. Pat. 9,667,679; (iv) U.S. application Ser. No. 14/495,590 titled “Associating a Captured Image with a Media Item” (Docket No. 14-0907), filed Sep. 24, 2014, and issued Jan. 2, 2018, as U.S. Pat. 9,860,286; and (v) U.S. application Ser. No. 14/495,659 titled “Media Item Context from Social Media” (Docket No. 14-0908), filed Sep. 24, 2014, and issued May 1, 2018, as U.S. Pat. 9,959,087.

FIELD OF THE DISCLOSURE

[0003] The disclosure is related to consumer goods and, more particularly, to methods, systems, products, features, services, and other items directed to media playback or some aspect thereof.

BACKGROUND

[0004] Options for accessing and listening to digital audio in an out-loud setting were severely limited until in 2003, when SONOS, Inc. filed for one of its first patent applications, entitled “Method for Synchronizing Audio Playback between Multiple Networked Devices,” and began offering a media playback system for sale in 2005. The Sonos Wireless HiFi System enables people to experience music from virtually unlimited sources via one or more networked playback devices. Through a software control application installed on a smartphone, tablet, or computer, one can play what he or she wants in any room that has a networked playback device. Additionally, using the controller, for

example, different songs can be streamed to each room with a playback device, rooms can be grouped together for synchronous playback, or the same song can be heard in all rooms synchronously.

[0005] Given the ever growing interest in digital media, there continues to be a need to develop consumer-accessible technologies to further enhance the listening experience.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Features, aspects, and advantages of the presently disclosed technology may be better understood with regard to the following description, appended claims, and accompanying drawings where:

[0007] FIG. 1 shows an example network configuration in which certain embodiments may be practiced;

[0008] FIG. 2 shows an example media playback system configuration;

[0009] FIG. 3 shows a functional block diagram of an example playback device;

[0010] FIG. 4 shows a functional block diagram of an example control device;

[0011] FIG. 5 shows an example controller interface;

[0012] FIG. 6 shows a flow diagram of an example method;

[0013] FIG. 7A shows another example controller interface;

[0014] FIG. 7B shows yet another example controller interface;

[0015] FIG. 7C shows a further example controller interface;

[0016] FIG. 8 shows a flow diagram of another example method; and

[0017] FIG. 9 shows an example social-media interface.

[0018] The drawings are for the purpose of illustrating example embodiments, but it is understood that the inventions are not limited to the arrangements and instrumentality shown in the drawings.

DETAILED DESCRIPTION

I. Overview

[0019] A social component to music listening may enhance the experience of listening to a media playback system. For example, in some cases, listening to a media playback system as a group may enhance the listening experience, as members of the group may share a common appreciation for the music. In other cases, a social component to music listening may facilitate discovery of new artists, albums, or genres, as tastes in music may be shared. Many other benefits from a social component to music listening are possible as well.

[0020] A social media service may facilitate incorporating a social component to listening to media content played by a media playback system. After receiving an opt-in, the media playback system may provide the social media service with playback history data indicating media items that are currently playing at or have been played at the media playback system. Further, such playback history data could be associated with a particular account of the social media service, such as an account that is registered to the media playback system. Then, in aggregate, playback history data provided from multiple instances of the media playback

system may provide the social media service with respective playback history data for a plurality of accounts.

[0021] The social media service may relate such playback history data to its social network, which may reveal relationships between accounts of the social media service. For instance, the related data may indicate that two or more accounts have listened to the same music. Further, provided that the listening data is updated regularly, the related data may indicate a temporal component—e.g., that the two or more accounts have listened to the same music within the past day or week or perhaps within the past hour. Or, further, historically, that two or more accounts listened to the same music within a certain time period (e.g., that two accounts listened to a particular artist during the summer of 2014). The data may also indicate how often each media item was played (i.e., a play count), which, in combination with the social network, may indicate that two or more accounts have listened to the same music on a certain number of occasions.

[0022] Based on the combination of playback history data from the media playback systems and its social network, the social media service may suggest or recommend new connections within the social network. Such connections may be referred to as “friends,” “circles,” “followers,” or “links,” among other examples. For instance, the social media service may suggest, to a particular account, other accounts that have listened to the same media item or media items recently. In some cases, the social media service may suggest connection to accounts that are connected to accounts that the particular account is already connected to within the social network (i.e., friends of friends). The social media service could also suggest connection to more remote connections within the social network (e.g., friends of friends of friends). In some examples, the social media service may suggest connection to accounts that have listened to the same media items as the particular account within the same geographic area (e.g., neighbors that are listening to the same music).

[0023] The social media service may facilitate recommended connections within several different contexts. In some cases, the social media service may provide recommended connections within a media application. Such a media application may be operable to allow a computing device to control one or more media playback systems. In other cases, the social media service may provide recommended connections within a social-media interface. A social-media interface may include a graphical interface that might be displayed on a social-media webpage or social-media application.

[0024] As indicated above, examples provided herein may be directed to providing social media connection recommendations based on playback information. In one aspect, a method is provided. The method may involve receiving data indicating a particular media item that is currently playing on a media playback system that is registered to a particular account of a social media service. The method may further involve querying the social media service for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. The method may also involve receiving the queried one or more accounts of the social media service that (i) are registered to respective media playback systems that

have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network and causing a graphical interface to display one or more respective selectable indications of the received one or more accounts of the social media service.

[0025] In another aspect, a computing device is provided. The computing device includes a network interface, at least one processor, a data storage, and a program logic stored in the data storage and executable by the at least one processor to perform operations. The operations may include receiving data indicating a particular media item that is currently playing on a media playback system that is registered to a particular account of a social media service. The operations may further include querying the social media service for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. The operations may also include receiving the queried one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network and causing a graphical interface to display one or more respective selectable indications of the received one or more accounts of the social media service.

[0026] In yet another aspect, a non-transitory computer-readable medium is provided. The non-transitory computer-readable medium having instructions stored thereon that are executable by a computing device of a media playback system to cause the computing device to perform operations. The operations may include receiving data indicating a particular media item that is currently playing on a media playback system that is registered to a particular account of a social media service. The operations may further include querying the social media service for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. The operations may also include receiving the queried one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network and causing a graphical interface to display one or more respective selectable indications of the received one or more accounts of the social media service.

[0027] In another aspect, another method is provided. The method may involve receiving (i) indications of one or more particular media items that have been played by a particular media playback system, and (ii) an indication of a particular account of a social media service that is registered with the particular media playback system. The method may further involve querying a database for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particular media items on at least a threshold number of

occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service. The method may also involve causing a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts.

[0028] In a further aspect, a computing system is provided. The computing system includes a network interface, at least one processor, a data storage, and a program logic stored in the data storage and executable by the at least one processor to perform operations. The operations may include receiving (i) indications of one or more particular media items that have been played by a particular media playback system, and (ii) an indication of a particular account of a social media service that is registered with the particular media playback system. The operations may further include querying a database for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particular media items on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service. The operations may also include causing a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts.

[0029] In yet another aspect, a non-transitory computer-readable medium is provided. The non-transitory computer-readable medium having instructions stored thereon that are executable by a computing system to cause the computing system to perform operations. The operations may include receiving (i) indications of one or more particular media items that have been played by a particular media playback system, and (ii) an indication of a particular account of a social media service that is registered with the particular media playback system. The operations may further include querying a database for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particular media items on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service. The operations may also include causing a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts.

[0030] It will be understood by one of ordinary skill in the art that this disclosure includes numerous other embodiments.

II. Example Network Configuration

[0031] FIG. 1 shows an example network configuration 100 in which one or more embodiments disclosed herein may be practiced or implemented. As shown, the network configuration 100 includes a wide area network (“WAN”) 110 that communicatively couples a media system server 120, a social-media server 130, one or more media playback systems 140 and 142, and one or more computing devices 150, 152, and 154. It should be understood that the network configuration 100 may include more or fewer of the depicted network elements and/or may include various other network elements not shown in FIG. 1 (e.g. one or more media sources).

[0032] In examples, the WAN 110 may include the Internet and/or one or more cellular networks, among other networks. Although the WAN 110 is shown as one network, it should be understood that the WAN 110 may include multiple, distinct WANs that are themselves communicatively linked. The WAN 110 may facilitate transferring data between one or more of the various network elements shown in FIG. 1. In some examples, a given network element may communicate with another network element through yet another network element. For instance, the media playback systems 140 and 142 may communicate with the social-media server 130 through the media system server 120 and/or the computing devices 150-154 may communicate with the media system server 120 through the social-media server 130. Other examples are also possible.

[0033] In some examples, certain network elements may be communicatively coupled to other network elements via elements other than the WAN 110. In particular, certain network elements may be communicatively coupled via a local area network (e.g., via WiFi), a personal area network (e.g., via Bluetooth), and/or other connections (e.g., via a wired connection). For example, the computing device 150 may communicate with the media playback system 140 via a local area network (e.g., WiFi or perhaps according to a proprietary protocol). The computing device 150 may do so while operating as part of the media playback system 140 (e.g., as a control device of the media playback system 140).

[0034] The media system server 120 may include a network interface, a processing unit, and data storage, all of which may be communicatively linked together by a system bus, network, or other connection mechanism. The network interface may facilitate data flow over the WAN 110 between the media system server 120 and other network elements. The processing unit may include one or more general purpose processors and/or one or more special purpose processors and may be integrated in whole or in part with the network interface. The data storage may include a non-transitory computer-readable medium, such as optical, magnetic, or flash memory, and may be integrated in whole or in part with the processing unit. The data storage may also include program instructions that are executable by the processing unit to carry out various operations described herein.

[0035] Moreover, the media system server 120 may be configured to store and/or access various data related to media items and/or media playback systems. In examples, the media system server 120 may be configured to store and/or access media items that are playable by a media playback system. In such examples, the media system server 120 may be configured to provide to a given media playback system media items (e.g., audio, video, and/or audio-visual files) or links, pointers, or other network location identifiers that are operable to locate the media items. Additionally, the media system server 120 may be configured to store and/or access a cross-service linking database that facilitates identifying a media item from a first media source based on media item information from a second media source.

[0036] The media system server 120 may also be configured to provide one or more media applications to the media playback systems 140-142 and/or the computing devices 150-154. In some cases, a media application may be operable to allow a computing device to control one or more media playback systems. Additionally or alternatively, a media application may be operable to allow a media play-

back system to interface with the social-media server **130** and playback media items based on social-media data. Further still, a media application may be operable to provide functions similar to those provided by a social-media application, discussed in further detail below. Other example media applications are also possible.

[0037] In examples, the media system server **120** may be configured to store and/or access account information corresponding to a particular media playback system. Such information, which may be collectively referred herein as a “playback system account”, may include system information (e.g., a household identifier (HHID) that is used to uniquely identify the particular media playback system, identifiers of the devices within the particular system, the software version currently installed on the particular media playback system, etc.) user information (e.g., name, date of birth, etc. of the user or users of the particular system), playback history information (e.g., media items previously played on the particular system and perhaps timestamps indicating when such media items were played), playback preference information (e.g., frequency at which a given media item is played, indications of media items that have been “liked,” “favorited” or “starred”, etc.), and linked-account information (e.g., one or more social-media accounts that are linked to the particular media playback system). Other examples of information storable and accessible by the media system server **120** are also possible.

[0038] In some examples, a playback system account may also include information regarding the media services that provide media to the particular media playback system. For example, the playback system account may include one or more identifiers of media services that provide media to the particular media playback system. Such information may be used by the media system server **120**, or perhaps the social media server **130**, to recommend media services that a user might be interested in. Other examples are also possible.

[0039] In practice, the media system server **120** may store some or all of the above-discussed information based on data received from media playback systems (e.g., the media playback systems **140** and **142**), the social-media server **130**, and/or the computing devices **150-154**. In examples, such information may be provided to the media system server **120** when a media playback system is first setup, when a media playback system plays back media items, when a media playback system receives data indicating user feedback, and/or when a computing device runs a media application to control a media playback system, among other scenarios. In any event, the media system server **120** may be configured to provide an option to a user to “opt-in” so that the aforementioned information is collected by the media system server **120**.

[0040] The media system server **120** may be further configured to use the above-discussed information to determine playback behaviors of users of media playback systems, among other operations. Based on user playback behaviors, the media system server **120** may perform a number of operations that may add to the users’ playback experience. For example, such information may be used to identify a trending artist and then recommend that trending artist to a user whose playback history indicates he/she listens to other artists similar to the trending artist. Other examples are certainly possible.

[0041] The social-media server **130** may include a network interface, a processing unit, and data storage, similar

to those of the media system server **120** discussed above. The social-media server **130** may be configured to provide a social-media service to subscribers to the service. For example, the social-media server **130** may be configured to establish and/or maintain a social network. To this end, the social-media server **130** may be configured to host a social-media webpage accessible over the WAN **110** by subscribers utilizing any suitable computing device, such as the computing devices **150-154**.

[0042] In examples, the social-media server **130** may be configured to store subscriber account information, which may be collectively referred herein as a “social media account”. Such information may include the name, gender, birthdate, email address, and/or residential address, among other information, for each subscriber. Moreover, the social-media server **130** may also be configured to link a given subscriber with a particular media playback system. For example, when a user first subscribes to the social-media service, the user may provide information, such as a HHID, of a media playback system used by the user, and the social-media server **130** may then store such information in the account of the subscriber.

[0043] In addition to subscriber account information, the social-media server **130** may also be configured to store respective subscriber profiles for each subscriber. Broadly speaking, a subscriber profile may include information regarding a subscriber’s life, such as relationship status, photos, videos, career information, education information, hobbies/interests, locations visited (e.g., “check-in” locations), sports teams that the subscriber is a fan of, and/or movies, books, artists, TV shows, and the like that the subscriber previously experienced and perhaps enjoyed. Such information may be presented on a subscriber profile in a number of manners, such as through subscriber posts, status updates, blogs, and other uploads.

[0044] The social network provided by the social-media server **130** may be configured so that subscribers may readily share and exchange information, ideas, creations, and the like within a virtual community. The social-media service may provide to its subscribers, via a social-media webpage, respective social-media information that is determined to be relevant to a particular subscriber. Such information may be provided in several manners (e.g., as a “news feed”, “timeline”, or the like) and may be personalized to fit the preferences of a particular subscriber. In examples, this information may be repeatedly updated to reflect current information that may be relevant to a particular subscriber.

[0045] A given subscriber may have certain “friends” that he/she chooses to associate with. After someone is deemed a “friend” with a given subscriber, the given subscriber may then receive social information that is uploaded, tagged, posted, or otherwise provided by the “friend.” For example, the given subscriber’s news feed may show a photograph that a “friend” captured and subsequently posted to the social-media webpage. Moreover, a listing of a given subscriber’s “friends” may also be provided and that listing may include various information in various forms reflecting a current “status” or the like for a given “friend.” The given subscriber may also be able to “de-friend” someone that was previously deemed a “friend.”

[0046] In practice, the social-media server **130** may be configured to collect and analyze the information that is shared and exchanged over the social-media service. The social-media server **130** may be configured to use this

collected information, as well as subscriber account information, to determine for a particular subscriber other subscribers that the particular subscriber might want to become “friends” with. In this way, the social-media server **130** may be configured to determine the preferences and/or tastes of its subscribers and recommend other subscribers with similar tastes.

[0047] Moreover, the social-media server **130** may be configured to provide one or more social-media applications that are operable to provide subscribers access to the social-media service in a manner different than through a web browser. Such an application may be installed on a computing device that is perhaps portable. In examples, a social-media application may further be operable to provide functions similar to those provided by a media application, as discussed above.

[0048] Furthermore, a social-media application, and/or perhaps a media application, installed on a computing device may be operable to determine what, if any, other applications are also installed on the computing device. An application that is operable in such a manner may facilitate linking a playback system account with a social media account and vice versa. In examples, after a social-media application installed on a computing device is linked to a playback system account, the social-media application may be operable to affect playback of media at a media playback system identified by the playback system account.

[0049] In examples, the network configuration **100** may also include one or more media service provider servers communicatively coupled to the WAN **110**. In general, a given media service provider server may correspond to a media service provider that provides streaming media, such as Internet radio and/or “on-demand” media, to the media playback systems **140-142** and/or the computing devices **150-154**. A user may subscribe to such a service and register media devices (e.g., a media playback system and/or one or more computing devices) that may at times be used to access the media service. A media service provider server may include similar components as the servers discussed above.

[0050] Generally speaking, the media playback systems **140** and **142** may be any type of media playback system configured to receive and transmit data over a communication network and playback media items. In practice, each media playback system **140** and **142** may include one or more playback devices, as well as additional system devices (e.g., a controller device). An example media playback system is discussed in further detail below with reference to FIG. 2. It should be understood that the media playback system **140** and the media playback system **142** may be configured similarly or differently and/or may include similar or different devices.

[0051] In general, each computing device **150-154** may be any computing device configured to transfer data over a communication network. The computing devices **150-154** may each include at least one processor, memory, a graphical display, an input interface, and a network interface, among other components. In some instances, the graphical display and the input interface may be part of the same component (e.g., a touchscreen). The network interface may facilitate data flow between the computing device and another network element, for example, via the WAN **110**. In some examples, one or more of the computing devices **150-154** may also include a camera configured to capture image and/or video data. Example computing devices

include, but are not limited to, cellular phones, smartphones, PDAs, tablets, laptops, desktop computers, video game consoles, and smart TVs.

[0052] Moreover, the computing devices **150-154** may be configured to download, install, and operate an application, such as a media or social-media application. In examples, a given computing device may include a media application provided by the media system server **120** and a social-media application provided by the social media server **130**, while another computing device may include one or the other application but not both.

[0053] A computing device may be configured to run both applications at the same time or individually. In some examples, the computing devices **150-154** may provide to the media system server **120** and/or the social media server **130** an indication of applications that are installed on a particular computing device. For instance, the computing device **150** may be configured to provide to the media system server **120** an indication that a social-media application is installed. Additionally or alternatively, the computing device **150** may be configured to provide to the social-media server **130** an indication that a media application is installed and/or active or otherwise currently running.

[0054] Furthermore, a computing device may be configured to provide social media information and/or media playback information to the media system server **120** and/or the social media server **130**. Such information may then be used by the media system server **120** and/or the social media server **130** to help perform some of the operations disclosed in further detail below.

III. Example Media Playback System

[0055] FIG. 2 shows an example configuration of a media playback system **200**. The media playback system **200** as shown is associated with an example home environment having several rooms and spaces, such as for example, a master bedroom, an office, a dining room, and a living room. As shown in the example of FIG. 2, the media playback system **200** includes playback devices **202-224**, control devices **226** and **228**, and a wired or wireless network router **230**.

[0056] Further discussions relating to the different components of the example media playback system **200** and how the different components may interact to provide a user with a media experience may be found in the following sections. While discussions herein may generally refer to the example media playback system **200**, technologies described herein are not limited to applications within, among other things, the home environment as shown in FIG. 2. For instance, the technologies described herein may be useful in environments where multi-zone audio may be desired, such as, for example, a commercial setting like a restaurant, mall or airport, a vehicle like a sports utility vehicle (SUV), bus or car, a ship or boat, an airplane, and so on.

a. Example Playback Devices

[0057] FIG. 3 shows a functional block diagram of an example playback device **300** that may be configured to be one or more of the playback devices **202-224** of the media playback system **200** of FIG. 2. The playback device **300** may include a processor **302**, software components **304**, memory **306**, audio processing components **308**, audio amplifier(s) **310**, speaker(s) **312**, and a network interface **314** including wireless interface(s) **316** and wired interface(s) **318**. In one case, the playback device **300** may not

include the speaker(s) 312, but rather a speaker interface for connecting the playback device 300 to external speakers. In another case, the playback device 300 may include neither the speaker(s) 312 nor the audio amplifier(s) 310, but rather an audio interface for connecting the playback device 300 to an external audio amplifier or audio-visual receiver.

[0058] In one example, the processor 302 may be a clock-driven computing component configured to process input data according to instructions stored in the memory 306. The memory 306 may be a tangible computer-readable medium configured to store instructions executable by the processor 302. For instance, the memory 306 may be data storage that can be loaded with one or more of the software components 304 executable by the processor 302 to achieve certain functions. In one example, the functions may involve the playback device 300 retrieving audio data from an audio source or another playback device. In another example, the functions may involve the playback device 300 sending audio data to another device or playback device on a network. In yet another example, the functions may involve pairing of the playback device 300 with one or more playback devices to create a multi-channel audio environment.

[0059] Certain functions may involve the playback device 300 synchronizing playback of audio content with one or more other playback devices. During synchronous playback, a listener will preferably not be able to perceive time-delay differences between playback of the audio content by the playback device 300 and the one or more other playback devices. U.S. Pat. No. 8,234,395 entitled, "System and method for synchronizing operations among a plurality of independently clocked digital data processing devices," which is hereby incorporated by reference, provides in more detail some examples for audio playback synchronization among playback devices.

[0060] The memory 306 may further be configured to store data associated with the playback device 300, such as one or more zones and/or zone groups the playback device 300 is a part of, audio sources accessible by the playback device 300, or a playback queue that the playback device 300 (or some other playback device) may be associated with. The data may be stored as one or more state variables that are periodically updated and used to describe the state of the playback device 300. The memory 306 may also include the data associated with the state of the other devices of the media system, and shared from time to time among the devices so that one or more of the devices have the most recent data associated with the system. Other embodiments are also possible.

[0061] The audio processing components 308 may include one or more digital-to-analog converters (DAC), an audio preprocessing component, an audio enhancement component or a digital signal processor (DSP), and so on. In one embodiment, one or more of the audio processing components 308 may be a subcomponent of the processor 302. In one example, audio content may be processed and/or intentionally altered by the audio processing components 308 to produce audio signals. The produced audio signals may then be provided to the audio amplifier(s) 310 for amplification and playback through speaker(s) 312. Particularly, the audio amplifier(s) 310 may include devices configured to amplify audio signals to a level for driving one or more of the speakers 312. The speaker(s) 312 may include an individual transducer (e.g., a "driver") or a complete speaker system

involving an enclosure with one or more drivers. A particular driver of the speaker(s) 312 may include, for example, a subwoofer (e.g., for low frequencies), a mid-range driver (e.g., for middle frequencies), and/or a tweeter (e.g., for high frequencies). In some cases, each transducer in the one or more speakers 312 may be driven by an individual corresponding audio amplifier of the audio amplifier(s) 310. In addition to producing analog signals for playback by the playback device 300, the audio processing components 308 may be configured to process audio content to be sent to one or more other playback devices for playback.

[0062] Audio content to be processed and/or played back by the playback device 300 may be received from an external source, such as via an audio line-in input connection (e.g., an auto-detecting 3.5 mm audio line-in connection) or the network interface 314.

[0063] The network interface 314 may be configured to facilitate a data flow between the playback device 300 and one or more other devices on a data network. As such, the playback device 300 may be configured to receive audio content over the data network from one or more other playback devices in communication with the playback device 300, network devices within a local area network, or audio content sources over a wide area network such as the Internet. In one example, the audio content and other signals transmitted and received by the playback device 300 may be transmitted in the form of digital packet data containing an Internet Protocol (IP)-based source address and IP-based destination addresses. In such a case, the network interface 314 may be configured to parse the digital packet data such that the data destined for the playback device 300 is properly received and processed by the playback device 300.

[0064] As shown, the network interface 314 may include wireless interface(s) 316 and wired interface(s) 318. The wireless interface(s) 316 may provide network interface functions for the playback device 300 to wirelessly communicate with other devices (e.g., other playback device(s), speaker(s), receiver(s), network device(s), control device(s), controller device(s) within a data network the playback device 300 is associated with) in accordance with a communication protocol (e.g., any wireless standard including IEEE 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac, 802.15, 4G mobile communication standard, and so on). The wired interface(s) 318 may provide network interface functions for the playback device 300 to communicate over a wired connection with other devices in accordance with a communication protocol (e.g., IEEE 802.3). While the network interface 314 shown in FIG. 3 includes both wireless interface(s) 316 and wired interface(s) 318, the network interface 314 may in some embodiments include only wireless interface(s) or only wired interface(s).

[0065] In one example, the playback device 300 and one other playback device may be paired to play two separate audio components of audio content. For instance, playback device 300 may be configured to play a left channel audio component, while the other playback device may be configured to play a right channel audio component, thereby producing or enhancing a stereo effect of the audio content. The paired playback devices (also referred to as "bonded playback devices") may further play audio content in synchrony with other playback devices.

[0066] In another example, the playback device 300 may be sonically consolidated with one or more other playback devices to form a single, consolidated playback device. A

consolidated playback device may be configured to process and reproduce sound differently than an unconsolidated playback device or playback devices that are paired, because a consolidated playback device may have additional speaker drivers through which audio content may be rendered. For instance, if the playback device **300** is a playback device designed to render low frequency range audio content (i.e. a subwoofer), the playback device **300** may be consolidated with a playback device designed to render full frequency range audio content. In such a case, the full frequency range playback device, when consolidated with the low frequency playback device **300**, may be configured to render only the mid and high frequency components of audio content, while the low frequency range playback device **300** renders the low frequency component of the audio content. The consolidated playback device may further be paired with a single playback device or yet another consolidated playback device.

[0067] By way of illustration, SONOS, Inc. presently offers (or has offered) for sale certain playback devices including a “PLAY: 1,” “PLAY: 3,” “PLAY: 5,” “PLAY-BAR,” “CONNECT: AMP,” “CONNECT,” and “SUB.” Any other past, present, and/or future playback devices may additionally or alternatively be used to implement the playback devices of example embodiments disclosed herein. Additionally, it is understood that a playback device is not limited to the example illustrated in FIG. 3 or to the SONOS product offerings. For example, a playback device may include a wired or wireless headphone. In another example, a playback device may include or interact with a docking station for personal mobile media playback devices. In yet another example, a playback device may be integral to another device or component such as a television, a lighting fixture, or some other device for indoor or outdoor use.

b. Example Playback Zone Configurations

[0068] Referring back to the media playback system **200** of FIG. 2, the environment may have one or more playback zones, each with one or more playback devices. The media playback system **200** may be established with one or more playback zones, after which one or more zones may be added, or removed to arrive at the example configuration shown in FIG. 2. Each zone may be given a name according to a different room or space such as an office, bathroom, master bedroom, bedroom, kitchen, dining room, living room, and/or balcony. In one case, a single playback zone may include multiple rooms or spaces. In another case, a single room or space may include multiple playback zones.

[0069] As shown in FIG. 2, the balcony, dining room, kitchen, bathroom, office, and bedroom zones each have one playback device, while the living room and master bedroom zones each have multiple playback devices. In the living room zone, playback devices **204**, **206**, **208**, and **210** may be configured to play audio content in synchrony as individual playback devices, as one or more bonded playback devices, as one or more consolidated playback devices, or any combination thereof. Similarly, in the case of the master bedroom, playback devices **222** and **224** may be configured to play audio content in synchrony as individual playback devices, as a bonded playback device, or as a consolidated playback device.

[0070] In one example, one or more playback zones in the environment of FIG. 2 may each be playing different audio content. For instance, the user may be grilling in the balcony zone and listening to hip hop music being played by the

playback device **202** while another user may be preparing food in the kitchen zone and listening to classical music being played by the playback device **214**. In another example, a playback zone may play the same audio content in synchrony with another playback zone. For instance, the user may be in the office zone where the playback device **218** is playing the same rock music that is being playing by playback device **202** in the balcony zone. In such a case, playback devices **202** and **218** may be playing the rock music in synchrony such that the user may seamlessly (or at least substantially seamlessly) enjoy the audio content that is being played out-loud while moving between different playback zones. Synchronization among playback zones may be achieved in a manner similar to that of synchronization among playback devices, as described in previously referenced U.S. Pat. No. 8,234,395.

[0071] As suggested above, the zone configurations of the media playback system **200** may be dynamically modified, and in some embodiments, the media playback system **100** supports numerous configurations. For instance, if a user physically moves one or more playback devices to or from a zone, the media playback system **200** may be reconfigured to accommodate the change(s). For instance, if the user physically moves the playback device **202** from the balcony zone to the office zone, the office zone may now include both the playback device **218** and the playback device **202**. The playback device **202** may be paired or grouped with the office zone and/or renamed if so desired via a control device such as the control devices **226** and **228**. On the other hand, if the one or more playback devices are moved to a particular area in the home environment that is not already a playback zone, a new playback zone may be created for the particular area.

[0072] Further, different playback zones of the media playback system **200** may be dynamically combined into zone groups or split up into individual playback zones. For instance, the dining room zone and the kitchen zone **214** may be combined into a zone group for a dinner party such that playback devices **212** and **214** may render audio content in synchrony. On the other hand, the living room zone may be split into a television zone including playback device **204**, and a listening zone including playback devices **206**, **208**, and **210**, if the user wishes to listen to music in the living room space while another user wishes to watch television.

c. Example Control Devices

[0073] FIG. 4 shows a functional block diagram of an example control device **400** that may be configured to be one or both of the control devices **226** and **228** of the media playback system **200**. As shown, the control device **400** may include a processor **402**, memory **404**, a network interface **406**, and a user interface **408**. In one example, the control device **400** may be a dedicated controller for the media playback system **200**.

[0074] In another example, the control device **400** may be a network device on which media application software is installed, such as an iPhone™, iPad™ or any other smart phone, tablet or network device (e.g., a networked computer such as a PC or Mac™). In examples, the media application may take the form of a media playback system controller application operable to control a media playback system. In yet another example, the media application may be operable to cause the control device **400** to obtain media (e.g., from a given media service provider associated with the media

application) independent from a media playback system and may also be operable as a control device of a media playback system.

[0075] The processor 402 may be configured to perform functions relevant to facilitating user access, control, and configuration of the media playback system 200. The memory 404 may be configured to store instructions executable by the processor 402 to perform those functions. The memory 404 may also be configured to store the media playback system controller application software and other data associated with the media playback system 200 and the user.

[0076] In one example, the network interface 406 may be based on an industry standard (e.g., infrared, radio, wired standards including IEEE 802.3, wireless standards including IEEE 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac, 802.15, 4G mobile communication standard, and so on). The network interface 406 may provide a means for the control device 400 to communicate with other devices in the media playback system 200. In one example, data and information (e.g., such as a state variable) may be communicated between control device 400 and other devices via the network interface 406. For instance, playback zone and zone group configurations in the media playback system 200 may be received by the control device 400 from a playback device or another network device, or transmitted by the control device 400 to another playback device or network device via the network interface 406. In some cases, the other network device may be another control device.

[0077] Playback device control commands such as volume control and audio playback control may also be communicated from the control device 400 to a playback device via the network interface 406. As suggested above, changes to configurations of the media playback system 200 may also be performed by a user using the control device 400. The configuration changes may include adding/removing one or more playback devices to/from a zone, adding/removing one or more zones to/from a zone group, forming a bonded or consolidated player, separating one or more playback devices from a bonded or consolidated player, among others. Accordingly, the control device 400 may sometimes be referred to as a controller, whether the control device 400 is a dedicated controller or a network device on which media playback system controller application software is installed.

[0078] The user interface 408 of the control device 400 may be configured to facilitate user access and control of the media playback system 200, by providing a controller interface such as the controller interface 500 shown in FIG. 5. The controller interface 500 includes a playback control region 510, a playback zone region 520, a playback status region 530, a playback queue region 540, and an audio content sources region 550. The user interface 500 as shown is just one example of a user interface that may be provided on a network device such as the control device 400 of FIG. 4 (and/or the control devices 226 and 228 of FIG. 2) and accessed by users to control a media playback system such as the media playback system 200. Other user interfaces of varying formats, styles, and interactive sequences may alternatively be implemented on one or more network devices to provide comparable control access to a media playback system.

[0079] The playback control region 510 may include selectable (e.g., by way of touch or by using a cursor) icons to cause playback devices in a selected playback zone or

zone group to play or pause, fast forward, rewind, skip to next, skip to previous, enter/exit shuffle mode, enter/exit repeat mode, enter/exit cross fade mode. The playback control region 510 may also include selectable icons to modify equalization settings, and playback volume, among other possibilities.

[0080] The playback zone region 520 may include representations of playback zones within the media playback system 200. In some embodiments, the graphical representations of playback zones may be selectable to bring up additional selectable icons to manage or configure the playback zones in the media playback system, such as a creation of bonded zones, creation of zone groups, separation of zone groups, and renaming of zone groups, among other possibilities.

[0081] For example, as shown, a “group” icon may be provided within each of the graphical representations of playback zones. The “group” icon provided within a graphical representation of a particular zone may be selectable to bring up options to select one or more other zones in the media playback system to be grouped with the particular zone. Once grouped, playback devices in the zones that have been grouped with the particular zone will be configured to play audio content in synchrony with the playback device(s) in the particular zone. Analogously, a “group” icon may be provided within a graphical representation of a zone group. In this case, the “group” icon may be selectable to bring up options to deselect one or more zones in the zone group to be removed from the zone group. Other interactions and implementations for grouping and ungrouping zones via a user interface such as the user interface 500 are also possible. The representations of playback zones in the playback zone region 520 may be dynamically updated as playback zone or zone group configurations are modified.

[0082] The playback status region 530 may include graphical representations of audio content that is presently being played, previously played, or scheduled to play next in the selected playback zone or zone group. The selected playback zone or zone group may be visually distinguished on the user interface, such as within the playback zone region 520 and/or the playback status region 530. The graphical representations may include track title, artist name, album name, album year, track length, and other relevant information that may be useful for the user to know when controlling the media playback system via the user interface 500.

[0083] The playback queue region 540 may include graphical representations of audio content in a playback queue associated with the selected playback zone or zone group. In some embodiments, each playback zone or zone group may be associated with a playback queue containing information corresponding to zero or more audio items for playback by the playback zone or zone group. For instance, each audio item in the playback queue may comprise a uniform resource identifier (URI), a uniform resource locator (URL) or some other identifier that may be used by a playback device in the playback zone or zone group to find and/or retrieve the audio item from a local audio content source or a networked audio content source, possibly for playback by the playback device.

[0084] In one example, a playlist may be added to a playback queue, in which case information corresponding to each audio item in the playlist may be added to the playback queue. In another example, audio items in a playback queue

may be saved as a playlist. In a further example, a playback queue may be empty, or populated but “not in use” when the playback zone or zone group is playing continuously streaming audio content, such as Internet radio that may continue to play until otherwise stopped, rather than discrete audio items that have playback durations. In an alternative embodiment, a playback queue can include Internet radio and/or other streaming audio content items and be “in use” when the playback zone or zone group is playing those items. Other examples are also possible.

[0085] When playback zones or zone groups are “grouped” or “ungrouped,” playback queues associated with the affected playback zones or zone groups may be cleared or re-associated. For example, if a first playback zone including a first playback queue is grouped with a second playback zone including a second playback queue, the established zone group may have an associated playback queue that is initially empty, that contains audio items from the first playback queue (such as if the second playback zone was added to the first playback zone), that contains audio items from the second playback queue (such as if the first playback zone was added to the second playback zone), or a combination of audio items from both the first and second playback queues. Subsequently, if the established zone group is ungrouped, the resulting first playback zone may be re-associated with the previous first playback queue, or be associated with a new playback queue that is empty or contains audio items from the playback queue associated with the established zone group before the established zone group was ungrouped. Similarly, the resulting second playback zone may be re-associated with the previous second playback queue, or be associated with a new playback queue that is empty, or contains audio items from the playback queue associated with the established zone group before the established zone group was ungrouped. Other examples are also possible.

[0086] Referring back to the user interface **500** of FIG. 5, the graphical representations of audio content in the playback queue region **540** may include track titles, artist names, track lengths, and other relevant information associated with the audio content in the playback queue. In one example, graphical representations of audio content may be selectable to bring up additional selectable icons to manage and/or manipulate the playback queue and/or audio content represented in the playback queue. For instance, a represented audio content may be removed from the playback queue, moved to a different position within the playback queue, or selected to be played immediately, or after any currently playing audio content, among other possibilities. A playback queue associated with a playback zone or zone group may be stored in a memory on one or more playback devices in the playback zone or zone group, on a playback device that is not in the playback zone or zone group, and/or some other designated device.

[0087] The audio content sources region **550** may include graphical representations of selectable audio content sources from which audio content may be retrieved and played by the selected playback zone or zone group. Discussions pertaining to audio content sources may be found in the following section.

d. Example Audio Content Sources

[0088] As indicated previously, one or more playback devices in a zone or zone group may be configured to retrieve for playback audio content (e.g. according to a

corresponding URI or URL for the audio content) from a variety of available audio content sources. In one example, audio content may be retrieved by a playback device directly from a corresponding audio content source (e.g., a line-in connection). In another example, audio content may be provided to a playback device over a network via one or more other playback devices or network devices.

[0089] Example audio content sources may include a memory of one or more playback devices in a media playback system such as the media playback system **200** of FIG. 2, local music libraries on one or more network devices (such as a control device, a network-enabled personal computer, or a networked-attached storage (NAS), for example), streaming audio services providing audio content via the Internet (e.g., the media service servers **135-145**), or audio sources connected to the media playback system via a line-in input connection on a playback device or network device, among other possibilities.

[0090] In some embodiments, audio content sources may be regularly added or removed from a media playback system such as the media playback system **200** of FIG. 2. In one example, an indexing of audio items may be performed whenever one or more audio content sources are added, removed or updated. Indexing of audio items may involve scanning for identifiable audio items in all folders/directory shared over a network accessible by playback devices in the media playback system, and generating or updating an audio content database containing metadata (e.g., title, artist, album, track length, among others) and other associated information, such as a URI or URL for each identifiable audio item found. Other examples for managing and maintaining audio content sources may also be possible.

[0091] The above discussions relating to playback devices, controller devices, playback zone configurations, and media content sources provide only some examples of operating environments within which functions and methods described below may be implemented. Other operating environments and configurations of media playback systems, playback devices, and network devices not explicitly described herein may also be applicable and suitable for implementation of the functions and methods.

IV. Example Method To Provide Social Network Context For Media Item

[0092] As discussed above, in some examples, a computing device may provide suggested social-media connections recommendations based on playback information.

[0093] For method **600** of FIG. 6, and other processes and methods disclosed herein, the flowcharts show functionality and operation of one possible implementation of present embodiments. In this regard, each block may represent a module, a segment, or a portion of program code, which includes one or more instructions executable by a processor for implementing specific logical functions or steps in the process. The program code may be stored on any type of computer-readable medium, for example, such as a storage device including a disk or hard drive. The computer-readable medium may include non-transitory computer-readable medium, for example, such as computer-readable media that stores data for short periods of time like register memory, processor cache and Random Access Memory (RAM). The computer-readable medium may also include non-transitory media, such as secondary or persistent long term storage, like read only memory (ROM), optical or magnetic disks,

compact-disc read only memory (CD-ROM), for example. The computer-readable media may also be any other volatile or non-volatile storage systems. The computer-readable medium may be considered a computer-readable storage medium, for example, or a tangible storage device. In addition, for the method **600**, and other processes and methods disclosed herein, each block in FIG. **6** may represent circuitry that is wired to perform the specific logical functions in the process.

[0094] Furthermore, although the blocks are illustrated in sequential order, these blocks may also be performed in parallel, and/or in a different order than those described herein. Also, the various blocks may be combined into fewer blocks, divided into additional blocks, and/or removed based upon the desired implementation.

[0095] For clarity, the methods may be described herein with reference to FIGS. **1** and **7A-7C**. It should be understood, however, that this is for purposes of example and explanation only and that the operations of the methods should not be limited by these figures.

a. Receiving An Indication Of A Particular Media Item.

[0096] At block **602**, the method may involve receiving an indication of a particular media item. In some examples, a computing device, such as control device **150** of FIG. **1** (which may be an instance of control device **400** of FIG. **4**), may receive data indicating a particular media item that is currently playing on a media playback system, such as media playback system **140** of FIG. **1**. Playback of the particular media item may involve one or more playback devices of the media playback system playing the media item. The data may include an identifier, such as a URI, that distinguishes the particular media item from other available media items.

[0097] The computing device may receive the indication via a network interface, such as network interface **406**. For example, control device **150** may receive the indication from media playback system **150**. In some examples, the computing device may receive the indication from a playback device of the media playback system, which may maintain or have access to a playback queue of the media playback system.

[0098] In some examples, the computing device may request the indication of the particular media item from the media playback system (e.g., from a playback device of the media playback system). As noted above, one or more playback devices of the media playback system may maintain or have access to data representing a playback queue from which the media playback system plays media items. In some examples, the computing device may send, via its network interface, a request for data indicating media items that are queued in a playback queue of the media playback system. In response, the computing device may receive data indicating the particular media item that is currently being played by the media playback system and perhaps one or more media items that are also in the playback queue. In various examples, the playback queue might include data maintained on a playback device, data maintained in the cloud (e.g., on a server involved in providing a cloud service), or a social-media queue.

[0099] In other examples, the computing device may receive the indication of the particular media item after connecting to the media playback system over a local area network. Such a connection may indicate proximity between the computing device and the media playback system.

Accordingly, a computing device that has made such a connection to a media playback system registered to a particular account of the social media service may indicate that the particular account is playing the particular media item.

[0100] In some implementations, the computing device may initiate playback of a particular media item on the media playback system. The computing device may initiate playback by way of a transmission sent via a network interface. For instance, the computing device may send a command to start playback of the playback queue. In other instances, the computing device may send a message indicating one or more media items to add to the playback queue of the media playback system. Many examples of initiating playback are possible.

[0101] As noted above, a social media service may provide a social network that includes various connections between subscriber accounts of the social media service. Such connections are sometimes referred to as “links”, “connections”, “circles”, or “friends”, among other examples. Also, as noted above, such connections may represent certain people that a user represented by the particular account has chosen to associate with. One or more social-media computing systems may maintain subscriber account information, which may include data indicating respective connections for different subscriber profiles. In some cases, forming a connection may involve an invitation and acceptance process in which a first subscriber account causes an invitation to connect to be sent to a second subscriber account. After receiving the invitation, the second subscriber account may then accept or reject the invitation.

[0102] In some examples, a particular account of the social media service may be registered to the media playback system. Multiple instances of the media playback system may exist, and some of these other instances may be registered to other accounts of the social media service, respectively. As noted above, the registrations between media playback systems and accounts of the social media service may be referred to as linked-account information. Such information may be maintained by a server, such as social media server **130** or media system server **120**, among other examples.

[0103] While individual media items have been discussed by way of example, in various examples, the computing device may alternatively receive an indication of any audio content source, such as a playlist (e.g., of a streaming audio service) or a streaming radio station, among other examples.

b. Querying Social Media Service.

[0104] At block **604**, the method may involve querying a social media service. More particularly, a computing device may query the social media service for data related to the particular media item currently playing on the media playback system. Querying the social media service may involve a computing device, such as computing device **150**, sending a query to a server, such as social-media server **130**, which may in turn be one instance of multiple servers by which the social media service provides a social network.

[0105] In some cases, the computing device may query the social media service for one or more accounts of the social media service that are registered to respective media playback systems. As noted above, the social media service may maintain or have access to linked-account information which indicates registrations between media playback systems and accounts of the social media service.

[0106] The computing device may further limit the query to one or more accounts that have played the particular media item on their respective media playback systems. These accounts may represent connections of the particular account that have played back, on their respective media playback systems, the particular media item that is currently playing on the media playback system registered to the particular account.

[0107] In other examples, the computing device may query the social media service for one or more accounts that have received respective indications of the particular media item from respective media playback systems. Receiving an indication of the particular media item may indicate that the particular media item has been played back on a media playback system registered to a certain account.

[0108] As noted above, the media playback system may provide the social media service with playback history data indicating media items that are currently playing at or have been played at the media playback system. In some cases, the media playback system may send the data to the social media service, which may then maintain a database or other data storage of the data. In other cases, the social media service may have access to a database or other data storage of the data. For instance, the social media service may have access to media system server **120**.

[0109] Within examples, the query may be limited to accounts of the social media service that have played the particular media item on at least a threshold number of occasions, such as ten or twenty listens. Such a play count condition may indicate accounts for which the particular media item is preferred compared to other media items. In some cases, the threshold number of occasions may be configurable to any suitable pre-determined play count.

[0110] In some cases, the query may be further limited to one or more accounts that have initiated playback of the particular media item on respective media playback systems within a particular period of time, such as a day or a week. This may further limit the queried accounts to accounts that have played back the particular media item recently (i.e., within the particular period of time). In some cases, the particular period of time may be configured and indicated in a message to the social networking service. In the case noted above in which the query indicates media playback systems that have received an indication of the particular media item, the query may request one or more accounts of the social networking service that have received the indication of the particular media item within a particular period of time.

[0111] The query may be limited to one or more accounts of the social networking service that have not yet been connected to the particular account of the social media service within the social network. In some implementations, any two given accounts of the social media service may either be connected or not connected. Such a binary relationship may facilitate querying the social networking service for one or more accounts that have not yet been connected to the particular account within the social network.

[0112] As noted above, in some cases, the computing device may query the social media service for one or more accounts of the social media service that are connected to accounts that are connected to the particular account that is registered to the media playback system. Such accounts may be referred to as “friends of friends” or “second-level connections.” Some may be more likely to or more com-

fortable with connecting with such accounts because of the connections in common. Further, in some implementations, the computing device may query the social media service for extended connections. For instance, the computing device may query for one or more accounts of the social media service that are connected to accounts of the social media service that are connected to the accounts of the social media service which are connected to the particular account of the social media service. Such accounts may be referred to as “friends of friends of friends” or “third-level connections.” In further examples, the computing device may query for yet further extended connections, such as seventh-level connections, which may cause the social media service to recommend connecting with a subscriber profile that represents a user named Kevin, among other possibilities.

[0113] Within examples, the computing device may query the social media service for one or more accounts of the social media service that have played the one or more media items and have also indicated respective preference for the one or more media items. Preferences may be indicated using a variety of techniques, such as by indicating a “thumbs-up” (or “thumbs-down”), by starring a media item, or by marking an item as a favorite, among other examples. Such preference information may be maintained respective metadata associated with the media item (e.g., in a file header of the media item) or perhaps in database linking media items to preference information (e.g., in a database that media server system **120** or social media server **130** maintain or have access to). Such a condition may exclude from the query accounts that happen to play a media item often, but might not necessarily prefer the media item (which might occur if the media item was in a playlist that was often played).

[0114] In some implementations, querying the social media service may involve requesting certain data from the social media service and providing certain information to define the request. For example, querying the social media service may involve the computing device sending, via the network interface to a social-media computing system (e.g., social media server **130**) certain data. This sent data may include a track identification that uniquely identifies the particular media item among a plurality of media items of a media streaming service. The track identification may be any suitable identifier by which the social-media computing system can distinguish the particular media item from other media items. In some examples, the track identification may include a URI, as discussed above. The sent data may further include an indication of the media streaming service. Many media streaming services are currently offered, and some media items are available from more than one media streaming service. In some cases, the track identification may also identify the streaming media service in addition to the particular media item. The sent data may further include an indication of the particular account that is registered to the social media service. Such data may indicate to the social media service the subscriber account on which to base the query.

[0115] The request portion of the query may identify the data sought by the query. For instance, the computing device may request data indicating the one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and

(ii) have not yet been connected to the particular account of the social media service within the social network.

c. Receiving Queried Accounts.

[0116] At block **606**, the method may involve receiving the queried accounts. In some examples, a computing device may receive, via its network interface, data indicating the queried one or more accounts of the social networking service. For instance, computing device **150** may receive data indicating the queried one or more accounts from social media server **130**.

[0117] The data may indicate the queried one or more accounts in a variety of ways. As noted above, the social media server may store subscriber account information such as the name, gender, birthdate, email address, and/or residential address, among other information, for each subscriber account. The social media server may send data indicating any of this subscriber account information, among other possibilities. For instance, the computing device may receive data that indicates respective names of the one or more accounts. Alternatively, the computing device may receive respective pictures designated within the accounts to represent the subscribers. In some cases, the computing device may receive data that indicates the one or more profiles in several ways, such as by a name and a photo.

d. Causing Display Of Queried Accounts.

[0118] At block **608**, the method may involve causing display of the queried accounts. In some examples, a computing device may a graphical interface, such as user interface **408** of control device **400** in FIG. **4**, to display one or more respective selectable indications of the received one or more accounts. The displayed one or more accounts may indicate subscriber profiles for which connection is recommended, as such accounts were returned from the query.

[0119] In some examples, the computing device may cause the graphical interface to display an indication that the queried one or more accounts have also played the particular media item. FIG. **7A** shows controller interface **700A**, which is an instance of controller interface **500**. FIG. **7A** includes a playback control region **710A**, a playback zone region **720A**, a playback status region **730A**, a playback queue region **740A**, and an audio content sources region **750A**, which may be instances of playback control region **510**, playback zone region **520**, playback status region **530**, playback queue region **540**, and audio content sources region **550**, respectively. The playback control region **530A** indicates the particular media item by way of a track title, album name, and album artwork, as shown. Playback control region **530A** also includes a selectable indication of a recommended account that has listened to the media item ("Mark has listened to this song on 10 occasions, invite to connect?"), which also indicates that the media playback system registered to Mark's profile has played the particular media item.

[0120] In some cases, the computing device may detect a selection of a particular indication that indicates a particular one of the received one or more accounts of the social media service. For instance, the indication may include a button or a link, among other examples, and the computing device may detect selection of that button or link. Referring back to FIG. **7A**, playback control region **530A** includes a selectable link ("Mark"). As noted above, connecting within the social network may involve an invitation and acceptance process. Detection of the selection may cause the computing device

to request an invitation to be sent to the particular one of the received one or more accounts. For instance, based on a detected selection of the link in playback control region **530A**, the computing device may send, via a network interface, a request to the social media service to connect the particular account of the social media service to the particular one of the received one or more accounts of the social media service indicated by the selected indication within the social network (i.e., the Mark's subscriber account).

[0121] In some cases, the computing device may cause indications of one or more respective names registered with the queried one or more accounts of the social media service to be displayed on the graphical interface in association with the displayed one or more respective selectable indications of the received one or more accounts of the social media service. As shown, playback control region **530A** indicates a name ("Mark") which is registered with a queried account of the social media service. As noted above, the selectable link includes the name, thereby showing the name in association with the selectable indication.

[0122] Within examples, the computing device may cause one or more respective pictures associated with the queried one or more accounts of the social media service to be displayed on the graphical interface in association with the displayed one or more respective selectable indications of the received one or more accounts of the social media service. For instance, the graphical interface may include a profile picture associated with Mark's subscriber profile in association with the selectable link. In some cases, the picture may be a reduced size version of the picture associated with the account, which may be referred to as a thumbnail.

[0123] As noted above, in some cases, a computing device may cause an indication of a playback queue of one or more media items to be displayed on the graphical interface. For instance, playback queue region **540** of FIG. **5** indicates a playback queue. As another example, FIG. **7B** shows a controller interface **700B** that includes a playback queue region **740B**. Playback queue region **740B** indicates the currently playing media item (i.e., the particular media item) in bold text. Playback queue region **704B** also includes a profile picture associated with Mark's subscriber profile in association with a selectable indication (a button having displayed text reading "Connect with Mark?"). The profile picture and selectable indication are further shown in association with the particular media item in the playback queue, which may indicate that the account associated with the profile pictures has played the particular media item.

[0124] FIG. **7C** shows a controller interface **700C** that includes a playback queue region **740C**. Playback queue region **740C** includes respective profile pictures associated with Mark and Chris' subscriber profiles. The profile pictures are shown in association with the particular media item in the playback queue. In some cases, the profile pictures may themselves be selectable indications. In such cases, the computing system may detect selection of one or more of the pictures, and responsively cause an invitation to connect to be sent to the respective accounts.

[0125] In some cases, the computing device may cause the graphical interface to display suggested or recommended accounts without necessarily showing the accounts in association with the one or more particular media items that have been played back at the media playback system. For instance, the computing device may display the suggested or

recommended accounts in a graphical interface that includes a section that indicates accounts that might have been suggested for a variety of reasons, and not only that the accounts listened to the same music.

V. Second Example Method To Provide Social Network Context For Media Item

[0126] As discussed above, in some examples, a computing system may provide a social networking context for a media item.

[0127] For method **800** of FIG. **8**, and other processes and methods disclosed herein, the flowcharts show functionality and operation of one possible implementation of present embodiments. In this regard, each block may represent a module, a segment, or a portion of program code, which includes one or more instructions executable by a processor for implementing specific logical functions or steps in the process. The program code may be stored on any type of computer-readable medium, for example, such as a storage device including a disk or hard drive. The computer-readable medium may include non-transitory computer-readable medium, for example, such as computer-readable media that stores data for short periods of time like register memory, processor cache and Random Access Memory (RAM). The computer-readable medium may also include non-transitory media, such as secondary or persistent long term storage, like read only memory (ROM), optical or magnetic disks, compact-disc read only memory (CD-ROM), for example. The computer-readable media may also be any other volatile or non-volatile storage systems. The computer-readable medium may be considered a computer-readable storage medium, for example, or a tangible storage device. In addition, for the method **800**, and other processes and methods disclosed herein, each block in FIG. **8** may represent circuitry that is wired to perform the specific logical functions in the process.

[0128] Furthermore, although the blocks are illustrated in sequential order, these blocks may also be performed in parallel, and/or in a different order than those described herein. Also, the various blocks may be combined into fewer blocks, divided into additional blocks, and/or removed based upon the desired implementation.

[0129] For clarity, the methods may be described herein with reference to FIGS. **1** and **9**. It should be understood, however, that this is for purposes of example and explanation only and that the operations of the methods should not be limited by these figures.

a. Receiving Indications of One or More Media Items And A Particular Account.

[0130] At block **802**, the method may involve receiving indications of one or more particular media items and a particular account. In particular, a social-media computing system, such as social media server **130**, may receive data representing the indications via a network interface, perhaps from a media playback system, such as media playback system **140** or **142**. The social-media computing system may represent one or more computing devices or systems.

[0131] More particularly, in some cases, the received indications of one or more media items may be an data indicating a particular media item that is currently playing at a media playback system, which may be the media playback system that sent the indication. For instance, the currently playing media item may be the particular media item discussed above in reference to blocks **602-608**. Alternatively,

the received indications of one or more media items may be data indicating one or more particular media items that have been played by a particular media playback system. As noted above, a media playback system may periodically provide the social media service with playback history data.

[0132] The received indication of the particular profile may indicate a particular account of the social media service that is registered with the media playback system. As discussed above, an account of a social media service may be registered or otherwise linked to a particular media playback system.

[0133] As noted above, a media playback system may be divided into zones that each include one or more media playback systems. Referring back to FIG. **2**, media playback system **200** may be divided into zones based on the rooms in which playback devices **202-224** are positioned. For instance, during a set-up procedure, playback device **214** may be designated as a “Kitchen” zone, and playback devices **204**, **206**, **208**, and **210** may be grouped into a zone that is designated a “Living Zone” zone. A computing system or device, such as media system server **120** or perhaps a playback device, may store data that references zones to particular types of rooms. In some cases, receiving indications of one or more particular media items may involve receiving data indicating the one or more particular media items that have been played in a particular zone that is associated with a particular type of room. Such data may be useful, as some may enjoy listening to particular media items while in a certain room (e.g., listening to a particular streaming talk radio station while cooking).

b. Determining One Or More Accounts Of Social Media Service.

[0134] At block **804**, the method may involve determining one or more accounts of the social media service. For example, the social-media computing system may query a database for data indicating one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particular media items on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service.

[0135] As noted herein, a social media service may provide a social network that includes various connections between subscriber accounts. Data maintained by the social network may represent the connections for each subscriber. Based on such data, the social-media computing system may determine one or more accounts of the social media service that are connected to the particular account within a social network.

[0136] As noted above, a social-media computing system may maintain or have access to playback history data indicating media items that are currently playing at or have been played at the media playback system. Based on such data, the social-media computing system may determine which of the one or more accounts of the social media service that are connected to the particular account within a social network have played the particular media item their respective media playback systems on at least a threshold number of occasions. The particular threshold number of occasions may be a five, twenty-five, or any other predetermined threshold number, as noted in connection with block **604**.

[0137] As noted above, the social-media computing system may receive data indicating the one or more particular media items that have been played in a particular zone that is associated with a particular type of room. In such cases, querying the database for one or more accounts of the social media service may involve querying the database for one or more accounts of the social media service that are registered to respective media playback systems that have played the one or more particular media items in respective zones associated with the particular type of room.

c. Display Queried Accounts.

[0138] At block 808, the method may involve displaying the queried accounts. For instance, the social-media computing system may cause a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts. Such selectable indications may represent suggested or recommended accounts.

[0139] As noted above, information relating to a subscriber profile may be presented on a subscriber profile in a number of manners, such as through subscriber posts, status updates, blogs, and other uploads. This information may be displayed on a graphical interface as a social-media interface in a variety of ways, such as in a social-media webpage or as information presented in a social-media application, among other options. Causing the computing system to display the selectable indications may involve changing data to alter this information to change the social-media interface.

[0140] For example, the social-media computing system may change the social-media interface to include the selectable indications of the queried one or more accounts in association with the particular account of the social media service. The social-media computing system may then receive a request to access the social-media interface. Based on such a request, the social-media computing system may send, via a network interface, data indicating the social-media interface.

[0141] As an example, FIG. 9 shows an example social-media interface 900 which includes a “news feed” 910. The “news feed” 910 presents social-media postings by various subscriber accounts of the social media service. As shown, the “news feed” 910 includes social-media postings 912, 914, and 916 by different subscribers. While the “news feed” 910 includes social-media postings 912, 914, and 916 by different subscribers, the “news feed” 910 presents information of a particular subscriber account (“Kristen”).

[0142] Social media posting 914 by Kristen’s subscriber profile includes an indication of a playback queue of one or more media items that are queued for playback at particular media playback system that is registered to Kristen’s subscriber profile. The playback queue indicates a media playback item that is currently playing back at the media playback system in bold text.

[0143] In association with the indication of the particular media item, social media post 914 includes respective pictures associated with Mark, Chris, and Kristen’s respective subscriber profiles. The pictures associated with Mark and Chris’s subscriber accounts may indicate one or more accounts that are not yet connected to Kristen’s account within the social network and have played the particular media item on their respective media playback systems. The social media post 914 also includes selectable indications (“Connect?” buttons) in association with the indications of the accounts. While pictures have been shown by way of

example, the social-media computing system may cause any suitable information that indicates the subscriber accounts to be displayed.

[0144] In some cases, the picture associated with Kristen’s subscriber account may also be displayed as shown, which may indicate that the media playback system registered to her subscriber account also played the particular media item. As noted above, in some cases, the computing device may cause the graphical interface to display suggested or recommended accounts without necessarily showing the accounts in association with the one or more particular media items that have been played back at the media playback system.

d. Additional Features.

[0145] In some cases, two or more profiles that have not yet been connected within the social media network may have shared music taste or appreciation, but might not necessarily play the same particular media items. For instance, two profiles might play the same artist or genre frequently, but not necessarily the same songs by the artist or within the genre.

[0146] To account for such cases, after receiving the one or more particular media items, the social-media computing system may determine the respective artists, genre, or other attributes of the one or more particular media items. The social-media computing system may then query the database for one or more second accounts of the social media service that are registered to respective media playback systems have played media items having the respective attributes on at least a threshold number of occasions.

[0147] For instance, the social-media computing system may query the database for one or more second accounts of the social media service that (i) are registered to respective media playback systems have played media items by the determined artists on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. Alternatively, the social-media computing system may query the database for one or more second accounts of the social media service that (i) are registered to respective media playback systems have played media items of the determined genres on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. Other examples are possible as well.

[0148] Then, perhaps as described above in connection with block 808, the social-media computing system may cause the computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more second accounts.

[0149] It will be understood by one of ordinary skill in the art that this disclosure includes numerous other embodiments. While some examples described herein may refer to functions performed by given actors such as “users,” “subscribers,” and/or other entities, it should be understood that this is for purposes of explanation only. The claims should not be interpreted to require action by any such example actor unless explicitly required by the language of the claims themselves.

VI. Conclusion

[0150] The description above discloses, among other things, various example systems, methods, apparatus, and articles of manufacture including, among other components, firmware and/or software executed on hardware. It is under-

stood that such examples are merely illustrative and should not be considered as limiting. For example, it is contemplated that any or all of the firmware, hardware, and/or software aspects or components can be embodied exclusively in hardware, exclusively in software, exclusively in firmware, or in any combination of hardware, software, and/or firmware. Accordingly, the examples provided are not the only way(s) to implement such systems, methods, apparatus, and/or articles of manufacture.

[0151] As indicated above, examples provided herein may be directed to providing social media connection recommendations based on playback information. In one aspect, a method is provided. The method may involve receiving data indicating a particular media item that is currently playing on a media playback system that is registered to a particular account of a social media service. The method may further involve querying the social media service for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. The method may also involve receiving the queried one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network and causing a graphical interface to display one or more respective selectable indications of the received one or more accounts of the social media service.

[0152] In another aspect, a computing device is provided. The computing device includes a network interface, at least one processor, a data storage, and a program logic stored in the data storage and executable by the at least one processor to perform operations. The operations may include receiving data indicating a particular media item that is currently playing on a media playback system that is registered to a particular account of a social media service. The operations may further include querying the social media service for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. The operations may also include receiving the queried one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network and causing a graphical interface to display one or more respective selectable indications of the received one or more accounts of the social media service.

[0153] In yet another aspect, a non-transitory computer-readable medium is provided. The non-transitory computer-readable medium having instructions stored thereon that are executable by a computing device of a media playback system to cause the computing device to perform operations. The operations may include receiving data indicating a particular media item that is currently playing on a media playback system that is registered to a particular account of a social media service. The operations may further include

querying the social media service for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network. The operations may also include receiving the queried one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the particular media item on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within the social network and causing a graphical interface to display one or more respective selectable indications of the received one or more accounts of the social media service.

[0154] In another aspect, another method is provided. The method may involve receiving (i) indications of one or more particular media items that have been played by a particular media playback system, and (ii) an indication of a particular account of a social media service that is registered with the particular media playback system. The method may further involve querying a database for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particular media items on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service. The method may also involve causing a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts.

[0155] In a further aspect, a computing system is provided. The computing system includes a network interface, at least one processor, a data storage, and a program logic stored in the data storage and executable by the at least one processor to perform operations. The operations may include receiving (i) indications of one or more particular media items that have been played by a particular media playback system, and (ii) an indication of a particular account of a social media service that is registered with the particular media playback system. The operations may further include querying a database for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particular media items on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service. The operations may also include causing a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts.

[0156] In yet another aspect, a non-transitory computer-readable medium is provided. The non-transitory computer-readable medium having instructions stored thereon that are executable by a computing system to cause the computing system to perform operations. The operations may include receiving (i) indications of one or more particular media items that have been played by a particular media playback system, and (ii) an indication of a particular account of a social media service that is registered with the particular media playback system. The operations may further include querying a database for one or more accounts of the social media service that (i) are registered to respective media playback systems that have played the one or more particu-

lar media items on at least a threshold number of occasions and (ii) have not yet been connected to the particular account of the social media service within a social network of the social media service. The operations may also include causing a computing system to display, in association with the particular account of the social media service, selectable indications of the queried one or more accounts.

[0157] Additionally, references herein to “embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment can be included in at least one example embodiment of an invention. The appearances of this phrase in various places in the specification are not necessarily all referring to the same embodiment, nor are separate or alternative embodiments mutually exclusive of other embodiments. As such, the embodiments described herein, explicitly and implicitly understood by one skilled in the art, can be combined with other embodiments.

[0158] The specification is presented largely in terms of illustrative environments, systems, procedures, steps, logic blocks, processing, and other symbolic representations that directly or indirectly resemble the operations of data processing devices coupled to networks. These process descriptions and representations are typically used by those skilled in the art to most effectively convey the substance of their work to others skilled in the art. Numerous specific details are set forth to provide a thorough understanding of the present disclosure. However, it is understood to those skilled in the art that certain embodiments of the present disclosure can be practiced without certain, specific details. In other instances, well known methods, procedures, components, and circuitry have not been described in detail to avoid unnecessarily obscuring aspects of the embodiments. Accordingly, the scope of the present disclosure is defined by the appended claims rather than the forgoing description of embodiments.

[0159] When any of the appended claims are read to cover a purely software and/or firmware implementation, at least one of the elements in at least one example is hereby expressly defined to include a tangible, non-transitory medium such as a memory, DVD, CD, Blu-ray, and so on, storing the software and/or firmware.

1. A computing system comprising:

at least one processor; and

at least one tangible, non-transitory computer-readable medium comprising program instructions that are executable by the at least one processor such that the computing system is configured to:

receive an indication of one or more media items that either (i) are currently being played back by a first media playback system associated with a first account of a social media service, or (ii) have previously been played back within a particular time period by the first media playback system associated with the first account of the social media service;

determine one or more second accounts of the social media service that: (i) indicate a preference for at least one media item of the one or more media items, and (ii) have not yet been connected to the first account of the social media service; and

cause, based on the determination, a graphical user interface to display one or more respective selectable indications associated with the determined one or more second accounts of the social media service;

wherein each of the one or more respective selectable indications, when selected, causes a request to be sent to connect the first account to the respective second account associated with the selected indication.

2. The computing system of claim 1, wherein the program instructions that are executable by the at least one processor such that the computing system is configured to determine one or more second accounts of the social media service that: (i) indicate a preference for at least one media item of the one or more media items, and (ii) have not yet been connected to the first account of the social media service, comprises program instructions that are executable by the at least one processor such that the computing system is configured to determine one or more second accounts of the social media service that: (i) indicate a preference for at least one media item of the one or more media items, (ii) are associated with respective one or more second media playback systems that have played back, on at least a threshold number of occasions, the at least one media item of the one or more media items, and (iii) have not yet been connected to the first account of the social media service.

3. The computing system of claim 1, wherein the indication, in a second account of the one or more second accounts of the social media service, of the preference for the at least one media item comprises an indication, in the second account of the one or more second accounts of the social media service, that the at least one media item has been marked as a favorite.

4. The computing system of claim 1, wherein the indication, in a second account of the one or more second accounts of the social media service, of the preference for the at least one media item comprises an indication, in the second account of the one or more second accounts of the social media service, that the at least one media item has been marked with a positive indicator.

5. The computing system of claim 4, wherein the positive indicator comprises a star indication.

6. The computing system of claim 4, wherein the positive indicator comprises a thumbs-up indication.

7. The computing system of claim 1, wherein the computing system is associated with the social media service.

8. The computing system of claim 1, wherein the program instructions that are executable by the at least one processor such that the computing system is configured to cause, based on the determination, a graphical user interface to display one or more respective selectable indications associated with the determined one or more second accounts of the social media service, comprises program instructions that are executable by the at least one processor such that the computing system is configured to cause, based on the determination, a graphical user interface of a user device to display the one or more respective selectable indications associated with the determined one or more second accounts of the social media service.

9. The computing system of claim 8, wherein the user device comprises a control device of the first media playback system.

10. A non-transitory computer-readable medium having stored thereon instructions executable by one or more processors to cause a computing system to perform functions comprising:

receiving an indication of one or more media items that either (i) are currently being played back by a first media playback system associated with a first account

of a social media service, or (ii) have previously been played back within a particular time period by the first media playback system associated with the first account of the social media service;

determining one or more second accounts of the social media service that: (i) indicate a preference for at least one media item of the one or more media items, and (ii) have not yet been connected to the first account of the social media service; and

causing, based on the determination, a graphical user interface to display one or more respective selectable indications associated with the determined one or more second accounts of the social media service;

wherein each of the one or more respective selectable indications, when selected, causes a request to be sent to connect the first account to the respective second account associated with the selected indication.

11. The non-transitory computer-readable medium of claim **10**, wherein determining the one or more second accounts of the social media service that: (i) indicate the preference for the at least one media item of the one or more media items, and (ii) have not yet been connected to the first account of the social media service, comprises determining one or more second accounts of the social media service that: (i) indicate the preference for the at least one media item of the one or more media items, (ii) are associated with respective one or more second media playback systems that have played back, on at least a threshold number of occasions, the at least one media item of the one or more media items, and (iii) have not yet been connected to the first account of the social media service.

12. The non-transitory computer-readable medium of claim **11**, wherein the indication, in a second account of the one or more second accounts of the social media service, of the preference for the at least one media item comprises an indication, in the second account of the one or more second accounts of the social media service, that the at least one media item has been marked as a favorite.

13. The non-transitory computer-readable medium of claim **11**, wherein the indication, in a second account of the one or more second accounts of the social media service, of the preference for the at least one media item comprises an indication, in the second account of the one or more second accounts of the social media service, that the at least one media item has been marked with a positive indicator.

14. The non-transitory computer-readable medium of claim **13**, wherein the positive indicator comprises a star indication.

15. The non-transitory computer-readable medium of claim **13**, wherein the positive indicator comprises a thumbs-up indication.

16. The non-transitory computer-readable medium of claim **10**, wherein the computing system is associated with the social media service.

17. The non-transitory computer-readable medium of claim **10**, wherein causing, based on the determination, the graphical user interface to display the one or more respective selectable indications associated with the determined one or more second accounts of the social media service, comprises causing, based on the determination, a graphical user interface of a user device to display the one or more respective selectable indications associated with the determined one or more second accounts of the social media service.

18. The non-transitory computer-readable medium of claim **17**, wherein the user device comprises a control device of the first media playback system.

19. A method performed by a computing system, the method comprising:

receiving an indication of one or more media items that either (i) are currently being played back by a first media playback system associated with a first account of a social media service, or (ii) have previously been played back within a particular time period by the first media playback system associated with the first account of the social media service;

determining one or more second accounts of the social media service that: (i) indicate a preference for at least one media item of the one or more media items, and (ii) have not yet been connected to the first account of the social media service; and

causing, based on the determination, a graphical user interface to display one or more respective selectable indications associated with the determined one or more second accounts of the social media service;

wherein each of the one or more respective selectable indications, when selected, causes a request to be sent to connect the first account to the respective second account associated with the selected indication.

20. The method of claim **19**, wherein determining the one or more second accounts of the social media service that: (i) indicate the preference for the at least one media item of the one or more media items, and (ii) have not yet been connected to the first account of the social media service, comprises determining one or more second accounts of the social media service that: (i) indicate the preference for the at least one media item of the one or more media items, (ii) are associated with respective one or more second media playback systems that have played back, on at least a threshold number of occasions, the at least one media item of the one or more media items, and (iii) have not yet been connected to the first account of the social media service.

* * * * *