

(12) **United States Patent**  
**Mitchell**

(10) **Patent No.:** **US 12,395,475 B2**  
(45) **Date of Patent:** **\*Aug. 19, 2025**

(54) **CRYPTOGRAPHIC SYSTEMS AND METHODS**

(71) Applicant: **Intertrust Technologies Corporation**,  
Berkeley, CA (US)  
(72) Inventor: **Stephen G. Mitchell**, Ben Lomond, CA  
(US)  
(73) Assignee: **Intertrust Technologies Corporation**,  
Berkeley, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.  
  
This patent is subject to a terminal dis-  
claimer.

(21) Appl. No.: **18/530,893**

(22) Filed: **Dec. 6, 2023**

(65) **Prior Publication Data**  
US 2024/0106809 A1 Mar. 28, 2024

**Related U.S. Application Data**

(63) Continuation of application No. 17/530,009, filed on  
Nov. 18, 2021, now Pat. No. 11,848,922, which is a  
(Continued)

(51) **Int. Cl.**  
**H04L 9/40** (2022.01)  
**H04L 9/08** (2006.01)  
**H04L 9/32** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **H04L 63/045** (2013.01); **H04L 9/0825**  
(2013.01); **H04L 9/0897** (2013.01);  
(Continued)

(58) **Field of Classification Search**  
CPC ... H04L 63/045; H04L 9/0825; H04L 9/0897;  
H04L 9/3247; H04L 63/061;  
(Continued)

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,991,399 A \* 11/1999 Graunke ..... G11B 20/00086  
713/168  
6,735,313 B1 \* 5/2004 Bleichenbacher .....  
H04N 21/4405  
348/E7.056

(Continued)

**FOREIGN PATENT DOCUMENTS**

EP 2341682 A1 7/2011  
WO WO-2011068996 A1 \* 6/2011 ..... G06F 12/1408

**OTHER PUBLICATIONS**

Final Office Action mailed Apr. 17, 2018, received in U.S. Appl. No.  
14/991,687.

(Continued)


*Primary Examiner* — David Garcia Cervetti

(74) *Attorney, Agent, or Firm* — John P. Davis; Thayne  
and Davis LLC

(57) **ABSTRACT**

Systems and methods are described that use cryptographic  
techniques to improve the security of applications executing  
in a potentially untrusted environment associated with a  
software application. Embodiments of the disclosed systems  
and methods may, among other things, facilitate crypto-  
graphic operations within an execution environment asso-  
ciated with browser software of a client system while  
maintaining security of cryptographic keys imported into the  
environment. As the security of keys is maintained in an  
execution environment implementing embodiments of the  
disclosed systems and methods, users and/or systems may  
be more willing to consign their keys for use in connection  
with cryptographic operations performed in such environ-  
ments.

**18 Claims, 5 Drawing Sheets**

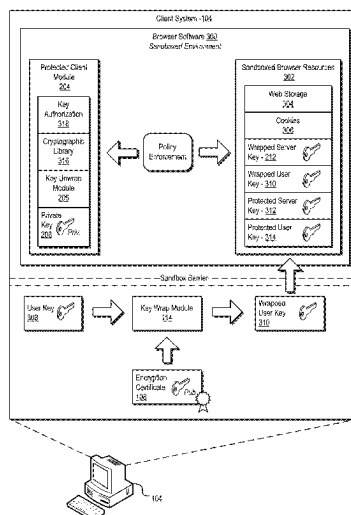

Related U.S. Application Data					
continuation of application No. 16/245,447, filed on Jan. 11, 2019, now Pat. No. 11,196,724, which is a continuation of application No. 14/991,687, filed on Jan. 8, 2016, now Pat. No. 10,205,710.		2002/0023212	A1 *	2/2002	Proudlar ..... H04L 63/08 714/E11.204
		2002/0162104	A1 *	10/2002	Raike ..... H04L 9/083 380/282
		2002/0172367	A1	11/2002	Mulder et al.
		2003/0194085	A1 *	10/2003	Dillaway ..... G06F 21/6209 380/29
(60)	Provisional application No. 62/101,293, filed on Jan. 8, 2015.	2004/0025036	A1 *	2/2004	Balard ..... G06F 21/575 713/176
		2004/0255137	A1 *	12/2004	Ying ..... H04L 63/0884 713/193
(52)	<b>U.S. Cl.</b> CPC ..... <i>H04L 9/3247</i> (2013.01); <i>H04L 63/061</i> (2013.01); <i>H04L 63/0823</i> (2013.01); <i>H04L 2209/16</i> (2013.01)	2005/0069138	A1 *	3/2005	de Jong ..... G06F 9/3017 380/278
		2005/0086479	A1 *	4/2005	Ondet ..... G06F 21/10 713/172
(58)	<b>Field of Classification Search</b> CPC ..... H04L 63/0823; H04L 2209/16; H04L 9/0822; H04L 9/3263; G06F 21/53; G06F 21/602; G06F 21/72; H04W 12/069 See application file for complete search history.	2005/0114683	A1 *	5/2005	Jin ..... G06F 21/14 713/187
		2007/0040021	A1 *	2/2007	Nakayma ..... G06F 12/1408 235/382
		2007/0086586	A1 *	4/2007	Jakubowski ..... H04L 9/002 380/28
		2007/0160203	A1 *	7/2007	Sudhakar ..... H04L 9/3263 380/30
(56)	<b>References Cited</b> U.S. PATENT DOCUMENTS	2008/0056501	A1 *	3/2008	McGough ..... H04L 63/08 380/282
		2008/0063201	A1 *	3/2008	Wormald ..... H04L 63/0823 380/255
		2008/0065886	A1 *	3/2008	McGough ..... H04L 63/061 713/168
		2008/0080708	A1 *	4/2008	McAlister ..... H04L 9/0844 380/44
		2008/0152144	A1 *	6/2008	Douguet ..... H04L 9/3236 380/277
		2008/0181412	A1 *	7/2008	Acar ..... G06F 21/79 380/279
		2008/0192937	A1 *	8/2008	Challener ..... H04L 9/14 380/278
		2008/0229117	A1 *	9/2008	Shin ..... G06F 21/72 713/190
		2008/0232598	A1 *	9/2008	Vennelakanti ..... G06F 21/62 380/279
		2008/0301470	A1 *	12/2008	Green ..... G06F 21/6218 713/193
		2008/0313743	A1 *	12/2008	Chan ..... G06F 21/105 726/28
		2009/0097660	A1 *	4/2009	Malaviarachchi ..... G06Q 20/3829 380/279
		2009/0103726	A1 *	4/2009	Ahmed ..... H04L 9/12 380/46
		2009/0138708	A1 *	5/2009	Miyazaki ..... H04L 63/04 713/168
		2009/0150681	A1 *	6/2009	Kaabouch ..... H04L 9/14 713/193
		2009/0158035	A1 *	6/2009	Stultz ..... H04L 63/0442 713/160
		2009/0169013	A1 *	7/2009	Fascenda ..... G06F 21/72 380/277
		2009/0296941	A1 *	12/2009	Devanand ..... H04L 63/0428 380/281
		2010/0058047	A1 *	3/2010	Medvinsky ..... H04L 9/321 713/189
		2010/0082987	A1 *	4/2010	Thom ..... G06F 21/34 713/171
		2010/0146292	A1 *	6/2010	Shi ..... H04L 9/3263 713/189
		2010/0146293	A1 *	6/2010	Shi ..... G06F 21/10 713/189
		2010/0146501	A1 *	6/2010	Wyatt ..... G06F 21/84 718/1
		2010/0174919	A1 *	7/2010	Ito ..... G06F 21/74 713/192
		2010/0223456	A1 *	9/2010	Schneider ..... H04L 63/0428 380/277
		2010/0293049	A1	11/2010	Maher et al.
		7,051,005	B1 *	5/2006	Peinado ..... H04L 63/0442 713/193
		7,093,129	B1 *	8/2006	Gavagni ..... H04L 9/3263 713/153
		7,802,111	B1 *	9/2010	Tahan ..... G06F 21/57 713/193
		8,213,620	B1 *	7/2012	Sussland ..... H04L 9/0894 380/278
		8,234,387	B2	7/2012	Bradley et al.
		8,245,270	B2 *	8/2012	Cooperstein ..... G06F 21/53 713/168
		8,391,494	B1 *	3/2013	Serenyi ..... H04L 63/0428 380/278
		8,583,911	B1 *	11/2013	Miller ..... H04L 63/0428 713/150
		8,719,590	B1 *	5/2014	Faibish ..... G06F 21/602 713/190
		8,762,712	B1 *	6/2014	Kwan ..... H04L 9/0825 713/165
		8,776,216	B2	7/2014	Boccon-Gibod et al.
		8,838,974	B2 *	9/2014	Webb ..... G06F 21/51 713/168
		8,843,750	B1 *	9/2014	Sokolov ..... H04L 63/0823 713/175
		8,966,581	B1 *	2/2015	Gross ..... G06F 21/34 726/4
		8,984,285	B1 *	3/2015	Dorwin ..... H04N 21/24 713/151
		9,094,206	B2 *	7/2015	Di Crescenzo ..... H04L 9/3073
		9,141,769	B1 *	9/2015	Hitchcock ..... H04L 9/0877
		9,189,609	B1 *	11/2015	Antony ..... G06F 21/10
		9,225,690	B1 *	12/2015	Fitch ..... H04L 63/04
		9,246,690	B1 *	1/2016	Roth ..... G06F 21/53
		9,251,334	B1 *	2/2016	Molitor ..... H04L 9/3271
		9,367,697	B1 *	6/2016	Roth ..... H04L 9/0897
		9,515,996	B1 *	12/2016	Juels ..... H04L 63/0428
		9,584,517	B1 *	2/2017	Roth ..... G06F 21/602
		9,652,631	B2 *	5/2017	Novak ..... H04L 9/3247
		9,690,941	B2 *	6/2017	Thom ..... G06F 21/6209
		9,692,741	B1 *	6/2017	Vilhuber ..... H04L 63/0823
		9,754,116	B1 *	9/2017	Roth ..... G06F 21/602
		9,767,271	B2 *	9/2017	Ghose ..... G06F 21/52
		9,785,489	B1 *	10/2017	Chheda ..... G06F 9/45558
		9,887,836	B1 *	2/2018	Roth ..... H04L 9/088
		9,910,997	B1 *	3/2018	Brail ..... G06F 21/44
		10,079,681	B1 *	9/2018	Roth ..... H04L 47/70
		10,187,363	B2 *	1/2019	Smirnov ..... H04L 9/0897
		10,554,475	B2 *	2/2020	Weinstein ..... G06F 21/53
		10,757,082	B2 *	8/2020	Buendgen ..... H04L 9/0897
		11,748,492	B1 *	9/2023	Campagna ..... H04L 9/0637 713/150

(56)	References Cited				2014/0195807 A1 *	7/2014	Bar-El	H04L 9/0877
U.S. PATENT DOCUMENTS								713/168
				2014/0229729 A1 *	8/2014	Roth	G06F 21/602	713/153
2010/0318786 A1 *	12/2010	Douceur	H04L 63/123	2014/0229732 A1 *	8/2014	Roth	H04L 63/0428	713/167
			713/155					713/176
2011/0010547 A1 *	1/2011	Noda	H04L 9/321	2014/0229737 A1 *	8/2014	Roth	H04L 9/088	713/176
			713/168					713/176
2011/0085667 A1 *	4/2011	Berrios	H04L 9/3249	2014/0230007 A1 *	8/2014	Roth	G06F 21/602	726/1
			709/203					726/1
2011/0179268 A1 *	7/2011	Strom	H04L 9/3247	2014/0237239 A1 *	8/2014	Hursti	H04L 9/32	713/168
			713/168					713/168
2011/0261964 A1 *	10/2011	Kahler	H04L 9/083	2014/0237252 A1 *	8/2014	Hursti	H04L 9/30	713/176
			380/44					713/176
2011/0314271 A1	12/2011	Boccon-Gibod et al.		2014/0237255 A1 *	8/2014	Martin	G06F 21/10	713/182
2012/0042170 A1 *	2/2012	Curtin	G06F 21/77					713/182
			713/185	2014/0281481 A1 *	9/2014	Moroney	H04N 21/26613	713/151
2012/0140923 A1 *	6/2012	Lee	H04L 9/0894					713/151
			380/44	2014/0281483 A1 *	9/2014	Vigliaturo	H04L 63/0471	713/153
2012/0159148 A1 *	6/2012	Behren	G06Q 20/3823					713/153
			713/150	2014/0289535 A1 *	9/2014	Gan	H04L 9/32	713/189
2012/0159178 A1 *	6/2012	Lin	H04L 63/065					713/189
			713/176	2014/0321646 A1 *	10/2014	Ksontini	H04W 4/60	380/247
2012/0166807 A1 *	6/2012	Shear	G06F 21/51					380/247
			713/176	2014/0359288 A1 *	12/2014	Jensen	H04W 12/04	713/168
2012/0173877 A1 *	7/2012	Pendakur	H04N 21/43635					713/168
			713/169	2014/0365763 A1 *	12/2014	Manohar	G06F 21/53	713/156
2012/0179902 A1 *	7/2012	Noda	H04L 63/06					713/156
			713/153	2015/0026483 A1 *	1/2015	Jiang	G06F 21/10	713/190
2012/0192283 A1 *	7/2012	Gu	H04L 9/002					713/190
			726/26	2015/0052358 A1 *	2/2015	Udupi	H04L 9/0822	713/171
2012/0246487 A1 *	9/2012	Gu	G06F 21/14					713/171
			713/190	2015/0058629 A1 *	2/2015	Yarvis	H04L 9/0825	713/171
2012/0297200 A1 *	11/2012	Thom	G06F 21/602					713/171
			713/189	2015/0143117 A1 *	5/2015	Freeman	H04L 67/1097	713/168
2012/0328106 A1 *	12/2012	Dellow	G06F 21/73					713/168
			380/283	2015/0149772 A1 *	5/2015	Leavy	H04L 63/06	713/168
2013/0091353 A1 *	4/2013	Zhang	H04L 9/3268					713/168
			713/156	2015/0150084 A1 *	5/2015	Kiperberg	G06F 21/44	726/3
2013/0124862 A1 *	5/2013	Pestoni	G06F 21/121					726/3
			713/168	2015/0161382 A1 *	6/2015	Boivie	G06K 19/06112	726/28
2013/0151848 A1 *	6/2013	Baumann	H04L 9/3263					726/28
			713/164	2015/0199528 A1 *	7/2015	Bobinski	G06F 8/61	713/191
2013/0152180 A1 *	6/2013	Nair	G06F 21/575					713/191
			726/26	2015/0229471 A1 *	8/2015	Nair	H04L 9/0891	713/171
2013/0166906 A1 *	6/2013	Swaminathan	H04N 21/8456					713/171
			713/162	2015/0248668 A1 *	9/2015	Radu	G06Q 20/322	705/71
2013/0166923 A1 *	6/2013	Tsuhara	G06F 3/0605					705/71
			713/193	2015/0270951 A1 *	9/2015	Michiels	H04L 63/1466	380/28
2013/0318577 A1 *	11/2013	Bulusu	H04W 12/08					380/28
			726/5	2015/0270956 A1 *	9/2015	Basnov	G06F 21/74	713/189
2014/0003608 A1 *	1/2014	MacMillan	H04L 9/3239					713/189
			380/279	2015/0278531 A1 *	10/2015	Smith	H04L 63/0428	713/165
2014/0013109 A1 *	1/2014	Yin	H04W 12/068					713/165
			713/155	2015/0312223 A1 *	10/2015	Michiels	G06F 21/51	713/168
2014/0089658 A1 *	3/2014	Raghuram	G06F 9/45533					713/168
			380/278	2015/0332262 A1 *	11/2015	Lingappa	G06Q 20/3823	705/71
2014/0095867 A1 *	4/2014	Smith	H04L 63/0861					705/71
			713/164	2016/0006724 A1 *	1/2016	Vlot	G06F 21/72	713/156
2014/0108805 A1 *	4/2014	Smith	H04L 9/3247					713/156
			713/176	2016/0036826 A1 *	2/2016	Pogorelik	G06F 21/10	726/1
2014/0129844 A1 *	5/2014	Johnson	G06F 21/78					726/1
			713/189	2016/0057619 A1 *	2/2016	Lopez	G06Q 20/3829	380/247
2014/0140504 A1 *	5/2014	Karroumi	H04L 9/0861					380/247
			380/44	2016/0063219 A1 *	3/2016	Vlot	H04L 63/0464	713/168
2014/0140508 A1 *	5/2014	Kamath	H04L 9/0822					713/168
			380/255	2016/0080144 A1 *	3/2016	Choi	H04L 9/0822	380/44
2014/0164790 A1 *	6/2014	Dodgson	G06Q 10/10					380/44
			713/193	2016/0092696 A1 *	3/2016	Guglani	G06F 21/606	726/26
2014/0181518 A1 *	6/2014	Kim	G06F 9/54					726/26
			713/168	2016/0125180 A1 *	5/2016	Smith	H04L 9/0822	726/20
2014/0195690 A1 *	7/2014	Harrison	H04L 67/141					726/20
			709/227	2016/0127351 A1 *	5/2016	Smith	G06F 21/316	726/10
2014/0195804 A1 *	7/2014	Hursti	H04L 9/0863					726/10
			713/168	2016/0134623 A1 *	5/2016	Roth	H04L 63/0823	713/156

(56)

**References Cited**

## U.S. PATENT DOCUMENTS


2016/0164849 A1 \* 6/2016 Smith ..... H04L 9/3263  
713/155  
2016/0180066 A1 \* 6/2016 Michiels ..... H04L 9/0631  
713/189  
2016/0182227 A1 \* 6/2016 Michiels ..... H04L 9/06  
380/28  
2016/0182472 A1 \* 6/2016 Michiels ..... H04L 63/0876  
713/171  
2016/0182499 A1 \* 6/2016 Sharaga ..... G06F 21/82  
713/156  
2016/0191236 A1 \* 6/2016 Smirnov ..... H04L 9/0822  
713/171  
2016/0205074 A1 \* 7/2016 Mitchell ..... H04L 63/045  
713/171  
2016/0226661 A1 \* 8/2016 Keidar ..... H04L 9/3231  
2016/0261592 A1 \* 9/2016 Hubert ..... G06F 21/53  
2016/0315917 A1 \* 10/2016 Smith ..... H04L 63/10  
2017/0048206 A1 \* 2/2017 Sui ..... H04L 63/0281  
2017/0063811 A1 \* 3/2017 Hitchcock ..... H04L 9/3234  
2017/0116438 A1 \* 4/2017 Ekberg ..... H04L 63/0876  
2017/0187524 A1 \* 6/2017 Furukawa ..... H04L 9/0844  
2017/0213027 A1 \* 7/2017 Gu ..... G06F 21/556  
2017/0228525 A1 \* 8/2017 Wajs ..... H04L 9/3226


2017/0237551 A1 \* 8/2017 Van Foreest ..... G06F 21/10  
713/189  
2017/0243000 A1 \* 8/2017 Shraim ..... H04L 9/00  
2017/0286141 A1 \* 10/2017 Adler ..... G06F 9/4856  
2017/0288874 A1 \* 10/2017 Narendra Trivedi .....  
G06F 9/45533  
2017/0310647 A1 \* 10/2017 Hu ..... G06F 21/33  
2017/0330402 A1 \* 11/2017 Menard ..... G07C 9/00857  
2017/0373828 A1 \* 12/2017 Michiels ..... G06F 21/75  
2018/0150646 A1 \* 5/2018 Roth ..... H04L 63/20  
2019/0095617 A1 \* 3/2019 Stefan ..... G06F 8/75  
2019/0312718 A1 \* 10/2019 Michiels ..... G06F 21/75  
2020/0044837 A1 \* 2/2020 Bos ..... H04W 12/041  
2021/0111884 A1 \* 4/2021 Nagao ..... H04L 9/0861  
2021/0390189 A1 \* 12/2021 Nagao ..... H04L 9/3247  
2022/0094536 A1 \* 3/2022 Nilsson ..... H04L 9/3263

## OTHER PUBLICATIONS


International Search Report and Written Opinion dated May 3, 2016, received in PCT Application No. PCT/US2016/012726 (7 pages).  
Notice of Allowance and Fee(s) Due mailed Oct. 11, 2018, received in U.S. Appl. No. 14/991,687.  
Office Action mailed Aug. 11, 2017, received in U.S. Appl. No. 14/991,687.


\* cited by examiner

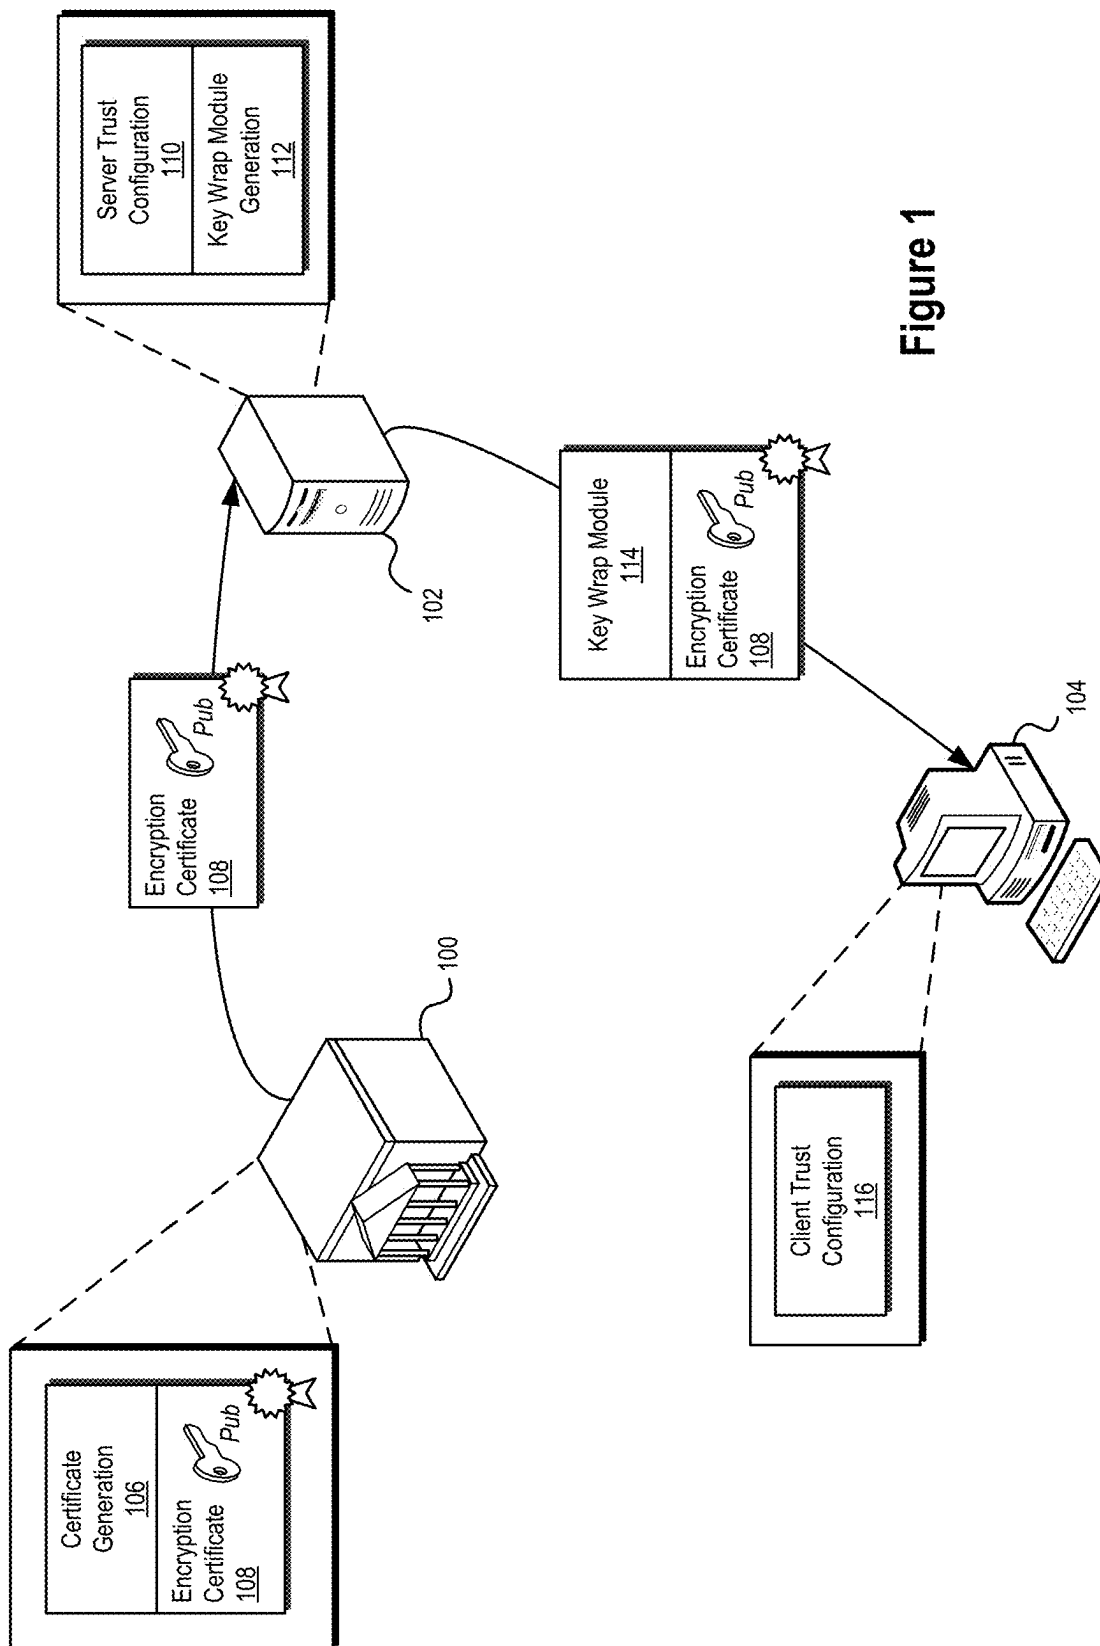

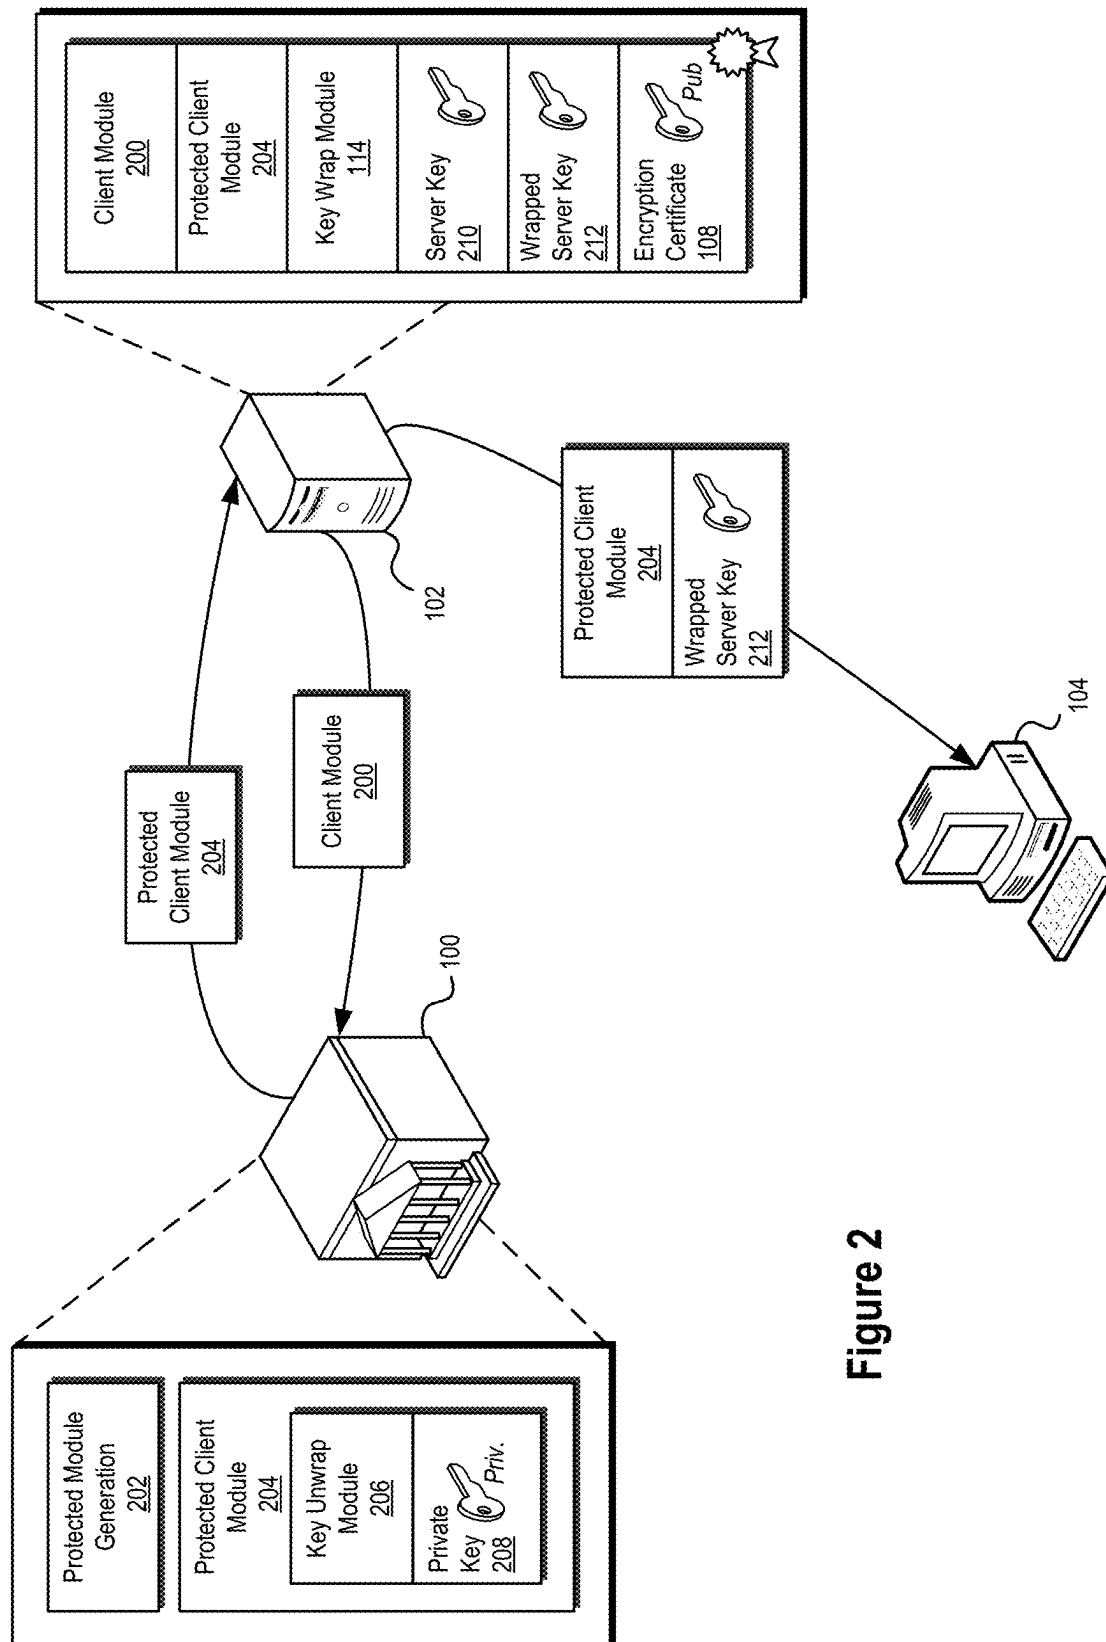


## Figure 2

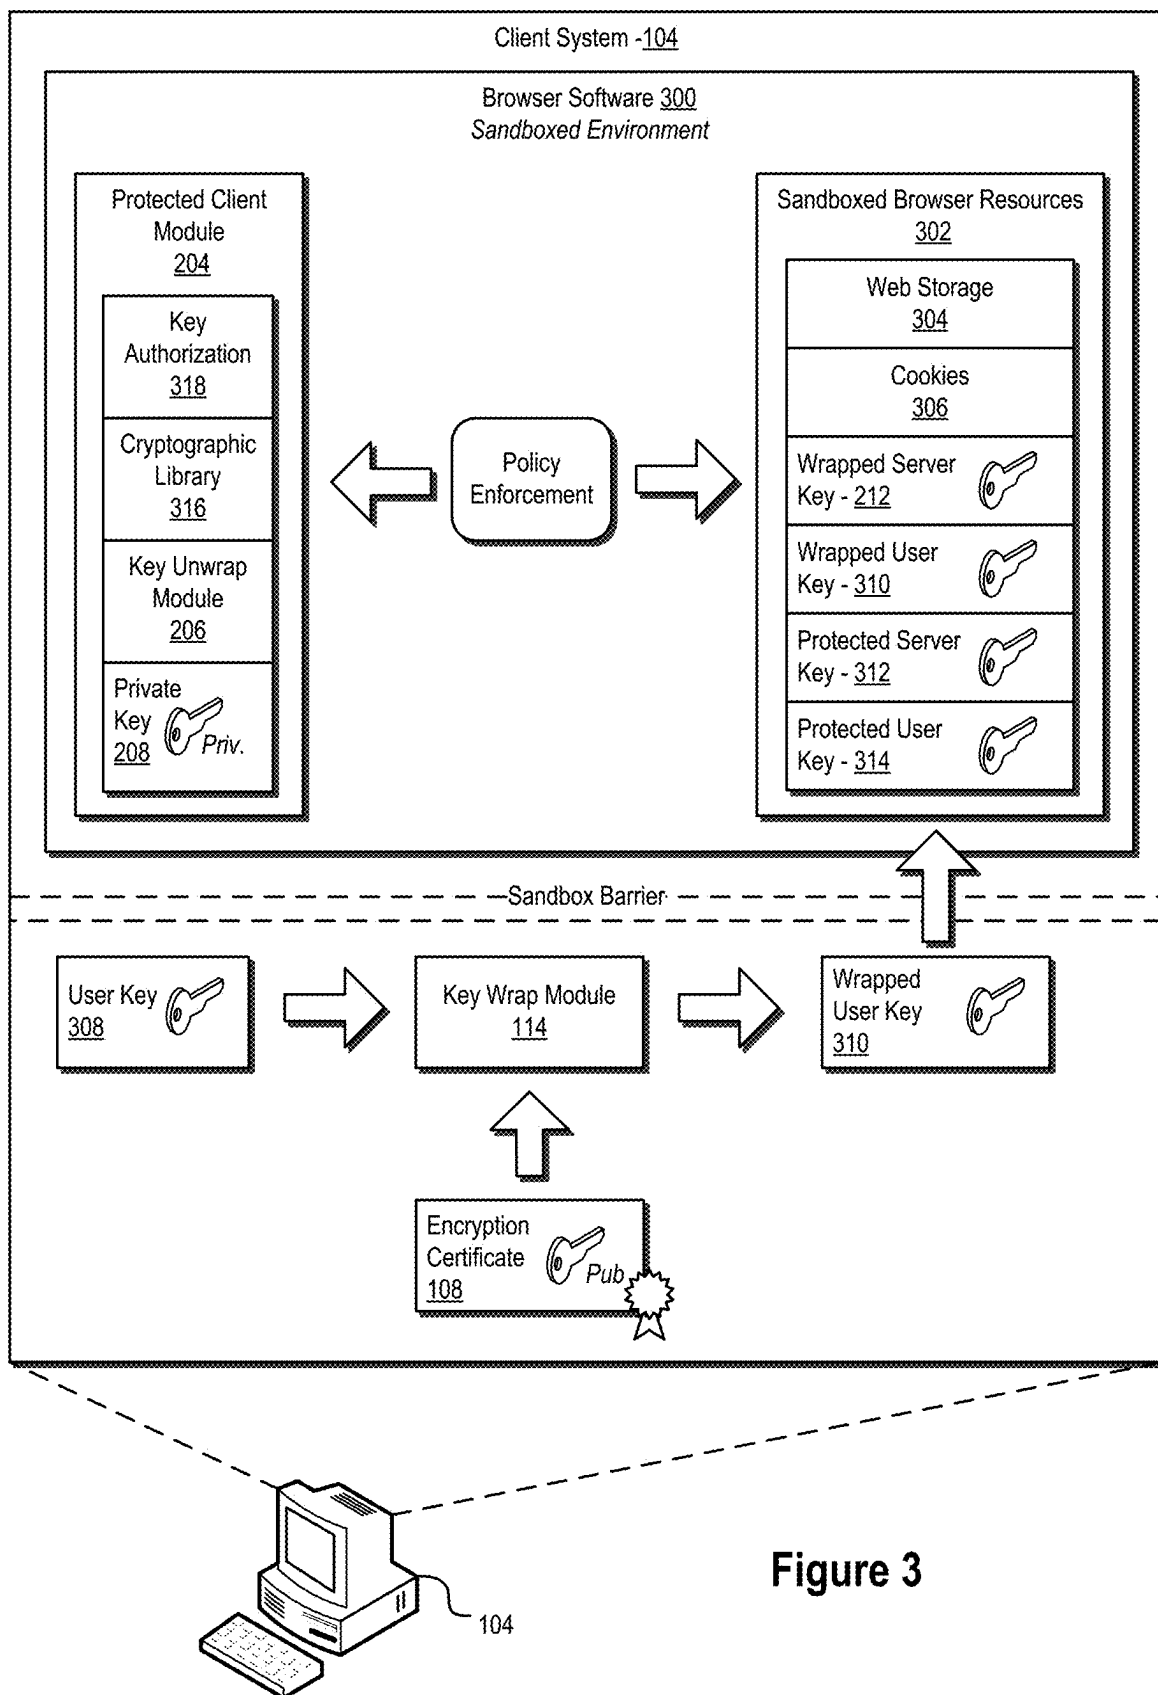

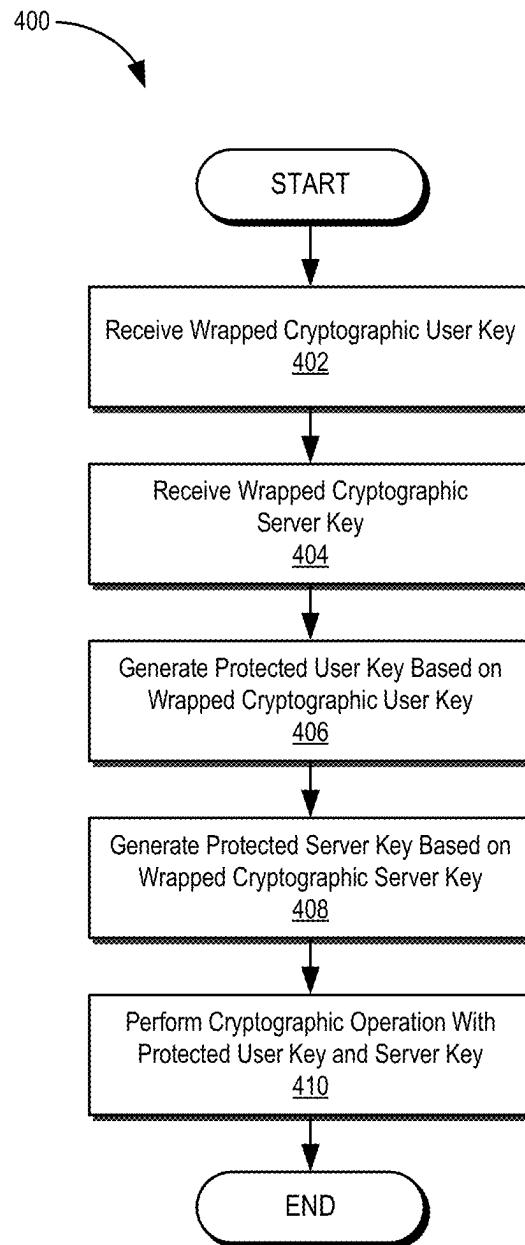**Figure 4**

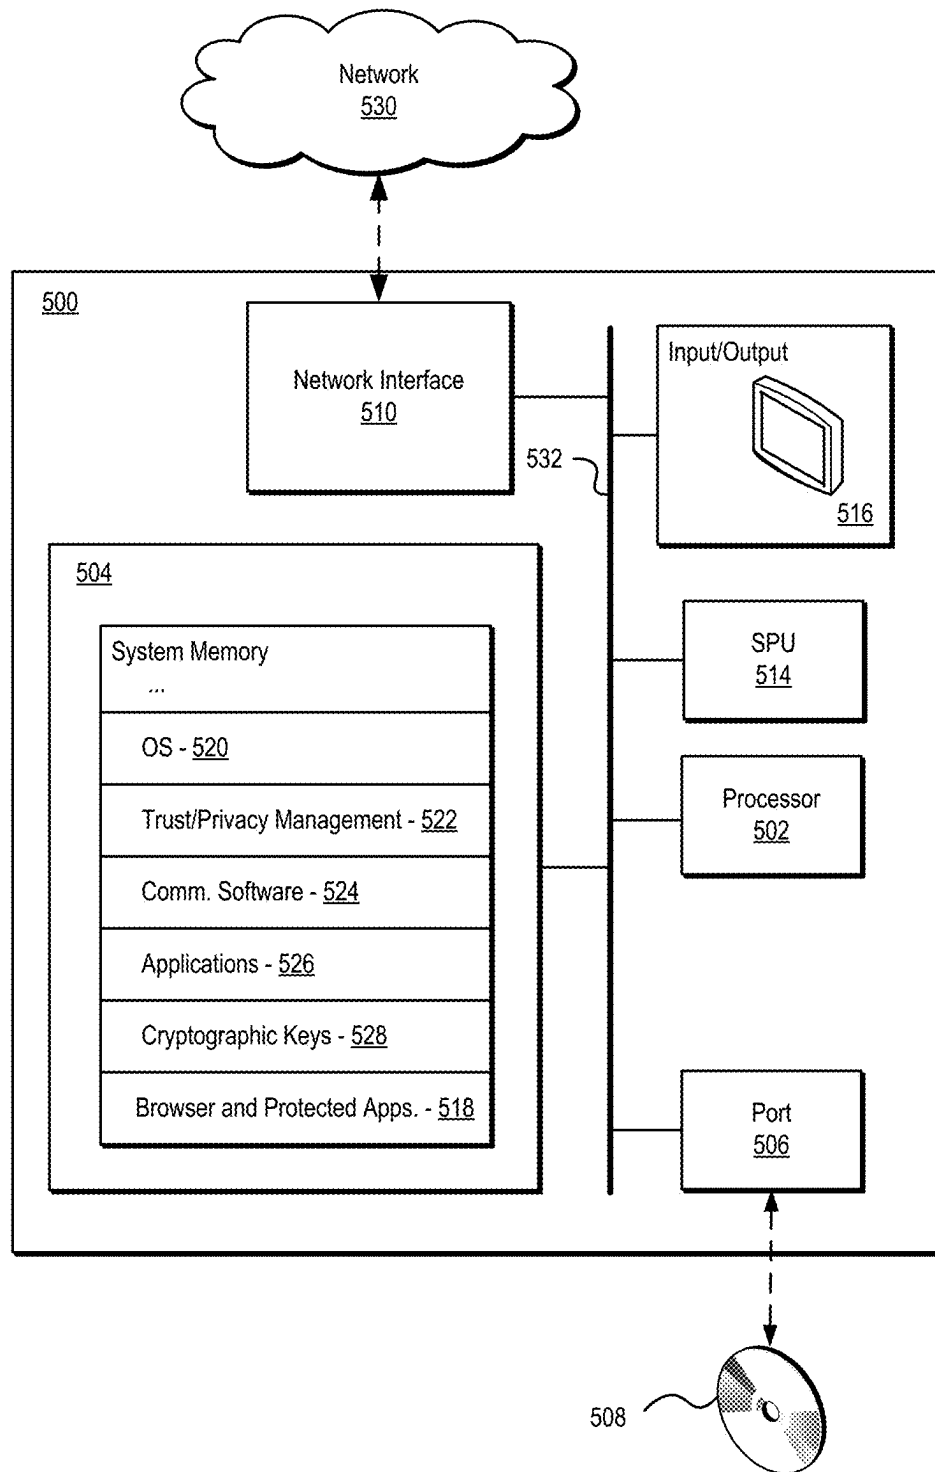

**Figure 5**

1

**CRYPTOGRAPHIC SYSTEMS AND METHODS****RELATED APPLICATIONS**

This application is a continuation of U.S. Nonprovisional application Ser. No. 17/530,009 filed Nov. 18, 2021, which is a continuation of U.S. Nonprovisional application Ser. No. 16/245,447, filed Jan. 11, 2019 (now U.S. Pat. No. 11,196,724), and entitled "CRYPTOGRAPHIC SYSTEMS AND METHODS," which is a continuation of U.S. Nonprovisional application Ser. No. 14/991,687, filed Jan. 8, 2016 (now U.S. Pat. No. 10,205,710), and entitled "CRYPTOGRAPHIC SYSTEMS AND METHODS," which claims the benefit of priority under 35 U.S.C. § 119(e) to U.S. Provisional Patent Application No. 62/101,293, filed Jan. 8, 2015, and entitled "CRYPTOGRAPHIC SYSTEMS AND METHODS," all of which are hereby incorporated by reference in their entirety.

**COPYRIGHT AUTHORIZATION**

Portions of the disclosure of this patent document may contain material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the U.S. Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

**BACKGROUND AND SUMMARY**

The present disclosure relates generally to systems and methods for performing cryptographic operations. More specifically, but not exclusively, the present disclosure relates to systems and methods that use cryptographic techniques to protect secure information shared with a potentially untrusted execution environment associated with a software application.

Conventional cryptographic services implemented within browser software of a client system may be vulnerable to certain attacks. For example, a server provisioning a cryptographic implementation to browser software of a client system and/or a communication channel associated with the same may be compromised (e.g., via a man-in-the-middle attack or the like). In view of these potential vulnerabilities, a user of a client system may be unwilling to provide certain secure user keys or other sensitive data to cryptographic implementations and/or other data processing methods operating within browser software downloaded from an untrusted server. Similarly, a server may be unwilling to provide certain secure server keys to browser software of an untrusted client system.

Certain embodiments of the systems and methods disclosed herein provide for secure implementation of cryptographic services including trusted credential and/or key management services operating within browser software executing on a client system. In some embodiments, a user may trust their secure keys to a cryptographic implementation operating within browser software based on the cryptographic service being signed and/or otherwise protected or authenticated by a trusted service (e.g., a trusted third party cryptographic service or the like). Similarly, a server may trust its secure keys to a cryptographic implementation operating within the browser software of a client system. In certain embodiments, the disclosed systems and methods may enable trusted credential and/or secure user key man-

2

agement within a sandboxed area of the client system associated with the browser software, thereby protecting the integrity of the trusted credentials and/or secure keys.

**BRIEF DESCRIPTION OF THE DRAWINGS**

The inventive body of work will be readily understood by referring to the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 illustrates a trust configuration process consistent with embodiments disclosed herein.

FIG. 2 illustrates a process of provisioning a client system with a protected client module consistent with embodiments disclosed herein.

FIG. 3 illustrates an exemplary implementation of a cryptographic service included in browser software executing on a client system consistent with embodiments disclosed herein.

FIG. 4 illustrates a flow chart of an exemplary cryptographic operation consistent with embodiments disclosed herein.

FIG. 5 illustrates a system that may be used to implement certain embodiments of the systems and methods of the present disclosure.

**DETAILED DESCRIPTION**

A detailed description of systems and methods consistent with embodiments of the present disclosure is provided below. While several embodiments are described, it should be understood that the disclosure is not limited to any one embodiment, but instead encompasses numerous alternatives, modifications, and equivalents. In addition, while numerous specific details are set forth in the following description in order to provide a thorough understanding of the embodiments disclosed herein, some embodiments can be practiced without some or all of these details. Moreover, for the purpose of clarity, certain technical material that is known in the related art has not been described in detail in order to avoid unnecessarily obscuring the disclosure.

Some embodiments of the disclosure may be understood by reference to the drawings, wherein like parts may be designated by like numerals. The components of the disclosed embodiments, as generally described and illustrated in the figures herein, could be arranged and designed in a wide variety of different configurations. Thus, the following detailed description of certain illustrative embodiments is not intended to limit the scope of the disclosure, as claimed, but is merely representative of possible embodiments of the disclosure. In addition, the steps of any method disclosed herein do not necessarily need to be executed in any specific order, or even sequentially, nor need the steps be executed only once, unless otherwise specified.

Embodiments of the systems and methods disclosed herein may employ trusted key management in connection with cryptographic services implemented within browser software executing on a client system. In certain embodiments, the systems and methods may use a trusted service operating as a root-of-trust. Credentials (e.g., certificates, keys, and/or the like) may be provisioned by the trusted service to client and/or server systems for use in connection with protecting the security of keys used in cryptographic operations performed by a protected client module executing within browser software of the client system (e.g., a JavaScript application and/or the like). In certain embodiments, the protected client module may be protected using a variety of cryptographic and/or white-box cryptographic

techniques employed by the trusted service. Using such an architecture, the integrity of keys shared by a user of client system and/or the server system with the protected client module may be maintained. Although certain embodiments disclosed herein are discussed in connection with client modules executing within browser software of a client system, it will be appreciated that the disclosed embodiments may be further employed in connection with any other type of software and/or execution environments and in a variety of configurations and/or architectures.

In certain embodiments, the systems and methods described herein can, for example, be used in connection with digital rights management ("DRM") technologies such as those described in commonly assigned, co-pending U.S. patent application Ser. No. 11/583,693 ("the '693 application"), service orchestration technologies such as those described in commonly assigned co-pending U.S. patent application Ser. No. 10/863,551 ("the '551 application"), and/or content delivery technologies such as those described in commonly assigned co-pending U.S. patent application Ser. No. 12/785,406 ("the '406 application") (the contents of '693 application, the '551 application, and the '406 application hereby being incorporated by reference in their entireties), as well as in other contexts. It will be appreciated that these systems and methods are novel, as are many of the components, systems, and methods employed therein.

FIG. 1 illustrates a trust configuration process consistent with embodiments disclosed herein. In certain embodiments, a trusted service **100** may interact with a server system **102** and/or a client system **104** in connection with a trust configuration process. The trusted service **100**, the server system **102**, the client system **104**, and/or other services and/or systems (not shown) used in connection with the disclosed embodiments may comprise any suitable computing system or combination of systems configured to implement embodiments of the systems and methods disclosed herein. In certain embodiments, the trusted service **100**, the server system **102**, the client system **104**, and/or other systems or services may comprise at least one processor system configured to execute instructions stored on an associated non-transitory computer-readable storage medium. As discussed in more detail below, the trusted service **100**, the server system **102**, the client system **104**, and/or other systems or services may further comprise a secure processing unit ("SPU") configured to perform sensitive operations such as trusted credential and/or key management, secure policy management, and/or other aspects of the systems and methods disclosed herein. The trusted service **100**, the server system **102**, and/or the client system **104**, and/or other services or systems may further comprise software and/or hardware configured to enable electronic communication of information between the devices and/or systems via one or more associated network connections.

The client system **104** may comprise a computing device executing one or more applications configured to implement certain embodiments of the systems and methods disclosed herein. In certain embodiments, the client system **104** may comprise a laptop computer system, a desktop computer system, a smartphone, a tablet computer, and/or any other computing system and/or device that may be utilized in connection with the disclosed systems and methods. In some embodiments, the client system **104** may comprise software and/or hardware configured to, among other things, implement cryptographic operations using software executing within browser software of the client system **104** and/or a sandboxed environment associated with the same. As discussed in more detail below, in some embodiments, such

cryptographic functionality may be implemented using, at least in part, one or more protected applications (e.g., client modules) executing within a browser of the client system **104**.

Communication between the client system **104**, server system **102**, trusted service **100**, and/or one or more other service providers may be facilitated by a network comprising any suitable number of networks and/or network connections. The network connections may comprise a variety of network communication devices and/or channels and may utilize any suitable communication protocols and/or standards facilitating communication between the connected devices and systems. The network connections may comprise the Internet, a local area network, a virtual private network, and/or any other communication network utilizing one or more electronic communication technologies and/or standards (e.g., Ethernet or the like). In some embodiments, the network connections may comprise a wireless carrier system such as a personal communications system ("PCS"), and/or any other suitable communication system incorporating any suitable communication standards and/or protocols. In further embodiments, the network connections may comprise an analog mobile communications network and/or a digital mobile communications network utilizing, for example, code division multiple access ("CDMA"), Global System for Mobile Communications or Groupe Special Mobile ("GSM"), frequency division multiple access ("FDMA"), and/or time divisional multiple access ("TDMA") standards. In certain embodiments, the network connections may incorporate one or more satellite communication links. In yet further embodiments, the network connections may utilize IEEE's 802.11 standards, Bluetooth®, ultra-wide band ("UWB"), Zigbee®, and/or any other suitable communication protocol(s).

As part of the trust configuration process, the trusted service **100** may generate and issue one or more trusted credentials to the server system **102** and/or the client system **104**. In certain embodiments, a trusted credential may comprise a certificate including one or more cryptographic components. For example, as illustrated, the trusted service **100** may generate an encryption certificate **108** that includes a cryptographic key using a certificate generation module **106**. In some embodiments, the cryptographic key included in the encryption certificate **108** may be a public cryptographic key. Although embodiments disclosed herein are discussed in connection with a trusted credential that comprises an encryption certificate **108** including a public key, it will be appreciated that any suitable trusted credential may be used in connection with the disclosed embodiments. As discussed in more detail below, the encryption certificate **108** may be used in connection with facilitating trust between a server system **102**, a client system **104**, and/or a module executing on the same (e.g., a script executing in browser software and/or the like).

The encryption certificate **108** may be communicated to the server system **102** and/or the client system **104**. In certain embodiments, the encryption certificate **108** may be issued to the server system **102** from the trusted service **100**, which may in turn issue the encryption certificate **108** to the client system **104**. In other embodiments, the encryption certificate **108** may be issued to the client system **104** by the trusted service **100** directly and/or via one or more other intermediate services and/or systems. Similarly, the encryption certificate **108** may be issued to the server system **102** via one or more intermediate services and/or systems.

Upon receiving the encryption certificate **108**, the server system **102** may use the encryption certificate **108** in con-

5

nection with a server trust configuration process 110. In certain embodiments, the encryption certificate 108 may be loaded in a trusted certificate library maintained by the server system 102 as part of the server trust configuration process 110 for use in connection with future trusted and/or cryptographic operations. In certain embodiments, prior to committing secret information to the trusted service 100, the server system 102 may verify that the trusted service 100 is trusted as part of the server trust configuration process 110. Trust may be verified and/or otherwise established in a variety of suitable ways. For example, trust may be verified and/or otherwise established by determining that the trusted service 100 meets trust and/or security requirements articulated by the server system 102 and/or another service. After trust has been verified and/or established, the encryption certificate 108 may be used by the server system 102 to encrypt information in connection with the disclosed embodiments.

The server system 102 may generate a key wrap module 112 as part of a key wrap module generation process 112. In certain embodiments, the key wrap module 112 may use the encryption certificate 108 to perform a key wrapping operation. In some embodiments, the key wrap module 114 may be used to encapsulate cryptographic keys, thereby protecting wrapped cryptographic keys while in untrusted storage and/or during transmission over untrusted communication channels. In certain embodiments, the key wrap module 114 may comprise an asymmetric encryption algorithm that utilizes the public key included in the encryption certificate 108 to wrap and/or otherwise protect a cryptographic key. In some embodiments, the key wrap module 114 may be configured to perform a key wrapping operation using an RSA encryption algorithm, although other suitable key wrapping algorithms and/or processes may also be used in connection with the disclosed embodiments. Although in the illustrated embodiments the key wrap module 112 is shown as being generated and distributed by the server system 102, it will be appreciated that the key wrap module 112 may be generated and distributed by the trusted service 100 and/or one or more other services.

In some embodiments, the encryption certificate 108 may be separate from the key wrap module 114 and may be accessed by the key wrap module 114 in connection with key wrapping operations (e.g., from a certificate library and/or the like). In other embodiments, the encryption certificate 108 may be included as a component within the key wrap module 114.

The key wrap module 114 and/or the encryption certificate 108 may be transmitted to the client system 104 for use in connection with key wrapping and/or other cryptographic operations. In certain embodiments, upon receiving the encryption certificate 108, the client system 104 may use the encryption certificate 108 in connection with a client trust configuration process 116. In certain embodiments, prior to committing secret information to the trusted service 100 and/or modules and/or applications protected by the same, the client system 104 may verify that the trusted service 100 is trusted as part of the client trust configuration process 116. Trust may be verified and/or otherwise established in a variety of suitable ways. For example, trust may be verified and/or otherwise established by determining that the trusted service 100 meets trust and/or security requirements articulated by the client system 104 and/or another service. After trust has been verified and/or established, the encryption certificate 108 may be used by the client system 104 to encrypt information in connection with the disclosed embodiments.

6

In certain embodiments, the encryption certificate 108 may be loaded in a trusted certificate library maintained by the client system 104 as part of the user trust configuration process 116 for use in connection with future trusted and/or cryptographic operations. Similarly, the key wrap module 114 may be loaded into one or more cryptographic libraries of the client system 104 for use in connection with trusted and/or cryptographic operations performed by the client system 104.

Various trust configuration processes illustrated in connection with FIG. 1 may be performed at a variety of suitable times. For example, in some embodiments, the server system 102 and/or client system 104 may be provisioned with an encryption certificate 108 and/or key wrap module 114 at a time of manufacture. In other embodiments, various aspects of the trust configuration processes may be performed in connection with a system registration process (e.g., a server and/or client registration process or the like). In yet further embodiments, aspects of the trust configuration processes may be performed when a protected client module is transmitted to a client system 104 from the server system 102 for execution within browser software of the client system 104, as is discussed in more detail below.

FIG. 2 illustrates a process of provisioning a client system 104 with a protected client module 204 consistent with embodiments disclosed herein. In certain embodiments, the server system 102 may transmit a client module 200 to the trusted service 100 for protection. In some embodiments, the client module 200 may be generated by the server system 102. In further embodiments, a developer of the client module 200 may transmit the client module 200 to the server system 102 and/or the trusted service 100 for distribution to one or more client systems 104 and/or for protection by the trusted service 100.

The client module 200 may comprise a software application configured to be executed by the client system 104. For example, in some embodiments, the client module 200 may be configured to be executed within browser software of the client system. In some embodiments, the client module 200 may comprise a JavaScript application downloaded to a client system 102 in connection with accessing a webpage using associated browser software. Consistent with embodiments disclosed herein, the client module 200 may implement certain cryptographic operations (e.g., operations using cryptographic keys and/or the like), which may be protected by the trusted service 100.

Upon receipt of the client module 200, the trusted service 100 may engage in a protected module generation process 202. In certain embodiments, the protected module generation process 202 may utilize any suitable software code protection method to yield a protected client module 204 including, for example, white-box cryptographic protection methods, fully homomorphic encryption ("FHE") methods, software obfuscation methods, functional encryption methods, and/or the like. For example, in certain embodiments, white-box protection methods may allow secret information associated with the client module 200 (e.g., secure keys such as a private key) to remain encrypted and/or otherwise protected, even during execution of code associated with the client module 200. In some embodiments, such white-box cryptographic methods may protect software code and/or associated secret information from being exposed in clear text during execution of the module. Among other things, this may allow execution and/or storage of the client module 202 on and/or in a memory of a client system 104 having an open architecture.

In certain embodiments, the protected client module **204** may comprise a key unwrap module **206**. The key unwrap module **206** may be configured to unwrap a cryptographic key using a private cryptographic key **208** included in the protected client module **204** to yield a protected cryptographic key (e.g., a white-box protected cryptographic key). For example, in some embodiments, the key unwrap module **206** may receive a cryptographic key wrapped using the public cryptographic key included in the encryption certificate **108** generated and/or provisioned by the trusted service **100** as part of a trust configuration process. The key unwrap module **206** may utilize the private cryptographic key **208** included in the protected client module **204** corresponding to the public key to unwrap the wrapped cryptographic key and yield a protected cryptographic key that may then be used in connection with certain cryptographic operations performed by the protected client module **204**. In some embodiments, the private cryptographic key **208** may comprise a white-box protected cryptographic key.

The protected client module **204** may be transmitted to the server system **102** by the trusted service **100** for distribution to one or more client systems **104**. The server system **102** may distribute the protected client module **204** to the client system **104** under a variety of circumstances. For example, in some embodiments, the protected client module **204** may comprise a protected JavaScript application. When browser software executing on the client system **104** accesses an associated webpage, the protected JavaScript application may be downloaded by the client system **104** from the server system **102** for execution within an environment associated with the browser software. In some embodiments, the protected JavaScript application may not be permanently installed on the client system **104**, but be cached for use during a single and/or over a limited number of sessions and/or period of time.

In some embodiments, the protected client module **204** may perform cryptographic operations utilizing a variety of cryptographic keys. For example, the protected client module **204** may perform a secure cryptographically-enforced transaction between the server system **102** and the client system **104** using keys associated with the server system **102** and/or the client system **104**. Similarly, the protected client module **204** may use keys associated with the server system **102** and/or the client system **104** in connection with various web analytics methods, network authentication methods (e.g., Kerberos network authentication protocol methods), financial transaction methods including EMV payments, and/or the like. It will be appreciated that embodiments disclosed herein may also be utilized in connection with protecting secret information used in various non-cryptographic operations performed by the protected client module **204**.

In certain embodiments, the server system **102** may not trust the integrity and/or security of the client system **104**, and thus may not wish to provide its unencrypted keys to the client system **104** for use in connection with various operations including, for example, cryptographic operations. Accordingly, the server system **102** may use the key wrap module **114** to wrap a server key **210** using the public key included in the encryption certificate **108**. After the server key **210** has been wrapped, the wrapped server key **212** may be transmitted to the client system **104** for use in connection with various cryptographic operations performed by the protected client module **204**.

FIG. 3 illustrates an exemplary implementation of a cryptographic service included in browser software **300** executing on a client system **104** consistent with embodi-

ments disclosed herein. In certain embodiments, certain software code executing on the client system **104** may be sandboxed and/or otherwise executed in some type of a limited virtualized environment. Software code executing in a sandbox may be restricted to accessing and/or using a controlled set of resources, functions, and/or services associated with the client system. For example, a sandbox may allow software code executing therein to only access a certain subset of storage disk space and/or memory associated with the client system. Access to certain input/output channels, networking resources, processing resources, and/or the like may be similarly controlled and/or restricted.

In certain embodiments, browser software **300** executing on the client system **104** may be sandboxed, thereby protecting the client system **104** from nefarious code executing within the browser software **300**. In certain embodiments, the browser software **300** may have access to defined sandboxed resources **302** of the client system **104**. The sandboxed resources **302** may comprise certain portions and/or locations of storage on the client system **104** that may store, for example, cached and/or otherwise stored website information **304**, cookies **306**, and/or trusted credentials such as keys **312**, **310-314**. The sandboxed resources **302** may further comprise certain processing resources, functions, services, and/or interfaces of the client system **104** accessible by the browser software **300** and/or modules executing in an environment associated with the same. In other embodiments, the sandboxed resources **302** may comprise a secure clock, a secure random number generator, a secure user interface, and/or the like.

A protected client module **204** may be loaded into the execution environment of the browser software **300** to facilitate implementation of certain cryptographic services within the browser software **300** consistent with embodiments disclosed herein. In certain embodiments, the interaction between the browser software **300** and/or modules executing in the sandboxed environment of the browser software **300** may be managed by one or more articulated policies. For example, in certain embodiments, the protected client module **304** may only be allowed access to sandboxed browser resources **302** associated with the module **304** (e.g., web storage **304**, cookies **306**, and/or keys **212**, **310-314**). Similarly, in some embodiments, a same-origin policy may be enforced by the browser software **300** to allow a specific browser application to access cookies and/or other information generated by the application while restricting access to cookies and/or other information generated by other applications. In this manner, the specific resources included in the sandboxed browser resources **302** may vary between various browser-executed applications.

A user of the client system **104** may wish to use a cryptographic key **308** in connection with a cryptographic operation performed by the protected client module **204** executing in the sandboxed environment of the browser software **300**. The user, however, may not necessarily trust applications executing within the browser software **300**, and thus may not wish to provide their unencrypted user key **308** to the execution environment of the browser software **300**. Accordingly, the client system **104** may use a key wrap module **114** provisioned as part of the trust configuration process detailed above to wrap the user key **308** using the public key included in the provisioned encryption certificate **108**. In certain embodiments, by wrapping the user key **308** with the public key included in the encryption certificate **108**, the client system **104** may limit use of the user key **308** to trusted applications protected by a trusted service.

In certain embodiments, the encryption certificate **108** may also comprise descriptions of various functions and/or permissions relating to how a key wrapped with information included in the encryption certificate **108** (e.g., the public key) will be used by the protected client module **104**. In some embodiments, such descriptive information may allow a user of the client system **104** to better determine what operations they are consigning their secret user key **308** to prior to wrapping the key using information included in the encryption certificate **108** and importing the wrapped key **310** into the execution environment associated with the browser software **300**. In some embodiments, functions and/or permissions relating to how a key is used by the protected client module **204** and/or other related modules and/or systems may be enforced by a key authorization module **318** included in the protected client module **204** and/or the browser software **300**.

After the user key **308** has been wrapped, the resulting wrapped user key **310** may be imported to the execution environment of the browser software **300** for use in connection with cryptographic operations implemented by the protected client module **204**. In certain embodiments, the key unwrap module **206** included in the protected client module **204** may be configured to unwrap the wrapped user key **310** using the private cryptographic key **208** provisioned to the protected client module **204** by the trusted service to yield a protected user key **314**. In certain embodiments, the protected user key **314** may comprise a white-box protected user key. Accordingly, the protected user key **314** may be exposed outside the sandboxed environment of the browser software **300** (e.g., to a remote server system and/or the like) without compromising the security of the user key. The protected user key **314** may be used in connection with cryptographic operations performed by the protected client module **204** and/or by a remote server system.

Certain cryptographic operations performed by the protected client module **204** may further use a key provided by a server system. For example, certain secure transactions may utilize both a user key and a server key. Accordingly, a wrapped server key **212** sent to the execution environment of the browser software **300** by a server system may further be unwrapped using the key unwrap module **206** included in the protected client module **204** to generate a protected server key **312**. Like the protected user key **314**, the protected server key **312** may comprise a white-box protected user key. Accordingly, the protected server key **312** may be exposed outside the server system (e.g., to the execution environment of the browser software **300**) without compromising the security of the server key.

Key unwrapping consistent with the disclosed embodiments may be performed at a variety of times. For example, in some embodiments, key unwrapping may be performed using the key unwrap module **206** when the wrapped server key **212** and/or the wrapped user key **310** are initially loaded into the execution environment of the browser software **300**. In further embodiments, key unwrapping may be performed when keys used in connection with a cryptographic operation are requested by the protected client module **204**. In certain embodiments, unwrapped protected keys **312**, **314** may be utilized in connection with cryptographic operations performed using a cryptographic library **316** of the protected client module **204**. In yet further embodiments, key unwrapping may be included as part of platform and/or service communication methods (e.g., SSL communication methods and/or the like).

Although certain embodiments disclosed herein are discussed in connection with the use of a key wrap module **114**

to protect various secret information including user and server keys (e.g., user key **308**), it will be appreciated that other protection mechanisms may also be used in connection with the disclosed embodiments. For example, in some embodiments, keys may be communicated to the protected client module **204** via a secure and/or otherwise authenticated communications channel. In some embodiments, the secure and/or authenticated communication channel may protect the keys from being exposed in the clear.

A variety of cryptographic operations may be performed using the protected keys **312**, **314**. For example, the protected client module **204** may use the protected keys **312**, **314** in connection with a secure cryptographically-enforced transaction between a server system and the client system **104**. Other cryptographic operations using embodiments of the disclosed systems and methods include, without limitation, data encryption/decryption operations, cryptographic signing operations, cryptographic signature verification operations, and/or the like. In yet further embodiments, the protected keys **312**, **314** may be used in a variety of other operations that may not necessarily be cryptographic operations.

In certain embodiments, the protected client module **204** may implement a safe application program interface ("API"). In certain embodiments, the safe API may expose certain defined functions that may not be used to compromise the integrity of secret information imported to the protected client module **204** and/or the associated browser software **300** such as secure keys (e.g., keys **212**, **310-314**). In certain embodiments, such defined functions may be articulated in metadata and/or other information associated with the keys. For example, in certain embodiments, functions such as unwrapping a wrapped user key **310** and making it directly available may not be exposed by the safe API. In this manner, the integrity of the imported secure user key **310** may be maintained by the protected client module **204**. Similarly, specific permitted uses of secure keys **212**, **310-314** by the protected client module **204**, the browser software **300**, and/or other software and/or systems may be enforced by implementation of a safe API, thereby preventing the keys **212**, **310-314** from being used in arbitrary ways.

In some embodiments, a safe API may further utilize certain code verification techniques to ensure that the integrity of secret information imported into a protected client module **204** and/or associated browser software is maintained. For example, the safe API may validate the integrity of its inputs and/or perform certain authorization checks. In certain embodiments, the safe API may perform and/or otherwise verify certain key authorizations using any suitable technique (e.g., DRM license checks and/or the like). In some embodiments, this functionality may, among other things, reduce the potential of repeated or rogue activations from detrimentally impacting an overall trust ecosystem and/or its various participants.

In further embodiments, a user of the client system **104** may trust their secure user keys **308** to a trusted service. In certain embodiments, the trusted service may be trusted by the user through assurance and/or auditing of certain security implementations. The trusted service may protect the secret user keys **308** using white-box cryptographic protection methods and may distribute protected user keys **314** to the client system **104**. Similarly, a server may trust its keys to the trusted service, which may protect the server keys using white-box cryptographic protection methods and may similarly distribute the protected server keys **312** to the server system and/or the client system. The protected client module **204** executing within the browser software **300** of

## 11

the client system **104** may then access the protected keys **312**, **314** in connection with various operations including, for example, cryptographic operations. In certain embodiments, such an implementation may reduce the burden on the client system **104** and/or a server system associated with performing key wrapping and/or unwrapping operations.

In certain embodiments, the browser software **300** executing on the client system **104** may use Google® Native Client (“NaCl”) and/or any other suitable sandboxing technology to facilitate safe execution of native code within an environment associated with the browser software **300**. In some embodiments, native code that is written in a defined manner may be executed within the sandboxed environment. In certain embodiments, the defined manner in which the native code is written may be analyzable and verifiable as being secure by the browser software **300** executing the code. For example, native code may be analyzed to determine that the code may only call certain permissible functions. In some embodiments, such an implementation may allow for executing of web-based applications (e.g., a protected client module **204**) at near-native speeds on the client system **104**.

Embodiments of the disclosed systems and methods may be utilized in connection with a variety of applications. For example, in some embodiments, a protected client module **204** may be utilized in connection with implementing a Kerberos Ticket Granting Service (“TGS”). In some embodiments, various secure resources used in connection with the Kerberos TGS (e.g., a secure random number generator, secure storage, etc.) may be provided by the client system **104** via a trusted SPU and/or the like. In further embodiments, a protected client module **204** may be used in connection with implementing a EMV payment service to, among other things, protect a user’s account information (e.g., credit card number) and/or sign payment tokens using associated keys (e.g., symmetric keys).

It will be appreciated that a number of variations can be made to the architecture and relationships presented in connection with FIGS. 1-3 within the scope of the inventive body of work. For example, without limitation, in some embodiments, some or all of the functions performed by the trusted service **100** may be performed by the server system **102**. Similarly, some or all of the functions performed by the client system **104** may be performed by the server system **102**. Furthermore, one or more other services and/or systems not necessarily illustrated may be utilized in connection with implementing various aspects of the embodiments of the disclosed systems and methods. Although certain embodiments are discussed in connection with protecting secure cryptographic keys, it will be appreciated that the disclosed embodiments may be further used in connection with protecting any suitable secret information including, without limitation, passwords, personal information, sensitive data, and/or the like. Thus it will be appreciated that FIGS. 1-3 are provided for purposes of illustration and explanation, and not limitation.

FIG. 4 illustrates a flow chart of an exemplary cryptographic method **400** consistent with embodiments disclosed herein. The illustrated method **400** may be implemented in a variety of ways, including using software, firmware, hardware, and/or any combination thereof. In certain embodiments, various aspects of the method **400** may be implemented by a client system, a server system, a trusted service, and/or any other related service or system as described above. Certain embodiments included in the illustrated method **400** may implement secure cryptographic operations within a sandboxed execution space of browser

## 12

software executing on a client system. It will be appreciated, however, that embodiments of the disclosed systems and methods may be similarly implemented in a variety of other execution spaces. In addition, it will be appreciated that cryptographic operations consistent with the disclosed embodiments may incorporate all of the elements of the illustrated method **400** or a subset thereof, and may proceed in any suitable order.

At **402**, a wrapped user key may be received via an import process in an execution environment associated with browser software. In certain embodiments, the wrapped user key may have been wrapped using a public key included in an encryption certificate provisioned to a client system executing the browser software from a trusted service. A wrapped server key may be similarly received in the execution environments of the browser software at **404**. Like the wrapped user key, the wrapped server key may have been wrapped using a public key included in an encryption certificate provisioned to the server system from a trusted service. The wrapped keys may be provided to the execution environment associated with the browser software and/or a protected application executing within the same through a platform API, a cookie, user interaction (e.g., user input via a browser widget or the like), etc.

The wrapped user key may be unwrapped by a component of a protected application such as a key unwrapping module executing within the execution environment of the browser software at **406**. In certain embodiments, the wrapped user key may be unwrapped using, at least in part, a private key provisioned to the protected application from the trusted service corresponding to the public key included in the encryption certificate used to wrap the user key. Unwrapping the wrapped user key may generate a white-box protected user key.

At **408**, the wrapped server key may be unwrapped by the key unwrapping module of the protected application executing within the execution environment of the browser software. Like the wrapped user key, the wrapped server key may be unwrapped using, at least in part, a private key provisioned to the protected application from the trusted service corresponding to the public key included in the encryption certificate used to wrap the server key. Unwrapping the wrapped server key may generate a white-box protected server key.

A cryptographic operation may be performed by the protected client module using the generated protected server and/or user keys at **410**. In certain embodiments, the security of the user and/or server keys may be maintained, as the corresponding protected cryptographic keys used in connection with the cryptographic operation may remain white-box protected in the execution space of the browser application and/or elsewhere that they may be sent in connection with the operation. Accordingly, a user of the client system and/or the server system may be more willing to import wrapped representations of their secure keys into the otherwise potentially untrusted execution space of the browser software.

FIG. 5 illustrates a system **500** that may be used to implement certain embodiments of the systems and methods of the present disclosure. The system **500** may comprise a trusted service, a server system, a client system, and/or any other system configured to implement certain aspects of the systems and methods described herein. In certain embodiments, the system **500** may perform some or all of the disclosed functions associated with a trusted service, a server system, a client system, and/or any other related system and/or service as disclosed herein.

13

As illustrated in FIG. 5, the system 500 may include: a processor 502; system memory 504, which may include high speed RAM, non-volatile memory and/or one or more bulk non-volatile computer-readable storage mediums (e.g., a hard disk, flash memory, etc.) for storing programs and other data for use and execution by the processor 502; an interface 516 (e.g., an input/output interface) that may include a display and/or one or more input devices such as, for example, a touchscreen, a keyboard, a mouse, a track pad, and the like; a port 506 for interfacing with removable memory 508 that may include one or more diskettes, optical storage mediums, and/or other computer-readable storage mediums (e.g., flash memory, thumb drives, USB dongles, compact discs, DVDs, etc.); a network interface 510 for communicating with other systems via a network 530 using one or more communication technologies; and one or more buses 532 for communicatively coupling the aforementioned elements.

In certain embodiments, the network 530 may comprise the Internet, a local area network, a virtual private network, and/or any other communication network utilizing one or more electronic communication technologies and/or standards (e.g., Ethernet or the like). In some embodiments, the network interface 510 and/or network 530 may be part of a wireless carrier system, such as a PCS, and/or any other suitable communication system incorporating any suitable communication standards and/or protocols. In further embodiments, the network interface 510 and/or the network 530 may be part of an analog mobile communications network and/or a digital mobile communications network utilizing, for example, CDMA, GSM, FDMA, and/or TDMA standards. In still further embodiments, the network interface 510 and/or the network 530 may incorporate one or more satellite communication links and/or use IEEE's 802.11 standards, near-field communication, Bluetooth®, UWB, Zigbee®, and or any other suitable standard or standards.

In some embodiments, the system 500 may, alternatively or in addition, include a SPU 514 that is protected from tampering by a user of system 500 or other entities by utilizing secure physical and/or virtual security techniques. An SPU 514 can help enhance and/or facilitate the security of sensitive operations such as private management of secret or otherwise secure information including cryptographic keys, and other aspects of the systems and methods disclosed herein. In certain embodiments, the SPU 514 may operate in a logically secure processing domain and be configured to protect and operate on secret information. In some embodiments, the SPU 514 may include internal memory storing executable instructions or programs configured to enable to the SPU 514 to perform secure operations. In further embodiments, the SPU 514 may facilitate certain secure platform resources including, without limitation, secure random number generators, secure clocks, secure user interfaces, secure storage, and/or the like.

The operation of system 500 may be generally controlled by the processor 502 operating by executing software instructions and programs stored in the system memory 504 (and/or other computer-readable media, such as removable memory 508). The system memory 504 may store a variety of executable programs or modules for controlling the operation of the system 500. For example, the system memory 504 may include an operating system ("OS") 520 that may manage and coordinate, at least in part, system hardware resources and provide for common services for execution of various applications and a trust and privacy management system 522 for implementing trust and privacy

14

management functionality including protection and/or management of secret information. The system memory 504 may further include, without limitation, communication software 524 configured to enable in part communication with and by the system 500, applications 526, cryptographic keys 528 (e.g., wrapped keys, protected keys, etc.), browser software and/or protected applications and/or client modules 518 configured to execute within an execution space associated with the same, and/or any other information and/or applications configured to implement embodiments of the systems and methods disclosed herein.

One of ordinary skill in the art will appreciate that the systems and methods described herein can be practiced with computing devices similar or identical to that illustrated in FIG. 5, or with virtually any other suitable computing device, including computing devices that do not possess some of the components shown in FIG. 5 and/or computing devices that possess other components that are not shown. Thus it should be appreciated that FIG. 5 is provided for purposes of illustration and not limitation.

The systems and methods disclosed herein are not inherently related to any particular computer, electronic control unit, or other apparatus and may be implemented by a suitable combination of hardware, software, and/or firmware. Software implementations may include one or more computer programs comprising executable code/instructions that, when executed by a processor, may cause the processor to perform a method defined at least in part by the executable instructions. The computer program can be written in any form of programming language, including compiled or interpreted languages, and can be deployed in any form, including as a standalone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. Further, a computer program can be deployed to be executed on one computer or on multiple computers at one site or distributed across multiple sites and interconnected by a communication network. Software embodiments may be implemented as a computer program product that comprises a non-transitory storage medium configured to store computer programs and instructions, that when executed by a processor, are configured to cause the processor to perform a method according to the instructions. In certain embodiments, the non-transitory storage medium may take any form capable of storing processor-readable instructions on a non-transitory storage medium. A non-transitory storage medium may be embodied by a compact disk, digital-video disk, a magnetic tape, a magnetic disk, flash memory, integrated circuits, or any other non-transitory digital processing apparatus memory device.

Although the foregoing has been described in some detail for purposes of clarity, it will be apparent that certain changes and modifications may be made without departing from the principles thereof. It should be noted that there are many alternative ways of implementing both the systems and methods described herein. Accordingly, the present embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein, but may be modified within the scope and equivalents of the appended claims.

What is claimed is:

1. A method performed by a system comprising a processor and a non-transitory computer-readable storage medium storing instructions that, when executed, cause the system to perform the method, the method comprising:
  - receiving a protected cryptographic client module and a wrapped cryptographic key;



15

executing the protected cryptographic client module within a sandboxed execution environment of the system;  
 importing the wrapped cryptographic key into the protected cryptographic client module within the sandboxed execution environment;  
 exposing an interface of the protected cryptographic client module, the interface providing a set of one or more defined functions, the set of one or more defined functions being based, at least in part, on the wrapped cryptographic key;  
 receiving, via the interface of the protected cryptographic client module from a first application executing outside the sandboxed execution environment, a request to perform at least one function of the set of one or more defined functions using the wrapped cryptographic key;  
 performing, by the protected cryptographic client module within the sandboxed execution environment, the at least one function using the wrapped cryptographic key; and  
 sending, by the protected cryptographic client module, a result of the at least one function to the first application.

2. The method of claim 1, wherein the set of one or more defined functions are identified in information associated with the wrapped cryptographic key.

3. The method of claim 2, wherein the information associated with the wrapped cryptographic key comprises key metadata.

4. The method of claim 1, wherein the sandboxed execution environment is associated with a software application executing on the system.

5. The method of claim 4, wherein the software application comprises a browser application.

6. The method of claim 1, wherein the protected cryptographic client module comprises a script application.

16

7. The method of claim 1, wherein the wrapped cryptographic key comprises an encrypted cryptographic key.

8. The method of claim 7, wherein the protected cryptographic client module stores a protected private key.

9. The method of claim 8, wherein the encrypted cryptographic key is decryptable using the protected private key.

10. The method of claim 9, wherein the protected private key comprises a private key protected with white-box cryptography.

11. The method of claim 1, wherein the at least one function comprises a decryption operation.

12. The method of claim 1, wherein the at least one function comprises an encryption operation.

13. The method of claim 1, wherein the at least one function comprises a cryptographic signature operation.

14. The method of claim 1, wherein the at least one function comprises a cryptographic signature verification operation.

15. The method of claim 1, wherein the wrapped cryptographic key comprises a wrapped server key.

16. The method of claim 1, wherein the wrapped cryptographic key comprises a wrapped user key.

17. The method of claim 1, wherein the method further comprises performing, by the protected cryptographic client module, a code verification check operation to confirm that the protected cryptographic client module has not been modified.

18. The method of claim 1, wherein the method further comprises performing, by the protected cryptographic client module prior to importing the wrapped cryptographic key, an authorization check to determine that the wrapped cryptographic key is permitted to be imported into the protected cryptographic client module.

\* \* \* \* \*