



US012387763B2

(12) **United States Patent**
Gilley

(10) **Patent No.:** **US 12,387,763 B2**
(45) **Date of Patent:** ***Aug. 12, 2025**

(54) **METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT**

(71) Applicant: **CrowdStrike, Inc.**, Sunnyvale, CA (US)

(72) Inventor: **Thomas S. Gilley**, New York, NY (US)

(73) Assignee: **CrowdStrike, Inc.**, Sunnyvale, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/622,718**

(22) Filed: **Mar. 29, 2024**

(65) **Prior Publication Data**
US 2024/0242738 A1 Jul. 18, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/010,731, filed on Sep. 2, 2020, now Pat. No. 11,990,157, which is a (Continued)

(51) **Int. Cl.**
G11B 27/034 (2006.01)
G06Q 30/02 (2023.01)
(Continued)

(52) **U.S. Cl.**
CPC **G11B 27/034** (2013.01); **G06Q 30/02** (2013.01); **G06Q 30/0273** (2013.01);
(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS

6,005,678 A * 12/1999 Higashida G11B 27/028 382/250
11,930,227 B2 3/2024 Gilley et al.
(Continued)

OTHER PUBLICATIONS

Office Action issued for U.S. Appl. No. 18/170,764 mailed Dec. 29, 2023, 12 pages.

(Continued)

Primary Examiner — Daniel T Tekle
(74) *Attorney, Agent, or Firm* — Womble Bond Dickinson (US) LLP

(57) **ABSTRACT**

A video player includes the user interface comprising: a video display; a texture strip visually representing a series of frames of a video, the texture strip comprising a sequence of textured frame representations, each textured frame representation in sequence of textured frame representations representing a corresponding frame from a series of frames; a control to allow a user to use the texture strip to seek frames in the series of frames in a random manner. An input is received via the control, the input including an indication of a selection of a location in the texture strip, the location in the texture strip having a corresponding temporal location in the series of frames. Based on the input, a frame selected from the series of frames is displayed in the video display, the selected frame located at the corresponding temporal location in the series of frames.

20 Claims, 16 Drawing Sheets

Related U.S. Application Data

continuation of application No. 16/708,110, filed on Dec. 9, 2019, now Pat. No. 10,789,986, which is a continuation of application No. 16/113,636, filed on Aug. 27, 2018, now Pat. No. 10,672,429, which is a continuation of application No. 14/968,425, filed on Dec. 14, 2015, now Pat. No. 10,090,019, which is a continuation of application No. 14/242,277, filed on Apr. 1, 2014, now Pat. No. 9,947,365, which is a continuation of application No. 11/439,600, filed on May 23, 2006, now Pat. No. 8,755,673.

(60) Provisional application No. 60/683,662, filed on May 23, 2005.

(51) **Int. Cl.**

G06Q 30/0241 (2023.01)
G06Q 30/0273 (2023.01)
G11B 20/10 (2006.01)
G11B 27/031 (2006.01)
G11B 27/036 (2006.01)
G11B 27/34 (2006.01)
H04N 5/262 (2006.01)
H04N 5/272 (2006.01)
H04N 5/76 (2006.01)
H04N 5/765 (2006.01)
H04N 5/77 (2006.01)
H04N 5/93 (2006.01)
H04N 7/173 (2011.01)
H04N 21/2225 (2011.01)
H04N 21/234 (2011.01)
H04N 21/2343 (2011.01)
H04N 21/2543 (2011.01)
H04N 21/2547 (2011.01)
H04N 21/2743 (2011.01)
H04N 21/4143 (2011.01)
H04N 21/4223 (2011.01)
H04N 21/426 (2011.01)
H04N 21/4402 (2011.01)
H04N 21/472 (2011.01)
H04N 21/61 (2011.01)
H04N 21/81 (2011.01)
H04N 21/854 (2011.01)
H04N 5/775 (2006.01)

(52) **U.S. Cl.**

CPC ... **G06Q 30/0277** (2013.01); **G11B 20/10527** (2013.01); **G11B 27/031** (2013.01); **G11B 27/036** (2013.01); **G11B 27/34** (2013.01);

H04N 5/262 (2013.01); **H04N 5/272** (2013.01); **H04N 5/7605** (2013.01); **H04N 5/765** (2013.01); **H04N 5/77** (2013.01); **H04N 5/93** (2013.01); **H04N 7/17318** (2013.01); **H04N 21/2225** (2013.01); **H04N 21/23424** (2013.01); **H04N 21/2343** (2013.01); **H04N 21/234309** (2013.01); **H04N 21/2543** (2013.01); **H04N 21/2547** (2013.01); **H04N 21/2743** (2013.01); **H04N 21/4143** (2013.01); **H04N 21/4223** (2013.01); **H04N 21/42646** (2013.01); **H04N 21/4402** (2013.01); **H04N 21/440218** (2013.01); **H04N 21/47202** (2013.01); **H04N 21/6125** (2013.01); **H04N 21/812** (2013.01); **H04N 21/854** (2013.01); **G11B 2020/10537** (2013.01); **G11B 2220/2562** (2013.01); **H04N 5/772** (2013.01); **H04N 5/775** (2013.01); **Y10S 715/972** (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0103429 A1 5/2004 Carlucci et al.
 2004/0133924 A1* 7/2004 Wilkins H04N 21/8547
 725/135
 2006/0020961 A1 1/2006 Chiu
 2006/0098941 A1* 5/2006 Abe G11B 27/031
 386/282
 2023/0319235 A1 10/2023 Gilley et al.

OTHER PUBLICATIONS

Notice of Allowance issued for U.S. Appl. No. 17/093,727, mailed Mar. 20, 2024, 9 pages.
 Notice of Allowance issued for U.S. Appl. No. 17/196,087, mailed Feb. 22, 2024, 11 pages.
 Notice of Allowance issued for U.S. Appl. No. 18/171,287, mailed Oct. 30, 2023, 9 pages.
 Notice of Allowance issued for U.S. Appl. No. 18/309,557, mailed Nov. 30, 2023, 9 pages.
 Final Office Action issued for U.S. Appl. No. 17/093,727, mailed Mar. 31, 2023, 22 pages.
 Notice of Allowance issued for U.S. Appl. No. 17/196,087, mailed Jul. 20, 2023, 9 pages.
 Office Action issued for U.S. Appl. No. 18/171,287 mailed Jul. 11, 2023, 10 pages.

* cited by examiner

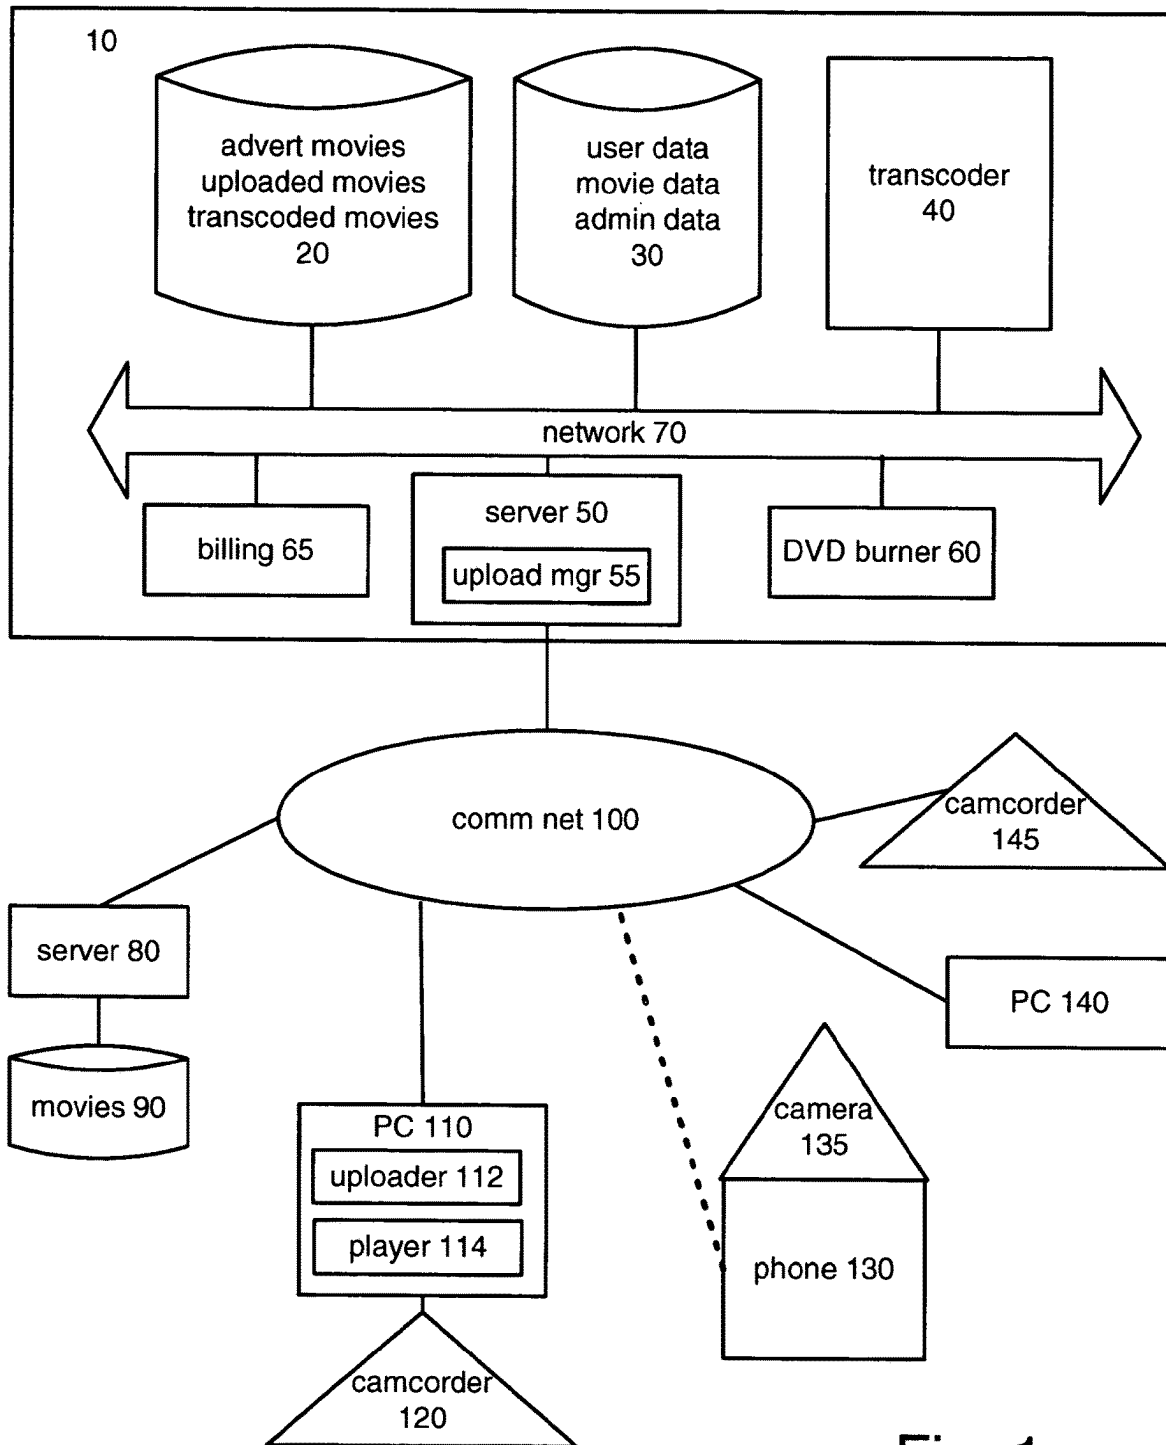


Fig. 1

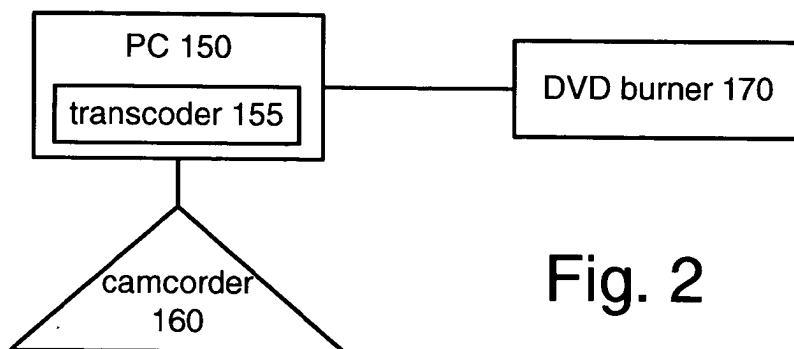


Fig. 2

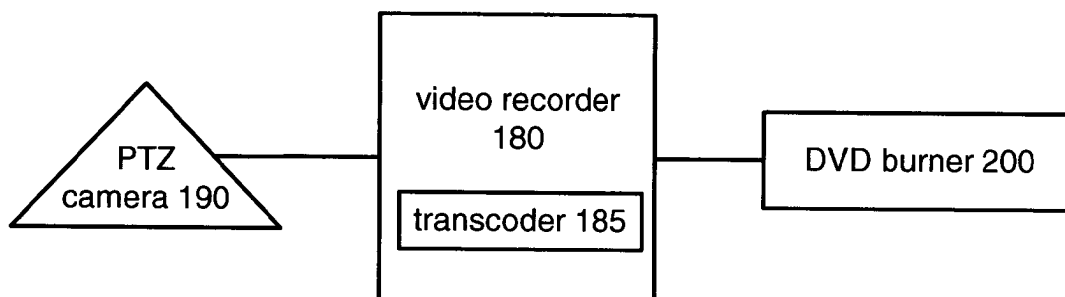


Fig. 3

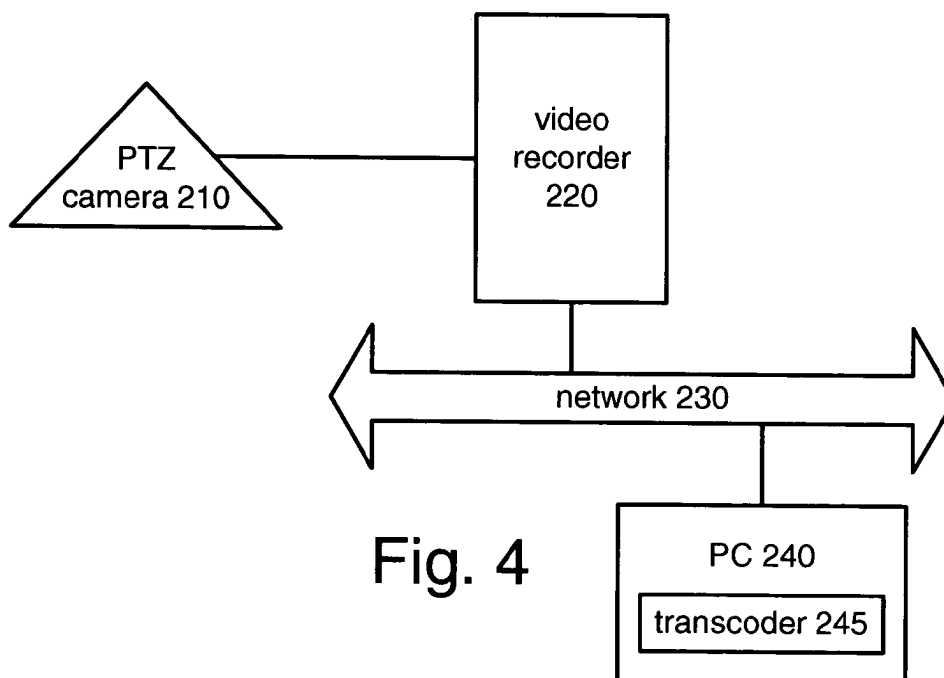


Fig. 4

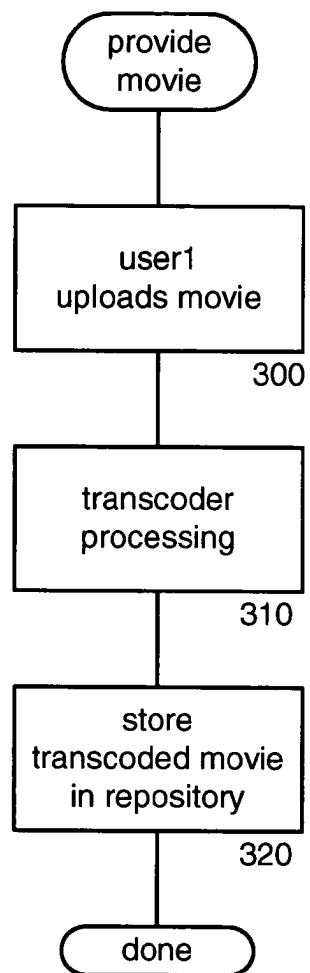


Fig. 5

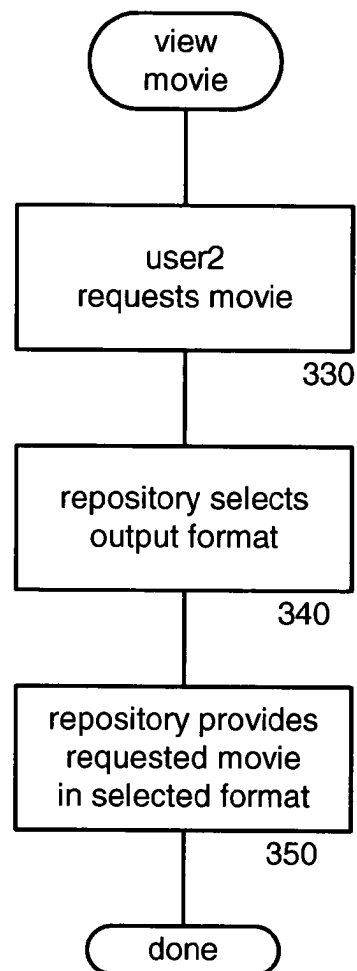


Fig. 6

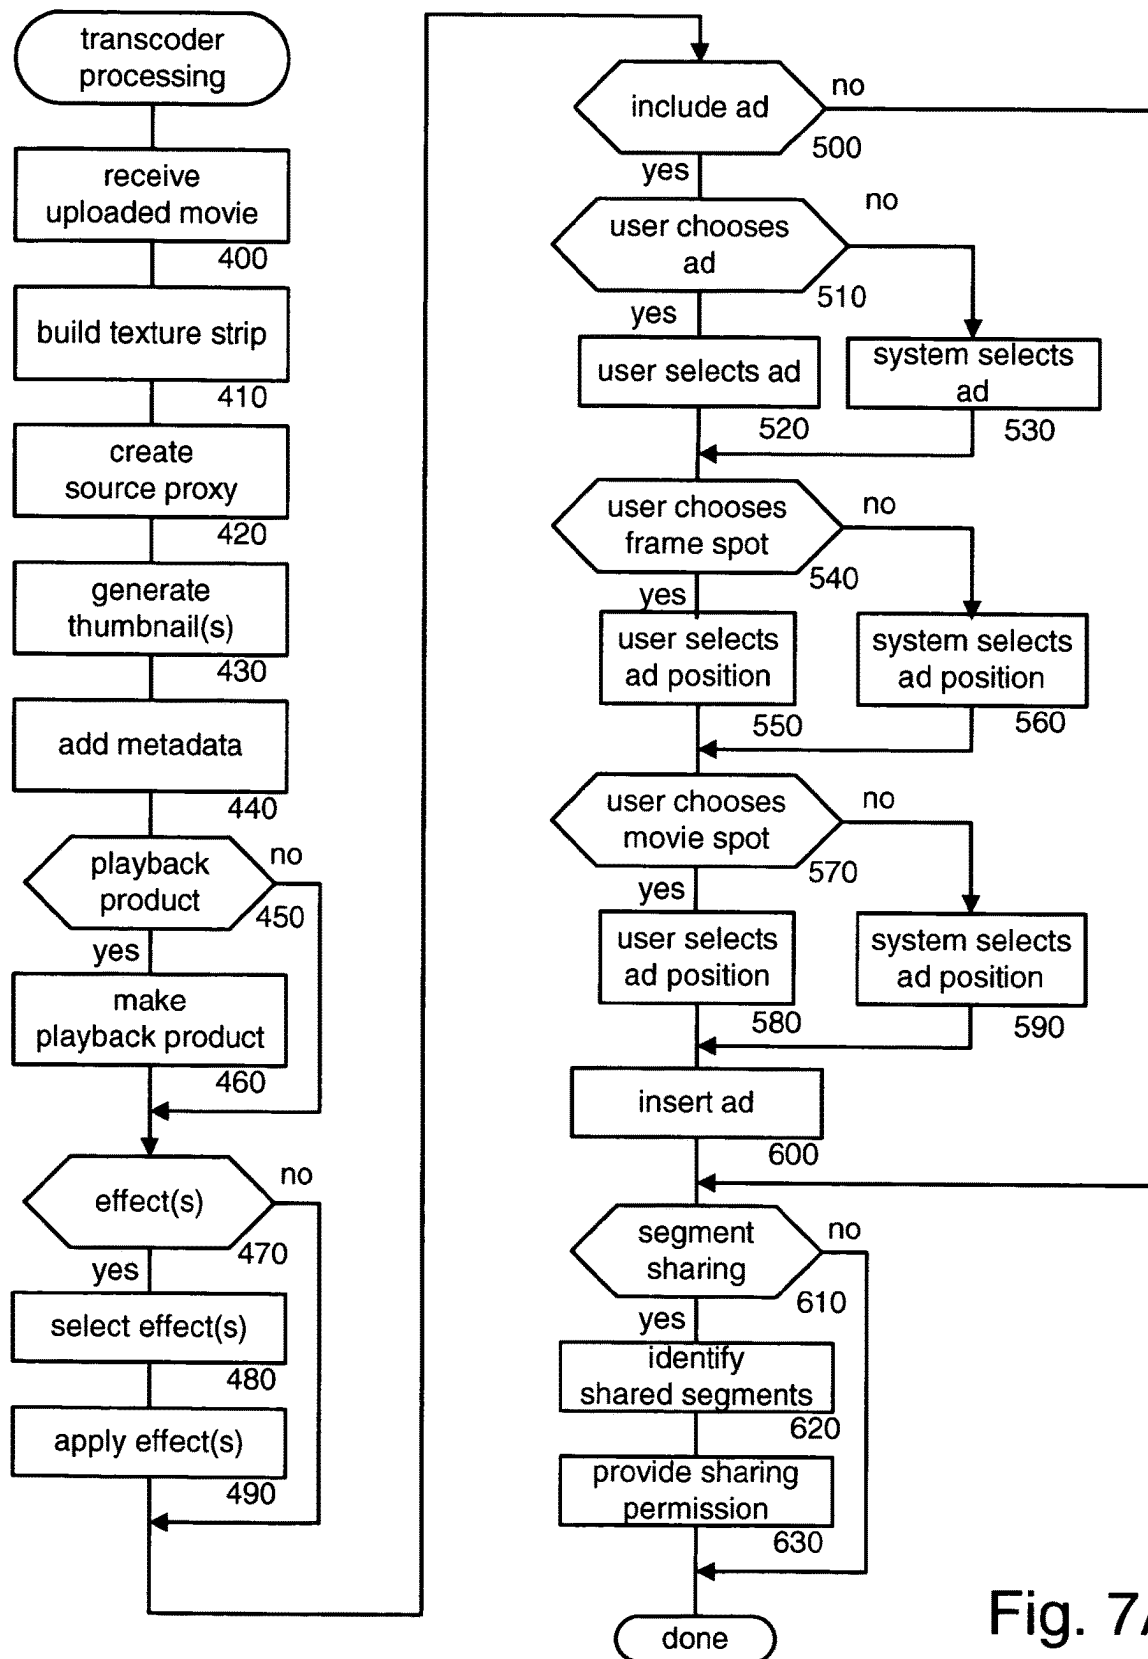


Fig. 7A

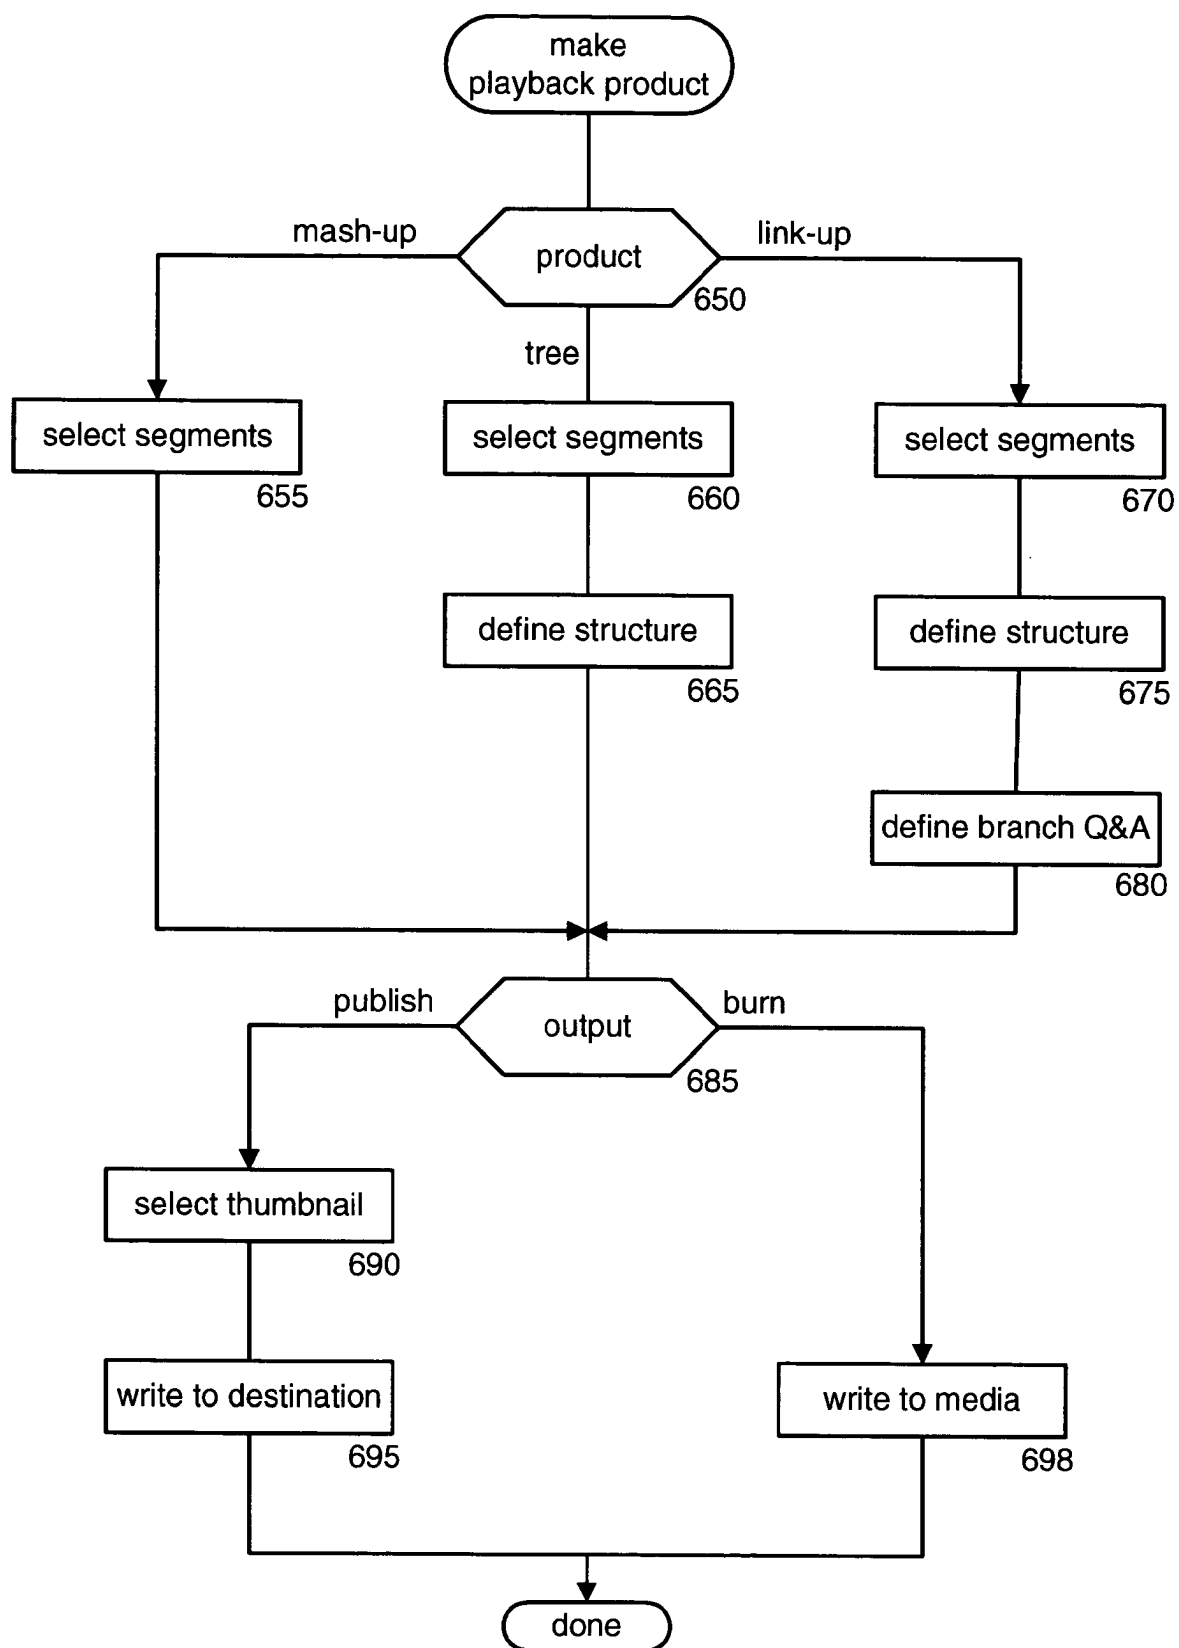


Fig. 7B

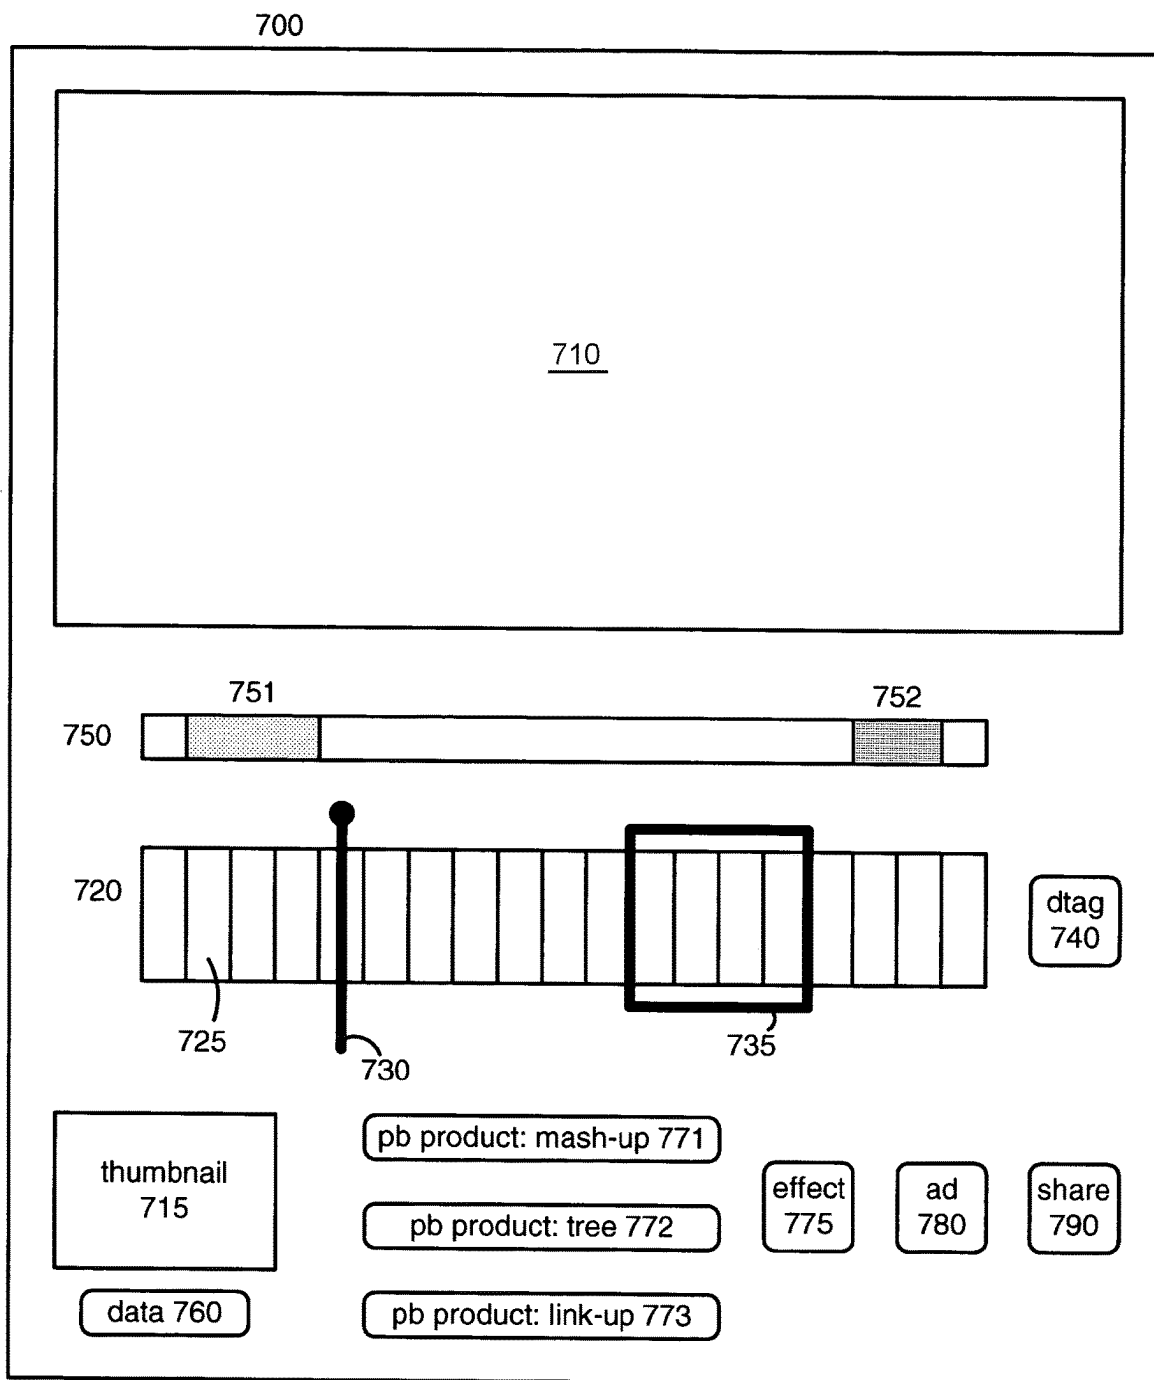


Fig. 8

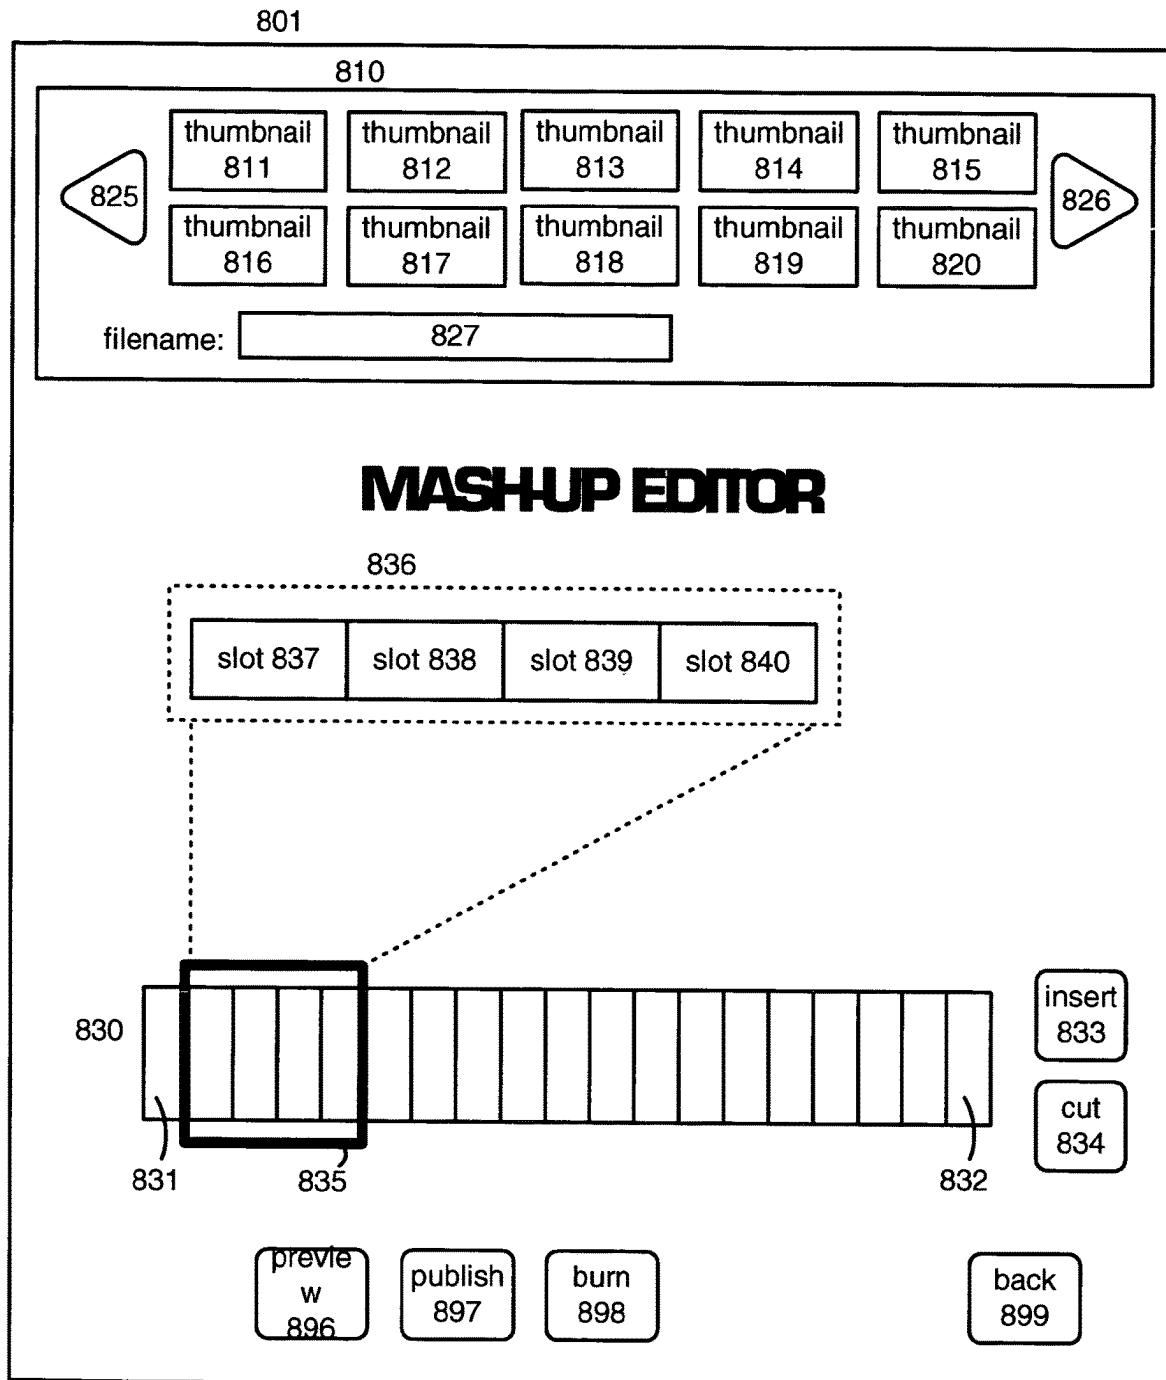


Fig. 9A

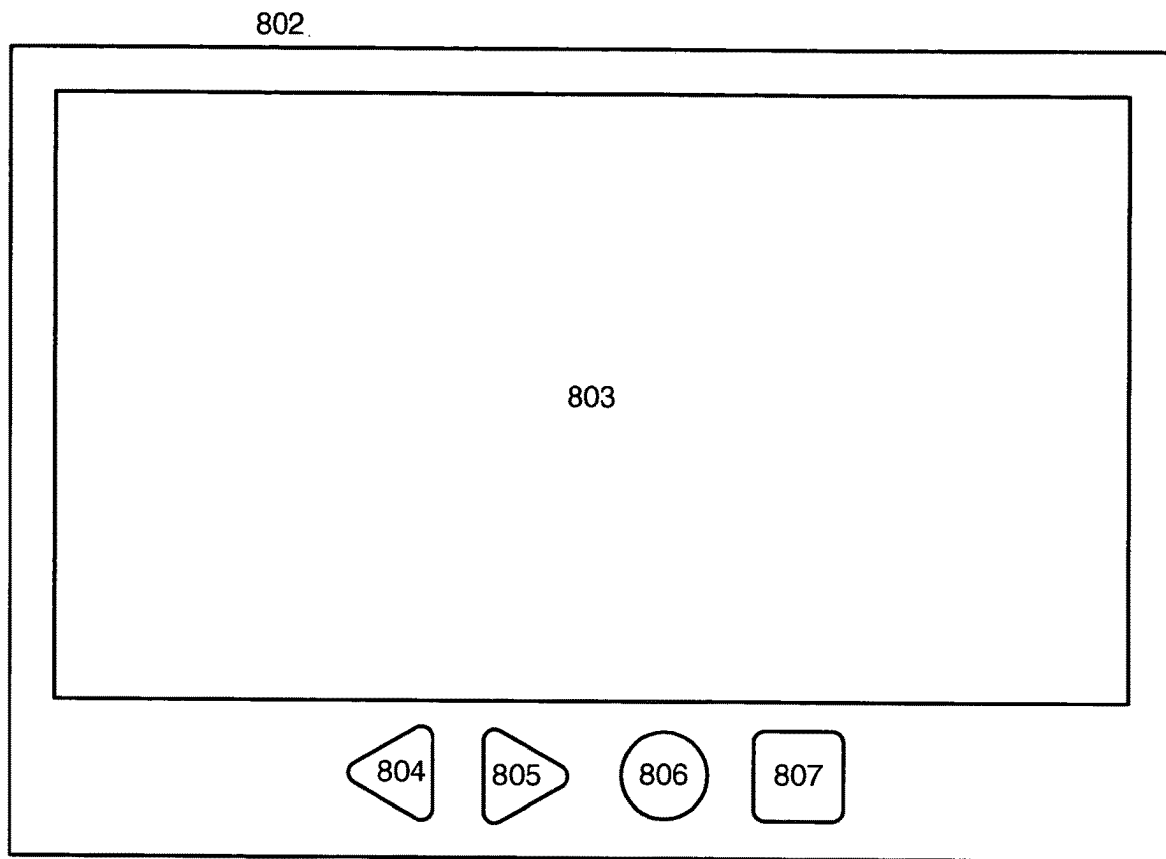


Fig. 9B

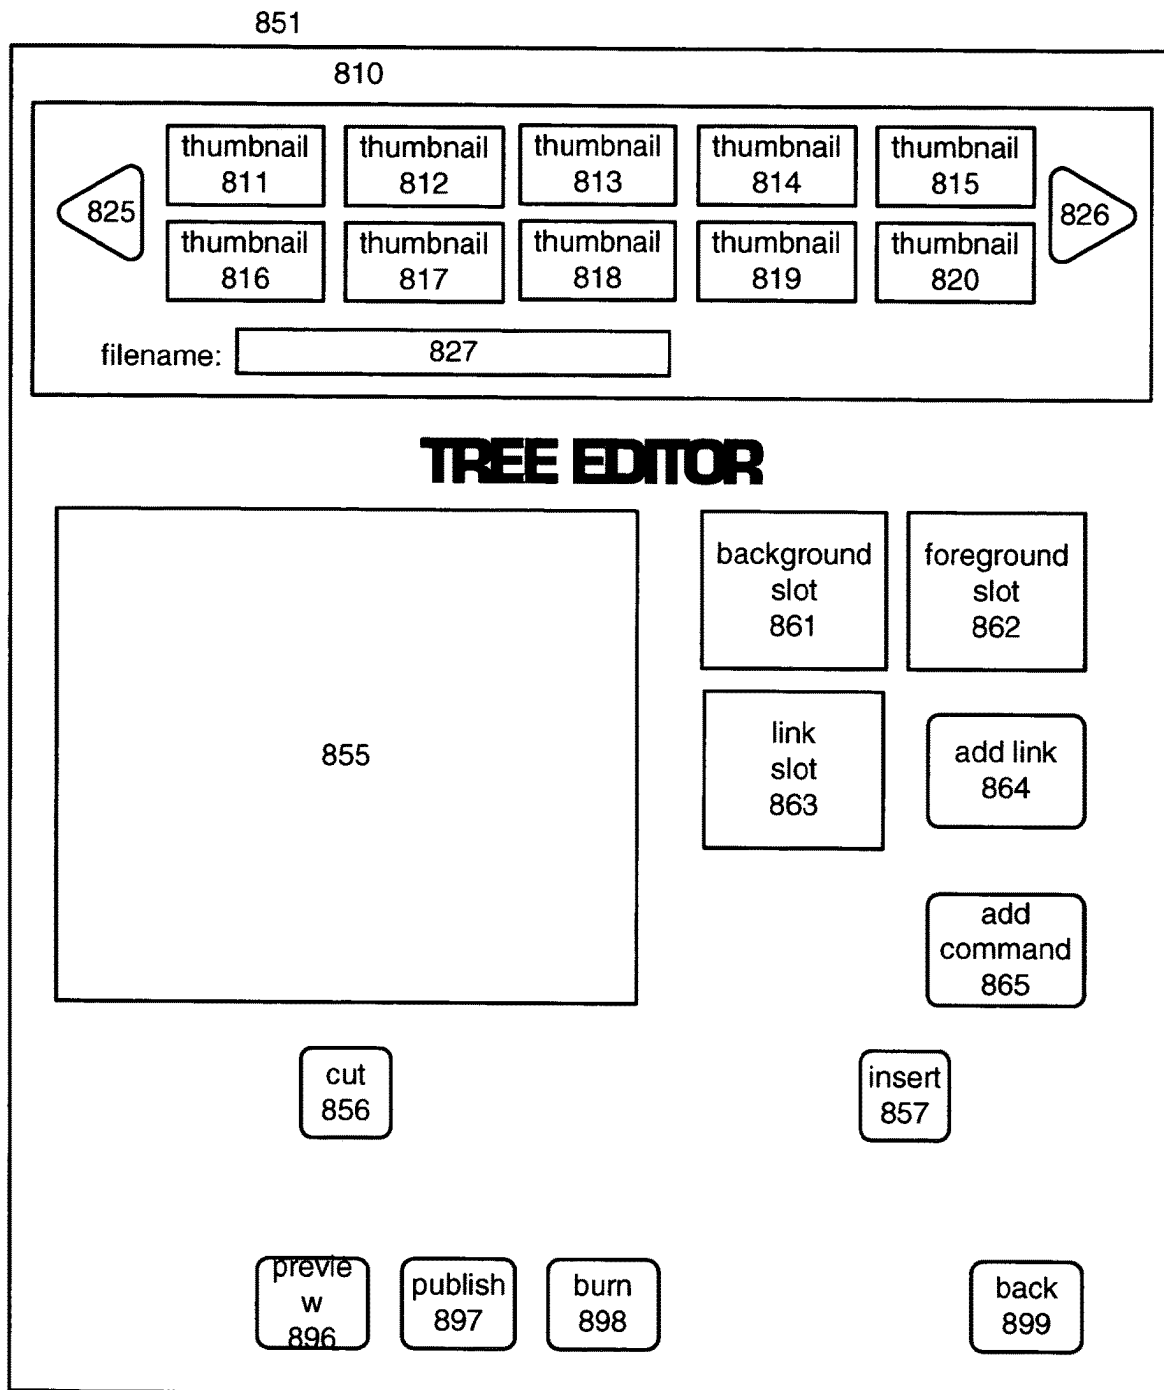


Fig. 9C

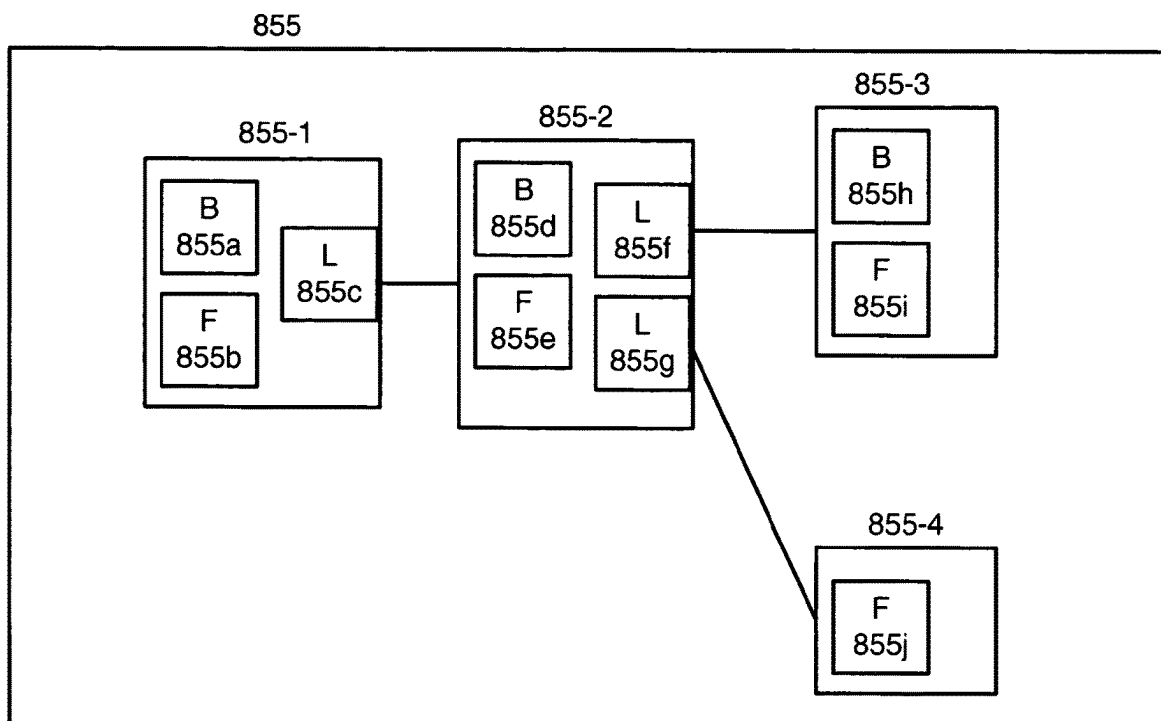


Fig. 9D

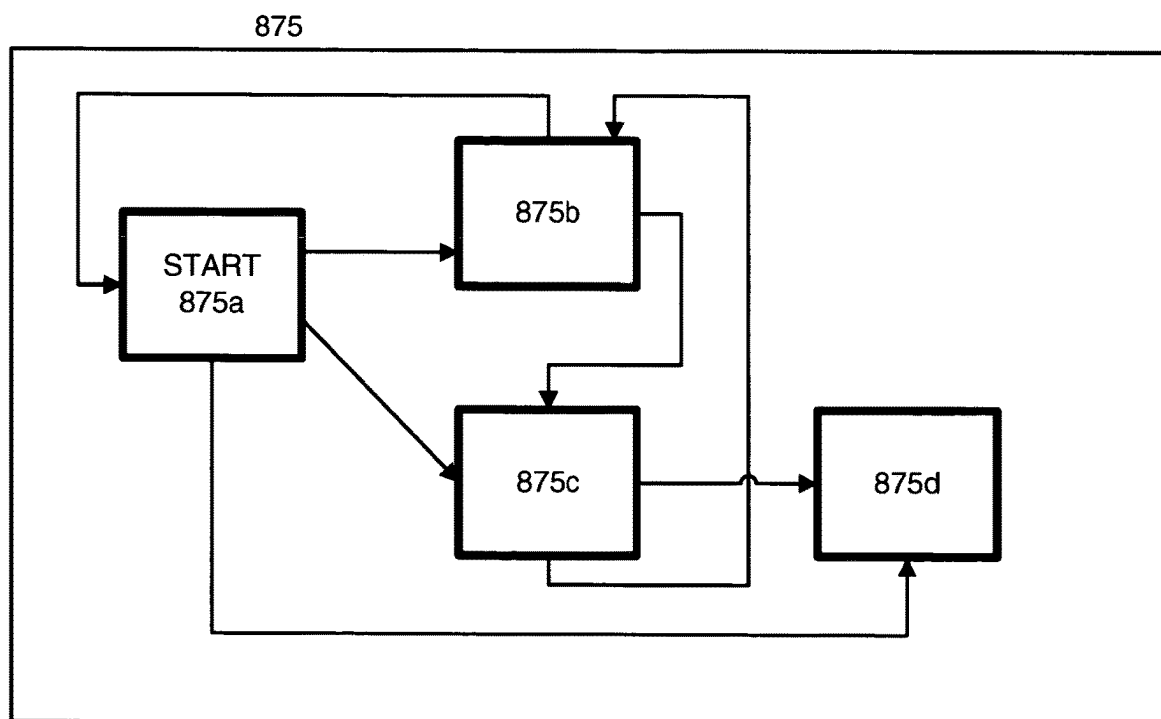


Fig. 9F

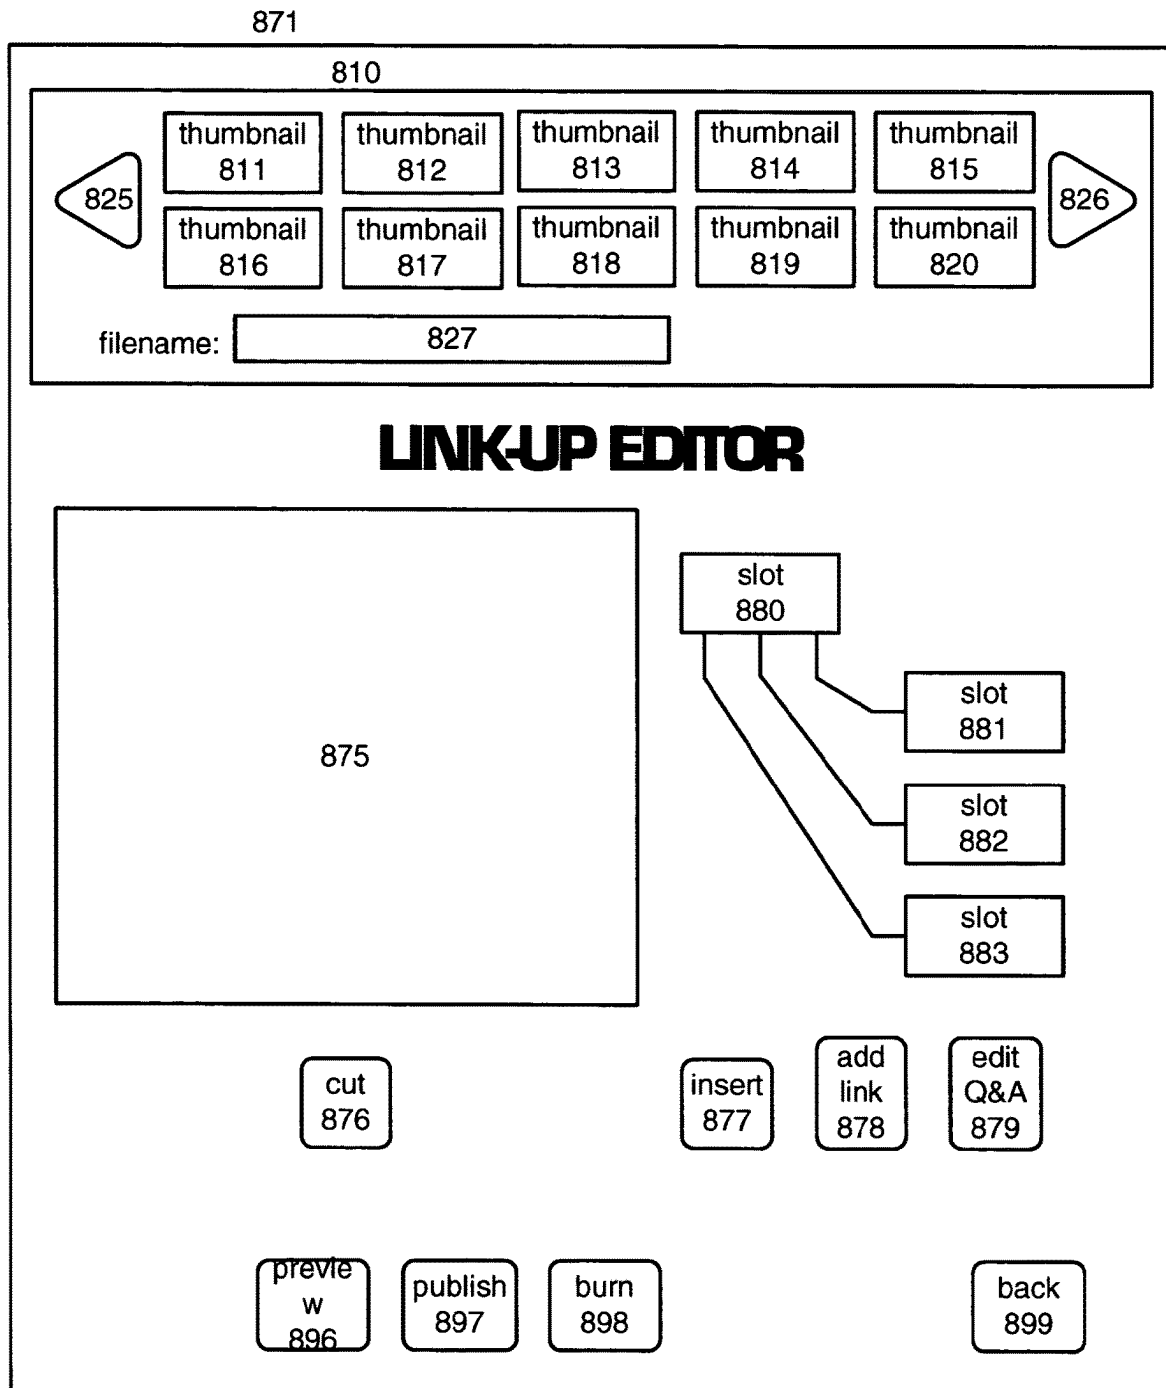


Fig. 9E

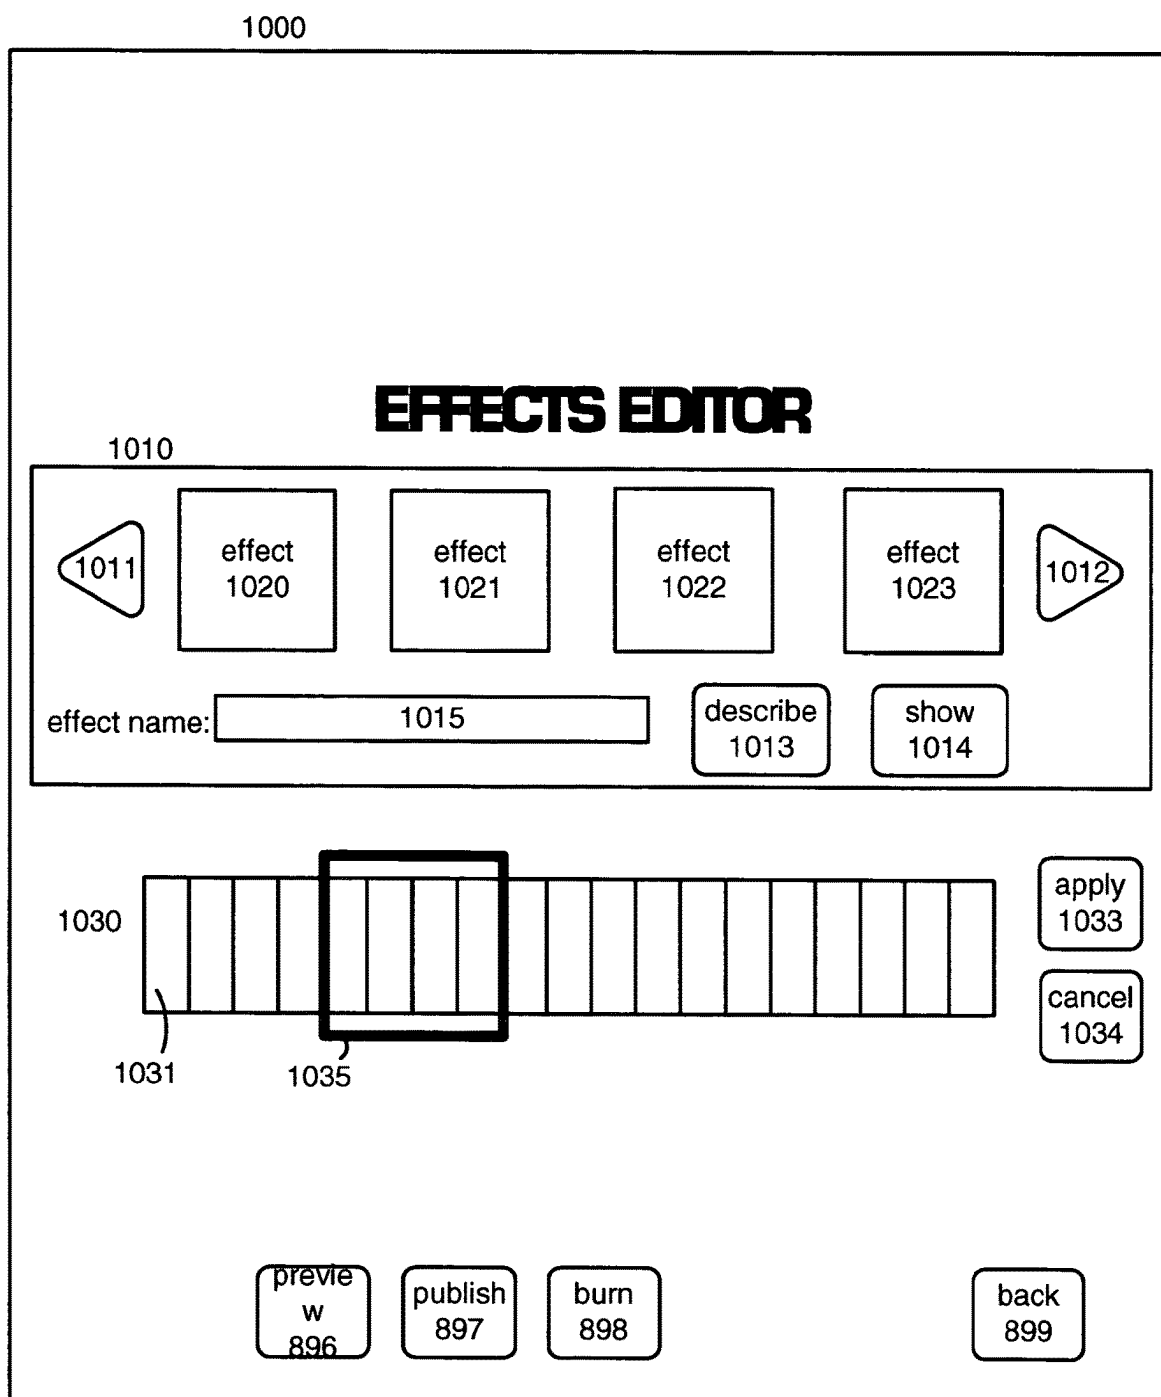


Fig. 9G

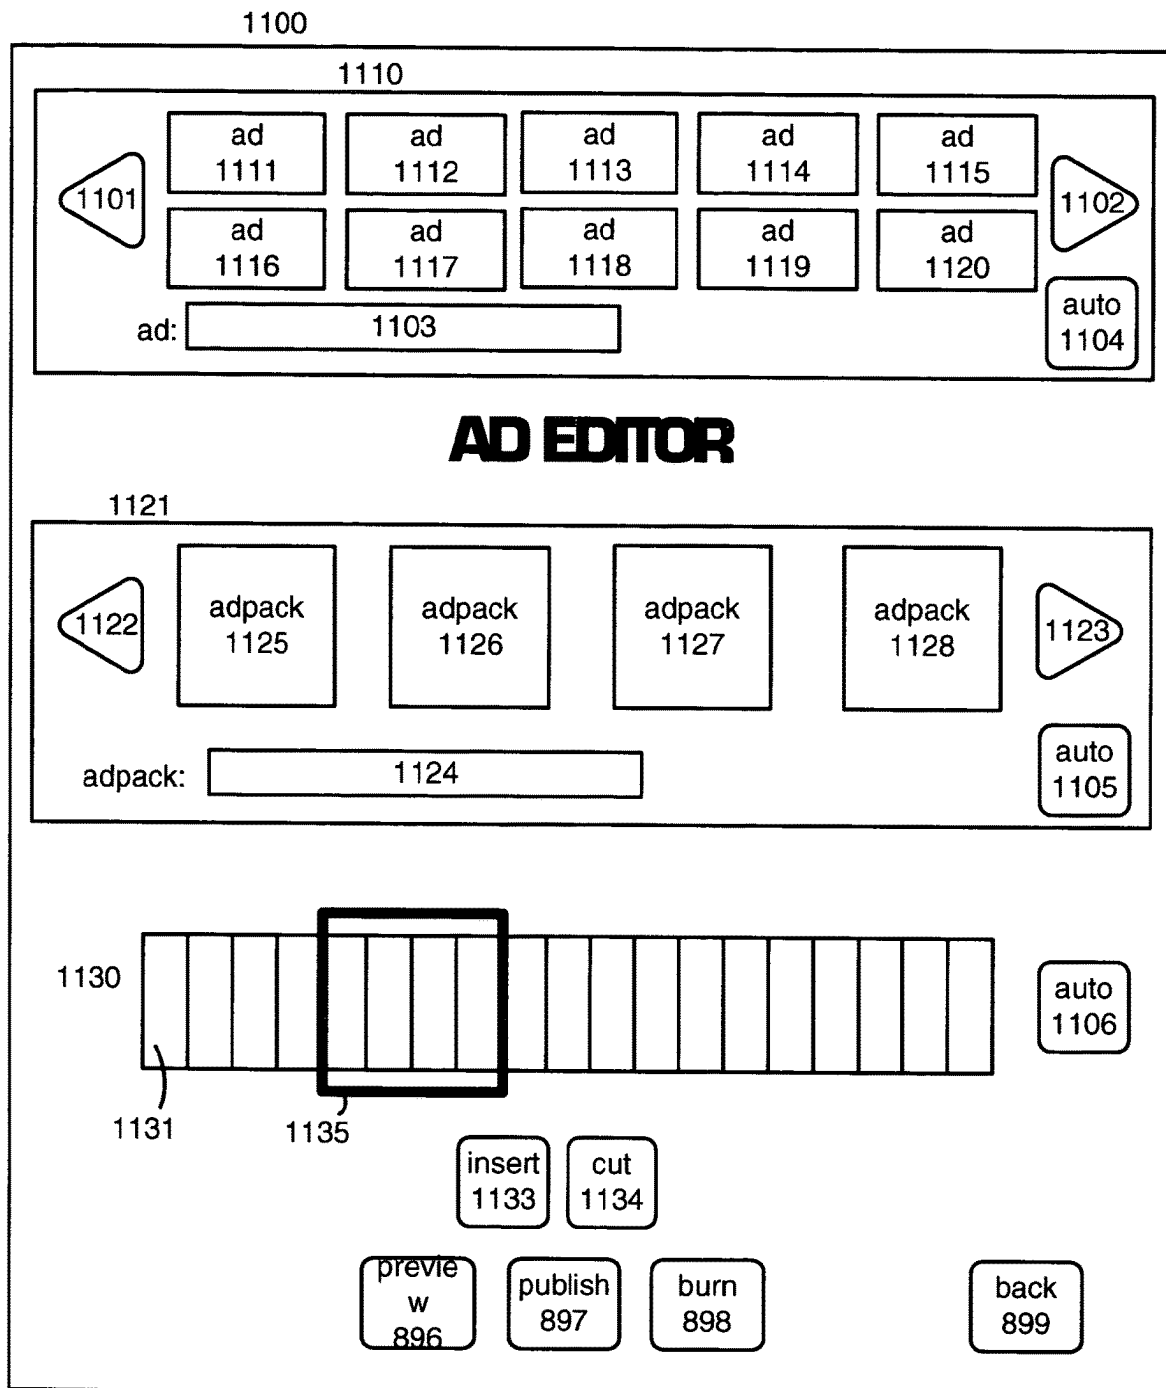


Fig. 9H

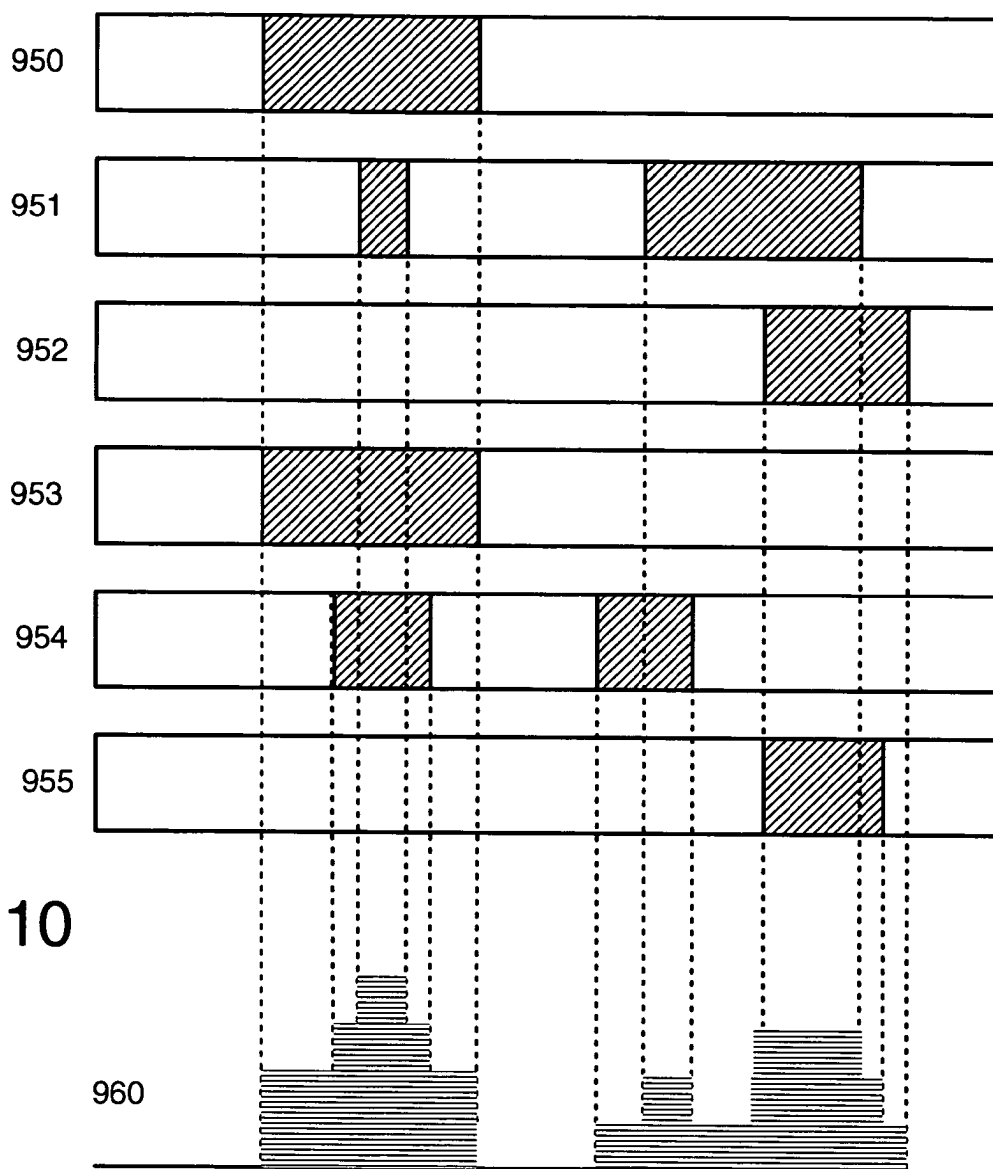


Fig. 10

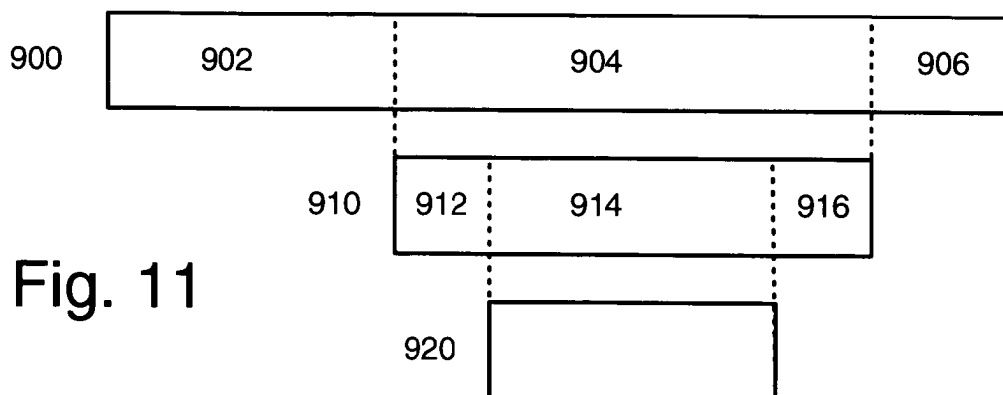


Fig. 11

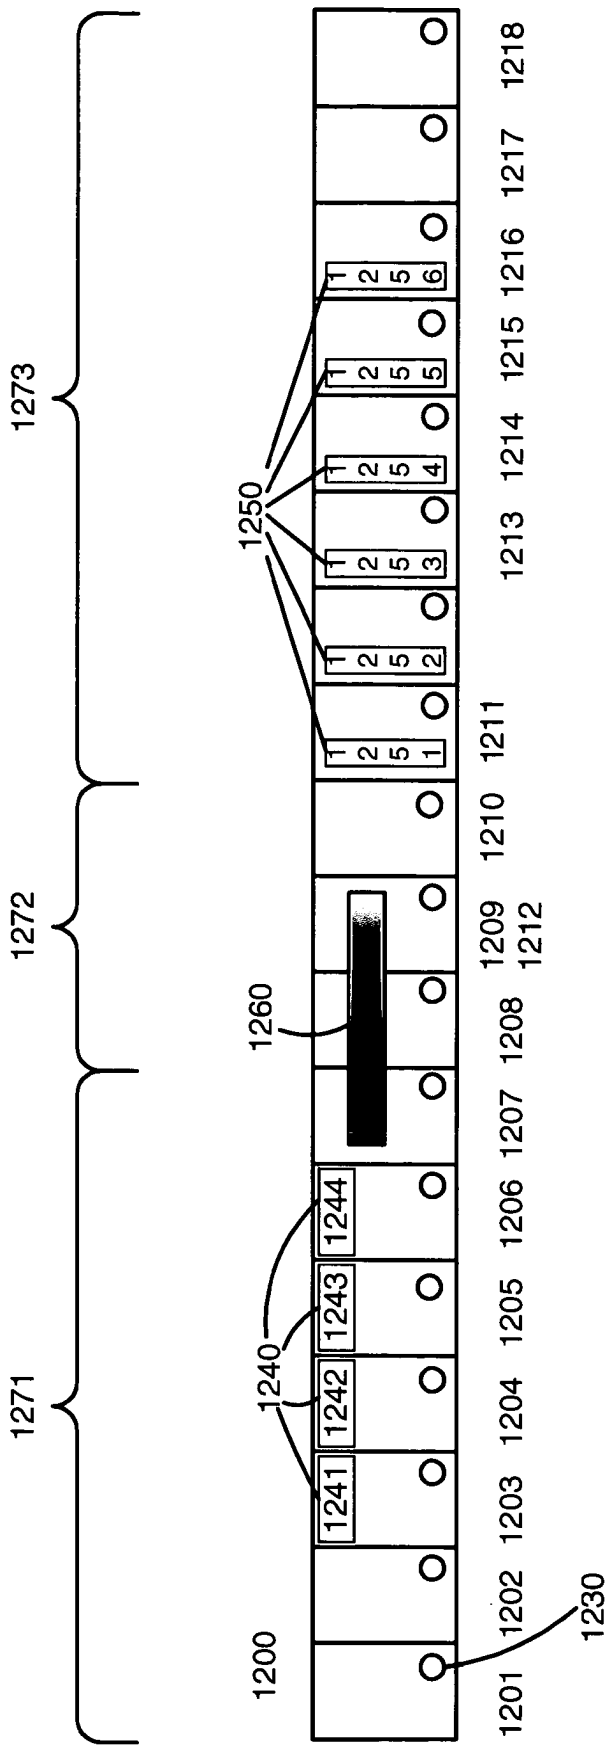


Fig. 12

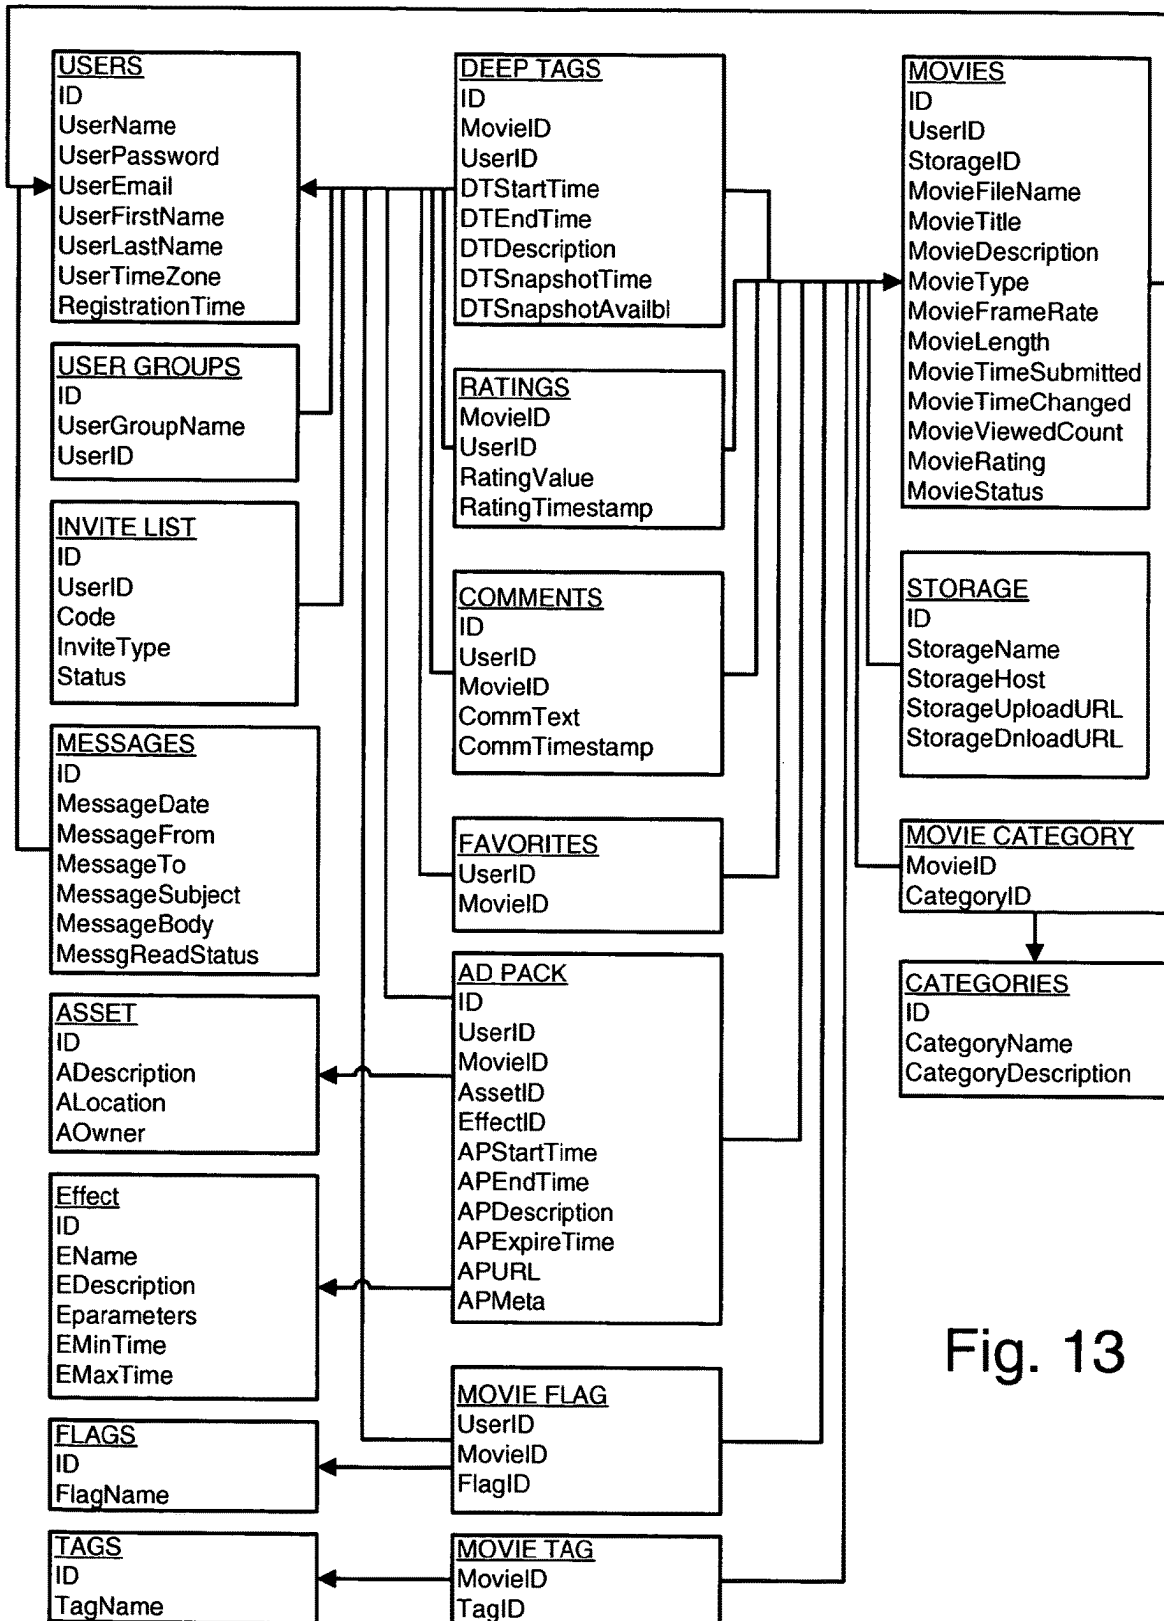


Fig. 13

1

METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT

CROSS-REFERENCE TO RELATED APPLICATION(S)

This application is a continuation of, and claims a benefit of priority from U.S. patent application Ser. No. 17/010,731, filed Sep. 2, 2020, entitled "METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT," which is a continuation of U.S. patent application Ser. No. 16/708,110, filed Dec. 9, 2019, entitled "METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT," now U.S. Pat. No. 10,789,986, which is a continuation of U.S. patent application Ser. No. 16/113,636, filed Aug. 27, 2018, entitled "METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT," now U.S. Pat. No. 10,672,429, which is a continuation of U.S. patent application Ser. No. 14/968,425, filed Dec. 14, 2015, entitled "METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT," now U.S. Pat. No. 10,090,019, which is a continuation of U.S. patent application Ser. No. 14/242,277, filed Apr. 1, 2014, entitled "METHOD, SYSTEM AND COMPUTER PROGRAM PRODUCT FOR EDITING MOVIES IN DISTRIBUTED SCALABLE MEDIA ENVIRONMENT," now U.S. Pat. No. 9,947,365, which is a continuation of U.S. patent application Ser. No. 11/439,600, filed May 23, 2006, entitled "DIGITAL SCALABLE MEDIA ENVIRONMENT," now U.S. Pat. No. 8,755,673, which claims a benefit of priority from U.S. Provisional Application No. 60/683,662, filed May 23, 2005, the entire contents of which are hereby expressly incorporated by reference for all purposes.

BACKGROUND OF THE INVENTION

The invention relates to distributed network systems, mass data storage and retrieval, non-linear editing systems and, more particularly, to a distributed network media system for the capture, archive, editing, analytical content retrieval of audio/visual information for web based media download or streaming distribution as well as authoring various files for network-accessible and end-user standalone devices including mobile phones, and audiovisual playback devices.

Linear media editing systems used for analog audio, video tape and photographic film are manual, time consuming and cumbersome to reduce content into a final form and distribute. In more recent times computer systems allow for time efficient non-linear video editing systems. Current non-linear editing on computer oriented systems involves capturing media content permitting rapid access to the media content at any point in the linear sequence for moving portions into any order and storing the media content on a storage device, such as a magnetic disk drive or digital versatile disk (DVD).

The average person currently has a small set of alternatives for editing content from media capture devices such as camcorders, camera phones, audio recorders, and other media capture devices without having to incur the costs of

2

a computer system and software for editing. In addition, non-linear editing systems are complex and very difficult to use.

People capture various random and personally interesting events, such as work, travel and entertainment events using their camcorders or camera phones. To edit this content, people require easy to use non-linear editing systems that facilitate editing without a high degree of computer or editing skill.

Media content storage technologies provide for storing great amounts of interactive multimedia, for example, the DVD format. Unfortunately, the DVD Specification for authoring is very complex, as are the computer systems that attempt to embody it. A further disadvantage of conventional DVD authoring systems is that they provide a DVD author with only minimal control and flexibility.

The process of authoring a DVD includes a number of complex steps and equipment. Accordingly, there is a need for authoring systems and methods that reduce the time, cost and complexity of the authoring and distributing DVD.

Separate and distinct systems for computer based non-linear editing, DVD authoring, and distributions are known. However, no system exists that accomplishes all in an environment that can be distributed and accessed by computer networks, such as the Internet, wide area networks (WAN), local area networks (LAN).

SUMMARY OF THE INVENTION

In accordance with an aspect of this invention, there is provided a method of editing an original movie, comprising creating a texture strip by applying a predetermined function to each frame of the original movie to produce a sequence of frame representations, using the texture strip to select a frame of the original movie, and displaying the selected frame in an output format different than the original format of the original movie.

In accordance with an aspect of this invention, there is provided a method of editing an original movie, comprising creating a texture strip by applying a predetermined function to each frame of the original movie to produce a sequence of frame representations, using the texture strip to select a plurality of frames of the original movie, and storing information about the selection of the plurality of frames in association with the original movie.

In accordance with an aspect of this invention, there is provided a method of creating a playback product including an original movie, comprising selecting a thumbnail representing the original movie, moving the thumbnail into a graphic representation of a control structure of the playback product, and indicating that the playback product having the original movie in the graphically represented control structure should be created.

In accordance with an aspect of this invention, there is provided a method of creating a playback product, comprising receiving at least two movies in respectively different formats, converting each of the movies to a third format, associating each of the converted movies with a thumbnail image representing the movie, receiving, via a graphical user interface enabling the thumbnails to be moved in the graphical user interface to indicate the playback order of the converted movies, information indicating the playback order of the converted movies in the playback product, and creating the playback product in accordance with the received information indicating the playback order of the converted movies in the playback product.

It is not intended that the invention be summarized here in its entirety. Rather, further features, aspects and advantages of the invention are set forth in or are apparent from the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a configuration diagram for one embodiment of the invention wherein the transcoder is used via a public communication network;

FIGS. 2-4 are configuration diagrams for other embodiments of the invention wherein the transcoder resides locally;

FIGS. 5-6 are flowcharts depicting high-level operation of movie uploading and downloading, respectively;

FIGS. 7A and 7B are a flowchart depicting transcoder operation;

FIG. 8 is a diagram of a user interface including a texture strip and deep tag marker;

FIGS. 9A-9H are diagrams used in explaining specialized editing capabilities;

FIG. 10 is a diagram illustrating automatic determination of popular parts of a movie;

FIG. 11 is a diagram illustrating access permission for a movie;

FIG. 12 is a diagram illustrating a transcoded movie; and
FIG. 13 is a data schema used in the invention.

DETAILED DESCRIPTION

As used herein and in the claims, the term “movie” refers to video and/or audio data intended for display to a human. In some cases, the video and audio data are separate but associated data, while in other cases, the video and audio are combined. In still other cases, video exists without audio, and vice-versa. Video encompasses still image data and moving image data.

The disclosures of the following patents are hereby incorporated by reference in their entirety:

U.S. Pat. No.	Issue Date	Title
5,880,722	Mar. 9, 1999	Video cursor with zoom in the user interface of a video editor
5,886,692	Mar. 23, 1999	Attracting/repelling edit blocks in a user interface of a video editor
6,027,257	Feb. 22, 2000	Pan and tilt unit
6,157,771	Dec. 5, 2000	Method and apparatus for seeking within audiovisual files
6,181,883	Jan. 30, 2001	Dual purpose camera for VSC with conventional film and digital image
6,201,925	Mar. 13, 2001	Method and apparatus for editing video files
6,262,777	Jul. 17, 2001	Method and apparatus for synchronizing edited audiovisual files
6,285,361	Sep. 4, 2001	Method and apparatus for clipping video segments from an audiovisual file
6,400,886	Jun. 4, 2002	Method and apparatus for stitching edited video segments
6,661,430	Dec. 9, 2003	Method and apparatus for copying an audiovisual segment

There are several environments in which a user might want to use a movie. Turning to FIG. 1, an environment including public communication network 100 is shown. Network 100 may be the Internet. Coupled to network 100 are movie system 10, server 80, PC 110, phone 130, PC 140 and camcorder 145. Coupling occurs via wireline and/or wireless communication lines, possibly with intermediate computers such as an Internet service provider (not shown).

Movie system 10 includes videobase 20, database 30, transcoder 40, server 50, DVD burner 60 and internal network 70. In some embodiments, videobase 20 and database 30 are combined. Elements 20, 30, 40, 50 are computers programmed according to the invention, and include suitable processors, memory, storage and communication interfaces; and each element may be embodied in one or many physical units depending on factors such as expected processing volume, redundant hardware design and so on.

Videobase 20 serves to store movies uploaded by users, in their uploaded format, and to store transcoded versions of these movies. Videobase 20 also stores advertisement movies, referred to herein as “ads”, intended for inclusion in the transcoded movies.

Database 30 serves to store data for movie system 10, including data relating to users of movie system 10, movies processed by movie system 10, and suitable administrative data such as usage, throughput and audit trail information. In some embodiments, users use movie system 10 for free and the suppliers of ads pay upon ad viewing. In other embodiments, users pay based on usage or a flat rate.

Transcoder 40 serves to receive uploaded movies and process them to generate transcoded movies, as described in detail below with regard to FIG. 7.

Server 50 receives requests from users via network 100 and responds thereto. In cases where responding to a request requires the services of transcoder 40, server 50 passes appropriate messages between transcoder 40 and network 100. Server 50 also functions as a firewall to protect network 70 from improper usage.

Server 50 executes upload manager 55, a software program that works with uploader 112, described below, to upload a movie to server 50.

DVD burner 60 is responsive to commands from transcoder 40 to create a digital video disk, which is then shipped via conventional physical shipping services.

Billing program 65 examines usage data created by transcoder 40 and server 50. The usage data is part of the administrative data in database 30. Billing program 65 then generates invoices and applies authorized payments. For example, some users may have preauthorized charges to their credit cards, telephone bills or bank accounts for their usage of movie system 10. As another example, transcoded movies created by users may include advertising, for which the advertisers agree to pay based on the number of views, and if so, billing system 65 arranges payments to users based on usage of the transcoded movies with advertising.

There is a cost to store and distribute movies. To offset this cost, and to reward users, movie system 10 enables movie creators to include ads, either manually or automatically, in their movies. Movie system 10 enables flexible ad placement, including at the start or end of a movie, within selected frames of a movie, and at a selected location and size within the selected frames. Advertisers generally pay for placement of their ads based on the number of times their ad is viewed, and possibly in accordance with the popularity of the place in the movie where the ad is inserted, how much time the ad is inserted for, and the size of the ad relative to a movie frame.

Internal network 70 serves to carry communication traffic between the elements of movie system 10. Internal network 70 may be a local area network at a single premises, or may span multiple premises.

Server 80 is a computer coupled to storage 90. Server 80 responds to requests from communication network 100 by providing movies stored in storage 90. By providing the

address of server **80** to movie system **10**, one of the movies stored in storage **90** can be used as an input for transcoder **40**.

PC **110** is a personal computer coupled to camcorder **120**. Camcorder **120** enables a user to record a movie and transfer the movie to PC **110**.

PC **110** executes uploader **112** and player **114**. Uploader **112** is a software program that enables a movie to be uploaded from PC **110** to server **50**. Player **114** is a software program that enables PC **110** to view and edit movies, in conjunction with transcoder **40**. When PC **110** registers with server **50**, server **50** downloads uploader **112** and player **114** to PC **110**.

Uploader **112** functions to locate movie files stored in PC **110**, and to manage transmission of the movie files to upload manager **55** of server **50** using a suitable protocol such as the secure file transfer protocol (sftp). In embodiments having a peer-to-peer network for downloading, such as networks using the bittorrent protocol, the peer-to-peer network is also used for uploading. Since movie files are large, the file uploading may be interrupted; uploader **112** enables the uploading to resume at its interruption point. In some embodiments, uploader **112** converts a very large file, such as a 36 Mb file in DV format, to a smaller file of comparable visual quality, such as a 3 Mb file in MPEG format. Uploader **112** enables the user of PC **110** to select a file for uploading; to monitor the status of the upload, such as percent completed and speed of uploading; to pause and resume the uploading; and to cancel the uploading.

Player **114** is a client application for a PC browser. In some embodiments, player **114** resides on a portable device such as a mobile phone or network-attached digital video camera without a browser, and in these embodiments, player **114** is a network enabled client application.

Player **114** enables a user to view a movie, including forward seek and rewind functions; to seek the compressed video on a remote server using random seek points; to request a movie download from the random seek point, for example, in accordance with U.S. Pat. No. 6,157,771, the disclosure of which is hereby incorporated by reference in its entirety; and to use the functions described below with regard to FIG. 7 on the movie, including creating and editing deep tags, creating and editing mash-ups, adding special effects, providing sharing permission to other users, creating virtual and/or physical DVDs, inserting ads, and creating and editing watermarks. FIG. 8, discussed below, shows a graphical user interface for player **114**.

Phone **130** is a wireless communication device executing versions of uploader **112** and player **114** adapted for the device capabilities of phone **130**. Phone **130** is coupled to camera **135**, which serves to capture images and provide the captured images to phone **130** as a movie signal. In some embodiments, phone **130** uses the multimedia messaging service (MMS) protocol to transmit and/or receive movies. In other embodiments (not shown), phone **130** communicates with a local network using a protocol such as WiFi, and the WiFi network in turn communicates with communication network **100**.

PC **140** is a personal computer that is able to view transcoded movies by obtaining an address for the movie, or a segment thereof, and providing the address to server **50**. As an example, a user of PC **110** or a user of phone **130** may upload a movie to movie system **10**, edit the uploaded movie, and provide to the user of PC **140**, via email, an address of an edited segment that the user of PC **140** is permitted to view.

Camcorder **145** is a network enabled movie capture device configured to upload its recordings to movie system **10**. In some embodiments, there is at least one predefined user group able to immediately edit information uploaded from camcorder **145**. This configuration is useful in a security application, for example.

The user of PC **110** or phone **130** serves as an editor. PC **110**, phone **130**, PC **140** and camcorder **145** are each at respective locations that are remote from the location of movie system **10**.

FIGS. 2-4 illustrate other embodiments of the invention wherein the transcoder is local to the movie file, that is, the movie file is not uploaded via a public communication network. This is sometimes referred to as a transcoder appliance model.

FIG. 2 shows PC **150**, camcorder **160** and DVD burner **170**. Camcorder **160** is for recording a movie and providing the recorded movie to PC **150**. PC **150** is a personal computer operative to receive and store a recorded movie; to enable a user to edit the stored movie using transcoder **155**, which is a software program operative in a similar manner as transcoder **40**; and to provide a transcoded movie to DVD burner **170** for recording thereon, in similar manner as DVD burner **60**.

FIG. 3 shows video recorder **180**, robotic camera with pan-tilt-zoom (PTZ) control **190**, and DVD burner **200**. Robotic camera **190** is operative to provide a video signal to video recorder **180**. Video recorder **180** is a computer operative to receive and store the video signal from robotic camera **190**, to enable a user to edit the stored video using transcoder **185**, which is a software program operative in a similar manner as transcoder **40**; and to provide a transcoded movie to DVD burner **200** for recording thereon, in similar manner as DVD burner **60**.

FIG. 4 shows robotic camera **210**, video recorder **220**, private network **230** and PC **240**. PTZ camera **210** is operative to provide a video signal to video recorder **220**. Video recorder **220** is operative to receive and store the video signal from robotic camera **210**, and to provide the stored video to PC **240** via private network **230**. Private network **230** is a local area network, virtual private network, or the like, which serves to couple video recorder **220** and PC **240**. PC **240** is a general-purpose personal computer operative to receive video from video recorder **220**, sometimes in response to a command from PC **240** and sometimes on a periodic or as-available basis from video recorder **220**; to store the received video; and to execute transcoder **245** to edit the stored video to produce transcoded video. Transcoder **245** is a software program operative in a similar manner as transcoder **40**.

FIGS. 5-6 are flowcharts depicting high-level operation of movie uploading and downloading, respectively.

Turning to FIG. 5, at step **300**, user1 (not shown) at PC **110** uploads a movie to server **50**, such as a movie recorded by camcorder **120**. The uploaded movie is in an original format, also referred to as a first format or an uploaded format. In some cases, user1 provides an address of server **80**, and instructs server **50** to retrieve the movie from server **80**. Server **50** stores the uploaded movie in videobase **20**. At step **310**, transcoder **40** processes the uploaded movie, enabling the user to edit the uploaded movie as described in detail below, to produce a transcoded movie. The transcoded movie is in a proxy format, also referred to as a second format or an intermediate format.

At step **320**, transcoder **40** stores the transcoded movie in videobase **20**. As described below, user1 can grant permission to other users to view the whole of the transcoded

movie, or to view segments of the transcoded movie, by providing suitable addresses to the authorized users.

Turning to FIG. 6, at step 330, user2 (not shown), who has received permission to view the transcoded movie, sends a request for the movie to server 50. The request includes information about the display capability of the device used by user2, such as phone 130 or PC 140.

At step 340, server 50 requests the selected movie from videobase 20, indicating the format for the movie.

At step 350, if the requested format happens to match the stored format, then the movie is provided directly to server 50. Otherwise, videobase 20 is operative to convert the format from the stored format to the requested format. The movie is provided in the requested format, also referred to as a third format, a downloaded format, or an output format. Server 50 then sends the provided movie to user2 via suitable distribution method such as streamed video or podcast, or presentation on a web page, blog, wiki, really simple syndication (RSS) or other technique. In some embodiments, videobase 20 sends the stored movie to transcoder 40, for conversion to the requested format, and then transcoder 40 provides the movie in the requested format to server 50.

FIGS. 7A and 7B, collectively referred to as FIG. 7, are a flowchart depicting transcoder 40 operation.

As an overview, transcoder 40 receives an uploaded movie, creates a representation for easy editing, and adds user-supplied editing data (steps 400-440) to create a transcoded movie. Then, at the user's option, some, all or none of the following functions can be performed, in any desired sequence, and in as many editing sessions as desired:

- creating a playback product using the transcoded movie, the playback product being one of a mash-up, a tree or a link-up (steps 450-460);
- adding special effects (steps 470-490),
- including advertising movies in the transcoded movie (steps 500-600), and
- providing permission for other users to view all of the transcoded movie, or segments of the transcoded movie (steps 610-630).

Including an advertising movie in a transcoded movie ensures that even if the viewer of the transcoded movie has a filter for blocking advertising pop-ups and the like, the included advertising movie is viewed, since the filter considers the advertising movie to be part of requested content.

At step 400 of FIG. 7, transcoder 40 receives the uploaded video, either from the user or from another web site. The video may be in one of several formats, some of which involve compression using a scheme wherein a compressed frame refers to an earlier and/or later frame, and then provides change information relative to the earlier and/or later frames. Transcoder 40 converts the uploaded movie to a series of self-referential (uncompressed) frames. Generally, a frame is a collection of picture elements (pixels) corresponding to an image presented to a human viewer.

At step 410, transcoder 40 builds a texture strip representing the movie. Specifically, transcoder 40 applies a function to each frame to generate texture data, and saves the texture data as a video image. For example, the function might be to extract the center 8x8 pixels of each frame and realign into a 64 pixel height column and the texture strip is the sequence of 64 pixel columns. The texture strip may be saved as a .jpg file. The texture strip serves to represent the entire movie in a convenient information bar, and is sometimes referred to as a navigation bar. The texture strip is an intuitive way of determining the temporal position of a frame relative to the entirety of a movie. The texture strip

often is useful in detecting scene changes, which is important when deciding which frames to group together as a segment.

At step 420, transcoder 40 creates a source proxy for the uploaded movie. Generally, a source proxy is a representation of the frames of the movie in a particular format that is easy to convert to other formats and to distribute via public communication network 100. For example, the Flash video format, according to the H.263 standard, can be used for the source proxy.

Using a source proxy reduces the format conversion issue. Specifically, if there are n movie formats, a general transcoder should be able to convert from any input to any output format, which, by brute force, would require n^2 different format converters. However, using a source proxy means that only $2n$ format converters are needed (n converters to the source proxy format, and another n converters from the source proxy format to the output format). Additionally, as new movie formats become available, supporting them requires creating only 2 converters per format (one to the source proxy format, and one from the source proxy format), rather than $2n$ with the brute force approach. It is recognized that, sometimes, the source proxy format may be the desired output format.

Editing of the proxy format, also referred to as proxy editing, may occur in several ways.

In one embodiment of proxy editing, the edits are applied directly to the proxy frames.

In another embodiment of proxy editing, the proxy frames are maintained as generated, and an edit list is created, comprising edits to be sequentially applied to the proxy frames. Each time the edited movie is provided, the edits are applied anew to the proxy frames. This embodiment is particularly useful when edits need to be undone, or when many users are editing one movie to create separate edited movies.

In a further embodiment of proxy editing, a hybrid approach is used, wherein during an edit session, an edit list is created, and only at the termination of the edit session are the edits applied directly to the proxy frames.

At step 430, transcoder 40 generates a thumbnail as a visual representation of the entire movie. Typically, the user selects a frame, and transcoder 40 reduces it to a thumbnail size, such as 177x144 pixels. A user having many stored movies can conveniently view their thumbnails, rather than or in addition to text descriptions and/or filename descriptions.

At step 440, transcoder 40 accepts metadata from the user. Movie metadata may include a filename for the transcoded movie, subject matter keywords associated with the movie, a short text description to be associated with the thumbnail, any deep tags the user cares to define, address information such as a hyperlink of information to be associated with the transcoded movie, and an associated movie such as an audio file describing the contents of the movie.

A deep tag is a video bookmark, indicating a sequential group of frames that are to be treated as a separately addressable segment; the deep tag metadata includes the movie filename, the user filename, date of creation of the deep tag, date of most recent modification of the deep tag, a deep tag filename, the start frame, the end frame, the duration of the segment, and a short text description of the segment. A deep tag is understood to be a convenient way of identifying a segment.

FIG. 8 shows screen display 700 of player 114, provided, for example, at PC 110, and including video display 710, thumbnail 715, texture strip 720, positioner 730, deep tag

marker **735**, deep tag button **740**, deep tag bar **750**, and function buttons **760**, **771**, **772**, **773**, **775**, **780** and **790**.

Video display **710** shows the current frame of video. When the editor's device, such as PC **110** or phone **130** permits, the video frame is displayed in its proxy format. However, if the editor's device cannot support the proxy format, the transcoder **40** converts edited frames to an output format suitable for the editor's device prior to sending the edited frames to the editor for display.

Thumbnail **715** is a small image representing the entire movie.

Texture strip **720** comprises sequential frame representations **725** and subsequent information; each frame representation **725** is the result of the function used to create the texture strip, such as a vertical column of 64 pixels, and represents a single frame. Subsequent information indicates special effects applied to the frames and any advertising inserted in the frames.

Positioner **730** indicates where the frame display in video display **710** is located relative to the entirety of the movie. Positioner **730** enables the editor to use texture strip **720** to seek frames in the movie in a random access manner.

Deep tag marker **735** has a left edge that can be adjusted by a user, and also has a right edge that can be adjusted by the user; after the user has adjusted the left and right edges of deep tag marker **735**, the user indicates that these settings should be saved as a deep tag, such as by clicking deep tag button **740**, and providing a text description corresponding to the movie segment indicated by the deep tag. Deep tag marker **735** enables the editor to use texture strip **720** to select a segment of the movie.

Deep tag bar **750** is a visual representation of deep tags that have already been created for the movie. In the example of FIG. 8, deep tags **751** and **752** have previously been created for the movie, and are located near the start and end, respectively, of the movie being edited.

Function buttons **760**, **771**, **772**, **773**, **775**, **780** and **790** enable the user to edit the movie. Data button **760** enables the user to view and edit metadata associated with the movie. Playback product buttons **771**, **772** and **773** take the user to specialized editing interfaces, discussed below. Effects button **775** enables the user to add and edit special effects. Ad button **780** enables the user to include advertising in the movie. Sharing button **790** enables the user to grant permission to other users or user groups to view selected segments of the movie.

At step **450** of FIG. 7, transcoder **40** determines whether the user wishes to create a playback product. If so, at step **460** of FIG. 7A, the steps of FIG. 7B are executed by transcoder **40**.

Turning to FIG. 7B, at step **650**, transcoder **40** receives the user's selection of which playback product is to be created. For instance, using the editing interface of FIG. 8, the user indicates which playback product by selecting one of buttons **771**, **772**, **773**. In this embodiment, three products are defined. In other embodiments, other products are available. The playback products are a mash-up, a tree, and a link-up.

A mash-up is a sequential display of selected segments. A viewer of a mash-up playback product can only navigate forward or backward in the product.

A tree is a set of segments and a hierarchical, linear control structure for displaying the segments. Generally, a viewer of a tree playback product clicks on selections to navigate the product, in addition to forward and backward.

A link-up is a set of segments and a non-linear control structure for displaying the segments. Generally, a viewer of a link-up playback product navigates via one or more of:

forward and back movement, clicking on selections, and/or providing alphanumeric input. A tree and a mash-up are constrained forms of a link-up.

If a mash-up is selected, at step **655**, the user selects the sequence of segments to be included via a mash-up editor. Then, at step **685**, the user selects whether the mash-up is to be published or burned.

Publishing means transferring the mash-up to videobase **20** or to user PC **110**. If publishing is selected, at step **690**, the user selects a thumbnail to represent the mash-up, and provides metadata if desired such as a mash-up filename. At step **695**, the user indicates a destination for the mash-up file, such as videobase **20**, or PC **110**. Transcoder **40** responds by transferring the mash-up in accordance with the user's selections.

Burning means writing the mash-up to a removable storage medium, such as a DVD or memory chip, and sending the removable storage medium to the user. If burning is selected, at step **698**, transcoder **40** transfers the mash-up file to the removable storage medium type designated by the user. In the case of a DVD, transcoder **40** sends the mash-up file to DVD burner **60**, which creates a DVD having the mash-up.

FIG. 9A shows mash-up editor interface **801**. Thumbnail area **810** includes navigation buttons **825**, **826** for altering which thumbnails of the user's stored thumbnails are displayed in area **810**. In general, a user acquires stored files, represented by thumbnails, by uploading a movie, image, graphic or audio file; selecting frames of an existing movie; or creating a playback product as described herein. After storing a file, the user can edit the file by selecting the file's thumbnail in one of the specialized editors discussed herein. Thumbnail area **810** shows ten thumbnail windows **811-820**, but a user may have hundreds of stored files, each with a corresponding thumbnail. Filename entry window **827** enables a user to type in the name of a file, or select a filename from a directory, which puts the file's thumbnail in thumbnail window **811**.

Slots area **836** comprises placeholders into which the editor, also referred to as the user, drags and drops thumbnails to indicate that the thumbnails are part of the mash-up being created. Slots area **836** includes slots **837**, **838**, **839**, **840**.

Texture strip **830** represents the mash-up being created. Phantom start and end frames **831**, **832** enable the user to add thumbnails before or after the selected thumbnails. Frame selector **835** has start and end portions that can be adjusted by the user. After the user is satisfied with the thumbnails dragged into slots **837-840**, the user clicks insert button **833** to insert these thumbnails into the mash-up. In response, transcoder **40** creates a frame representation of each thumbnail, puts the thumbnail frame representation in the appropriate frame of texture strip **830**, and clears slots **837-840**. To insert subsequent files into the mash-up, the user moves frame selector **835** to a position after the inserted thumbnails. To insert preceding files into the mash-up, the user moves frame selector **835** to include phantom frame **831**. To delete files from the mash-up, the user positions frame selector **835** on the frame representations of the thumbnails of the files to be deleted, and clicks cut button **834**.

At any time, the user can click preview button **896** to see what the mash-up will look like. In response to preview button **896**, transcoder **40** creates preview window **802** having viewing area **803**, and navigation button **804-807**, and begins playing the mash-up in preview window **803**. The user clicks back button **804** to "rewind" the playback,

11

forward button **805** to “advance” the playback, pause button **806** to pause the playback, and stop button **807** to terminate the playback and close preview window **802**.

Publish button **897** enables the user to indicate to transcoder **40** that publication of the mash-up is desired. Clicking publish button **897** causes transcoder **40** to pop-up a window (not shown) that enables the user to select a thumbnail and destination.

Burn button **898** enables the user to indicate to transcoder **40** that burning of the mash-up is desired. Clicking burn button **898** causes transcoder **40** to pop-up a window (not shown) that enables the user to select a media for burning and provide delivery directions for the burned media.

Back button **899** enables the user to return to edit window **700** in FIG. **8**. If a tree playback product is selected, at step **660**, the user selects the sequence of segments to be included via a tree editor, and at step **665**, defines the tree structure. Then, at step **685**, the user selects whether the tree playback product is to be published or burned.

FIG. **9C** shows tree editor interface **851**. Tree editor interface **851** is generally similar to mash-up editor interface **801**; similarities will not be discussed for brevity.

Tree structure window **855** shows a graph of the control structure of the tree playback product being created. Initially, the window is blank, since nothing has been specified.

FIG. **9D** shows an example of tree structure window **855** after a tree playback product has been created. The tree playback product includes segments **855-1**, **855-2**, **855-3** and **855-4**. Window **855** shows, via lines, the control structure for the navigation between the segments of the playback product. In this example, segment **855-1** leads to segment **855-2** which in turn leads to either of segment **855-3** and **855-4**.

Each segment of a tree playback product comprises a background, a foreground and a link. In one embodiment, a background is a still image, a foreground is a video or audio segment, and the link is indicated by a graphic image. When the viewer of the playback product clicks on the link, the viewer is taken to the next segment, that is, a link indicates one segment. Each segment can have 0, 1 or multiple links.

A tree segment can also include 0, 1 or multiple commands. Typically, a command is indicated by a graphic image. When the viewer of the playback product clicks on the command, the command is sent to the source of the playback product, such as server **50**, for execution.

Returning to FIG. **9C**, to create a segment, the editor drags and drops thumbnails from thumbnail window **810** into at least one of background slot **861**, foreground slot **862**, and link slot **863**. If more links are desired for this segment, the editor clicks add link button **864**, and then drags and drops thumbnails into the additional link slots (not shown) created by clicking link button **864**. When the user is satisfied, he or she clicks insert button **857** to create a segment.

If a tree playback product segment is created with at least one link, transcoder **40** creates an empty segment as the destination of each link, and displays the empty segment in tree structure window **855**. The editor clicks on the empty segment in tree structure window **855** and inserts thumbnails into at least one of the background, foreground and link slots.

If the editor wishes to delete a segment, the editor selects the segment in tree structure window **855**, then clicks cut button **856** to remove the segment. Removing a segment automatically removes the link leading to the segment from the preceding segment.

To create a command in a segment, the editor clicks add command button **865**. Transcoder **40** provides a pop-up

12

window with a command editor (not shown) that enables the editor to drag and drop a thumbnail indicating the command, select a command from a menu of commands or type the command directly into a command line window (if the editor knows how to write commands in the command language, such as Javascript), and, when appropriate, provide parameters for the command. Examples of commands are: (i) a hyperlink to a webpage, (ii) provide the email address of the viewer of the playback product to the owner of the playback product, (iii) provide the email address of the viewer to a third party, (iv) download a program and execute it, and so on.

It will be understood that a thumbnail can be dropped into multiple slots during creation of a tree playback product.

Clicking preview button **896** causes transcoder **40** to create a window similar to that shown in FIG. **9B**, however, the tree playback product includes link areas in window **803** that a user can click to navigate between segments.

If a link-up playback product is selected, at step **670**, the user selects the sequence of segments to be included via a link-up editor. At step **675**, the user defines the link-up structure. At step **680**, the user defines the link-up navigation questions and answers. Then, at step **685**, the user selects whether the link-up is to be published or burned.

FIG. **9E** shows link-up editor interface **871**. Link-up editor interface **871** is generally similar to tree editor interface **851**; similarities will not be discussed for brevity.

Link-up structure window **875** shows a graph of the control structure of the link-up playback product being created. Initially, the window is blank, since nothing has been specified.

FIG. **9F** shows an example of link-up structure window **875** after a link-up playback product has been created. The link-up playback product includes segments **875a**, **875b**, **875c** and **875d**. Window **875** shows, via lines, the control structure for the navigation between the segments of the playback product. In this example, segment **875a**, always the first segment to be played during playback, leads to segments **875b**, **875c** and **875d**. Segment **875b** leads to **875a** and **875c**. Segment **875c** leads to segments **875b** and **875d**. Segment **875d** is sometimes referred to as a final segment, since it is never followed by another segment. Segments **875b** and **875c** are sometimes referred to as intermediate segments, since they are not the start segment and they do lead to another segment.

Returning to FIG. **9E**, to create the link-up structure, the editor drags and drops thumbnails from thumbnail window **810** into start slot **880** and at least one of intermediate slots **881**, **882**, **883**. If more links are desired for this segment, the editor clicks add link button **878**, and then drags and drops thumbnails into the additional slots created by clicking link button **878** (not shown). When the user is satisfied, he or she clicks insert button **877** to create the link-up. Transcoder **40** responds by displaying the link-up in link-up structure window **875**, highlights the just-created bit of link-up structure, and freezes the highlight until the editor clicks edit Q&A button **879** to create text associated with the link-up.

A Q&A dialog (not shown), consists of an optional header and a set of choices associated with the respective links. One instance of a Q&A is,

Click on the word to indicate what you want to view next:

kitchen
den
basement
garage
backyard

13

Another instance of a Q&A is,
 More pictures of actor Alice
 More pictures of actor Bob
 More pictures of actor Chris
 Another instance of a Q&A is,
 Type (or click on) the number closest to your age:
 15
 20
 25
 30

If the editor wishes to delete a segment, the editor selects the segment in link-up structure window **875**, then clicks cut button **876** to remove the segment. Removing a segment automatically removes the portion of the Q&A leading to the segment from the preceding segments.

Clicking preview button **896** causes transcoder **40** to create a window similar to that shown in FIG. **9B**, however, the link-up playback product includes Q&A areas in window **803** that a viewer can utilize to navigate between segments.

Returning to FIG. **7A**, at step **470**, transcoder **40** determines whether the user wishes to apply any special effects to the transcoded movie. For example, the user indicates a desire to apply special effects by selecting effects button **775** in FIG. **8**. If so, at step **480**, transcoder **40** provides the user with an effects editor (discussed below). In some embodiments, there are about 300 different effects on the effects menu. The user selects desired effects and indicates where in the movie they should be applied. At step **490**, transcoder **40** applies the effects. Generally, the user views the results of the effects, and continues effects editing until satisfied with the result. The user can create multiple versions of a transcoded movie, differing in their special effects.

Examples of special effects include: watermark, mosaic, barndoor, noise, dissolve, spiral, fade in, fade out, increase contrast, decrease contrast, soften perimeter, cut frame, overlay, and so on.

A movie watermark for a movie including video is one of (a) a permanent graphic such as a logo inserted in each frame of the movie, (b) an overlay graphic such as a logo inserted in each frame of the movie, or (c) hidden information such as a logo, also referred to as steganography. A movie watermark for an audio only movie is (i) a sound file inserted at a predetermined point in the movie, such as its start or end, or (ii) hidden information such as text, also referred to as steganography.

FIG. **9G** shows effects editor interface **1000**. Effects area **1010** includes effects buttons **1020**, **1021**, **1022**, **1023**, indicating which effect is represented by the button. Typically, an effects button has an image of the effect and holding the cursor on the button displays text describing the effect. Forward and reverse navigation buttons **1011**, **1012** enable navigation among the effects buttons. Clicking describe button **1013** displays text describing the effect (same as holding the cursor on the button). Clicking show button **1014** creates a pop-up window showing the effect in action, useful when the size of the button is too small to fully convey the effect. Effect name window **1015** enables the editor to type the name of an effect or to select it from a drop-down menu.

An effect can also include an executable command, as described above with respect to the tree playback product editor.

Texture strip **1030** indicates the frame representations of the movie selected for effects, such as frame representation **1031**. Slider **1035** has a left and right edge that can be adjusted by the editor, to indicate frames to receive an effect. After the editor selects an effect in effects area **1010**, and

14

adjusts slider **1035**, the editor clicks apply button **1033** to apply the effect. After the editor has finished applying effects, he or she clicks preview button **896** to preview. If an editor wishes to cancel an effect, she positions slider **1035** on the appropriate frame representations and clicks cancel button **1034**. Publish button **897**, burn button **898**, and back button **899** function as described above.

Returning to FIG. **7A**, at step **500**, transcoder **40** obtains the user's preference for including advertising in the transcoded movie. For example, the user indicates a desire to include advertising by selecting advertising button **780** in FIG. **8**. Videobase **20** contains advertising movies, also referred to as ad movies, that is, segments provided by advertisers for inclusion in user-created movies. Database **30** includes the advertiser's preference for the types of movies that the advertiser wants its ad movies to be combined with, whether the advertiser prefers or requires that its ad be used as a static insert or a dynamic insert (discussed below), whether the advertiser permits its ad movies to be used as part of a mash-up video, and how the advertiser pays the user, such as a one-time fee, or per-viewing of the ad movie. Conventional systems place advertising only at the start of user-created content; movie system **10** is more flexible in that advertising can be inserted within a user-created transcoded movie in either a static or a dynamic manner.

If the user wants to include an ad movie in the transcoded movie, at step **510**, transcoder **40** determines whether the user wishes to select the ad movie, or to accept an ad movie selected by movie system **10**. If the user wishes to select the ad movie, at step **520**, transcoder **40** provides the user with a menu of ad movies that are consistent with the characteristics of the user's transcoded movie, and the user selects one or more ad movies for inclusion in their transcoded movie. If the user does not wish to select the ad movies, at step **530**, transcoder **40** selects one or more ad movies based on an ad movie selection procedure and its own determination of how many ad movies are appropriate for the transcoded movie. In some embodiments, the ad movie selection procedure is based on maximizing revenue for the user, and following a least-recently-used ad movie selection procedure. In some embodiments, the determination of how many ad movies are appropriate is based on at least one of: the length of the transcoded movie, keywords in the meta-data, how many segments are deep tagged, and the length of the deep tagged segments, and so on.

An ad used with movie system **10** can be static or dynamic. A static ad is inserted in the transcoded movie prior to its storage in videobase **20**. For a dynamic ad, the transcoded movie is stored in videobase **20** with a placeholder, and when the transcoded movie is presented to a user, the actual ad is inserted, the ad being chosen based on a characteristic of the user such as the user's location, referred to as a "geo-aware" ad, the characteristics of the display device, referred to as a "device aware" ad, or other suitable characteristic.

At step **540**, transcoder **40** determines whether the user wishes to control the position of the ad movie(s) within a frame of the transcoded movie, or to accept positioning determined by movie system **10**. If the user wishes to control the positioning of the ad movie, at step **550**, transcoder **40** provides the user with a graphical interface for controlling ad movie positioning, and a menu of how the ad-movie should be inserted, such as a picture-in-picture at the top, left, right or bottom of the transcoded movie, the top being referred to as a "banner" ad, or as a standalone segment in the transcoded movie. In some embodiments, the user

15

selects the size of the space in each frame that the ad may occupy. If the user does not wish to control the positioning of the ad movie, at step 560, transcoder 40 decides where the movie ad should be placed, typically by looking at the default position in the metadata associated with the ad movie.

At step 570, transcoder 40 determines whether the user wishes to control the frames of the transcoded movie where the ad will be placed, or to accept positioning determined by movie system 10. If the user wishes to control the positioning of the ad movie, at step 580, transcoder 40 provides the user with a graphical interface for controlling ad movie positioning, such as a texture strip and slider. If the user does not wish to control the positioning of the ad movie, at step 590, transcoder 40 estimates where the movie ad should be placed. Any suitable estimation procedure may be employed. As an example, if the transcoded movie is a completely new movie with no deep tags, the estimation procedure specifies that the first scene having a length of at least the length of the ad movie is the selected position, and that the ad movie should be inserted as a picture-in-picture in the lower right of the transcoded movie. However, if the transcoded movie is associated with at least one other user, then a popularity procedure is used to select the position for the ad movie.

FIG. 10 is a diagram illustrating automatic determination of popular parts of a movie. Horizontal bars 950-955 represent the same movie, as deep tagged by different users. Histogram 960, also referred to as popularity density function 960, indicates the number of times that a portion of the movie has appeared in a deep tag, which serves as an indication of the popularity of the various parts of the movie. Movie ads are placed in the popular parts, if they are long enough, or with respect to the popular parts, if the popular parts are shorter than the ad movie. For example, the movie ad could be placed so that its start is co-located with the start of a popular segment having a duration of at least 70% of the duration of the ad movie.

At step 600 of FIG. 7A, transcoder 40 inserts the selected movie ads into the transcoded movie.

FIG. 9H shows ad editor interface 1100 having ad area 1110, adpack area 1121 and texture strip 1130.

Ad area 1110 includes ad thumbnail windows 111-1120 and navigation buttons 1101, 1102 for altering which thumbnails of the ad thumbnails in videobase 20 are displayed in area 1110. Filename entry window 1103 enables a user to type in the name of an ad file, or select an ad filename from a directory, which puts the file's thumbnail in ad thumbnail window 1111. Ad area 1110 also includes automatic button 1104, for indicating that movie system 10 should select an ad.

An adpack is a pairing of an ad movie and an adpack description. An adpack description controls how the ad movie will be displayed in the transcoded movie. Examples of adpack descriptions are:

- Ad image at frame bottom
- Ad image at frame bottom, fade in and fade out
- Ad image slides from left to right in succeeding frames
- Ad audio plays when frames are viewed
- Ad video at frame top
- Ad video at frame bottom
- Ad video in frame left
- Ad video in frame right

The International Advertising Bureau has defined standard ad display areas, and these may be used as adpack descriptions; see, for example, <http://www.iab.net/standards/popup/index.asp>.

16

An adpack can also include one or more executable commands, as described above with respect to the tree playback product editor. The provider of an ad movie typically specifies certain adpacks as selectable for its ad movie, and configures the commands to be associated with its ad movie. Examples of commands are: (i) a hyperlink to the ad provider's web site, (ii) sending the email address of the viewer of the transcoded movie to the ad provider, and (iii) requesting a file download from the ad provider to the viewer of the transcoded movie; other commands are also contemplated.

Adpack area 1121 includes adpack description windows 1125-1128 and navigation buttons 1122, 1123 for altering which adpack descriptions are displayed in area 1121. Filename entry window 1124 enables a user to type in the name of an adpack, or select an adpack from a directory, which puts the adpack in adpack description window 1125. Adpack area 1121 also includes automatic button 1105, for indicating that movie system 10 should select the placement of the ad in the frame.

Texture strip 1130 includes frame representations of the movie being edited, such as frame representation 1131. Slider 1135 indicates frame representations in the texture strip; the editor can adjust the left and right edges of slider 1135. Automatic button 1106 is used when the editor wishes to indicate that movie system 10 should select the frames in which the ad is placed.

To manually insert an ad, the editor selects an ad, such as by clicking ad thumbnail 1117, then selects an adpack description to control where in the frame the ad is placed, such as by clicking adpack description 1127, then adjusts slider 1135 to indicate which frames the ad is placed in, then clicks insert button 1133.

To instruct movie system 10 to select an ad and put it in the movie being edited, the editor clicks automatic buttons 1104, 1105 and 1106.

To remove an ad, the editor adjusts slider 1135 then clicks cut button 1134.

Buttons 896, 897, 898, 899 function as described above.

Returning to FIG. 7A, at step 610, transcoder 40 determines whether the user wishes to share the transcoded movie, or segments thereof. For example, the user indicates a desire to share by selecting share button 790 in FIG. 8. If so, at step 620, the user identifies segments by deep tagging them, or using previously defined deep tags. At step 630, the user identifies who is permitted to access which segments. In some embodiments, when a user registers with movie system 10, the user can create access groups having one or more outside users in each group; the same outside user can be included in one or more access groups. An outside user is generally identified by a nickname and an email address. Then, the user instructs transcoder 40 when to make the access permissions effective, typically by sending an email to the outside users identifying the segment address, and its short text description. The segment address is of the form: (server 50 address, transcoded movie identifier, deep tag identifier). In some embodiments, the user can, as part of sharing, list the transcoded movie in a directory accessible to other users of movie system 10, searchable by characteristics of the transcoded movie, such as its metadata subject keywords, its creation time, and/or its ads.

FIG. 11 is a diagram illustrating access permission for a movie. Let it be assumed that the owner of movie 900, user1, defines a deep tag indicating segment 904 of movie 900, and permits an outside user, user2, to access segment 904. Now, in movie 900, segments 902 and 906 are private segments, while segment 904 is a shared segment.

17

User2 sees segment **904** as movie **910**. User2 can define a deep tag indicating segment **914** of movie **910**, and permit an outside user, user3, to access segment **914**. Now, in movie **910**, segments **912** and **916** are private to user2, while segment **914** is shared.

User3 sees segment **914** as movie **920**, and can similarly enable access to all or parts of movie **920**.

The transcoded movie is then stored in videobase **20**, and database **30** is suitably updated.

A use case will now be discussed.

Let it be assumed that a user uploads three files (FIG. 7, step **400**). The first file is a DVD file in MPEG2 format. The second file is a webcam file in MPEG4 format. The third file is a mobile phone camera recording in 3GP format. At this time, the MPEG2, MPEG4 and 3GP formats are considered incompatible.

Movie system **10** converts each of these three files to proxy files in H.263 Flash format (FIG. 7, step **420**). Let it be assumed that each of the proxy files has 100 frames, and have the filenames:

Proxy-1200

Proxy-1201

Proxy-1202

Now the user creates a mash-up (FIG. 7, step **450**) using the mash-up editor (FIG. 9A). Transcoder **40** represents the mash-up as a list of the proxy files and the start and end frames of each proxy file: Proxy-1200, start **22**, end **27**

Proxy-1201, start **84**, end **86**

Proxy-1202, start **62**, end **70**

Next, the user adds special effects (FIG. 7, step **480**) using the effects editor (FIG. 9G). Let it be assumed that one special effect is a watermark (effect **45**) comprising an image in the user's file proxy-678, and another special effect is a dissolve (effect **18**) between the seventh to ninth frames of the mash-up. Transcoder **40** represents the result as:

Proxy-1200, start **22**, end **27**

Proxy-1201, start **84**, end **86**

Proxy-1202, start **62**, end **70**

Effect **45**, proxy-678

Effect **18**, start **7**, end **9**

Finally, the user inserts two ads, allowing the system to automatically choose the ads and their placement (FIG. 7, steps **530**, **560**, **590**) using the ad editor (FIG. 9H). Transcoder **40** represents the result as:

Proxy-1200, start **22**, end **27**

Proxy-1201, start **84**, end **86**

Proxy-1202, start **62**, end **70**

Effect **45**, proxy-678

Effect **18**, start **7**, end **9**

Ad **4511268**, adpack **2**, start **3**, end **6**

Ad **3897522**, adpack **163**, start **11**, end **16**

FIG. 12 shows the texture strip resulting from this use case. Texture strip **1200** comprises frame representations **1201-1218**. As indicated by bracket **1271**, frame representations **1201-1207** are from file Proxy-1200. As indicated by bracket **1272**, frame representations **1208-1210** are from file Proxy-1201. As indicated by bracket **1273**, frame representations **1211-1218** are from file Proxy-1202. Watermark **1230**, the logo in file proxy-678, is present in the bottom right of each frame, as depicted in each of the frame representations. Dissolve special effect **1260** is present in frame representations **1207-1209**. First ad **1240**, having frame representations **1241-1244**, is present as a top banner in frames **1203-1206**. Second ad **1250**, having frame representations **1251-1256**, is present as a side banner in frames **1211-1216**.

18

It will be appreciated that some editing functions can be accomplished in several ways. For example, if the user wishes to delete a frame from the movie, this can be accomplished via (1) creating a mash-up comprising the frames before the deleted frame, followed by the frames after the deleted frame, and not including the deleted frame; (2) adding a special effect to cause the deleted frame to be entirely dark or entirely light, as part of a scene transition; (3) directly selecting "delete frame" from the special effects menu; (3) enabling sharing of the entirety of the movie except for the to-be-deleted frame; and so on.

FIG. 13 is a partial data schema for database **30**. Generally, database **30** can be viewed by users or by movies having appropriate access permission. The schema is structured in accordance with usage of movie system **10**.

Although an illustrative embodiment of the invention, and various modifications thereof, have been described in detail herein with reference to the accompanying drawings, it is to be understood that the invention is not limited to this precise embodiment and the described modifications, and that various changes and further modifications may be effected therein by one skilled in the art without departing from the scope or spirit of the invention as defined in the appended claims.

What is claimed is:

1. A movie system comprising:

a data store;

a transcoder coupled to the data store, the transcoder comprising a processor and memory, the transcoder operable to:

receive a video in a first format;

receive metadata for the video;

convert the video to a second format;

store the video and the metadata in the data store;

process the video to generate a texture strip representing the video, wherein processing the video to generate the texture strip comprises:

applying a function to frames from the video to produce a sequence of textured frame representations in temporal order, each textured frame representation in the sequence of textured frame representations representing a corresponding frame from the video; and

generating the texture strip as an image that comprises the sequence of textured frame representations as a continuous strip in which the sequence of textured frame representations is arranged in temporal order;

provide the texture strip to a player;

provide the frames from the video in the second format to the player for display;

a server operable to interface between the transcoder and a public communication network;

a client computer coupled to the public communication network, the client computer comprising the player, wherein the player is operable to:

display a graphical interface comprising the texture strip and a video display;

receive a selection of a frame from the video using the texture strip;

display the selected frame in the second format in the video display.

2. The movie system of claim 1, wherein the second format is a source proxy format.

3. The movie system of claim 1, wherein the transcoder is further operable to:

19

convert the video from the first format to a source proxy format that is different from the first format;
convert the video from the source proxy format to the second format, wherein the second format is different from the source proxy format.

4. The movie system of claim 1, wherein the video in the first format is stored in the data store in a linear sequence, and wherein the transcoder is operable to provide the selected frame to the player for display without previously provisioning frames of the video preceding the selected frame in the linear sequence.

5. The movie system of claim 1, wherein the graphical interface is provided to the player by the transcoder.

6. The movie system of claim 1, wherein the graphical interface comprises a control to apply an editing operation, and wherein:

the player is operable to:

receive a selection of the control;

provide an indication of the selected frame and the editing operation to the transcoder; and

the transcoder is operable to:

apply the editing operation to the video at the selected frame to update the video.

7. The movie system of claim 6, wherein the editing operation is selected from a group consisting of:

adding an effect;

adding a deep tag;

adding an advertisement; and

adding frames from another video.

8. A movie system comprising:

a processor;

memory coupled to the processor;

a non-transitory computer readable medium storing thereon:

a software transcoder, wherein the software transcoder is executable to:

receive a video;

process the video to generate a texture strip, wherein processing the video to generate the texture strip comprises:

applying a function to frames from the video to produce a sequence of textured frame representations in temporal order, each textured frame representation in the sequence of textured frame representations representing a corresponding frame from the video; and

generating the texture strip as an image that comprises the sequence of textured frame representations as a continuous strip in which the sequence of textured frame representations is arranged in temporal order;

provide the texture strip to a player application; and provide the frames from the video to the player application for display;

the player application, wherein the player application is executable to:

display a graphical interface comprising the texture strip and a video display;

receive a selection of a frame from the video using the texture strip; and

display the selected frame in the video display.

9. The movie system of claim 8, wherein the software transcoder is executable to

convert the video from a first format to a second format.

10. The movie system of claim 9, wherein the frames from the video are provided to the player application in the second format.

20

11. The movie system of claim 9, wherein the player application is executable to display the selected frame in the second format.

12. The movie system of claim 8, wherein the video is stored in a linear sequence, and wherein the software transcoder is executable to provide the selected frame to the player application for display without previously provisioning frames of the video preceding the selected frame in the linear sequence.

13. The movie system of claim 8, wherein the graphical interface is provided to the player application by the software transcoder.

14. The movie system of claim 8, wherein the graphical interface comprises a control to apply an editing operation, and wherein:

the player application is executable to:

receive a selection of the control;

provide an indication of the selected frame and the editing operation to the software transcoder; and

the software transcoder is executable to:

apply the editing operation to the video at the selected frame to update the video.

15. The movie system of claim 14, wherein the editing operation is selected from a group consisting of:

adding an effect;

adding a deep tag;

adding an advertisement; and

adding frames from another video.

16. A movie system comprising:

a video camera;

an appliance communicatively connected to the video camera, the appliance comprising a transcoder operable to:

receive a video recorded by the video camera;

process the video to generate a texture strip, wherein processing the video to generate the texture strip comprises:

applying a function to frames from the video to produce a sequence of textured frame representations in temporal order, each textured frame representation in the sequence of textured frame representations representing a corresponding frame from the video; and

generating the texture strip as an image that comprises the sequence of textured frame representations as a continuous strip in which the sequence of textured frame representations is arranged in temporal order;

provide a graphical interface for editing the video, the graphical interface comprising the texture strip and a video display;

receive a selection of a frame from the video using the texture strip; and

display the selected frame in the video display of the graphical interface.

17. The movie system of claim 16, wherein the appliance comprises a video storage, wherein the video is stored in the video storage in linear sequence, and wherein the transcoder is operable to provide the selected frame for display in the video display without previously provisioning frames of the video preceding the selected frame in the linear sequence.

18. The movie system of claim 16, wherein the graphical interface comprises a control to apply an editing operation, and wherein the transcoder is operable to:

receive a selection of the control; and

apply the editing operation to the video at the selected frame to update the video.

21

19. The movie system of claim **18**, wherein the editing operation is selected from a group consisting of:

adding an effect;

adding a deep tag;

adding an advertisement; and

adding frames from another video.

5

20. The movie system of claim **16**, wherein the transcoder is a software transcoder.

* * * * *

22