

US012395899B2

# (12) United States Patent McCann et al.

#### (54) NEGOTIATION OF QUALITY OF SERVICE (QoS) INFORMATION FOR NETWORK MANAGEMENT TRAFFIC IN A WIRELESS LOCAL AREA NETWORK (WLAN)

(71) Applicant: Malikie Innovations Limited, Dublin

(72) Inventors: **Stephen McCann**, Southampton (GB); **Michael Peter Montemurro**, Toronto

Assignee Malikia Innovations Limited Dub

(73) Assignee: Malikie Innovations Limited, Dublin (IE)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: 18/618,799

(22) Filed: Mar. 27, 2024

(65) Prior Publication Data

US 2024/0314643 A1 Sep. 19, 2024

#### Related U.S. Application Data

(63) Continuation of application No. 17/843,656, filed on Jun. 17, 2022, now Pat. No. 11,956,678, which is a (Continued)

#### (30) Foreign Application Priority Data

Mar. 15, 2010 (CA) ...... CA 2696037

(51) Int. Cl. H04W 28/24 (2009.01) H04W 74/00 (2009.01) H04W 84/12 (2009.01) (10) Patent No.: US 12,395,899 B2

(45) Date of Patent: \*Aug. 19, 2025

(52) U.S. Cl. CPC ....... *H04W 28/24* (2013.01); *H04W 74/006* 

(2013.01); H04W 84/12 (2013.01)

(58) Field of Classification Search

CPC ... H04W 28/24; H04W 74/006; H04W 84/12; H04W 72/12

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,283,143 B1 9/2001 Adachi, Jr. et al. 6,493,561 B1 12/2002 Hasegawa

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1893396 A 1/2007 CN 1969529 A 5/2007 (Continued)

OTHER PUBLICATIONS

Hiller, T., et al.; "A Container Type for the Extensible Authentication Protocol (EAP)"; Network Working Group; draft-hiller-eap-tlv-01.txt; May 2003; 16 pages.

(Continued)

Primary Examiner — Abdullahi E Salad (74) Attorney, Agent, or Firm — Conley Rose, P.C.; J. Robert Brown, Jr.

#### (57) ABSTRACT

An access point advertises a management frame quality of service (MFQ) policy that defines an access category used for transmitting a first type of management frame. Each mobile station associated with the access point is to prioritize transmission of management frames according to the MFQ policy advertised by the access point, unless a policy configuration request for the mobile station to prioritize transmission of management frames according to a different MFQ policy has been accepted.

20 Claims, 10 Drawing Sheets

RECEIVE DOWNLINK FRAME THAT INCLUDES MFQ POLICY ELEMENT

32

30

CONFIGURE STA TO IMPLEMENT DEFAULT MFQ POLICY MODIFIED BY CONTENT OF MFQ POLICY ELEMENT

Related U.S. A	Application Data	2004/0090958	A1	5/2004	Park et al.
	N. 17/146 100 Cl 1	2004/0199661			Murdock
	eation No. 17/146,189, filed on	2005/0060319			Douglas
Jan. 11, 2021, now P	at. No. 11,368,880, which is a	2005/0090259			Jain et al.
continuation of applic	eation No. 16/428,350, filed on	2005/0097362			Winget et al.
	at. No. 10,893,442, which is a	2005/0111419 2005/0210523			Kwon et al. Parnell et al.
	eation No. 15/460,991, filed on	2005/0210325			McNew et al.
		2006/0067526			Faccin et al.
	Pat. No. 10,356,662, which is a	2006/0109113			Reyes et al.
	eation No. 13/045,658, filed on	2006/0114928		6/2006	Utsunomiya et al.
Mar. 11, 2011, now P	at. No. 9,615,383.	2006/0142034			Wentink et al.
		2006/0153230	A1		Miyata et al.
(56) Referen	ices Cited	2006/0221901			Yaqub et al.
` '		2006/0245373		11/2006	
U.S. PATENT	DOCUMENTS	2006/0264245		11/2006	
		2007/0025297 2007/0041344			Lee et al. Yaqub et al.
7,010,305 B2 * 3/2006	Immonen H04W 28/16	2007/0041344			Ruuska
= 0.5 5.1 D0 510005	455/452.2	2007/0064660		3/2007	Qi et al.
	Teicher	2007/0086359		4/2007	
	Heinonen et al. Gavette	2007/0110018			Delaney et al.
	Adachi et al.	2007/0110092		5/2007	Kangude et al.
7,376,097 B2 5/2008		2007/0124592			Oyama
	Watanabe	2007/0153732		7/2007	
7,683,773 B1 3/2010	Goodall et al.	2007/0230389	A1"	10/2007	Amann H04W 72/569 370/314
	Dasylva et al.	2007/0230422	Δ1*	10/2007	Yoshida H04W 76/10
8,170,481 B2 5/2012	Rangarajan et al	2001/0230423	7.X.1	10/2007	370/338
	Hsin et al. Meier et al.	2007/0243888	A1	10/2007	
	Kuroda	2007/0297438		12/2007	Meylan et al.
	Montemurro et al.	2008/0031212	A1*	2/2008	Ogura H04W 28/16
8,458,279 B2 6/2013	Montemurro et al.				370/338
8,463,175 B2 6/2013	Bajko	2008/0049761	A1*	2/2008	Lin H04L 12/66
	Kim et al.				370/395.21
	Kaushik et al.	2008/0057992		3/2008	
	Xiao et al. Ruuska	2008/0095048	AI'	4/2008	Zhong H04W 28/12 370/229
	Montemurro et al.	2008/0096580	Α1	4/2008	Montemurro
	McCann et al.	2008/0101231			Lai H04L 47/2466
	Hassan et al.				370/395.42
	Anantharam et al.	2008/0114857	A1	5/2008	Snider
	Ha et al.	2008/0123607		5/2008	
8,879,455 B1* 11/2014	Stephenson H04W 52/0219	2008/0141031			Oba et al.
9 907 799 D2 11/2014	370/312 Ruuska	2008/0151796 2008/0178277		6/2008	Jokela Oba et al.
	Montemurro et al.	2008/01/82/7		8/2008	Sinha H04L 12/185
	McCann et al.	2000,0100,02		0,2000	370/389
	McCann et al.	2008/0261574	A1	10/2008	Rinta-Aho et al.
	McCann et al.	2008/0270534	A1	10/2008	Xia et al.
· · · · · · · · · · · · · · · · · · ·	McCann et al.	2008/0276303		11/2008	
	Montemurro et al.	2008/0298333		12/2008	
	McCann et al. McCann et al.	2009/0010399 2009/0031138			Kim et al. Nakhjiri
	McCann et al.	2009/0031138			Kim et al.
	McCann et al.	2009/0047922			Buckley et al.
10,142,921 B2 11/2018	McCann et al.	2009/0047974		2/2009	
	McCann et al.	2009/0067326			Perrot et al.
	McCann et al.	2009/0067397	A1*	3/2009	Seok H04L 41/00
	Montemurro et al. Bajko et al.	2000/0116647	A 1	5/2000	370/338
	McCann et al.	2009/0116647 2009/0156213		5/2009 6/2009	Korus et al.
	McCann et al.	2009/0130213			Spinelli et al. Ogawa et al.
	Montemurro et al.	2009/0245184			Torres et al.
11,166,226 B2 11/2021	McCann et al.	2009/0247111			Sennett et al.
	Montemurro et al.	2009/0252165		10/2009	Zhang et al.
, ,	Montemurro et al.	2009/0296688	A1	12/2009	Bakker et al.
	McCann et al. McCann et al.	2009/0296689		12/2009	Bakker et al.
	McCann et al.	2009/0298458			Bakker et al.
	Mansour	2009/0310692			Kafle et al.
2002/0141369 A1 10/2002		2009/0325566	Al*	12/2009	Bell H04W 8/22
2002/0159418 A1 10/2002	Rudnick et al.	2010/0110021	A 1	5/2010	455/419
	Bright et al.	2010/0118831 2010/0146272			Chen et al. Centonza et al.
	Raphaeli et al.	2010/0146272			Hofer et al.
2003/0117984 A1 6/2003 2003/0134636 A1 7/2003	Gavette Sundar et al.	2010/0109933			Ha et al.
	Adachi et al.	2010/0136136			Marcellino et al.
	Kallio	2010/0255864			Alfano et al.

(56)	Referen	nces Cited			39478 A1 18037 A1	12/2013 1/2014	Edge et al. Shanmugavadivel et al.
U.S.	PATENT	DOCUMENTS		2014/00	50167 A1	2/2014	Smedman et al.
2010/0271978 A1	10/2010	Gupta et al.		2014/00	50209 A1 73356 A1	3/2014	Bajko et al. Siomina et al.
2010/0275249 A1	10/2010	McCann et al.			78935 A1 86134 A1	3/2014	Sun Smadi et al.
2010/0279684 A1 2010/0293293 A1	11/2010	Salkintzis Beser			91987 A1		Lee et al.
2010/0325714 A1	12/2010	Tyer et al.			01441 A1		Edstrom et al.
2011/0019653 A1 2011/0028093 A1	1/2011	Seok Patel et al.			64763 A1 42985 A1		Cherian et al. Kneckt et al.
2011/0028093 A1 2011/0040969 A1		Yao et al.		2014/02	93978 A1	10/2014	Yang et al.
2011/0047382 A1		Wang et al.			31641 A1 48702 A1		Ong et al. Chatterton
2011/0055218 A1 2011/0072101 A1		Capuozzo et al. Forssell et al.			73765 A1		Lee et al.
2011/0103232 A1*		Sood	H04L 63/20		18018 A1		Huang et al.
2011/0112252 41	5/2011	77 1 4 1	370/241		53414 A1 22153 A1		McCann et al. McCann et al.
2011/0113252 A1 2011/0149806 A1		Krischer et al. Verma et al.					
2011/0149938 A1	6/2011	Bajko			FOREIG	N PATE	NT DOCUMENTS
2011/0154018 A1 2011/0162060 A1		Edstrom et al. Vijayakumar et al.		CN	101141	259 A	3/2008
2011/0188391 A1		Sella et al.		CN		2788 A	3/2008
2011/0216743 A1		Bachmann et al. Calhoun et al.		CN		)442 A	3/2008
2011/0274082 A1 2011/0280227 A1		McCann et al.		CN CN		2388 A 7384 A	7/2008 12/2008
2011/0286405 A1		Kim et al.		CN	101379	9801 A	3/2009
2012/0008605 A2 2012/0017267 A1		Montemurro et al. McCann et al.		CN CN		5949 A 3151 A	3/2009 11/2009
2012/0054106 A1	3/2012	Stephenson et al.		CN		2539 A	3/2010
2012/0057568 A1 2012/0076117 A1		Lim et al. Montemurro et al.		CN CN		0417 A 0111 A	7/2010 6/2011
2012/0076117 A1 2012/0076118 A1	3/2012	Montemurro et al.		CN		9303 A	10/2011
2012/0099476 A1		Mahaffy et al.		EP		0154 A1	5/2008
2012/0106514 A1 2012/0116886 A1		Zheng et al. Manku		EP EP		818 A2 5090 A1	5/2008 7/2009
2012/0134349 A1	5/2012	Jung et al.		EP	2093	3967 A2	8/2009
2012/0165056 A1 2012/0182970 A1		Kim et al. Ding et al.		EP EP		5242 A1 1122 A2	4/2012 11/2013
2012/0182970 A1 2012/0191780 A1		Sato et al.		EP		5712 B1	6/2019
2012/0218918 A1		Takae et al.		EP		3105 A1	12/2019
2012/0230308 A1 2012/0239755 A1*		Saito et al. Filgueiras	H04W 76/40	JP JP	2002314 2004186		10/2002 7/2004
		· ·	709/206	JP	2008537	657 A	9/2008
2012/0243524 A1 2012/0244902 A1		Verma et al. Saito et al.		JP TW	2008544	1588 A 1966 A1	12/2008 11/2009
2012/0246468 A1		Gabor		WO	0245	5456 A1	6/2002
2012/0281609 A1		Kasslin et al.		WO		2218 A1	11/2003
2012/0296986 A1 2013/0012260 A1		Hassan et al. Salkintzis et al.		WO WO		2007 A2 3824 A1	7/2007 7/2007
2013/0028245 A1	1/2013	Oerton et al.		WO	2007103	3055 A2	9/2007
2013/0034023 A1 2013/0039275 A1	2/2013	Jung Patil et al.		WO WO	2007116	5337 A2 5213 A1	10/2007 5/2008
2013/0051303 A1	2/2013	Huang et al.		WO	2008049	214 A1	5/2008
2013/0064175 A1		Pandey et al. Jung et al.		WO WO	2008107	7306 A1 8093 A2	9/2008 5/2009
2013/0065627 A1 2013/0065633 A1	3/2013 3/2013	Sridhara et al.		wo		861 A1	8/2009
2013/0066936 A1		Krishnan et al.		WO		5307 A2	5/2011
2013/0070738 A1 2013/0070739 A1		McCann et al. McCann et al.		WO WO	2011073 2011115	5449 A2	6/2011 9/2011
2013/0072248 A1	3/2013	Bajko		WO	2011132	2174 A1	10/2011
2013/0109313 A1 2013/0109314 A1		Kneckt et al. Kneckt et al.		WO WO		0611 A2 1421 A2	5/2012 7/2012
2013/0148643 A1	6/2013	Abraham et al.		,,,,	201209	121 112	7,2012
2013/0166759 A1		Rajamani et al.			OTI	HER PU	BLICATIONS
2013/0170351 A1 2013/0176897 A1		Reznik et al. Wang et al.					
2013/0177002 A1	7/2013	Sun et al.			-		URN Information"; IEEE 802.11-
2013/0208582 A1 2013/0227152 A1		Wijnands et al. Lee et al.			); Jan. 18, 20		
2013/0231151 A1	9/2013	Kneckt et al.					r Emergency Calling using Internet nework-10; Jul. 27, 2009; 74 pages.
2013/0259034 A1 2013/0259038 A1		Klein et al. Anantharam et al.					sions to the Emergency Services
2013/0259038 A1 2013/0259040 A1		Anantharam et al.		Architect	ure for deali	ng with U	Inauthenticated and Unauthorized
2013/0262850 A1		Canpolat et al.		Devices"; 38 pages.		t-unauther	nticated-access-06.txt; Apr. 30, 2013;
2013/0276076 A1 2013/0281056 A1		Gupta et al. Abraham et al.				ormation	Technology—Telecommunications
2013/0282793 A1	10/2013	Swings et al.		and Infor	mation Exch	ange bety	veen Systems-Local and Metro-
2013/0316705 A1	11/2013	Kneckt et al.		politan A	rea Networks	—Specific	Requirements—Part 11: Wireless

#### OTHER PUBLICATIONS

LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications"; IEEE Computer Society; IEEE Std 802.11e; Nov. 11, 2005; 211 pages.

Li, Wei, et al.; "A Reliable Active Scanning Scheme for the IEEE 802.11 MAC Layer Handoff"; IEEE; 2003; 4 pages.

MAC Layer Handoff"; IEEE; 2003; 4 pages. Montemurro, Michael; "TGae Requirements and Use Cases"; IEEE 802.11-10/0093r5; Jan. 21, 2010; 6 pages.

Bajko, Gabor; "Tutorial on Location and Emergency Services"; Nokia; Sep. 10, 2008; 45 pages.

"IEEE Standard for Information Technology—Telecommunications and Information Exchange between Systems—Local and Metropolitan Area Networks—Specific Requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications"; IEEE Computer Society; IEEE Draft P802.11-REVmb/D9.2; Jul. 2011; 2778 pages; (Part 1: pp. 1-1369).

"IEEE Standard for Information Technology—Telecommunications and Information Exchange between Systems—Local and Metropolitan Area Networks—Specific Requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications"; IEEE Computer Society; IEEE Draft P802.11-REVmb/D9.2; Jul. 2011; 2778 pages; (Part 2: pp. 1370-2778).

"IEEE Standard for Information Technology—Telecommunications and Information Exchange between Systems—Local and Metropolitan Area Networks—Specific Requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications"; IEEE Computer Society; IEEE Std 802.11u; Feb. 25, 2011; 208 pages.

"IEEE Standard for Information Technology—Telecommunications and Information Exchange between Systems—Local and Metropolitan Area Networks—Specific Requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications"; IEEE Computer Society; IEEE Std 802.11k; Jun. 12, 2008; 244 pages.

"IEEE Standard for Information Technology—Telecommunications and Information Exchange between Systems—Local and Metropolitan Area Networks—Specific Requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications"; IEEE Computer Society; IEEE Std 802.11; Mar. 29, 2012; 2793 pages.

Lin, Chen-Han, et al.; "Mobile Intelligent Agent Technologies to Support Intelligent Handover Strategy"; Proceedings of the Workshop on Wireless, Ad Hoc and Sensor Network; vol. 1; 2005; 8 pages.

"Wi-Fi Peer-to-Peer (P2P) Technical Specification"; Draft Version 1.14; Wi-Fi Alliance Technical Committee P2P Task Group; Jun. 25, 2010; 22 pages.

"Draft Standard for Local and Metropolitan Area Networks: Media Independent Handover Services"; IEEE P802.21/D8.0; Dec. 2007; 343 pages.

Barber, Phillip, et al.; "GAS Version Control in 11ai"; Document: IEEE 802.11-11/1498-01-00ai; Oct. 24, 2011; 16 pages.

McCann, Stephen, et al.; U.S. Appl. No. 18/403,474, filed Jan. 3, 2024; Title: Wireless Network Service Transaction Protocol; 57 pages.

McCann, Stephen, et al.; U.S. Appl. No. 18/670,198, filed May 21, 2024; Title: Discovering Network Information Available via Wireless Networks; 64 pages.

European Extended Search Report; Application No. 12847065.5; Jul. 13, 2015; 11 pages.

European Examination Report; Application No. 12847065.5; Oct. 12, 2018; 6 pages.

Korean Office Action; Application No. 10-2014-7015745; Apr. 29, 2015; 11 pages.

European Extended Search Report; Application No. 19191611.3; Sep. 9, 2019; 14 pages.

European Examination Report; Application No. 19191611.3; Jul. 23, 2021; 7 pages.

Chinese Office Action; Application No. 201910799303.7; Jan. 19, 2021; 18 pages.

Chinese Office Action; Application No. 201910799303.7; Aug. 20, 2021; 24 pages.

Taiwan Search Report; Application No. 102124777; Dec. 9, 2014; 1 page.

PCT International Search Report; Application No. PCT/CA2013/050540; Sep. 17, 2013; 3 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/CA2013/050540; Sep. 17, 2013; 3 pages. Canadian Office Action; Application No. 2,878,980; Feb. 19, 2019;

Canadian Office Action; Application No. 2,878,980; Feb. 19, 2019; 3 pages.

European Extended Search Report; Application No. 13816111.2;

Feb. 3, 2016; 7 pages. European Examination Report; Application No. 13816111.2; Mar.

29, 2017; 4 pages.

European Examination Report; Application No. 13816111.2; Dec. 4, 2017; 6 pages.

European Examination Report; Application No. 13816111.2; May 14, 2018; 4 pages.

European Summons to Attend Oral Proceedings; Application No. 13816111.2; Jan. 21, 2019; 6 pages.

European Extended Search Report; Application No. 18166755.1; Aug. 22, 2018; 6 pages.

European Examination Report; Application No. 18166755.1; Jul. 31, 2019; 4 pages.

European Summons to Attend Oral Proceedings; Application No. 18166755.1; Jan. 7, 2020; 7 pages.

European Brief Communication; Application No. 18166755.1; Apr. 23, 2020; 5 pages.

European Extended Search Report; Application No. 19172928.4; Jul. 19, 2019; 7 pages.

European Examination Report; Application No. 19172928.4; Dec. 21, 2020; 5 pages.

Taiwan Office Action; Application No. 102116774; Oct. 27, 2014; 16 pages.

Taiwan Office Action; Application No. 102116774; Jun. 12, 2015; 16 pages.

PCT International Search Report; Application No. PCT/CA2013/050362; Aug. 2, 2013; 4 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/CA2013/050362; Aug. 2, 2013; 5 pages.

Canadian Office Action; Application No. 2,872,882; Sep. 28, 2016; 4 pages.

Canadian Office Action; Application No. 2,872,882; Jun. 6, 2017; 3 pages.

European Extended Search Report; Application No. 13788377.3; Dec. 21, 2015; 8 pages.

European Examination Report; Application No. 13788377.3; Oct. 10, 2016; 6 pages.

European Examination Report; Application No. 13788377.3; Jun. 11, 2018; 7 pages.

European Extended Search Report; Application No. 19211911.3; Feb. 12, 2020; 12 pages.

Taiwan Search Report; Application No. 102122238; Dec. 24, 2014; 1 page.

Taiwan Search Report; Application No. 102122238; Sep. 21, 2015; 7 pages.

PCT International Search Report; PCT/CA2013/050539; Sep. 16, 2013; 3 pages.

PCT Written Opinion of the International Searching Authority; PCT/CA2013/050539; Sep. 16, 2013; 4 pages.

Canadian Office Action; Application No. 2,878,736; Mar. 6, 2019;

6 pages. Canadian Office Action; Application No. 2,878,736; Apr. 9, 2020; 3

pages. European Extended Search Report; Application No. 13817511.2;

Feb. 12, 2016; 9 pages.

European Examination Report; Application No. 13817511.2; Mar. 8, 2017; 5 pages.

European Examination Report; Application No. 13817511.2; Oct. 24, 2017; 4 pages.

European Extended Search Report; Application No. 19154310.7; Apr. 2, 2019; 15 pages.

#### OTHER PUBLICATIONS

European Examination Report; Application No. 19154310.7; Mar. 9, 2020; 5 pages.

PCT International Search Report; Application No. PCT/CA2014/050060; Apr. 15, 2014; 3 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/CA2014/050060; Apr. 15, 2014; 7 pages. European Extended Examination Report; Application No. 14749467.

8; Jun. 22, 2016; 8 pages. European Examination Report; Application No. 14749467.8; Dec. 7, 2018; 7 pages.

European Examination Report; Application No. 14749467.8; Jan. 2, 2020; 4 pages.

European Extended Examination Report; Application No. 21158898. 3; Jun. 8, 2021; 11 pages.

Notice of Allowance dated Mar. 30, 2022; U.S. Appl. No. 16/912,249,

filed Jun. 25, 2020; 14 pages. Office Action dated Mar. 22, 2018; U.S. Appl. No. 15/811,259, filed

Nov. 13, 2017; 70 pages. Final Office Action dated Nov. 1, 2018; U.S. Appl. No. 15/811,259,

filed Nov. 13, 2017; 18 pages. Advisory Action dated Jan. 14, 2019; U.S. Appl. No. 15/811,259,

filed Nov. 13, 2017; 2 pages. Notice of Allowance dated Feb. 25, 2019; U.S. Appl. No. 15/811,259,

filed Nov. 13, 2017; 13 pages.

Office Action dated Dec. 27, 2019; U.S. Appl. No. 16/176,467, filed Oct. 31, 2018; 92 pages.

Notice of Allowance dated Apr. 8, 2020; U.S. Appl. No. 16/176,467, filed Oct. 31, 2018; 13 pages.

Office Action dated Nov. 27, 2019; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 78 pages.

Final Office Action dated Mar. 17, 2020; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 12 pages.

Advisory Action dated May 19, 2020; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 4 pages.

Office Action dated Jun. 29, 2020; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 12 pages.

Final Office Action dated Sep. 24, 2020; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 17 pages.

Office Action dated Feb. 12, 2021; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 7 pages.

Notice of Allowance dated Jun. 23, 2021; U.S. Appl. No. 16/261,131, filed Jan. 29, 2019; 19 pages.

Notice of Allowance dated Sep. 3, 2020; U.S. Appl. No. 16/428,350, filed May 31, 2019; 42 pages.

Office Action dated Sep. 2, 2021; U.S. Appl. No. 16/912,249, filed Jun. 25, 2020; 90 pages.

Office Action dated Dec. 15, 2021; U.S. Appl. No. 16/912,249, filed Jun. 25, 2020; 28 pages.

Notice of Allowance dated Sep. 22, 2021; U.S. Appl. No. 17/072,957, filed Oct. 16, 2020; 97 pages.

Office Action dated Oct. 28, 2021; U.S. Appl. No. 17/146,189, filed Jan. 11, 2021; 97 pages.

Jan. 11, 2021; 97 pages.
PCT International Search Report; Application No. PCT/IB2011/051040; Jun. 30, 2011; 4 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/IB2011/051040; Jun. 30, 2011; 7 pages.

Taiwan Office Action; Application No. 100108467; Aug. 9, 2013; 12 pages.

PCT International Search Report; Application No. PCT/IB2011/051044; Jun. 30, 2011; 4 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/IB2011/051044; Jun. 30, 2011; 7 pages.

Canadian Office Action; Application No. 2,793,375; Oct. 18, 2013; 3 pages.

Canadian Office Action; Application No. 2,793,375; Jun. 25, 2014; 3 pages.

Canadian Office Action; Application No. 2,793,375; Jul. 10, 2015; 5 pages.

Canadian Office Action; Application No. 2,793,375; May 2, 2016; 6 pages.

Canadian Office Action; Application No. 2,793,375; Apr. 7, 2017; 4 pages.

Chinese Office Action; Application No. 201180023969.5; Oct. 30, 2014; 20 pages.

Chinese Office Action; Application No. 201180023969.5; Jul. 20, 2015; 10 pages.

European Examination Report; Application No. 11715273.6; Jan. 13, 2016; 6 pages.

European Examination Report; Application No. 11715273.6; Jan. 25, 2017; 4 pages.

Indian Office Action; Application No. 7976/CHENP/2012; Aug. 30, 2018; 6 pages.

Japanese Office Action; Application No. 2012-557644; Oct. 17, 2013; 5 pages.

Japanese Office Action; Application No. 2014-019062; Nov. 21, 2014; 4 pages.

PCT International Search Report; Application No. PCT/IB2010/002932; May 9, 2011; 3 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/IB2010/002932; May 9, 2011; 6 pages.

PCT International Search Report; Application No. PCT/IB2011/001006; Aug. 3, 2011; 4 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/IB2011/001006; Aug. 3, 2011; 9 pages.

Canadian Office Action; Application No. 2,799,291; May 28, 2014; 3 pages.

Canadian Office Action; Application No. 2,799,291; Jun. 2, 2015; 4 pages.

Chinese Office Action; Application No. 201180033223.2; Jan. 22, 2015; 15 pages.

Chinese Office Action; Application No. 201180033223.2; Oct. 10, 2015; 12 pages.

European Examination Report; Application No. 11726170.1; May 9, 2016; 8 pages.

European Examination Report; Application No. 11726170.1; Nov. 19, 2018; 6 pages.

European Extended Search Report; Application No. 19211770.3; Dec. 17, 2019; 7 pages.

PCT International Search Report; Application No. PCT/IB2011/001008; Aug. 3, 2011; 4 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/IB2011/001008; Aug. 3, 2011; 9 pages.

Canadian Office Action; Application No. 2,799,292; May 27, 2014; 3 pages.

Canadian Office Action; Application No. 2,799,292; Jun. 8, 2015; 4 pages.

Canadian Office Action; Application No. 2,799,292; Feb. 23, 2016; 4 pages.

Chinese Office Action; Application No. 201180033260.3; Jun. 3, 2015; 21 pages.

Chinese Office Action; Application No. 201180033260.3; Jan. 20, 2016; 7 pages.

European Examination Report; Application No. 11726171.9; May 9, 2016; 8 pages.

European Examination Report; Application No. 11726171.9; Nov. 20, 2018; 5 pages.

PCT International Search Report; Application No. PCT/IB2011/001023; Oct. 14, 2011; 3 pages.

PCT Written Opinion of the International Searching Authority;

Application No. PCT/IB2011/001023; Oct. 14, 2011; 5 pages. Canadian Office Action; Application No. 2,799,295; Oct. 31, 2014; 4 pages.

Canadian Office Action; Application No. 2,799,295; Feb. 24, 2016;

Chinese Office Action; Application No. 201180033296.1; Dec. 31, 2014; 14 pages.

Chinese Office Action; Application No. 201180033296.1; Dec. 16, 2015; 8 pages.

European Examination Report; Application No. 11726172.7; Feb. 10, 2015; 4 pages.

#### OTHER PUBLICATIONS

PCT International Search Report; Application No. PCT/IB2011/001018; Dec. 5, 2011; 3 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/IB2011/001018; Dec. 5, 2011; 6 pages.

Canadian Office Action; Application No. 2,799,293; Jun. 16, 2014; 2 pages.

Canadian Office Action; Application No. 2,799,293; Jul. 13, 2015; 6 pages.

Canadian Office Action; Application No. 2,799,293; Jun. 10, 2016; 5 pages.

Canadian Office Action; Application No. 2,799,293; May 17, 2017; 4 pages.

Chinese Office Action; Application No. 201180033197.3; Dec. 12, 2014; 20 pages.

Chinese Office Action; Application No. 201180033197.3; Aug. 18, 2015; 16 pages.

European Examination Report; Application No. 11733699.0; Jan. 15, 2016; 6 pages.

European Examination Report; Application No. 11733699.0; Sep. 6,

2016; 4 pages. European Examination Report; Application No. 11733699.0; Jul.

19, 2017; 4 pages. European Extended Search Report; Application No. 18157024.3;

May 25, 2018; 10 pages. PCT International Search Report; Application No. PCT/CA2012/

050635; Dec. 10, 2012; 2 pages. PCT Written Opinion of the International Searching Authority;

Application No. PCT/CA2012/050635; Dec. 10, 2012; 7 pages. Canadian Office Action; Application No. 2,848,754; Sep. 24, 2015; 4 pages.

Canadian Office Action; Application No. 2,848,754; Aug. 15, 2016; 5 pages.

5 pages. Canadian Office Action; Application No. 2,848,754; Jul. 28, 2017; 4 pages.

Chinese Office Action; Application No. 201280044612.X; Nov. 28, 2016; 15 pages.

Chinese Office Action; Application No. 201280044612.X; Jun. 23, 2017; 10 pages.

European Extended Search Report; Application No. 12831400.2; Jul. 3, 2015; 10 pages.

European Examination Report; Application No. 12831400.2; Jun. 16, 2017; 6 pages.

European Summons to Attend Oral Proceedings; Application No.

12831400.2; May 25, 2018; 9 pages. Korean Office Action; Application No. 10-2014-7008921; Mar. 23, 2015; 5 pages.

Korean Notice of Allowance; Application No. 10-2014-7008921;

Sep. 18, 2015; 3 pages. Chinese Office Action; Application No. 201810013191.3; Mar. 19,

European Extended Search Report; Application No. 19171474.0; May 23, 2019; 11 pages.

2020; 13 pages.

3 pages.

May 23, 2019; 11 pages. European Examination Report; Application No. 19171474.0; Jul.

22, 2020; 5 pages. European Examination Report; Application No. 19171474.0; Jun. 2,

2021; 7 pages. PCT International Search Report; Application No. PCT/CA2012/

050793; Jan. 16, 2013; 3 pages.

PCT Written Opinion of the International Searching Authority; Application No. PCT/CA2012/050793; Jan. 16, 2013; 5 pages. Canadian Office Action; Application No. 2,854,947; Aug. 9, 2018;

Canadian Office Action; Application No. 2,854,947; Jun. 25, 2019; 5 pages

Chinese Office Action; Application No. 201280066681.0; Mar. 10, 2017; 21 pages.

Chinese Office Action; Application No. 201280066681.0; Sep. 11, 2017; 18 pages.

Chinese Office Action; Application No. 201280066681.0; Jan. 15, 2018; 12 pages.

Chinese Reexamination Notification as Received in Co-pending Application No. 201280066681.0 on Aug. 29, 2018; 13 pages. (No English translation available).

Chinese Reexamination Notification as Received in Co-pending Application No. 201280066681.0 on Dec. 29, 2018; 13 pages. (No English translation available).

Chinese Rejection Decision as Received in Co-pending Application No. 201280066681.0 on May 31, 2019; 20 pages. (No English translation available).

Notice of Allowance dated Feb. 23, 2022; U.S. Appl. No. 17/146,189, filed Jan. 11, 2021; 19 pages.

Chinese Office Action; Application No. 201910799303.7; Jan. 26, 2022; 23 pages.

Office Action dated Jan. 4, 2024; U.S. Appl. No. 17/514,626, filed Oct. 29, 2021; 100 pages.

Notice of Allowance dated Feb. 28, 2024; U.S. Appl. No. 17/514,626, filed Oct. 29, 2021; 5 pages.

Office Action dated Feb. 15, 2023; U.S. Appl. No. 17/843,656, filed Jun. 17, 2022; 86 pages.

Final Office Action dated Aug. 17, 2023; U.S. Appl. No. 17/843,656, filed Jun. 17, 2022; 13 pages.

Notice of Allowance dated Nov. 22, 2023; U.S. Appl. No. 17/843,656, filed Jun. 17, 2022; 11 pages.

Office Action dated May 11, 2023; U.S. Appl. No. 17/877,045, filed Jul. 29, 2022; 91 pages.

Notice of Allowance dated Aug. 28, 2023; U.S. Appl. No. 17/877,045, filed Jul. 29, 2022; 9 pages.

European Extended Search Report; Application No. 23159129.8; May 11, 2023; 11 pages.

European Examination Report; Application No. 19172928.4; Oct. 21, 2021; 4 pages.

Bumiller, George; "Notes on Interworking with External Networks"; Document: IEEE 802.11-09/1272r2; Jul. 22, 2010; 156

Cao, Z., et al.; "DHCPv4 and DHCPv6 Options for Access Network Query Protocol Servers"; draft-cao-dhc-anqp-option-00; Jul. 9, 2012;

8 pages. Kneckt, Jarkko, et al.; "Active Scanning Enabling FILS"; IEEE 802.11-11/1619r1; Jan. 16, 2012; 15 pages.

Campbell, Andrew T., et al.; "Design, Implementation, and Evaluation of Cellular IP"; IEEE Personal Communications; Aug. 2000; 8 pages.

Nakano, Hiroki; "Upper Layer Data on Management Frames"; IEEE 802.11-11/1003rl; Jul. 18, 2011; 17 pages.

Bajko, Gabor; "IP Address Configuration During Association"; IEEE P802.11; Jul. 20, 2011; 5 pages.

Wi-Fi Alliance; "Wi-Fi Peer-to-Peer (P2P) Technical Specification"; Version 1.2; 2010; 159 pages.

Wi-Fi Alliance; "Wi-Fi Peer-to-Peer (P2P) Technical Specification"; Version 1.1; 2010; 159 pages.

Frikha, Mounir, et al.; "Micro Mobility in the IP Networks"; Telecommunication Systems; Apr. 2006; 16 pages.

"Proxy from FOLDOC"; Sep. 3, 2007; Retrieved from: http://foldoc.org/proxy on Dec. 17, 2019; 2 pages.

Georgantas, Konstantinos; "Fast Initial Authentication, a New Mechanism to Enable Fast WLAN Mobility"; Master of Thesis; MSc Communication Systems, School of ICT, Royal Institute of Technology, Stockholm, Sweden; Sep. 2011; 65 pages.

Gazis, Vangelis, et al.; "Towards the Functional Enhancement of 3GPP Networks with Reconfiguration Capacities"; Wireless Personal Communications; Jun. 2011; 28 pages.

Kempf, J., et al.; "An API for Service Location"; Request for Comments: 2614; Jun. 1999; 92 pages.

Juniper Networks; "P-CR 23.852 V1.2.0 SaMOG Layer 2 Solution"; SA WG2 Meeting #92; S2-123195; Barcelona, Spain; Jul. 9-13, 2012, 13 pages.

Wi-Fi Alliance; "Wi-Fi Certified Wi-Fi Direct"; Oct. 2010; 14 pages.

Stephenson, Dave, et al.; "Venue Type Assisted Network Selection"; IEEE 802.11-07/2494r1; Sep. 17, 2007; 11 pages.

#### OTHER PUBLICATIONS

Office Action dated Jun. 29, 2012; U.S. Appl. No. 12/780,603, filed May 14, 2010; 37 pages.

Office Action dated Jan. 2, 2013; U.S. Appl. No. 12/780,603, filed May 14, 2010; 35 pages.

Final Office Action dated Jun. 5, 2013; U.S. Appl. No. 12/780,603, filed May 14, 2010; 30 pages.

Office Action dated Dec. 17, 2013; U.S. Appl. No. 12/780,603, filed May 14, 2010; 27 pages.

Final Office Action dated Jun. 3, 2014; U.S. Appl. No. 12/780,603, filed May 14, 2010; 28 pages.

Notice of Allowance dated Sep. 2, 2014; U.S. Appl. No. 12/780,603, filed May 14, 2010; 7 pages.

Office Action dated Jun. 8, 2012; U.S. Appl. No. 12/780,709, filed May 14, 2010; 6 pages.

Office Action dated Aug. 23, 2012; U.S. Appl. No. 12/780,709, filed May 14, 2010; 13 pages.

Notice of Allowance dated Jan. 18, 2013; U.S. Appl. No. 12/780,709, filed May 14, 2010; 11 pages.

Office Action dated Apr. 3, 2012; U.S. Appl. No. 12/780,722, filed

May 14, 2010; 15 pages. Notice of Allowance dated Oct. 19, 2012; U.S. Appl. No. 12/780,722,

filed May 14, 2010; 6 pages. Notice of Allowance dated Feb. 5, 2013; U.S. Appl. No. 12/780,722,

filed May 14, 2010; 6 pages. Office Action dated May 2, 2012; U.S. Appl. No. 12/780,614, filed

May 14, 2010; 5 pages. Office Action dated Jul. 19, 2012; U.S. Appl. No. 12/780,614, filed

May 14, 2010; 14 pages.

Office Action dated Nov. 16, 2012; U.S. Appl. No. 12/780,614, filed May 14, 2010; 6 pages.

Office Action dated Mar. 25, 2013; U.S. Appl. No. 12/780,614, filed May 14, 2010; 10 pages.

Final Office Action dated Jul. 19, 2013; U.S. Appl. No. 12/780,614, filed May 14, 2010; 7 pages.

Notice of Allowance dated Oct. 31, 2013; U.S. Appl. No. 12/780,614, filed May 14, 2010; 7 pages.

Office Action dated Nov. 16, 2012; U.S. Appl. No. 13/045,622, filed Mar. 11, 2011; 19 pages.

Final Office Action dated Jul. 12, 2013; U.S. Appl. No. 13/045,622, filed Mar. 11, 2011; 17 pages.

Office Action dated Oct. 11, 2012; U.S. Appl. No. 13/045,658, filed Mar. 11, 2011; 11 pages.

Final Office Action dated May 15, 2013; U.S. Appl. No. 13/045,658, filed Mar. 11, 2011; 11 pages.

Advisory Action dated Jul. 26, 2013; U.S. Appl. No. 13/045,658, filed Mar. 11, 2011; 3 pages.

Office Action dated Sep. 23, 2016; U.S. Appl. No. 13/045,658, filed Mar. 11, 2011; 77 pages.

Notice of Allowance dated Nov. 18, 2016; U.S. Appl. No. 13/045,658,

filed Mar. 11, 2011; 7 pages. Office Action dated Jul. 12, 2013; U.S. Appl. No. 13/234,799, filed

Sep. 16, 2011; 16 pages. Notice of Allowance dated Jan. 30, 2014; U.S. Appl. No. 13/234,799,

filed Sep. 16, 2011; 7 pages. Office Action dated Apr. 20, 2015; U.S. Appl. No. 14/298,289, filed

Jun. 6, 2014; 10 pages.

Final Office Action dated Aug. 5, 2015; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 34 pages.

Advisory Action dated Oct. 15, 2015; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 3 pages.

Office Action dated Nov. 16, 2015; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 13 pages.

Final Office Action dated Mar. 21, 2016; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 21 pages.

Advisory Action dated Jun. 8, 2016; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 4 pages.

Office Action dated Aug. 23, 2016; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 8 pages.

Final Office Action dated Jan. 3, 2017; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 13 pages.

Office Action dated Mar. 30, 2017; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 7 pages.

Notice of Allowance dated Jun. 14, 2017; U.S. Appl. No. 14/298,289, filed Jun. 6, 2014; 8 pages.

Office Action dated Jul. 11, 2013; U.S. Appl. No. 13/407,444, filed Feb. 28, 2012; 14 pages.

Office Action dated Dec. 31, 2013; U.S. Appl. No. 13/407,444, filed Feb. 28, 2012; 11 pages.

Final Office Action dated Jun. 3, 2014; U.S. Appl. No. 13/407,444, filed Feb. 28, 2012; 11 pages.

Notice of Allowance dated Sep. 17, 2014; U.S. Appl. No. 13/407,444, filed Feb. 28, 2012; 5 pages.

Office Action dated Feb. 4, 2014; U.S. Appl. No. 13/548,864, filed Jul. 13, 2012; 15 pages.

Final Office Action dated Jul. 11, 2014; U.S. Appl. No. 13/548,864, filed Jul. 13, 2012; 10 pages.

Office Action dated Oct. 30, 2014; U.S. Appl. No. 13/548,864, filed Jul. 13, 2012; 10 pages.

Notice of Allowance dated May 1, 2015; U.S. Appl. No. 13/548,864, filed Jul. 13, 2012; 14 pages.

Office Action dated Jan. 14, 2014; U.S. Appl. No. 13/469,618, filed May 11, 2012; 28 pages.

Final Office Action dated Jul. 9, 2014; U.S. Appl. No. 13/469,618,

filed May 11, 2012; 31 pages. Office Action dated Jan. 21, 2015; U.S. Appl. No. 13/469,618, filed May 11, 2012; 26 pages.

Notice of Allowance Jul. 23, 2015; U.S. Appl. No. 13/469,618, filed May 11, 2012; 15 pages.

Office Action dated Dec. 31, 2014; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 19 pages.

Final Office Action dated Aug. 27, 2015; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 26 pages

Advisory Action dated Dec. 2, 2015; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 3 pages.

Advisory Action dated Jan. 20, 2016; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 4 pages.

Office Action dated Jun. 13, 2016; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 58 pages.

Final Office Action dated Dec. 14, 2016; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 33 pages.

Advisory Action dated Mar. 13, 2017; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 11 pages.

Office Action dated Mar. 28, 2017; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 24 pages.

Final Office Action dated Dec. 8, 2017; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 36 pages.

Office Action dated Jun. 13, 2018; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 39 pages.

Final Office Action dated Oct. 18, 2018; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 32 pages.

Advisory Action dated Jan. 29, 2019; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 4 pages.

Office Action dated Apr. 5, 2019; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 34 pages.

Final Office Action dated Oct. 18, 2019; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 40 pages.

Advisory Action dated Jan. 7, 2020; U.S. Appl. No. 13/547,880, filed Jul. 12, 2012; 11 pages.

Office Action dated Mar. 25, 2020; U.S. Appl. No. 13/547,880, filed

Jul. 12, 2012; 36 pages. Notice of Allowance dated Jun. 17, 2020; U.S. Appl. No. 13/547,880,

filed Jul. 12, 2012; 9 pages. Office Action dated Jun. 30, 2015; U.S. Appl. No. 13/836,759, filed

Mar. 15, 2013; 24 pages. Notice of Allowance dated Nov. 18, 2015; U.S. Appl. No. 13/836,759,

filed Mar. 15, 2013; 33 pages. Office Action dated Mar. 31, 2016; U.S. Appl. No. 14/854,685, filed

Sep. 15, 2015; 56 pages. Final Office Action dated Sep. 16, 2016; U.S. Appl. No. 14/854,685,

filed Sep. 15, 2015; 18 pages.

#### OTHER PUBLICATIONS

Notice of Allowance dated Nov. 23, 2016; U.S. Appl. No. 14/854,685, filed Sep. 15, 2015; 13 pages.

Office Action dated Apr. 8, 2016; U.S. Appl. No. 14/952,574, filed Nov. 25, 2015; 75 pages.

Final Office Action dated Oct. 20, 2016; U.S. Appl. No. 14/952,574, filed Nov. 25, 2015; 36 pages.

Advisory Action dated Jan. 11, 2017; U.S. Appl. No. 14/952,574, filed Nov. 25, 2015; 2 pages.

Office Action dated Feb. 15, 2017; U.S. Appl. No. 14/952,574, filed Nov. 25, 2015; 28 pages.

Notice of Allowance dated Jun. 30, 2017; U.S. Appl. No. 14/952,574, filed Nov. 25, 2015; 24 pages.

Office Action dated Aug. 11, 2017; U.S. Appl. No. 15/048,669, filed Feb. 19, 2016; 37 pages.

Notice of Allowance dated Dec. 8, 2017; U.S. Appl. No. 15/048,669, filed Feb. 19, 2016; 10 pages.

Office Action dated Nov. 16, 2018; U.S. Appl. No. 15/460,991, filed Mar. 16, 2017; 94 pages.

Notice of Allowance dated Mar. 11, 2019; U.S. Appl. No. 15/460,991, filed Mar. 16, 2017; 12 pages.

Office Action dated Feb. 22, 2018; U.S. Appl. No. 15/483,759, filed Apr. 10, 2017; 68 pages.

Notice of Allowance dated Jul. 18, 2018; U.S. Appl. No. 15/483,759, filed Apr. 10, 2017; 13 pages.

Office Action dated Sep. 11, 2018; U.S. Appl. No. 15/785,121, filed Oct. 16, 2017; 59 pages.

Notice of Allowance dated Nov. 30, 2018; U.S. Appl. No. 15/785,121, filed Oct. 16, 2017; 7 pages.

Intel, et al.; "Solution for Trusted WLAN Access to EPC"; 3GPP TSG SA WG2 Meeting #86; S2-1131481; Naantali, Finland, Jul. 11-15, 2011; 7 pages.

Cisco White Paper; "The Future of Hotspots: Making Wi-Fi as Secure and Easy to Use as Cellular"; Jun. 10, 2011; 7 pages.

European Extended Search Report; Application No. 24166176.8; Jun. 27, 2024; 9 pages.

McCann, Stephen, et al.; U.S. Appl. No. 19/029,256, filed Jan. 17, 2025; Title: Discovering Network Information Available via Wireless Networks; 64 pages.

Notice of Allowance dated Dec. 23, 2024; U.S. Appl. No. 18/403,474, filed Jan. 3, 2024; 9 pages.

Office Action dated Dec. 16, 2024; U.S. Appl. No. 18/670,198, filed May 21, 2024; 81 pages.

Notice of Allowance dated Jan. 23, 2024; U.S. Appl. No. 18/670,198, filed May 21, 2024; 5 pages.

McCann, STEPHEN, et al.; U.S. Appl. No. 19/169,695; Filing Date: Apr. 3, 2025; Title: Wireless Network Service Transaction Protocol; 58 pages.

\* cited by examiner

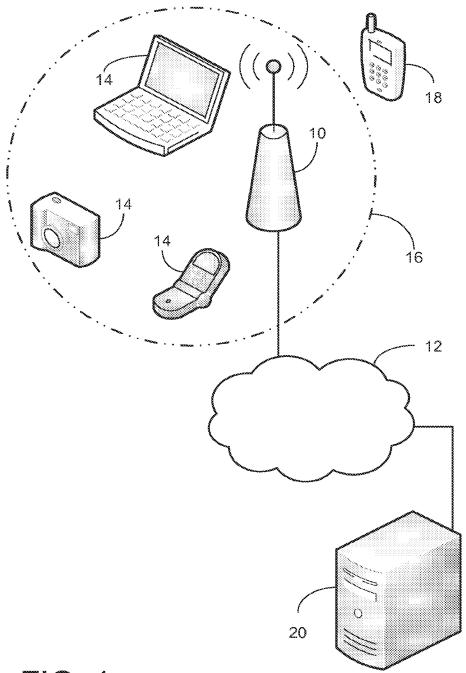


FIG. 1

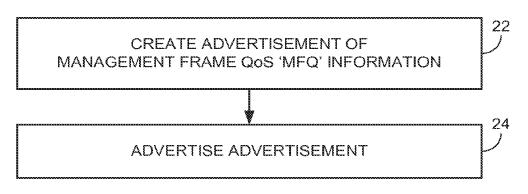


FIG. 2

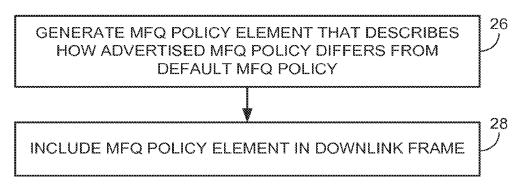


FIG. 3

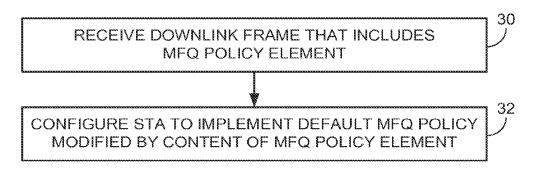
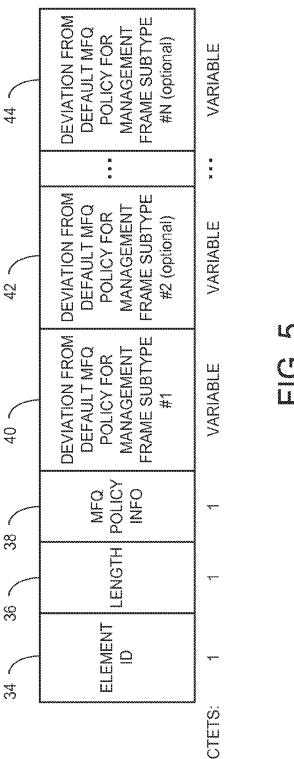


FIG. 4



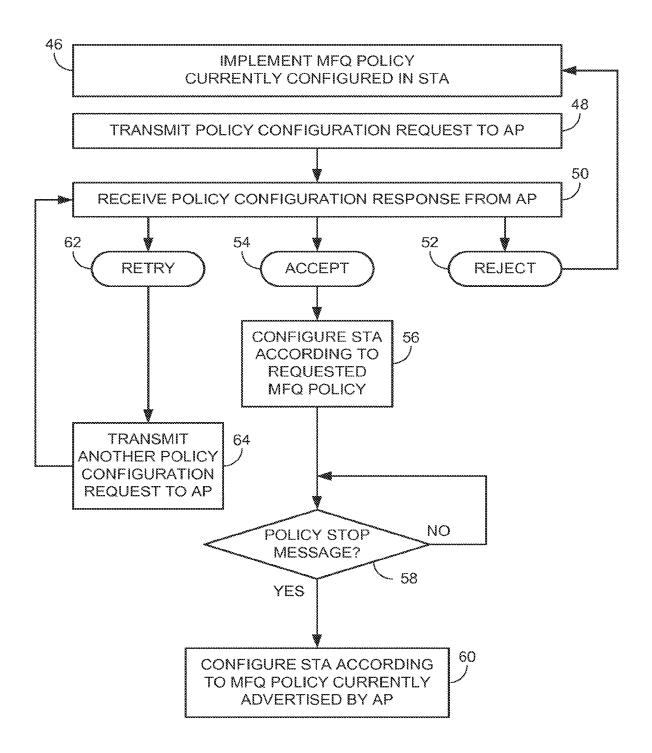


FIG. 6



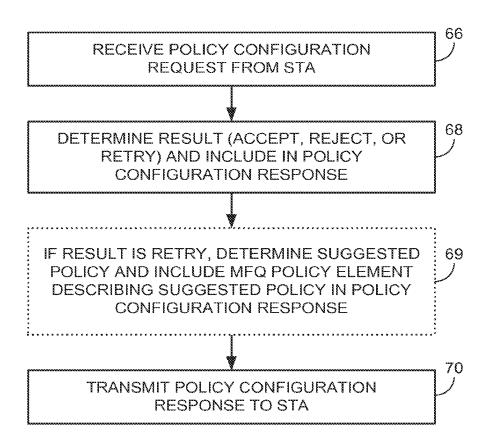


FIG. 7

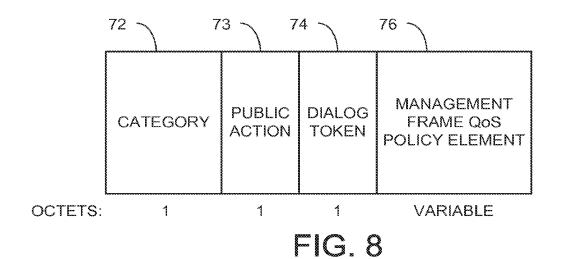

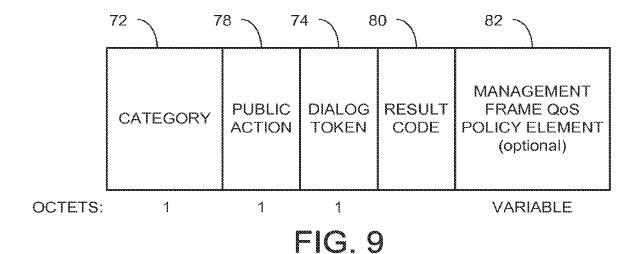

72 · 84 · 74 **PUBLIC** DIALOG **CATEGORY** ACTION TOKEN 1 1 1 OCTETS:

FIG. 10

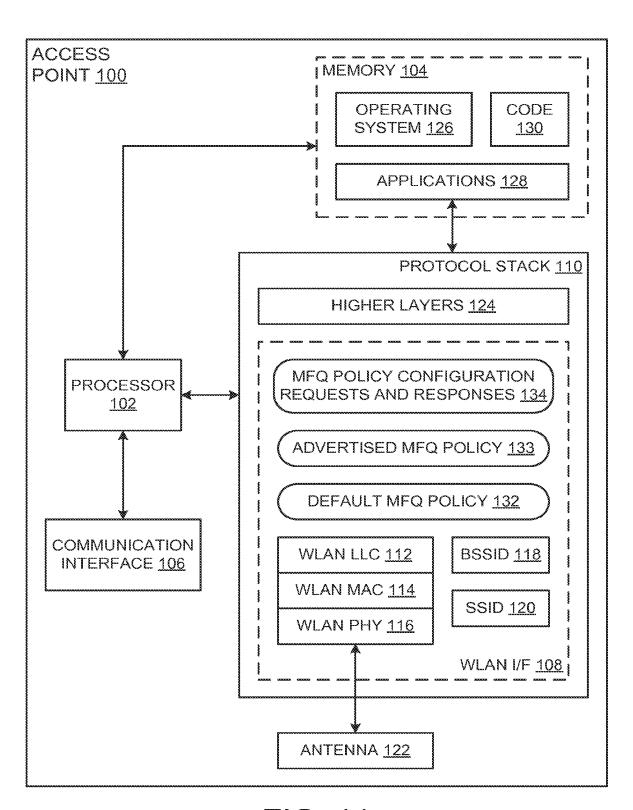


FIG. 11

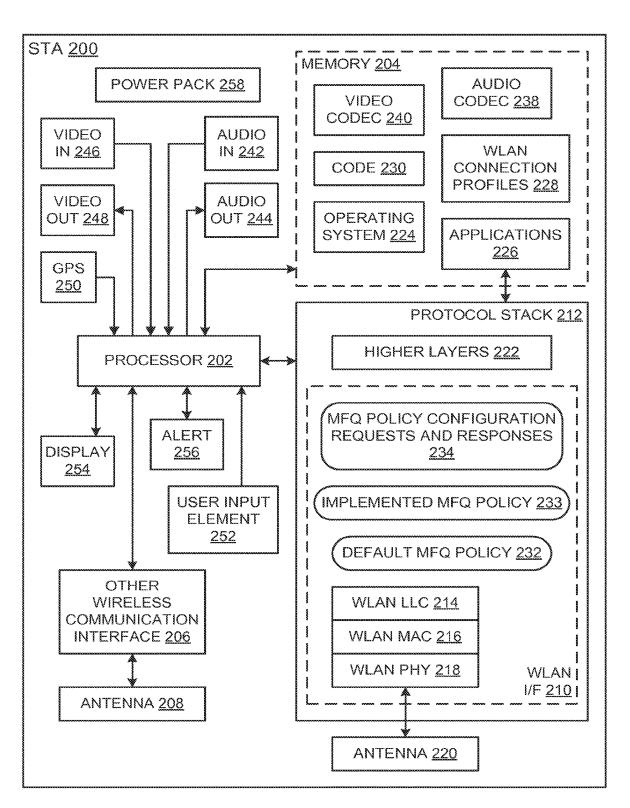


FIG. 12

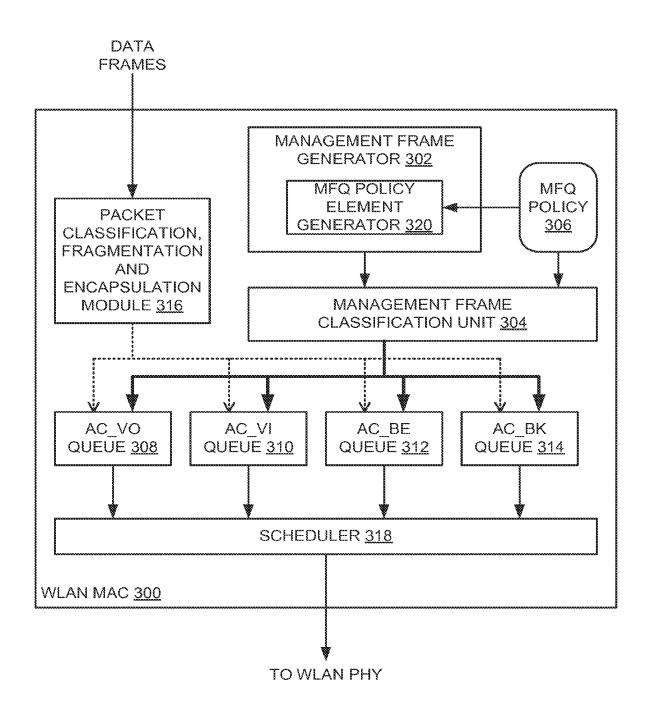


FIG. 13

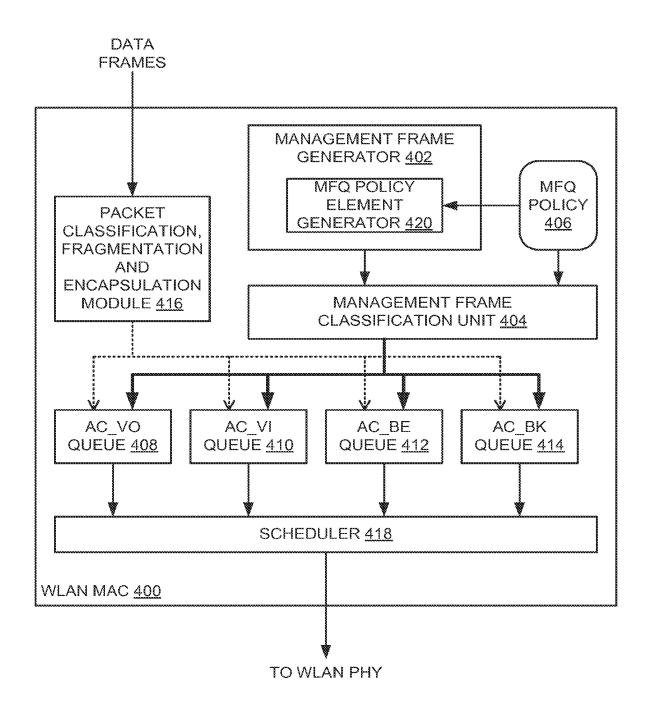


FIG. 14

1

#### NEGOTIATION OF QUALITY OF SERVICE (QoS) INFORMATION FOR NETWORK MANAGEMENT TRAFFIC IN A WIRELESS LOCAL AREA NETWORK (WLAN)

### CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation of U.S. patent application Ser. No. 17/843,656 filed Jun. 17, 2022 by Stephen McCann, et al. entitled, "Negotiation of Quality of Service (QOS) Information for Network Management Traffic in a Wireless Local Area Network (WLAN)", which is a continuation of U.S. patent application Ser. No. 17/146,189 filed Jan. 11, 2021, now U.S. Pat. No. 11,368,880, which is a continuation of U.S. patent application Ser. No. 16/428, 350 filed May 31, 2019, now U.S. Pat. No. 10,893,442, which is a continuation of U.S. patent application Ser. No. 15/460,991 filed Mar. 16, 2017, now U.S. Pat. No. 10,356, 20 662, which is a continuation of U.S. patent application Ser. No. 13/045,658 filed Mar. 11, 2011, now U.S. Pat. No. 9,615,383, which claims priority to Canadian Patent Application No. 2,696,037 filed Mar. 15, 2010 entitled "Advertisement and Dynamic Configuration of WLAN Prioritiza- 25 tion States", all of which are incorporated by reference herein as if reproduced in their entireties.

#### TECHNICAL FIELD

The technology described herein generally relates to wireless local area networks (WLANs), and more particularly, to the handling of network management traffic in a WLAN.

#### BACKGROUND

The enhanced Distributed Channel Access (EDCA) of the Institute of Electrical and Electronics Engineers (IEEE) standard 802.11 is an enhancement to the original IEEE 40 802.11 Media Access Control (MAC) sublayer and is a method of medium access described in the standard amendment document IEEE 802.11e. EDCA provides four prioritized queues for transmission, where each queue is associated with a different access category (AC). The four access 45 categories defined, for example, in IEEE standard 802.11e, in decreasing priority, are AC\_VO, AC\_VI, AC\_BE and AC\_BK, named for voice traffic, video traffic, best-effort traffic, and background traffic, respectively. The queues use a contention-based mechanism to determine the next frame 50 for transmission. The queue parameters are set such that the high priority queues have a preference for access to the wireless medium.

Management frames are the foundation of network management traffic in a Wireless Local Area Network (WLAN). 55 Current IEEE 802.11 standards dictate that, in any access point (AP) or non-AP station (STA), management frames are to be handled via the EDCA queue of highest priority.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- FIG. 1 is an illustration of an example network architecture for advertisement of management frame QoS (MFQ) information within a basic service set (BSS);
- FIG. 2 is an illustration of an example method to be 65 implemented by an access point (AP) for advertisement of MFQ information;

2

- FIG. 3 is an illustration of an example method to be implemented by an AP for including MFQ information in a downlink frame:
- FIG. 4 is an illustration of an example method to be implemented by a station (STA) associated with an AP for handling MFQ information received from the AP in a downlink frame;
- FIG. **5** is an illustration of example formatting information for a MFQ element;
- FIG. 6 is an illustration of an example method to be performed by a STA associated with an AP for requesting permission from the AP to deviate from MFQ information currently advertised by the AP, receiving a policy configuration response from the AP, and acting on the received policy configuration response;
- FIG. 7 is an illustration of an example method to be performed by an AP for receiving a policy configuration request from an associated STA for permission to deviate from MFQ information currently advertised by the AP and for responding to the policy configuration request;
- FIG. **8** is an illustration of example formatting for a policy configuration request;
- FIG. 9 is an illustration of example formatting for a policy configuration response;
- FIG. 10 is an illustration of example formatting for a policy stop message;
  - FIG. 11 is a block diagram of an example AP;
  - FIG. 12 is a block diagram of an example STA;
- FIG. 13 is a block diagram of a media access control <sup>30</sup> (MAC) sublayer module of an AP; and
  - FIG. 14 is a block diagram of a MAC sublayer module of a STA.

#### DETAILED DESCRIPTION

The disclosure can be better understood with reference to the following drawings and description. The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the disclosed technology. Moreover, in the figures, like referenced numerals designate corresponding parts or elements throughout the different views. The following description is merely exemplary in nature and is in no way intended to limit the disclosure, its application, or uses. As used herein, the term "module" refers to an Application Specific Integrated Circuit (ASIC), an electronic circuit, a processor (shared, dedicated, or group) and memory that executes one or more software or firmware programs stored in the memory, a combinational logical circuit, and/or other suitable components that provide the described functionality. Herein, the phrase "coupled with" is defined to mean directly connected to or indirectly connected through one or more intermediate components. Such intermediate components may include both hardware and software based components.

Recent amendments to the IEEE 802.11 family of standards have increased the number and type of management frames, resulting in an increase in network management traffic. If all management frames continue to be handled as frames of the highest priority, this may adversely affect overall network performance or the ability to provide Quality of Service (QOS) to data frames or both. For example, it would not be desirable for the transmission of diagnostic reports to reduce the quality of a voice call.

By way of introduction, the disclosure is related to the prioritization of management frames and are merely exemplary in nature. More particularly, the present disclosure describes the implementation of prioritization scheme(s)

that define various access categories of different management frames, where each of the access categories is associated with a respective prioritization used for transmission. An access category may be defined for a group of management frame subtypes or for an individual management frame subtype.

In the present disclosure, access categories AC BK, AC\_BE, AC\_VI and AC\_VO named for background traffic, best-effort traffic, video traffic, and voice traffic, respectively, are used to illustrate the concepts described herein. However, it is contemplated that the list of access categories may be different. If the list of access categories is different, then the number or definition or both of access-categorydependent queues in a compatible media access control (MAC) sublayer will also be different. An access category is a label given to a common set of enhanced distributed channel access (EDCA) parameters that are used, for example, by a station to contend for a channel in order to transmit information with certain priorities. In other words, each respective access category (e.g., AC\_BK, AC\_BE, AC\_VI and AC\_VO) is associated with (i.e., characterized by or indicative of) a respective priority used for transmission by a station.

Each data frame generated by an application in a non-access point (non-AP) station (STA) already has an indication of its priority. As used herein, the term "data frame" includes both a content data frame and a signaling data frame. For example, any one or any combination of the following values is an example indication of the priority of a data frame: a user priority assigned to the data frame; the IP-ToS (Internet Protocol-Type of Service) value in an IP header of the data frame; and a Differentiated Services Code Point (DSCP) value in the IP header of the data frame. The classification of a data frame to an access category by a MAC sublayer module of a non-AP STA may be based upon the data frame's indication of priority. For example, data frames having various user priorities may be classified as follows:

User Priority	Access Category
001	AC_BK
010	AC_BK
000	$AC\_BE$
011	$AC_BE$
100	AC_VI
101	AC_VI
110	AC_VO
111	AC_VO

Conventionally, management frames, in contrast to data frames, do not have an indication of priority, so there is no inherent classification of a management frame to an access category. Management frames are generated within the MAC sublayer module of an AP and/or a STA.

As proposed in the present disclosure, the prioritization scheme includes a default management frame QoS (MFQ) policy, which is a static definition of access categories for management frames. The default MFQ policy is implementable by a MAC sublayer module of an AP or non-AP STA. The default MFQ policy is known to all APs and STAs and is therefore not advertised. An example default MFQ policy includes the following definitions, where the access category of management frames not included in the following table is AC BE:

4

 Management Frame Subtypes	Access Category
Beacon	AC_VO
(Re)Association Request/Response	
Probe Request (individually addressed)	
Probe Response	
Announcement Traffic Indication Message (ATIM)	
Dissassociation	
Authentication	
Deauthentication	
Spectrum management - channel switch	
announcement	
QoS	
Block Ack	
Public - extended channel switch announcement	
Public - measurement pilot	
Public - TDLS Discovery Response	
Fast BSS Transition	
HT	
SA Query	
Protected Dual of Public Action - extended channel	
switch announcement	
Mesh Action - HWMP Mesh Path Selection	$AC_VI$
Self Protected	
Spectrum Management	AC_BE
Public	
Protected Dual of Public Action	
WNM	
Unprotected WNM	
Mesh Action	
Multihop Action	
Vendor-specific Protected	
Vendor-specific	

As proposed in the present disclosure, a MFQ policy will apply to a basic service set (BSS), which comprises an AP and any non-AP STAs associated with the AP. Therefore, the MFQ policy in effect in one BSS may differ from the MFQ policy in effect in a different BSS. In particular, the MFQ policy in effect in a BSS may differ from the default MFQ policy. The MFQ policies in effect in different BSSs belonging to the same extended service set (ESS) may be identical to one another, but this is not necessary. The MFQ policy in effect in a BSS may change over time. The prioritization scheme for management frames of the present disclosure is therefore dynamic in that the prioritization scheme allows for changes over time in the definition of access categories for management frame subtypes.

Furthermore, as proposed herein, the AP of the BSS will determine the MFQ policy that is currently in effect in the BSS and transmit management frames according that policy. The AP advertises MFQ information that describes how the MFQ policy currently in effect in the BSS differs from the default MFQ policy. Therefore, the MFQ policy currently in effect in a BSS may be referred to as the advertised MFQ policy, even though only the differences between the MFQ policy currently in effect in the BSS and the default MFQ policy are advertised. An associated STA is therefore informed of the MFQ policy currently in effect in the BSS through receipt of the advertised MFQ information.

In accordance with the present disclosure, an associated STA may follow the MFQ policy determined by the AP with which the STA is associated. Alternatively, an associated STA may follow the MFQ policy determined by the AP with which the STA is associated unless the STA has successfully negotiated a different MFQ policy with the AP. Compliance of an associated STA to the advertised MFQ policy or to the negotiated MFQ policy is not actually checked by the AP with which the STA is associated, because prioritization of management frames is handled internally in the STA prior to transmission of the frames.

#### Advertisement of MFQ Policy by AP

FIG. 1 is an illustration of an example network architecture for advertisement of MFQ information by an AP of a wireless local area network (WLAN). The WLAN may be configured using IEEE 802.11 technology, and/or or other wireless communication standards including other WLAN standards, personal area network (PAN) standards, wide area network (WAN) standards, or cellular communication standards or networks for providing wireless network communications.

In the network architecture shown in FIG. 1, a WLAN access point (AP) 10 is coupled to a network 12, possibly through a wired communication interface, a satellite interface, a Worldwide Interoperability for Microwave Access (WiMAX®) communication interface, or any other suitable communication interface. AP 10 broadcasts beacon frames. Stations 14 are WLAN devices that are within range (i.e., within communication range) of AP 10 and are associated 20 with AP 10. AP 10 and stations 14 together form a basic service set (BSS) 16. A basic service set identifier (BSSID) identifies BSS 16, and is included in every management frame sent by AP 10 or STAs 14. The MAC address of AP 10 is often used as the BSSID. The network to which BSS 25 16 belongs is identified by its network name, referred to as a service set identifier (SSID). Unless hidden, the SSID is included in certain downlink frames, including, for example, beacon frames and probe response frames transmitted by AP

A station (STA) 18 is within range of AP 10 but is not associated with AP 10. STA 18 is therefore not part of the BSS. STA 18 may detect the existence of AP 10 by undergoing a network discovery process to identify the available wireless local area networks within range. In some implementations, the network discovery process includes the receipt by STA 18 of beacon frames broadcasted by AP 10. In some implementations, the network discovery process includes the transmission by STA 18 of a probe request frame and receipt by STA 18 of a probe response frame from 40 AP 10 in response to the probe request frame.

A server 20 is coupled to AP 10 through network 12. In the present implementation, server 20 is local to AP 10. Alternatively, server 20 may be remote to AP 10, and the coupling of server 20 to AP 10 may occur via other networks 45 in addition to network 12. For example, if server 20 is remote to AP 10, the coupling of server 20 to AP 10 may occur via the Internet.

As explained in further detail in this disclosure, AP 10 advertises MFQ information that describes how the current 50 MFQ policy in effect in BSS 16 differs from the default MFO policy, and this advertisement may be received and interpreted by associated STAs, such as STAs 14, and by non-associated STAs, such as STA 18. Upon receipt of the advertised MFQ policy, a classification of management 55 frames of the associated STA may be adjusted in accordance with the advertised MFQ policy. A non-associated STA, such as STA 18, may use Access Network Query Protocol (ANQP) to query an AP, such as AP 10, for the advertised MFQ policy. For example, a non-associated STA that is 60 actively scanning may issue a probe request or a Generic Advertisement Service (GAS) request on an AP's channel in order to determine what MFQ policy the AP is implementing. However, such a non-associated STA may choose not to follow that MFQ policy. It should be noted that AP 10 65 transmits management frames according the current MFQ policy in effect (i.e., being implemented) within BSS 16.

6

FIG. 2 illustrates an example method to be implemented by an AP for advertisement of MFQ information. At 22, the AP creates an advertisement of MFQ information that describes how the current MFQ policy in effect in the BSS differs from the default MFQ policy. At 24, the AP advertises the advertisement, thus advertising the current MFQ policy in effect in the BSS (i.e., the current MFQ policy). For the sake of simplicity and brevity, the present disclosure discusses one format of the advertisement generated by the AP though those skilled in the art will appreciate that other forms of the advertisement are anticipated.

In the example method illustrated in FIG. 3, the advertisement is in the form of a MFQ policy element. The MFQ policy element defines access categories of management frames and, as mentioned above, is used to advertise and exchange MFQ policy between a STA and an AP. The AP generates a MFQ policy element at 26. At 28, the AP includes the MFQ policy element in downlink frames, for example, in beacon frames or in probe response frames or in both. As part of the process of generating a beacon frame and as part of the process of generating a probe response frame, the AP may regenerate the MFQ policy element to reflect the current MFQ policy in effect in the BSS. The MFQ policy element is not reused from an earlier beacon frame or probe response frame. Rather, the MFQ policy element is generated as part of the process of generating the beacon frame or probe response frame in which the MFQ policy element is to be included.

An AP may indicate support for management frame prioritization by setting an appropriate bit, referred to herein as MFQActivated, in the Capabilities field of the Extended Capabilities information element (IE) to a value of 1 or may indicate lack of support for management frame prioritization by setting that bit to a value of 0. One of the currently reserved bits of the Capabilities field of the Extended Capabilities IE (as defined in IEEE Std 802.11-2007) may be used for this purpose. Alternatively, presence of the MFQ policy element in the downlink frame may be an indication to STAs receiving the downlink frame that MFQ is enabled, and lack of presence of the MFQ policy element in the downlink frame may be an indication to STAs receiving the downlink frame that either the AP sending the downlink frame does not support MFQ, or the AP sending the downlink frame supports MFQ and there is no change to the current MFQ policy for the AP to advertise.

When the AP changes its current MFQ policy in effect in the BSS, the change is communicated in all the beacon frames transmitted during the Delivery Traffic Indication Message (DTIM) interval following the MFQ policy change. The change may be indicated, for example, by setting a change bit to a value of 1. The change bit may be part of the MFQ policy element or may be in another part of the beacon frame. Setting the change bit to 1 in all beacon frames transmitted during the DTIM interval following the MFQ policy change will ensure that most, if not all, STAs in the BSS will be informed of a change in MFQ policy for the BSS. For example, even if a STA is in an awake state only for beacon frames that includes DTIMs and is not awake to receive other beacon frames, that STA will still be informed of the change in MFQ policy, and therefore be prompted to check the MFQ policy element in the beacon frame. However, a STA that has set its ReceiveDTIMs parameter to "No" may not receive a beacon frame that informs of a change in MFQ policy for the BSS.

FIG. 4 illustrates an example method to be implemented by a STA associated with an AP for handling MFQ information received from the AP in a downlink frame. At 30, the

STA receives a downlink frame that includes a MFQ policy element. At **32**, the STA configures itself to implement the advertised MFQ policy. In other words, the STA configures itself to implement the default MFQ policy modified by the content of the MFQ policy element. As such, the STA assigns an access category to each management frame according to an access category assignment indicated in the MFQ policy element (i.e., the advertised MFQ policy).

FIG. 5 illustrates example formatting information for a MFQ policy element. In order that the advertisement may be 10 received by associated STAs and by non-associated STAs, the size of the MFQ policy element complies with any upper limit on the size of an element in non-associated mode. In one implementation, an Element ID field 34 which is 1 octet in length includes a value indicating that the element is a 15 MFQ policy element. A length field 36 which is also 1 octet in length stores the length of the MFQ policy element. The length of the MFQ policy element may vary, because information for multiple deviations from the default MFQ policy may be included in the MFQ policy element. A MFQ  $\,^{20}$ policy info field 38, alternatively named "Access Category Assignment Count" field 38, is 1 octet in length and includes a value indicating the number of deviations which are included in the MFQ policy element. MFQ policy info field 38 may also include a change bit to indicate whether the 25 MFQ policy has changed. The "Deviation from default MFQ policy for management frame subtype #1" field 40, alternatively named "Management Prioritization Policy for Category #1" field 40, "Access Category Assignment #1" field 40, or "Access Category Mapping #1" field 40, stores a first 30 deviation to be included in the advertised MFQ policy. Optionally, additional deviations may be provided in fields 42 and 44. Fields 40, 42 and 44 are all of variable length.

Any one or any combination of the following factors may be taken into account when determining a change to a MFQ 35 policy: detection of changes in network conditions, anticipation of changes in network conditions, detection of changes in network loading (at the BSS level or at the ESS level or both), anticipation of changes in network loading (at the BSS level or at the ESS level or both), detection of 40 changes in AP loading, anticipation of changes in AP loading, the presence or lack of a multi-media stream, detection of changes in a multi-media stream, anticipation of changes in a multi-media stream, and other operating conditions.

### Negotiated MFQ Policy

An associated non-AP STA may negotiate with the AP with which it is associated in order to deviate from the advertised MFQ policy (i.e., the configured MFQ policy). 50 FIG. 6 illustrates an example method to be performed by a STA associated with an AP for requesting permission from the AP to deviate from the advertised MFQ policy, receiving a response from the AP, and acting on the received response.

The method begins at **46** with a STA implementing the 55 MFQ policy configured in its MAC sublayer module. At **48**, the STA transmits a policy configuration request, also referred to herein as an "MFQ Policy Config Request", to the AP to request a change in the MFQ policy used to transmit management frames between the STA and the AP 60 (i.e., the responding AP). In other words, a MFQ Policy Config Request is used to negotiate a change or modification to the MFQ policy between a STA and an AP with which the STA is associated. The MFQ Policy Config Request transmitted by the STA includes or indicates a change(s) to the 65 MFQ policy being implemented. The policy configuration request may be transmitted in response to a triggering event,

8

for example, a network problem, application-related diagnostics, or a financial transaction. At **50**, the STA receives a policy configuration response from the AP.

The policy configuration request (i.e., the MFQ Policy Config Request) includes a MFQ policy element describing how a requested MFQ policy differs from the default MFQ policy. In other words, the MFQ policy element indicates a proposed change with reference to the default MFQ policy. Any one or any combination of the following factors may taken into account when determining a requested MFQ policy: detection of changes in the associated non-AP STA due to diminishing battery power levels, anticipation of changes in the associated non-AP STA due to diminishing battery power levels, detection that a current predicted motion of the non-AP STA will shortly take the non-AP STA out of radio coverage, so the requested MFQ policy prioritizes signaling frames over a poor link.

If, as shown at **52**, a policy configuration response, also referred to as a "MFQ Policy Config Response", from the AP indicates that a policy configuration request has been rejected by the AP (i.e., the proposed change(s) in the MFQ Policy Config Request has (have) been rejected), the STA that transmitted the request may continue at **46** to transmit management frames in accordance with the MFQ policy configured in its MAC sublayer module.

In this document, a "negotiated MFQ policy" is a requested MFQ policy requested in a policy configuration request that has been accepted by the AP. If, as shown at 54. a policy configuration response received from the AP indicates that a policy configuration request has been accepted by the AP (i.e., the proposed change(s) in the MFQ Policy Config Request has (have) been accepted), the STA proceeds at 56 to implement the negotiated MFQ policy by configuring its MAC sublayer module to implement the default MFQ policy modified by the content of the policy element (i.e., the proposed changes) in the policy configuration request that has been accepted. In some implementations, both the STA and the AP may transmit management frames to each other in accordance with the changes to the MFQ policy that were indicated in the MFQ Policy Config Request. The negotiated MFQ policy applies only to the associated STA that made the policy configuration request and does not apply to any other STA in the BSS.

At some point following acceptance of a policy configu-45 ration request, the AP may send a policy stop message to the STA that made the policy configuration request. Alternatively, the STA that made the policy configuration request may send a policy stop message to the AP. As long as no policy stop message has been transmitted by the AP to the STA or by the STA to the AP, the STA may continue to implement the negotiated MFQ policy. However, if the STA determines at 58 that a policy stop message has been received from the AP or transmitted by the STA, the STA may at 60 configure its MAC sublayer module according to the MFQ policy currently advertised by the AP. The AP may have changed its advertised MFQ policy during the time that the STA was configured according to the negotiated MFQ policy. After the STA has at 58 received a policy stop message from the AP or transmitted a policy stop message to the AP, the STA may wait for an advertisement of the MFQ policy currently in effect for the BSS in order to configure its MAC sublayer module in accordance with the current advertised MFQ policy.

Optionally, a policy configuration response received from the AP may indicate that the STA should retry its policy configuration request, as shown at **62**. In this case, the policy configuration response may include a suggested MFQ policy

(not shown) that the AP might accept upon request. At **64**, the STA may transmit another policy configuration request to the AP. This policy configuration request may be the same policy configuration request that was transmitted by the STA at **48**, or this policy configuration request may include a 5 MFQ policy element received from the AP describing a suggested MFQ policy (not shown) suggested by the AP, or this policy configuration request may include a different MFQ policy element describing a different MFQ policy than the previously requested MFQ policy. After transmitting the 10 other policy configuration request to the AP at **64**, the STA receives a new policy configuration response from the AP at **50** 

As an alternative to use of the policy stop message, a STA that no longer wishes to follow the negotiated MFQ policy 15 may send to its associated AP a policy configuration request that includes an MFQ policy element identical to the MFQ policy element advertised by the associated AP. It is expected that the AP will accept a policy configuration request that is requesting the MFQ policy currently implemented in the BSS.

As an alternative to use of the policy stop message, an AP that wants a STA to stop following a negotiated MFQ policy may send to the STA a policy configuration request that includes an MFQ policy element identical to the MFQ 25 policy element advertised by the associated AP. It is expected that the STA will interpret the policy configuration request as a command from the associated AP to stop following the negotiated MFQ policy and to begin following the advertised MFQ policy.

FIG. 7 illustrates an example method to be performed by an AP for receiving a policy configuration request from an associated STA for permission to deviate from a MFQ policy currently advertised by the AP and for responding to the request.

The method begins at **66** when the AP receives a policy configuration request from an associated STA. At **68**, the AP determines the result of the policy configuration request and includes the result in a policy configuration response to be transmitted to the STA. For example, the AP may determine 40 to accept the policy configuration request or to reject the policy configuration request. Alternatively, the AP may determine that the STA should retry the policy configuration request. In the case that the AP determines that the result of the policy configuration request is retry, the AP may optionally determine at **69** a suggested MFQ policy to include in its policy configuration response to the STA. It is contemplated that such a suggested MFQ policy may be more likely to be accepted by the AP than the requested MFQ policy in the policy configuration request received from the STA at 50 **66**.

Following the AP's determination of the result of the policy configuration request at **66** and its optional determination (if the result is retry) of a suggested MFQ policy to describe in a policy configuration response at **68**, the AP 55 transmits the policy configuration response to the STA at **70**.

FIG. 8 illustrates example formatting information for a policy configuration request. A policy configuration request may be implemented as a particular type of management frame called an action frame. A Category field 72 which is 60 1 octet in length is set to a value for public action. A Public Action field 73 which is 1 octet in length is set to indicate a policy configuration request frame. A dialog token field 74 which is 1 octet in length is set by the STA to a value to enable the STA to keep track of its policy configuration 65 requests. A MFQ policy element 76 field describes the particular MFQ policy that is being requested.

10

FIG. 9 illustrates example formatting information for a policy configuration response. A policy configuration response may be implemented as an action frame. Category field 72 is as described above for a policy configuration request. A Public Action field 78 which is 1 octet in length is set to indicate a policy configuration response frame. Dialog token field 74 is as described above for a policy configuration request and has the same value that was used to identify the policy configuration request for which this is a response. A Result Code field 80, alternatively named "Status Code" field 80, includes an indication that the AP accepts or rejects the policy configuration request to which the Dialog Token applies or that the STA should retry a request for a policy. An optional MFQ policy element field 82, applicable when the content of the Result Code field 80 comprises an indication that the STA should retry a request, describes how a suggested MFQ policy differs from the default MFQ policy. The STA may request the suggested MFQ policy in place of the originally requested MFQ policy.

FIG. 10 illustrates example formatting information for a policy stop message. A policy stop message may be implemented as an action frame. Category field 72 is as described above for a policy configuration request. A Public Action field 84 which is 1 octet in length is set to indicate a policy stop message. Dialog token field 74 is as described above for a policy configuration request and has the same value that was used to identify the policy configuration request for which this is a policy stop message.

## Implementation of MFQ Policy (Default, Advertised or Negotiated)

An AP or non-AP STA may configure its MAC sublayer module to implement an MFQ policy. The MFQ policy being implemented by the MAC sublayer module may be the default MFQ policy. Alternatively, the MFQ policy being implemented by the MAC sublayer module may be the default MFQ modified by an advertised MFQ policy element. Alternatively, the MFQ policy being implemented by the MAC sublayer module may be the default MFQ policy modified by a MFQ policy element in a policy configuration request that has been accepted. While a management frame is generated within the MAC sublayer module, the management frame will be assigned to an access category as defined by the MFO policy, and subsequently transmitted, using the respective access category. In the present implementation, the management frame is directed, based on its assigned access category, to one of four EDCA prioritized queues where each of the prioritized queues is associated with a respective access category. As such, in the present implementation, a management frame assigned to AC\_VO will be transmitted using a prioritization (i.e., a transmission priority) associated with AC\_VO, a management frame assigned to AC\_VI will be transmitted using a prioritization associated with AC\_VI, a management frame assigned to AC\_BE will be transmitted using a prioritization associated with AC\_BE, and a management frame assigned to AC\_BK will be transmitted using a prioritization associated with AC\_BK. In other words, each access category (e.g., AC\_VO, AC\_VI, AC\_BE and AC\_BK) is indicative of a distinct prioritization (i.e., transmission priority) used to transmit a particular type or subtype of management frame. Handling of the contents of the prioritized queues may follow IEEE 802.11 scheduling and transmission rules. For example, a frame scheduler schedules frames from the

prioritized queues to be passed to the physical (PHY) sublayer module for transmission over a channel of a wireless medium.

FIG. 11 is a block diagram of an example AP 100. AP 10 is an example of AP 100. AP 100 comprises a processor 102 5 coupled to a memory 104 and to a communication interface 106. Communication interface 106 may be a wired communication interface, a satellite interface, a Worldwide Interoperability for Microwave Access (WiMAX®) communication interface, or any other suitable communication interface. AP 10 100 also comprises a WLAN interface 108 within a protocol stack 110 that is coupled to processor 102. WLAN interface 108 comprises a logical link control (LLC) sublayer module 112, a MAC sublayer module 114 and a PHY sublayer module 116. The BSSID of AP 100 is stored in WLAN 15 interface 108, possibly in a register 118. The SSID of the WLAN supported by AP 100 is stored in WLAN interface 108, possibly in a register 120. MAC sublayer module 114 may be compatible with IEEE 802.11. AP 100 also comprises an antenna 122 coupled to PHY sublayer module 116. 20 Protocol stack 110 may comprise higher layers 124. ANQP support may be implemented in MAC sublayer module 114.

Memory 104 may store an operating system 126 to be executed by processor 102. Memory 104 may store applications 128 installed in AP 100 to be executed by processor 25 102. Examples of applications 128 include a configuration application that enables a WLAN administrator to configure parameters of the WLAN, for example, its SSID and BSSID(s). Memory 104 may store code 130 which, when executed by processor 102, results in one or more of the 30 methods illustrated in FIGS. 2, 3, and 7.

A default MFQ policy 132 is not advertised in the BSS. Depending upon implementation, default MFQ policy 132 may be stored in WLAN interface 108 (as illustrated) or in memory 104. Depending upon implementation, an adver- 35 tised MFQ policy 133 currently implemented by WLAN MAC sublayer 114 may be stored in WLAN interface 108 (as illustrated) or in memory 104. AP 100 is able to advertise how advertised MFQ policy 133 differs from default MFQ policy 132. AP 100 may optionally store data 134 related to 40 one or more policy configuration requests that have previously been received from one or more associated STAs and related to one or more policy configuration responses that have previously been transmitted to one or more associated STAs. Data 134 may be implemented, for example, as 45 records in a table, where the records are maintained on a per-AID (association identifier) basis. Depending upon implementation, data 134 may be stored in WLAN interface 108 (as illustrated) or in memory 104.

AP 100 may comprise other elements that, for clarity, are 50 not illustrated in FIG. 11. Similarly, AP 100 may comprise a subset of the elements illustrated in FIG. 11.

FIG. 12 is a block diagram of an example STA, for example, any one of STAs 14. An STA 200 comprises a processor 202 coupled to a memory 204 and optionally to 55 one or more other wireless communication interfaces 206. For example, wireless communication interfaces 206 may comprise a short-range wireless communication interface such as a wireless personal area network interface, possibly compatible with the Bluetooth Specification Version 4.0 60 published 30 Jun. 2010 or its official successors. In another example, wireless communication interfaces 206 may comprise a wireless wide area network (WWAN) interface such as for cellular communications. One or more antennas 208 may be coupled to respective ones of the wireless communication interfaces 206. An antenna may be shared among more than one wireless interface.

12

STA 200 also comprises a WLAN interface 210 within a protocol stack 212 that is coupled to processor 202. WLAN interface 210 comprises a LLC sublayer module 214, a MAC sublayer module 216 and a PHY sublayer module 218. MAC sublayer module 216 may be compatible with IEEE 802.11. STA 200 also comprises an antenna 220 coupled to PHY sublayer module 218. Protocol stack 212 may comprise higher layers 222.

Memory 204 may store an operating system 224 to be executed by processor 202. Memory 204 may store applications 226 installed in STA 200 to be executed by processor 202. For example, applications 226 may comprise a control application to act on MFQ policy elements received from an AP. In a further example, applications 226 may comprise a Voice over Internet Protocol (VOIP) application. In yet another example, applications 226 may comprise a telephony application. Memory 204 may also store data (not shown) used by operating system 224 and applications 226.

Memory 204 may store one or more WLAN connection profiles 228, each identifying a wireless local area network by its SSID, as known in the art.

Memory 204 may store code 230 which, when executed by processor 202, results in one or more of the methods illustrated in FIGS. 4 and 6. Receipt of a downlink frame and handling of MFQ information describing an advertised MFQ policy may be implemented in MAC sublayer module 216. ANQP support may be implemented in MAC sublayer module 216.

A default MFQ policy 232 is not advertised in the BSS. Depending upon implementation, default MFQ policy 232 may be stored in WLAN interface 210 (as illustrated) or in memory 204. Depending upon implementation, a MFQ policy 233 currently implemented by WLAN MAC sublayer 216 may be stored in WLAN interface 210 (as illustrated) or in memory 204. STA 200 may optionally store data 234 related to one or more policy configuration requests made by the STA and related to one or more policy configuration responses received by the STA. STA 200 may store an indication of its requested MFQ policy and then overwrite currently implemented MFQ policy 233 with the negotiated MFQ policy upon receiving acceptance of the policy configuration request.

Memory 204 may store an audio coder-decoder (codec) 238 or a video codec 240 or both. STA 200 may comprise an audio input element 242 and an audio output element 244, both coupled to processor 202. STA 200 may comprise a video input element 246 and a video output element 248, both coupled to processor 202.

STA **200** may comprise a Global Positioning System (GPS) module **250** coupled to processor **202**.

STA 200 may comprise one or more user input elements 252 coupled to processor 202. Examples of user input elements include a keyboard, a keypad, a touchscreen, a joystick, a thumbwheel, a roller, a touchpad, a trackpad, a capacitive touch pad, an optical touch pad, and any other type of navigation actuator.

STA 200 may comprise one or more user output elements coupled to processor 202, of which a display 254 is illustrated. In the event that display 254 is a touchscreen, it functions also as a user input element.

STA 200 may comprise one or more alert components 256 coupled to processor 202, to be activated in order to alert a user, for example, by sounding a buzzer, playing a ringtone, emanating light, or vibrating.

STA 200 may include mechanical interfaces, such as a power connector jack, a data interface port such as a

Universal Serial Bus (USB) port, a headphone jack, and other mechanical interfaces that are not explicitly shown.

STA 200 comprises a power pack 258 that provides power to the other components of STA 200.

STA 200 may comprise other elements that, for clarity, are 5 not illustrated in FIG. 12. Similarly, STA 200 may comprise a subset of the elements illustrated in FIG. 12.

FIG. 13 is a block diagram of a MAC sublayer module 300 of an AP, for example, MAC sublayer module 114 of AP 100. MAC sublayer module 300 uses a management frame generator 302 to generate management frames which are distributed to different memory queues by a management frame classification unit 304. Distribution to the different memory queues is done according to a MFQ policy 306 currently implemented in the BSS to which the AP belongs. 15 Management frames of the type or types for which MFQ policy 306 defines the access category AC\_VO are routed by management frame classification unit 304 through memory queue 308. Management frames of the type or types for which MFO policy 306 defines the access category AC VI 20 are routed by management frame classification unit 304 through memory queue 310. Management frames of the type or types for which MFQ policy 306 defines the access category AC\_BE are routed by management frame classification unit 304 through memory queue 312. Management 25 frames of the type or types for which MFQ policy 306 defines the access category AC\_BK are routed by management frame classification unit 304 through memory queue 314. In some implementations, MFQ policy 306 defines an access category other than the AC\_VO access category associated with the highest priority queue 308 for at least one management frame type.

Data frames (content frames and signaling frames) received at MAC sublayer module 300 from an LLC sublayer module (not shown) of the AP, for example, LLC 35 sublayer module 112, may be processed by a packet classification, fragmentation and encapsulation module 316 in MAC sublayer module 300 and then subsequently routed through the same memory queues as the management frames.

A scheduler 318 schedules frames from memory queues 308, 310, 312 and 314 to be passed to a PHY sublayer module of the AP, for example, PHY sublayer module 116. For example, IEEE 802.11e has separate minimum and maximum values for each access category. Within each 45 access category, a random number is generated that represents a wait time as multiplied by a "slot time". In IEEE 802.11a/g, a slot time is 9 microseconds. Once the wireless medium is quiet or unoccupied, a countdown begins before transmission. Each count is 9 microseconds in real time. For 50 AC VO queue 308, the countdown begins at a value between 31 and 127. For AC\_VI queue 310, the countdown begins at a value between 127 and 255. For AC\_BE queue **312**, the countdown begins at a value between 255 and 511. For AC\_BK queue 314, the countdown begins at a value 55 between 511 and 1023. If the countdown is interrupted, it is paused until the wireless medium is once again quiet, and is then resumed from the value at which it was paused. If the countdowns for different queues begin at the same time, traffic in a higher priority queue will gain access to the 60 wireless medium ahead of traffic in a lower priority queue.

MAC sublayer module 300 further comprises a MFQ policy element generator 320 which generates a MFQ policy element based on MFQ policy 306. As described previously, a MFQ policy element may be included in certain management frames generated by management frame generator 302 to advertise an advertised MFQ policy. For example, a MFQ

14

policy element generated by MFQ policy element generator 320 may be included in a downlink frame such as a beacon frame or a probe response frame that is generated by management frame generator 302. It should be noted that, while not explicitly shown, MAC sublayer module 300 may also implement ANQP support.

FIG. 14 is a block diagram of a MAC sublayer module 400 of a STA, for example, MAC sublayer module 216 of STA 200. MAC sublayer module 400 uses a management frame generator 402 to generate management frames which are distributed to different memory queues by a management frame mapping unit 404. Distribution to the different memory queues is done according to a MFQ policy 406. Management frames of the type or types for which MFQ policy 406 defines the access category AC\_VO are routed by management frame classification unit 404 through memory queue 408. Management frames of the type or types for which MFQ policy 406 defines the access category AC\_VI are routed by management frame classification unit 404 through memory queue 410. Management frames of the type or types for which MFQ policy 406 defines the access category AC\_BE are routed by management frame classification unit 404 through memory queue 412. Management frames of the type or types for which MFQ policy 406 defines the access category AC\_BK are routed by management frame classification unit 404 through memory queue 414. In some implementations, MFQ policy 406 defines an access category other than the AC\_VO access category associated with the highest priority queue 408 for at least one management frame type.

It is contemplated that MFQ policy **406** is an advertised MFQ policy. It is also contemplated that MFQ policy **406** is a negotiated MFQ policy accepted by an AP with which the STA is associated. It is also contemplated that MFQ policy **406** is the default MFQ policy.

Data frames (content frames and signaling frames) received at MAC sublayer module 400 from an LLC sublayer module (not shown) of the STA, for example, LLC sublayer module 214, may be processed by a packet classification, fragmentation and encapsulation module 416 in MAC sublayer module 400 and then subsequently routed through the same memory queues as the management frames

A scheduler 418 schedules frames from memory queues 408, 410, 412 and 414 to be passed to a PHY sublayer module of the STA, for example, PHY sublayer module 218. For example, IEEE 802.11e has separate minimum and maximum values for each access category. Within each access category, a random number is generated that represents a wait time as multiplied by a "slot time". In IEEE 802. 11a/g, a slot time is 9 microseconds. Once the wireless medium is quiet or unoccupied, a countdown begins before transmission. Each count is 9 microseconds in real time. For AC\_VO queue 408, the countdown begins at a value between 31 and 127. For AC\_VI queue 410, the countdown begins at a value between 127 and 255. For AC BE queue 412, the countdown begins at a value between 255 and 511. For AC\_BK queue 414, the countdown begins at a value between 511 and 1023. If the countdown is interrupted, it is paused until the wireless medium is once again quiet, and is then resumed from the value at which it was paused. If the countdowns for different queues begin at the same time, traffic in a higher priority queue will gain access to the wireless medium ahead of traffic in a lower priority queue.

MAC sublayer module **400** further comprises a MFQ policy element generator **420** which generates a MFQ policy element based on a requested MFQ policy. As described

50

15

previously, the MFQ policy element may be included in a policy configuration request generated by management frame generator **402** to negotiate a deviation from an advertised MFQ policy. It should be noted that, while not explicitly shown, MAC sublayer module **400** may also implement 5 ANQP support.

Although the subject matter has been described in language specific to structural features and/or methodological acts, it is to be understood that the subject matter defined in the appended claims is not necessarily limited to the specific features or acts described above. Rather, the specific features and acts described above are disclosed as example forms of implementing the claims.

What is claimed is:

A method for a wireless station, the method comprising: 15 receiving, from an access point, an extended capabilities element having an indication of support of prioritization of management frames;

receiving, from the access point, a management frame quality of service (MFQ) policy that defines an access 20 category used for transmitting a first type of management frame, wherein the management frames are distinct from data frames; and

transmitting a policy configuration request to request a change to the MFQ policy.

- 2. The method of claim 1, wherein the data frame is a content data frame or a signaling data frame.
- 3. The method of claim 1, wherein the MFQ policy comprises an MFQ policy element including an element identifier (ID) field identifying the MFQ policy element, a 30 length field indicating the length of the MFQ policy element, and a policy information field indicating a number of differences from a default MFQ policy.
- **4**. The method of claim **1**, wherein the policy configuration request includes an MFQ policy element indicative of 35 the requested change.
- **5**. The method of claim **1**, further comprising receiving, from the access point, a policy configuration response in response to the policy configuration request.
- **6**. The method of claim **5**, wherein the policy configuration response includes an indication that the change has been accepted by the access point.
  - 7. The method of claim 6, further comprising:
  - transmitting management frames of the first type in accordance with the change to the MFQ policy after receiving the policy configuration response indicating that the change has been accepted.
- 8. The method of claim 5, wherein the policy configuration response includes an indication that the change has been rejected by the access point.
  - 9. The method of claim 8, further comprising:

transmitting management frames of the first type in accordance with the MFQ policy after receiving the policy configuration response indicating that the change has been rejected.

10. A mobile station, comprising:

a processor; and

memory storing instructions executable by the processor such that when executed cause the processor to:

receive, from an access point, an extended capabilities 60 element having an indication of support of prioritization of management frames;

receive, from the access point, a management frame quality of service (MFQ) policy that defines an access category used for transmitting a first type of manage16

ment frame, wherein the management frames are distinct from data frames; and

transmit a policy configuration request to request a change to the MFQ policy.

- 11. The mobile station of 30, wherein the MFQ policy comprises an MFQ policy element including an element identifier (ID) field identifying the MFQ policy element, a length field indicating the length of the MFQ policy element, and a policy information field indicating a number of differences from a default MFQ policy.
- 12. The mobile station of claim 10, wherein the policy configuration request includes an MFQ policy element indicative of the requested change.
- 13. The mobile station of claim 10, wherein the processor is further configured to receive, from the access point, a policy configuration response in response to the policy configuration request.
- 14. The mobile station of claim 13, wherein the policy configuration response includes an indication that the change has been accepted by the access point.
  - 15. A method for an access point, the method comprising: transmitting, to a mobile station, an extended capabilities element having an indication of support of prioritization of management frames;

transmitting, to the mobile station, a management frame quality of service (MFQ) policy that defines an access category used for transmitting a first type of management frame, wherein the management frames are distinct from data frames; and

receiving a policy configuration request to request a change to the MFQ policy.

- 16. The method of claim 15, wherein the MFQ policy comprises an MFQ policy element including an element identifier (ID) field identifying the MFQ policy element, a length field indicating the length of the MFQ policy element, and a policy information field indicating a number of differences from a default MFQ policy.
- 17. The method of claim 15, wherein the policy configuration request includes an MFQ policy element indicative of the requested change.
  - **18**. An access point comprising:

a processor; and

memory storing instructions executable by the processor such that when executed cause the processor to:

transmit, to a mobile station, an extended capabilities element having an indication of support of prioritization of management frames;

transmit, to the mobile station, a management frame quality of service (MFQ) policy that defines an access category used for transmitting a first type of management frame, wherein the management frames are distinct from data frames; and

receive a policy configuration request to request a change to the MFQ policy.

- 19. The access point of claim 18, wherein the MFQ policy comprises an MFQ policy element including an element identifier (ID) field identifying the MFQ policy element, a length field indicating the length of the MFQ policy element, and a policy information field indicating a number of differences from a default MFQ policy.
- 20. The access point of claim 18, wherein the policy configuration request includes an MFQ policy element indicative of the requested change.

\* \* \* \* \*