



US012391424B2

(12) **United States Patent**
Darr et al.

(10) **Patent No.:** **US 12,391,424 B2**

(45) **Date of Patent:** ***Aug. 19, 2025**

(54) **LIGHTWEIGHT PLASTIC CONTAINER AND PREFORM**

(71) Applicant: **Plastipak Packaging, Inc.**, Plymouth, MI (US)

(72) Inventors: **Richard C. Darr**, Medina, OH (US);
Edward V. Morgan, Northville, MI (US)

(73) Assignee: **Plastipak Packaging, Inc.**, Plymouth, MI (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/614,065**

(22) Filed: **Mar. 22, 2024**

(65) **Prior Publication Data**

US 2024/0228101 A1 Jul. 11, 2024

Related U.S. Application Data

(60) Continuation of application No. 18/377,493, filed on Oct. 6, 2023, now Pat. No. 11,939,104, which is a (Continued)

(51) **Int. Cl.**
B65D 1/02 (2006.01)
B29B 11/08 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **B65D 1/0246** (2013.01); **B29B 11/08** (2013.01); **B29B 11/14** (2013.01); **B29C 48/141** (2019.02);

(Continued)

(58) **Field of Classification Search**

CPC B29B 11/14; B29B 11/08; B29C 48/141;
B29C 49/06; B29C 49/071; B29C 49/08;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

198,528 A 12/1877 Woodward
2,367,317 A 1/1945 Thomas
(Continued)

FOREIGN PATENT DOCUMENTS

DE 2638351 12/1977
DE 2814952 10/1978
(Continued)

OTHER PUBLICATIONS

Certified English translation of FR 2 846 946 (FR 2 846 946 has a filing date of Nov. 12, 2002, and the reference was previously cited in the IDS provided on Jul. 22, 22 in parent U.S. Appl. No. 17/314,721).

(Continued)


Primary Examiner — Michael C Miggins

(74) *Attorney, Agent, or Firm* — Fishman Stewart PLLC

(57) **ABSTRACT**

A plastic container includes a hollow body portion including a lower supporting base portion; a sidewall portion extending upwardly from the base portion; and a neck portion extending upwardly from the sidewall portion. The neck portion includes a support flange having an upper and lower surface, at least one thread, and a dispensing opening at the top of the neck portion. In embodiments, a closure may be provided to form an assembly. A preform and method for making a container are also disclosed.

20 Claims, 3 Drawing Sheets

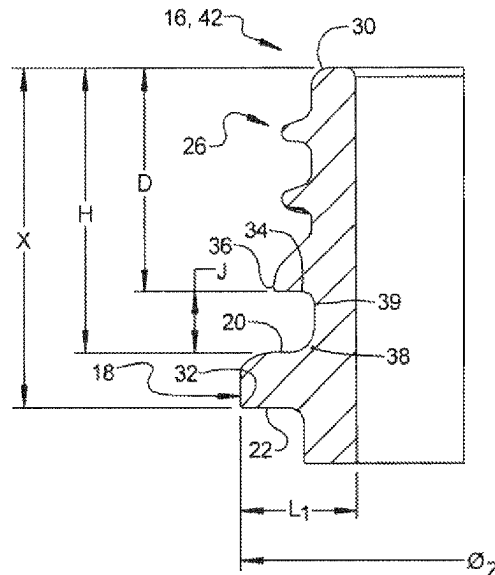

Related U.S. Application Data

continuation of application No. 18/084,064, filed on Dec. 19, 2022, now Pat. No. 11,780,634, which is a continuation of application No. 17/314,721, filed on May 7, 2021, now Pat. No. 11,560,250, which is a continuation of application No. 16/598,452, filed on Oct. 10, 2019, now abandoned, which is a continuation of application No. 16/013,139, filed on Jun. 20, 2018, now Pat. No. 10,457,437, which is a continuation of application No. 16/012,302, filed on Jun. 19, 2018, now Pat. No. 10,266,299, which is a continuation of application No. 15/495,084, filed on Apr. 24, 2017, now Pat. No. 10,023,345, which is a continuation of application No. 15/404,731, filed on Jan. 12, 2017, now Pat. No. 9,738,409, which is a continuation of application No. 15/383,179, filed on Dec. 19, 2016, now Pat. No. 9,850,019, which is a continuation of application No. 15/220,731, filed on Jul. 27, 2016, now Pat. No. 9,522,759, which is a continuation of application No. 14/803,505, filed on Jul. 20, 2015, now Pat. No. 9,403,310, which is a continuation of application No. 14/688,734, filed on Apr. 16, 2015, now Pat. No. 9,139,326, which is a continuation of application No. 14/511,848, filed on Oct. 10, 2014, now Pat. No. 9,033,168, which is a division of application No. 11/749,501, filed on May 16, 2007, now Pat. No. 8,857,637.

(51) Int. Cl.

B29B 11/14 (2006.01)
B29C 48/14 (2019.01)
B29C 49/00 (2006.01)
B29C 49/06 (2006.01)
B29C 49/08 (2006.01)
B29C 49/46 (2006.01)
B29K 67/00 (2006.01)
B29K 105/00 (2006.01)
B29K 105/26 (2006.01)
B29L 31/00 (2006.01)
B65D 1/40 (2006.01)
B65D 1/44 (2006.01)
B65D 1/46 (2006.01)
B65D 43/02 (2006.01)

(52) U.S. Cl.

CPC **B29C 49/06** (2013.01); **B29C 49/071** (2022.05); **B29C 49/08** (2013.01); **B65D 1/0207** (2013.01); **B65D 1/023** (2013.01); **B65D 1/0284** (2013.01); **B65D 1/40** (2013.01); **B65D 1/44** (2013.01); **B65D 1/46** (2013.01); **B65D 43/0235** (2013.01); **B29C 2049/4664** (2013.01); **B29C 2949/072** (2022.05); **B29C 2949/073** (2022.05); **B29C 2949/0732** (2022.05); **B29C 2949/0733** (2022.05); **B29C 2949/074** (2022.05); **B29C 2949/0773** (2022.05); **B29C 2949/0774** (2022.05); **B29C 2949/0777** (2022.05); **B29C 2949/0812** (2022.05); **B29C 2949/0816** (2022.05); **B29C 2949/0821** (2022.05); **B29C 2949/0822** (2022.05); **B29C 2949/0825** (2022.05); **B29C 2949/0829** (2022.05); **B29C 2949/0831** (2022.05); **B29C 2949/0832** (2022.05); **B29C 2949/0833** (2022.05); **B29C 2949/0834** (2022.05); **B29C 2949/0872** (2022.05); **B29K 2067/00** (2013.01); **B29K 2067/003** (2013.01); **B29K 2105/258**

(2013.01); **B29K 2105/26** (2013.01); **B29L 2031/7158** (2013.01); **Y10T 428/1352** (2015.01); **Y10T 428/1397** (2015.01)

(58) Field of Classification Search

CPC **B29C 2049/4664**; **B29C 2949/072**; **B29C 49/46**; **B29C 2949/073**; **B29C 2949/0733**; **B29C 2949/0732**; **B29C 2949/074**; **B29C 2949/0773**; **B29C 2949/0774**; **B29C 2949/0777**; **B29C 2949/0821**; **B29C 2949/0825**; **B29C 2949/0812**; **B29C 2949/0829**; **B29C 2949/0816**; **B29C 2949/0822**; **B29C 2949/0831**; **B29C 2949/0832**; **B29C 2949/0833**; **B29C 2949/0872**; **B29C 2949/0834**; **B29C 49/087**; **B29C 2049/023**; **B29C 49/42808**; **B29C 2049/7879**; **B29C 2949/0715**; **B65D 1/0246**; **B65D 1/023**; **B65D 1/40**; **B65D 1/44**; **B65D 1/0284**; **B65D 1/0207**; **B65D 1/46**; **B65D 43/0235**; **B29K 2067/00**; **B29K 2067/003**; **B29K 2105/258**; **B29K 2105/26**; **Y10T 428/1397**; **Y10T 428/1352**; **B29L 2031/7158**

See application file for complete search history.

(56)**References Cited****U.S. PATENT DOCUMENTS**

2,914,206 A 11/1959 Lowen
 3,235,115 A 2/1966 Duke
 3,398,427 A 8/1968 John
 3,470,282 A 9/1969 Scalora
 3,559,833 A 2/1971 Alonso
 3,598,270 A 8/1971 Adomaitis
 3,733,309 A 5/1973 Wyeth et al.
 3,774,795 A 11/1973 Leenaards
 3,830,893 A 8/1974 Steingiser
 3,881,622 A 5/1975 Dockery
 4,098,419 A 7/1978 Virog, Jr. et al.
 4,117,050 A 9/1978 Appel et al.
 4,126,658 A 11/1978 Rupert et al.
 4,156,490 A 5/1979 Peraboni
 4,177,906 A 12/1979 Von Hagel
 4,180,175 A 12/1979 Virog, Jr. et al.
 4,301,937 A 11/1981 Von Hagel
 4,307,137 A 12/1981 Ota et al.
 4,342,395 A 8/1982 Brown
 4,342,398 A 8/1982 Chang
 4,401,227 A 8/1983 Pehr
 4,463,056 A 7/1984 Steele
 4,469,234 A 9/1984 Deussen
 4,534,930 A 8/1985 Nohara
 4,541,536 A 9/1985 Davis et al.
 4,573,599 A 3/1986 Fillmore
 4,606,723 A 8/1986 Pasternicki
 4,615,667 A 10/1986 Roy
 4,715,504 A 12/1987 Chang et al.
 4,756,438 A 7/1988 Ryder
 4,830,251 A 5/1989 Conrad
 4,842,153 A 6/1989 Hulon
 4,901,873 A 2/1990 Weiler
 4,928,835 A 5/1990 Collette et al.
 4,936,474 A 6/1990 Szczesniak et al.
 5,027,964 A 7/1991 Banich, Sr.
 5,040,692 A 8/1991 Julian
 5,104,704 A 4/1992 Labes et al.
 5,143,235 A 9/1992 Repp
 5,366,774 A 11/1994 Pinto et al.
 5,383,779 A 1/1995 Robinson
 5,403,538 A 4/1995 Maeda
 5,409,983 A 4/1995 Jones et al.
 5,431,291 A 7/1995 LaBombard, Jr.
 5,447,766 A 9/1995 Orimoto et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,450,972	A	9/1995	Zemlo	7,770,745	B2	8/2010	Weissmann et al.
5,464,106	A	11/1995	Slat et al.	7,798,357	B2	9/2010	Hanafusa et al.
5,480,045	A	1/1996	Molinaro et al.	7,820,257	B2	10/2010	Kjorlaug et al.
5,593,055	A	1/1997	Repp et al.	7,882,977	B2	2/2011	Johnson
5,645,183	A	7/1997	Slat et al.	7,918,355	B2	4/2011	Penny
5,647,495	A	7/1997	Orimoto et al.	7,918,356	B2	4/2011	Penny
5,674,448	A	10/1997	Slat et al.	7,976,767	B2	7/2011	Ungrady et al.
5,676,267	A	10/1997	Slat et al.	8,037,734	B2	10/2011	Hanafusa et al.
5,688,572	A	11/1997	Slat et al.	8,132,439	B2	3/2012	Hanafusa et al.
5,690,244	A	11/1997	Darr	8,308,002	B2	11/2012	Penny
5,756,172	A	5/1998	Semersky	8,308,005	B2	11/2012	Penny
5,804,305	A	9/1998	Slat et al.	8,317,042	B2	11/2012	Cervený
5,850,932	A	12/1998	Beck et al.	8,413,829	B2	4/2013	Penny
5,888,598	A	3/1999	Brewster et al.	8,499,601	B2	8/2013	Hanafusa et al.
5,918,753	A	7/1999	Ogg et al.	8,740,001	B2	6/2014	Hanafusa et al.
5,927,525	A	7/1999	Darr et al.	8,857,637	B2	10/2014	Darr
5,951,938	A	9/1999	Takeuchi et al.	9,033,168	B2	5/2015	Darr
5,954,216	A	9/1999	Meisner et al.	9,139,326	B2	9/2015	Darr
5,971,184	A	10/1999	Krishnakumar et al.	9,403,310	B2	8/2016	Darr
5,975,320	A	11/1999	Bietzer et al.	9,522,759	B2	12/2016	Darr
6,006,930	A	12/1999	Dreyer et al.	9,738,409	B2	8/2017	Darr
6,011,132	A	1/2000	Paschke et al.	9,850,019	B2	12/2017	Darr
6,041,953	A	3/2000	Goodall	10,023,345	B2	7/2018	Darr
6,060,140	A	5/2000	Sprayberry et al.	10,214,312	B2	2/2019	Darr
6,063,325	A	5/2000	Nahill et al.	10,266,299	B2	4/2019	Darr
6,082,568	A	7/2000	Flanagan	10,457,437	B2	10/2019	Darr
6,085,924	A	7/2000	Henderson	11,560,250	B2	1/2023	Darr
6,105,800	A	8/2000	Czesak	11,780,634	B2	10/2023	Darr
6,168,749	B1	1/2001	Koch	11,834,222	B2	12/2023	Darr
6,203,870	B1	3/2001	Darr	11,939,104	B2	3/2024	Darr
6,217,818	B1	4/2001	Collette et al.	2001/0038171	A1	11/2001	Darr
6,276,546	B1	8/2001	Davis et al.	2001/0054779	A1	12/2001	Collette et al.
6,298,638	B1	10/2001	Bettle	2002/0022099	A1	2/2002	Schmidt et al.
6,305,564	B1	10/2001	Takeuchi et al.	2002/0134747	A1	9/2002	Babcock et al.
6,349,838	B1	2/2002	Saito et al.	2002/0162818	A1	11/2002	Williams
6,391,408	B1	5/2002	Hutchinson	2003/0001311	A1	1/2003	Collette et al.
6,461,697	B1	10/2002	Slat et al.	2003/0041568	A1	3/2003	Seidita
6,464,486	B1	10/2002	Barray et al.	2003/0071007	A1	4/2003	Ma et al.
6,548,133	B2	4/2003	Schmidt et al.	2003/0102278	A1	6/2003	Chupak
6,557,714	B2	5/2003	Babcock et al.	2003/0116522	A1	6/2003	Julian et al.
6,568,156	B2	5/2003	Silvers et al.	2003/0155320	A1	8/2003	Peronek et al.
6,569,370	B1	5/2003	Amin et al.	2003/0235667	A1	12/2003	Darr et al.
6,635,325	B1	10/2003	Hebert	2004/0084333	A1	5/2004	Boyd
6,637,611	B2	10/2003	Luch	2004/0091651	A1	5/2004	Rule et al.
6,641,774	B2	11/2003	Slat et al.	2004/0129669	A1	7/2004	Kelley et al.
6,673,303	B2	1/2004	White et al.	2004/0146675	A1	7/2004	Hashimoto et al.
6,745,919	B2	6/2004	Moros	2004/0209022	A1	10/2004	Ghatta et al.
6,749,796	B1	6/2004	Hansen	2005/0053739	A1	3/2005	Lee et al.
6,779,677	B2	8/2004	Chupak	2005/0072751	A1	4/2005	Price
6,796,450	B2	9/2004	Prevot et al.	2005/0092390	A1	5/2005	Krulitsch
6,808,820	B2	10/2004	Lee et al.	2005/0139566	A1	6/2005	Uesugi et al.
6,837,390	B2	1/2005	Lane et al.	2005/0153089	A1	7/2005	Lynch et al.
6,841,262	B1	1/2005	Beck et al.	2005/0158495	A1	7/2005	Nahill
6,854,614	B2	2/2005	Sprick	2005/0167879	A1	8/2005	Smith
6,929,139	B2	8/2005	Darr	2005/0258127	A1	11/2005	Darr
6,939,498	B2	9/2005	Wong	2005/0271843	A1	12/2005	Collette et al.
6,939,591	B2	9/2005	Hutchinson et al.	2006/0105127	A1	5/2006	Akiyama et al.
6,948,630	B2	9/2005	Julian et al.	2006/0121222	A1	6/2006	Andrich et al.
6,971,530	B2	12/2005	Darr	2006/0207961	A1	9/2006	Kurtz
6,977,104	B1	12/2005	Nahill et al.	2006/0255049	A1	11/2006	McCarthy et al.
6,991,336	B2	1/2006	Matsui	2007/0087214	A1	4/2007	Portnoy et al.
7,028,857	B2	4/2006	Peronek	2007/0108668	A1	5/2007	Hutchinson et al.
7,037,099	B2	5/2006	Linke et al.	2007/0175854	A1	8/2007	Penny
7,080,747	B2	7/2006	Lane et al.	2007/0175855	A1	8/2007	Penny
7,150,902	B2	12/2006	Farha	2007/0205175	A1	9/2007	Darr et al.
7,207,451	B2	4/2007	Taylor et al.	2007/0210026	A1	9/2007	Darr et al.
7,226,648	B2	6/2007	Al Ghatta et al.	2007/0224374	A1	9/2007	Kelley
7,332,204	B2	2/2008	Hutchinson et al.	2007/0257001	A1	11/2007	Paz
7,531,125	B2	5/2009	Dygert	2008/0050546	A1	2/2008	Kitano et al.
7,531,226	B2	5/2009	Lee et al.	2008/0290099	A1	11/2008	MacDonald et al.
7,553,441	B2	6/2009	Shi	2010/0270255	A1	10/2010	Penny
7,574,938	B2	8/2009	Andrews	2010/0270256	A1	10/2010	Penny
7,654,168	B2	2/2010	O'Brien	2024/0034508	A1	2/2024	Darr
7,708,159	B2	5/2010	Darr				
7,735,663	B2	6/2010	Tanaka et al.				

FOREIGN PATENT DOCUMENTS

DE	2807949	8/1979
DE	2910609	9/1980
DE	4107011	9/1992

(56)

References Cited

FOREIGN PATENT DOCUMENTS

DE	10021961	11/2001
DE	10201850	8/2002
DE	10349753	6/2005
DE	202005017075	2/2006
EP	0049876	4/1982
EP	0269920	6/1988
EP	0316167	5/1989
EP	0574472	12/1993
EP	1371477	12/2003
EP	1417141	5/2004
EP	1468925	10/2004
EP	1529736	5/2005
EP	1633639	3/2006
EP	1714887	10/2006
EP	07101873 A	2/2007
EP	1885602	2/2008
EP	2167385	3/2010
EP	2933201 A1	10/2015
EP	2933201 B1	7/2018
FR	2758800	7/1998
FR	2846946	5/2004
GB	1531783	11/1978
GB	2085395	4/1982
GB	2124543	2/1984
GB	2357491	7/2003
JP	S54-140687	11/1979
JP	S59-184627	10/1984
JP	H09-239852	9/1997
JP	2578523	8/1998
JP	2000-211017	8/2000
JP	2001-122237	5/2001
JP	2002-080021	3/2002
JP	2002-240136	8/2002
JP	2002-248675	9/2002
JP	2002-249651	9/2002
JP	2002-284132	10/2002
JP	2003-011211	1/2003
JP	2003-267334	9/2003
JP	2004-083128	3/2004
JP	2005-001383	1/2005
JP	2007-039109	2/2007
JP	4074143	4/2008
JP	4570838	10/2010
JP	4908544	4/2012
KR	1020050005232 A	1/2005
WO	WO 1992/015442	9/1992
WO	WO 1996/33062	10/1996
WO	WO 1998/25752	6/1998
WO	WO 1998/29314	7/1998
WO	WO 1999/61325	12/1999
WO	WO 1999/61337	12/1999
WO	WO 2003/008293	1/2003
WO	WO 2003/057572	7/2003
WO	WO 2004/030895	4/2004
WO	WO 2004/035394	4/2004
WO	WO 2004/043794	5/2004
WO	WO 2004/065105	8/2004
WO	WO 2004/106174	12/2004
WO	WO 2005/047120	5/2005
WO	WO 2006/013443	2/2006
WO	WO 2006/066356	6/2006
WO	WO 2007/085896	8/2007
WO	WO 2007/089552	8/2007
WO	WO 2007/089566	8/2007
WO	WO 2008/095842	8/2008
WO	WO 2008/144417	11/2008

OTHER PUBLICATIONS

New BERICAP Neck Finish According to New ISBT's PCO 1881 (1 page) Dec. 8, 2006.

Novembal, "Closures for the Beverage Market—Alternative Solutions" Jun. 19, 2007, 37 pages (publication date, if any, unknown).

Bericap Supershorty for PCT 1881, SuperShorty from Bericap for new PCO1881 short height neck finish standard. (1 page) Dec. 14, 2006.

Unipack.RU Packaging Portal, Logoplaste launches Europe's lightest PET Bottle. (1 page) Aug. 30, 2006.

Bericap, Ferrarelle, A lightweight closure for 28 mm two-start thread neck finish for sparkling water. (1 page) Jun. 27, 2006.

Defosse, Matt, "Trim that neck with low-profile closures", *Plastics Today*. (3 pages) Feb. 1, 2007.

Keep Up with Blow Molding, "Shorter Closure Cuts PET Bottle Weight & Cost." (author unknown) access www.ptonline.com (1 page). Jan. 1, 2007.

I.I. Moroz, et al., "Investigation of the Organization of Lightweight Bottle Production," Ukrainian Scientific Research Institute of the Glass and Porcelain Faience Industry (UNISP) (5 pages) Feb. 1, 1971.

(Author Unknown) The "Ugly Duckling" is hatched, PET container weight halved. (publication date, if any, unknown) (1 page).

Husky Exhibit 1006 Drawing (1 page) International Society of Beverage Technologies (Drawing dated May 15, 2002).

Exhibit 4, Email Invitation to Speak: Plastics Caps and Closures Nov. 7-8, 2006, Brussels from Victor Cooper to Lothar Brauer. (2 pages) Apr. 30, 2021.

Plastics Caps & Closures 2006 Innovative Technical Advances and Business Solutions for Cost Reduction and Quality Preservation Throughout the Value Chain, Brussels, Belgium. (4 pages) Nov. 7, 2006.

Exhibit 15, Nanetti, Luca, Sacmi Imola, SlideShow for ML27 Multi Lok 27 mm, "It is not just another short neck for still beverages." (24 pages) (publication, if any unknown).

Google Books: Library of the University of Wisconsin, S.E. Slocum, B.E., Ph.D., et al. "Text-Book on the Strength of Materials," Ginn & Company. (346 pages) (1907).

Kazmer>000017/000018—Revised Index by John S. Bowers of Nissei Asb Company (2 pages: (ii), (iii), 70, 71) (Dated Jun. 1, 1999, publication unknown).

LogoPlaste Lights Its Bottles, Editorial Staff of Emballages Mazazine; posted on Aug. 24, 2006. (4 pages) Apr. 1, 2020.

Conference Proceedings, "Packaging Closures and Sealing System," N. Theobald and B. Winder, 2006 (52 pages).

Exhibit 5, Plastics Caps & Closures 2006, "Innovative technical advances and business solutions for cost reduction and quality preservation throughout the value chain", Nov. 7-8, 2006, Brussels, Belgium (4 pages).

English translation of DE10349753 (DE10349753 already provided on Jul. 22, 2022 in parent U.S. Appl. No. 17/314,721).

Husky Exhibit 1012, Declaration of James D. Sykes dated Dec. 17, 2019, 11 pages.

Co-pending U.S. Appl. No. 18/669,243, filed May 20, 2024.

[No Author Listed], "28mm Carbonated Soft Drink (CSD), 38mm Carbonated Soft Drink (CSD)," 1 page (publication date, if any, unknown).

[No Author Listed], "Attendee List," *Plastics Caps & Closures 2006*, Brussels, Belgium, Nov. 7-8, 2006, 5 pages (publication date, if any, unknown).

[No Author Listed], "Capping resin price rises," *European Plastics News*, Dec. 22, 2006.

[No Author Listed], "Green? Environment Yes But Cost Savings Also," *Tetra Pak*, Brussels Conference, Nov. 27, 2007, 35 pages (publication date, if any, unknown).

[No Author Listed], "Multi Lok* 27 mm," 14 pages (publication date, if any, unknown).

[No Author Listed], "Novembal Business News," *Journal d'information de Novembal*, Jan. 5, 2007, 9 pages (with English translation).

[No Author Listed], "SACMI ML-27 Short CSD Closure—Ambient & Elevated T CO₂ Tests, Cold & Ambient Removal Torque Tests (JML-0017)," Jun. 2006, 2 pages (publication date, if any, unknown).

[No Author Listed], "SFR 9/27 Specifications and possible bi configurations," *SIPA at PETnology Forum 2004*, May 2004, 1 page (publication date, if any, unknown).

[No Author Listed], "SIPA latest development in two step technology," *SIPA at PETnology Forum 2004*, May 2004, 19 pages (publication date, if any, unknown).

(56)

References Cited**OTHER PUBLICATIONS**

[No Author Listed], "Standard Specification for Dimensions and Tolerances for Plastic Bottles," ASTM International, reapproved 2001, 1-16.

[No Author Listed], "Thread Finish Standards," Husky, Aug. 2006, 32 pages.

[No Author Listed], "Updated Programme—new speakers confirmed," Plastics Caps & Closures 2006, Brussels, Belgium, Nov. 7-8, 2006, 4 pages (publication date, if any, unknown).

[No Author Listed], Declarations relating to cited "Bottles, Preforms, Closures: A Design Guide for PET Packaging," edited by Ottmar Brandau, 19 pages (publication date, if any, unknown).

Blow Molding of Thermoplastics, Plastics Engineering Handbook of the Society of the Plastics Industry, 5th ed., Berins (ed.), 1991, 363, 5 pages.

bottledwaterworld.com [online], "Best Bottle in PET," Design Awards 2006, Sep.-Oct. 2006, 38:26-47.

Bottles, Preforms, Closures: A Design Guide for PET Packaging, Brandau (ed.), vol. 4, 2005, 142-143, 5 pages.

Brandau, "Stretch Blow Molding," Plastic Design Library (POL), POL Handbook Series, 3rd Ed., 2017, 1-4, 8 pages.

Budynas, Advanced Strength and Applied Stress Analysis, 2nd ed., 1999, 348-357, 509-511, 15 pages.

data.europa.eu [online], "European Parliament and Council Directive 94/62/EC of Dec. 20, 1994 on packaging and packaging waste," Dec. 31, 1994, retrieved from URL <<http://data.europa.eu/eli/dir/1994/62/2015-05-26>>, 29 pages.

devtechpet.com [online], "Preforma 38SP400," retrieved on Jul. 22, 2020, retrieved at URL <devtechpet.com/en/packaging-solutions/group-product-catalogue/pet-packaging/productdetails/?filter8y=&product=16728>, 1 page (publication date unknown).

Extended European Search Report in European Appln. No. 07749157.9, dated Jun. 2, 2010, 5 pages.

Extended European Search Report in European Appln. No. 08755571.0, mailed Jan. 7, 2011, 5 pages.

Extended European Search Report in European Appln. No. 15164122.2, dated Aug. 31, 2015, 5 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00428, Patent Owner; U.S. Pat. No. 8,857,637, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 21 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00429, Patent Owner; U.S. Pat. No. 9,033,168, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 22 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00430, Patent Owner; U.S. Pat. No. 9,139,326, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 23 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00431, Patent Owner; U.S. Pat. No. 9,403,310, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 24 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00432, Patent Owner; U.S. Pat. No. 9,522,759, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 23 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00433, Patent Owner; U.S. Pat. No. 9,850,019, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 23 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00434, Patent Owner; U.S. Pat. No. 9,738,409, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 23 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00435, Patent Owner; U.S. Pat. No. 10,023,345, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 24 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00436, Patent Owner; U.S. Pat. No. 10,266,299, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 23 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00437, Patent Owner; U.S. Pat. No. 10,214,311, Decision Denying Institution of Inter Partes Review, Jul. 29, 2020, 23 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00438, Patent Owner; U.S. Pat. No. 10,214,312, Decision Denying Institution of Inter Partes Review, Jul. 29, 2020, 22 pages.

Husky Injection molding Systems, Ltd. And Husky Injection Molding Systems, Inc., Petitioner, v. *Plastipak Packaging, Inc.*, Case No. IPR2020-00439, Patent Owner; U.S. Pat. No. 10,457,437, Decision Denying Institution of Inter Partes Review, Jul. 28, 2020, 23 pages.

Ifuku et al., "International News," Beverage Japan, 2006, 299(11):80, 6 pages (with English translation).

International Search Report and Written Opinion in International Appln. No. PCT/US07/01880, mailed Nov. 19, 2007, 5 pages.

International Search Report and Written Opinion in International Appln. No. PCT/US08/63744, mailed Sep. 2, 2008, 8 pages.

ISBT Threadssecs, "Alcoa-1690 Voluntary Standard 38mm CSD finish," 1 page (drawing dated Jun. 6, 2001; publication date, if any, unknown).

ISBT Threadssecs, "Alcoa-1716 Voluntary Standard 28mm CSD finish," 1 page (drawing dated Apr. 15, 1999; publication date, if any, unknown).

ISBT Threadssecs, "Alcoa-1788 Voluntary Standard 28mm CSD finish," 1 page (drawing dated Apr. 15, 1999; publication date, if any, unknown).

ISBT Threadssecs, "BPF-C Voluntary Standard 28mm CSD finish," 1 page (drawing dated Oct. 19, 2000; publication date, if any, unknown).

ISBT Threadssecs, "Flat Water," 1 page (drawing dated Dec. 12, 2011; publication date, if any, unknown).

ISBT Threadssecs, "Hot-Fill," 1 page (publication date, if any, unknown).

ISBT Threadssecs, "ISBT Threadssecs Nomenclature," 2 pages (publication date, if any, unknown).

ISBT Threadssecs, "ISBT Threadssecs Voluntary Standard Thread Finish Specifications Nomenclature Feature Terminologies," 2 pages (publication date, if any, unknown).

ISBT Threadssecs, "ISBT Voluntary Standard Flatwater Finish PCF-26P-1 ("US Standard")," 1 page (drawing dated May 15, 2002; publication date, if any, unknown).

ISBT Threadssecs, "Obrist-28 (18mm) Voluntary Standard Flatwater Finish," 1 page (drawing dated Feb. 23, 1999; publication date, if any, unknown).

ISBT Threadssecs, "Obrist-28 (19mm) Voluntary Standard Flatwater Finish," 1 page (drawing dated Feb. 23, 1999; publication date, if any, unknown).

ISBT Threadssecs, "PCF-33P-1 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Dec. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "PCF-38G-3 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Dec. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "PCF-38P-2 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Dec. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "PCF-38P-4 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Dec. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "PCF-38P-5 Voluntary Standard Non-Carbonated beverage finish (extrusion blown)," 1 page (drawing dated Nov. 21, 2001; publication date, if any, unknown).

ISBT Threadssecs, "PCF-38P-1 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Dec. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "PCF-43P-1 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Jan. 17, 2000; publication date, if any, unknown).

(56)

References Cited**OTHER PUBLICATIONS**

ISBT Threadssecs, "PCF-48P-2 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Jan. 17, 2000; publication date, if any, unknown).

ISBT Threadssecs, "PCF-48P-3 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Jan. 17, 2000; publication date, if any, unknown).

ISBT Threadssecs, "PCF-48P-4 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Jan. 17, 2000; publication date, if any, unknown).

ISBT Threadssecs, "PCF-48P-5 Voluntary Standard Hot Fill Finish," 1 page (drawing dated Jan. 17, 2000; publication date, if any, unknown).

ISBT Threadssecs, "PCF-26P-2 Voluntary Standard Flatwater Finish," 1 pages (drawing dated May 15, 2002; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1810 Voluntary Standard 28mm CSD finish," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1815 Voluntary Standard 28mm CSD finish," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1816 Voluntary Standard 28mm CSD finish," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1817 Voluntary Standard 28mm CSD finish," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1820 Voluntary Standard 28mm CSD finish," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1823 Voluntary Standard 28mm CSD finish," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT Threadssecs, "PCO-1881 Voluntary Standard 28mm CSD finish," 1 page (drawing dated Feb. 14, 2007; publication date, if any, unknown).

ISBT Threadssecs, "PCO-38 Voluntary Standard 38mm CSD Finish," 1 page (drawing dated Oct. 19, 2000; publication date, if any, unknown).

ISBT Threadssecs, "SP-400 Voluntary Standard," 1 page (drawing dated Mar. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "SP-410 Voluntary Standard," 1 page (drawing dated Mar. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "SP-415 Voluntary Standard," 1 page (drawing dated Mar. 10, 1999; publication date, if any, unknown).

ISBT Threadssecs, "SPI-Series," 1 page (publication date, if any, unknown).

ISBT Threadssecs, "Terminologies for Bottle Finishes," 1 page (drawing dated Jun. 12, 2001; publication date, if any, unknown).

ISBT Threadssecs, "Voluntary Standard PET Finish Dimension Nomenclature," 1 page (drawing dated May 29, 1998; publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #10, Oct. 17, 2006, 8 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #11, Oct. 24, 2006, 6 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #12, Nov. 2, 2006, 6 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #13, Nov. 14, 2006, 6 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #14, Nov. 28, 2006, 7 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #15, Dec. 12, 2006, 7 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #6, Aug. 1, 2006, 7 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #7, Aug. 22 & 23, 2006, 7 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #89, Jul. 9, 2013, 8 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO 1881 Finish Subcommittee: Minutes of Meeting," Meeting #9, Oct. 5, 2006, 8 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO Finish Subcommittee: Minutes of Meeting," Meeting #3, Jun. 15, 2006, 5 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO Finish Subcommittee: Minutes of Meeting," Meeting #4, Jun. 27, 2006, 6 pages (publication date, if any, unknown).

ISBT, "Reduced height/Lightweight PCO Finish Subcommittee: Minutes of Meeting," Meeting #5, Jul. 12, 2006, 6 pages (publication date, if any, unknown).

ISBT, "Short Height Finish Subcommittee: Minutes of Meeting," Meeting #1, Apr. 24, 2006, 3 pages (publication date, if any, unknown).

ISBT, "Short Height Finish Subcommittee: Minutes of Meeting," Meeting #2, May 2, 2006, 3 pages (publication date, if any, unknown).

Krautkramer, "Short Necks and Closures for Carbonated Beverages—a PET saving initiative," Bericap, 27 pages (publication date, if any, unknown).

Krupp Corpoplast Maschinenbau GmbH, "Operating Instructions: Blow Moulding Machine B 177," Operator Reference Manual, 1995, 9 pages.

Lamarche, "Solutions to lighter plastic closures for use in water bottles," Plastics Caps & Closures 2006, Brussels, Belgium, Nov. 7-8, 2006, 28 pages (publication date, if any, unknown).

linkplas.com [online], "Winners at Bottled Water Awards," Sep. 19, 2006, retrieved at URL <<https://www.linkplas.com/Awards/Winners+at+Bottled+Water+Awards.html>>, 1 page.

Novemal, "Danone Innovation Day," May 31, 2006, 3 pages (publication date, if any, unknown).

Novemal, "Novaqua 29.4," 2 pages (publication date, if any, unknown).

Opposition, "foodproductiondaily", [gefunden04.02.2021], Exhibit D59 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 2 pages.

Opposition, "Interempresas", [gefunden04.02.2021], Exhibit D64 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 4 pages (with English translation).

Opposition, "Affidavit Paulo Correia," Exhibit D17 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 7 pages.

Opposition, "Auszug aus Wayback-Machine," Exhibit D31 in European Appln. No. 15164122.2, dated Oct. 7, 2020, 1 page.

Opposition, "Data Sheet Packaging Glass," Exhibit D32 in European Appln. No. 15164122.2, dated Oct. 7, 2020, 3 pages.

Opposition, "Eidesstattliche Versicherung Herr Thomas Andereg," Exhibit D56 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 3 pages (with English translation).

Opposition, "Eidesstattliche Versicherung van Dr. Michael Kruger," Exhibit D57 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 4 pages (with English translation).

Opposition, "Eidesstattliche Versicherung van Frau Barbara Appel," Exhibit D42 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 4 pages (with English translation).

Opposition, "Eidesstattliche Versicherung van Frau Barbara Appel," Exhibit D55 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 4 pages (with English translation).

Opposition, "Eidesstattliche Versicherung van Herr Alexander Krautkramer," Exhibit D54 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 3 pages (with English translation).

References Cited

Opposition, "Eidesstattliche Versicherung van Herr Andreas Reich," Exhibit D45 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 3 pages (with English translation).

Opposition, "Eidesstattliche Versicherung van Herr Fiorenza Parrinello," Exhibit D43 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 3 pages.

Opposition, "Eidesstattliche Versicherung van Herr Jochen Forsthovel," Exhibit D44 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 3 pages (with English translation).

Opposition, "Eidesstattliche Versicherung van Herr Werner Rosenberger," Exhibit D63 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 2 pages (with English translation).

Opposition, "Handbook bottles front and p143," Exhibit D15 in European Appln. No. 15164122.2, dated Sep. 20, 2019, 2 pages.

Opposition, "Handout," Exhibit D39 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 17 pages.

Opposition, "Husky Zeichnung," Exhibit D14 in European Appln. No. 15164122.2, dated Apr. 25, 2019, 1 page.

Opposition, "In response to the Patent Proprietor's written statement dated Oct. 2, 2020," European Appln. No. 15164122.2, dated Feb. 5, 2021, 98 pages (with English translation).

Opposition, "In response to the summons dated Oct. 16 to an oral hearing," European Appln. No. 15164122.2, dated Feb. 5, 2021, 12 pages (with English translation).

Opposition, "Invoice 1," Exhibit D18 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 3 pages.

Opposition, "Invoice 2," Exhibit D19 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 3 pages.

Opposition, "Invoice 3," Exhibit D20 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 2 pages.

Opposition, "Invoice 4," Exhibit D21 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 3 pages.

Opposition, "Invoice 5," Exhibit D22 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 3 pages.

Opposition, "Katalog Husky," Exhibit D30 in European Appln. No. 15164122.2, dated Oct. 7, 2020, 32 pages.

Opposition, "Letter Plastipak to Cetie Jan. 2021," Exhibit D69 in European Appln. No. 15164122.2, dated Apr. 2, 2021, 1 page.

Opposition, "Letter Plastipak to Cetie," Exhibit D68 in European Appln. No. 15164122.2, dated Apr. 2, 2021, 2 pages.

Opposition, "MHT is part of Krones as one party," Exhibit D16 in European Appln. No. 15164122.2, dated Sep. 20, 2019, 1 page.

Opposition, "Norm GME 30.28," Exhibit D71 in European Appln. No. 15164122.2, dated Apr. 2, 2021, 3 pages.

Opposition, "Norm GME 30.38," Exhibit D70 in European Appln. No. 15164122.2, dated Apr. 2, 2021, 4 pages.

Opposition, "On the correspondence of patent-holder of Feb. 8, 2021," European Appln. No. 15164122.2, dated Mar. 9, 2021, 36 pages (with English translation).

Opposition, "Präsentation, 27.11.07," Exhibit D13 in European Appln. No. 15164122.2, dated Apr. 25, 2019, 35 pages.

Opposition, "Preform 11, 5g 0, 33 I," Exhibit D23 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 4 pages.

Opposition, "Preform 15g 0,5 I," Exhibit D24 in European Appln. No. 15164122.2, dated Sep. 2, 2020, 2 pages.

Opposition, "Signiert Frau Appel," Exhibit D34 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 20 pages.

Opposition, "Signiert Frau Appel," Exhibit D50 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 28 pages.

Opposition, "Signiert Herr Anderegg," Exhibit D53 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 28 pages.

Opposition, "Signiert Herr Forsthovel," Exhibit D37 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 20 pages.

Opposition, "Signiert Herr Krautkramer," Exhibit D51 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 28 pages.

Opposition, "Signiert Herr Kruger," Exhibit D41 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 17 pages.

Opposition, "Signiert Herr Kruger," Exhibit D48 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 2 pages.

Opposition, “Signiert Herr Kruger,” Exhibit D52 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 28 pages.

Opposition, “Signiert Herr Parrinello,” Exhibit D36 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 20 pages.

Opposition, “Signiert Herr Parrinello,” Exhibit D40 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 12 pages.

Opposition, “Signiert Herr Parrinello,” Exhibit D47 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 2 pages.

Opposition, “Signiert Herr Reich,” Exhibit D35 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 20 pages.

Opposition, “Signiert Signiert Herr Kruger,” Exhibit D38 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 20 pages.

Opposition, “Zeichnung 191476,” Exhibit D66 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 1 page.

Opposition, “Zeichnung 2770143,” Exhibit D65 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 1 page.

Opposition, “Zeichnung 2874756,” Exhibit D67 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 1 page.

Opposition, “Zeichnung 9406_137_067 02,” Exhibit D62 in European Appln. No. 15164122.2, dated Feb. 5, 2021, 1 page.

packagingconnections.com [online], Good Morning Packaging Keeping Pace with Packaging Around the World Issue 24, vol. 1, 2006, Sep. 5, 2006, retrieved on Apr. 1, 2020, retrieved at URL <<https://www.packagingconnections.com/news/good-morning-packaging-keeping-pace-packaging-around-worldissue-24-vol-1-2006.htm>>, 6 pages.

packagingconnections.com [online], “Good Morning Packaging Keeping Pace with Packaging Around the World Issue 24, vol. 1, 2006,” Sep. 2006, retrieved on Dec. 3, 2020, Packaging Connections, 7 pages (this item is a part of Exhibit A to Affidavit of Paulo Correia (Cited as Desig. ID 399)—this item not subject to the Attorney’s Eyes Only designation).

Papiewski, “The Advantages of Plastic Bottles,” retrieved on Dec. 13, 2019, retrieved at URL <<https://education.seattlepi.com/advantages-plastic-bottles-4834.html>>, 4 pages.

Parker, “How the Plastic Bottle went from Miracle Container to Hated Garbage,” Aug. 23, 2019, retrieved at URL <<https://www.nationalgeographic.com/environment/2019/08/plastic-bottles->>, 5 pages.

PETnology GmbH, “Focus PET: Experts Presentations in Sessions and Knowledge Exchange in Workshops,” The PETnology Forum 2004, IV. Annual Business and Technology Conference for the PET Packaging Industry, Munich, Germany, May 3-4, 2004, 1 page (publication date, if any, unknown).

Pitman, “Logoplaste Launches Europe’s Lightest PET Bottle,” Aug. 22, 2006, retrieved on Apr. 1, 2020, retrieved at URL <<https://www.beveragedaily.com/Article/2006/08/23/Logoplaste-launches-Europe-s-lightest-PET-bottle>>, 3 pages.

plasticsnews.com [online], “Plastics Resin Pricing—Commodity Thermoplastics: Bottle-grade PET resin with annual volumes greater than 20 million pounds,” retrieved on Nov. 11, 2019, retrieved from URL <<https://www.plasticsnews.com/resin/historicPricing/commodity-thermoplastics/pet/bottleresin/1?CSAuthResp=1%3A%3A383902%3A311%3A24%3A5%E2%80%A6>>, 9 pages.

plasticsnews.com [online], “Plastics Resin Pricing—Commodity Thermoplastics: Injection general purpose HDPE resin with annual volumes greater than 20 million pounds,” retrieved on Nov. 11, 2019, retrieved from URL: <<https://www.plasticsnews.com/resin/historicPricing/commodity-thermoplastics/hdpe/injection-gp/1/>>, 9 pages.

plasticsnews.com [online], “Plastics Resin Pricing—Commodity Thermoplastics: Random copolymer injection PP resin with annual volumes greater than 20 million pounds,” retrieved on Nov. 11, 2019, retrieved from URL: <<https://www.plasticsnews.com/resin/historicPricing/commodity-thermoplastics/pp/randomcopolymer-injection/1>> 10 pages.

Plastipak Packaging Inc., Plaintiff, v. *Ice River Springs USA, Inc.* and *Ice River Springs Water Co. Inc.*, Defendants, submitted in Civil Action No. 1: 19-cv-11193-IT [U.S. District Court for the District of Massachusetts], Exhibit B to Affidavit of Paulo Correia, dated Sep. 16, 2020, 13 pages. Note: With respect to Exhibits A and C of the Correia Affidavit (Cited as Desig. ID 399), portions of the Exhibits filed with the Court were not available to Applicant—portions of Exhibit A were designated “Confidential—For Coun-

(56)

References Cited**OTHER PUBLICATIONS**

sel Only”—the public portions of Exhibit A have been provided herein; Exhibit C was designated “Confidential—Outside Counsel of Record Only.”

Plastipak Packaging, Inc., Plaintiff, v. *Ice River Springs Water Co. Inc. and Ice River Springs USA, Inc.*, Civil Action No. 1:19-cv-11193-IT, Affidavit of Paulo Correia on Behalf of Logoplaste Consultores Tecnicos, S.A., Sep. 16, 2020—submitted in Civil Action No. 1: 19-cv-11193-IT [U.S. District Court for the District of Massachusetts], 14 pages.

Plastipak Packaging, Inc., Plaintiff, v. *Nestle Waters North America, Inc.*, Defendant, Case No. 1:20-cv-01288 (RDA-IDD), Declaration of Julio Manuel Da Rocha Cabral, May 27, 2021, 5 pages.

Plastipak Packaging, Inc., Plaintiff, v. *Nestle Waters North America, Inc.*, Defendant, Case No. 1:20-cv-01288 (RDA-IDD), Declaration of Pierre-Christophe Lamarche, Jul. 20, 2021, 9 pages.

Plastipak Packaging, Inc., Plaintiff, v. *Premium Waters, Inc.*, Defendant, Case No. 3:20-cv-00098-wmc, Document 183, filed Aug. 19, 2021, 37 pages.

Preforms Plus, “30.0-Gram Preform,” Print dated Feb. 25, 2011, published purportedly Sep. 24, 2012, 1 page.

Preforms Plus, Print dated Dec. 10, 2010, published purportedly Sep. 24, 2012, 1 page.

Premium Waters, Inc., Petitioner, v. *Husky Injection Molding Systems, Inc.*, Respondent, Case: 1:20-cv-06098, Document #: 5-9, Filed: Oct. 13, 2020, Drawing Exhibit I—Husky, drawing purportedly dated 2004, 2 pages (publication date, if any, unknown).

Radicles3.rssing.com [online], “GCS Press Releases,” Feb. 4, 2007 Press Release, retrieved from URL <<http://radicles3.rssing.com/chan-3122006/latest.php#item42>>, 16 pages.

Sacmi 1295 Invoice, Sep. 2005, 2 pages (publication date, if any, unknown).

Sacmi, “ML 27,” Jul. 25, 2006, 15 pages (publication date, if any, unknown).

Sacmi, “ML 27,” Sep. 10, 2006, 35 pages (publication date, if any, unknown).

Scudellari, “Proforma Invoice No. OKUS05-045,” Sacmi 1386, Sep. 2005, 23 pages (publication date, if any, unknown).

sec.gov [online], “2005 Annual Report of Danone S.A.,” as filed with the Securities and Exchanges Commission on Apr. 20, 2006, retrieved from URL <<https://www.sec.gov/Archives/edgar/data/1048515/000119312506084606/d20f.htm>>, 210 pages.

Steeman, “Worldwide innovations in packaging technology with a ‘touch of greenness’ and an accent on sustainability and recyclability,” Nov. 4, 2009, retrieved on Oct. 16, 2019, retrieved from URL <<https://bestinpackaging.com/2009/11/04/short-shorter-the-shortest/>>, 2 pages.

Stone et al., “Closures for the Beverage Market—Alternative Solutions,” PIRA Conference, Atlanta, GA, Jun. 19 and 21, 2007, 37 pages (publication date, if any, unknown).

The Editorial Staff of Emballages Magazine, “LogoPlaste allege ses bouteilles,” Emballages Magazine, Aug. 24, 2006, retrieved on Apr. 1, 2020, retrieved at URL <<https://www.emballagesmagazine.com/actualites/logoplaste-allege-ses-bouteilles.3493>>, 9 pages (with English translation).

threadspecs.com [online], “ISBT Threadspecs Nomenclature,” 2 pages (publication date, if any, unknown).

Velas et al., Blog Posts, retrieved on Jun. 18, 2020, retrieved at URL ><http://chunk-o-funk.blogspot.com/2006/>>, various 2006 dates, 28 pages (with English translation).

Zacarias, “Technology News,” Logoplaste Technology, Lda, N°6, Jan. 2006, 6 pages.

Related Co-Pending U.S. Appl. No. 17/531,637, filed Nov. 19, 2021—which is a reissue application pertaining to U.S. Pat. No. 7,708,159, U.S. Appl. No. 11/368,860, filed Mar. 6, 2006, from which the instant application claims priority.

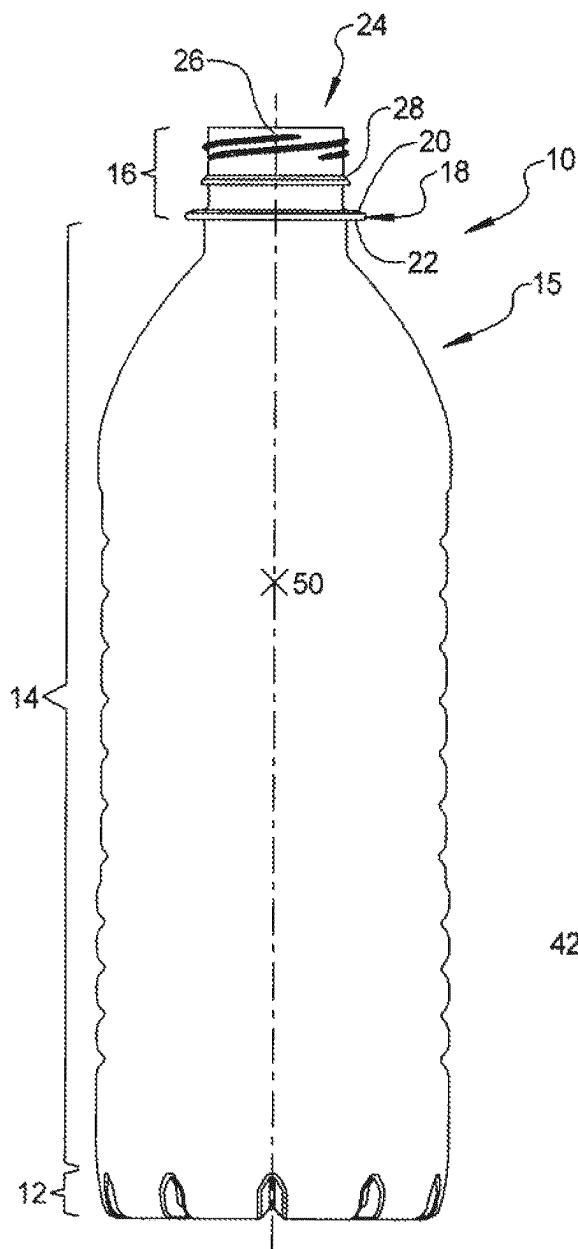


FIG 1

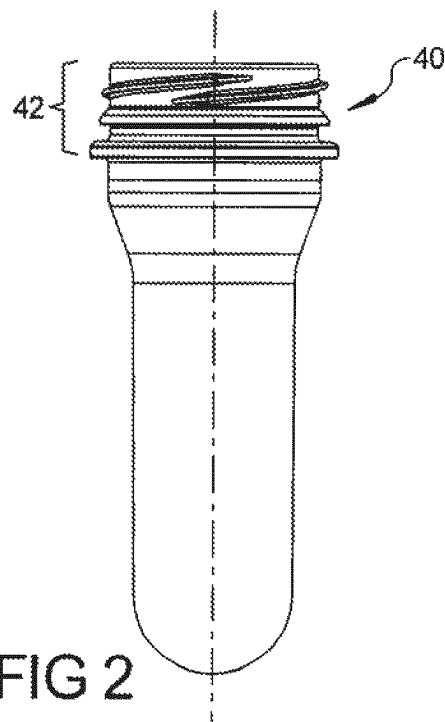


FIG 2

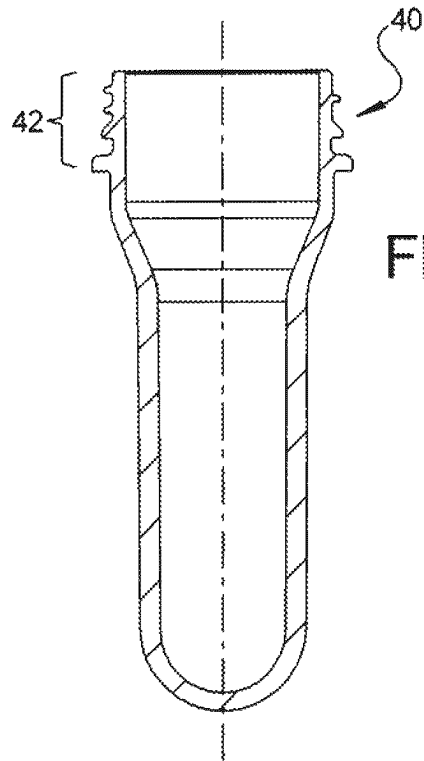


FIG 3

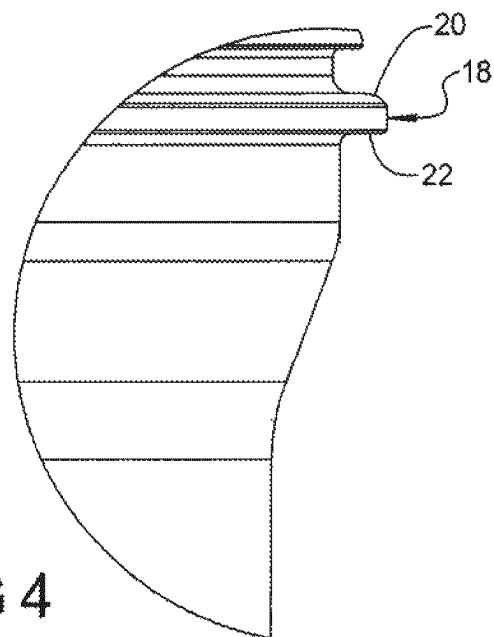


FIG 4

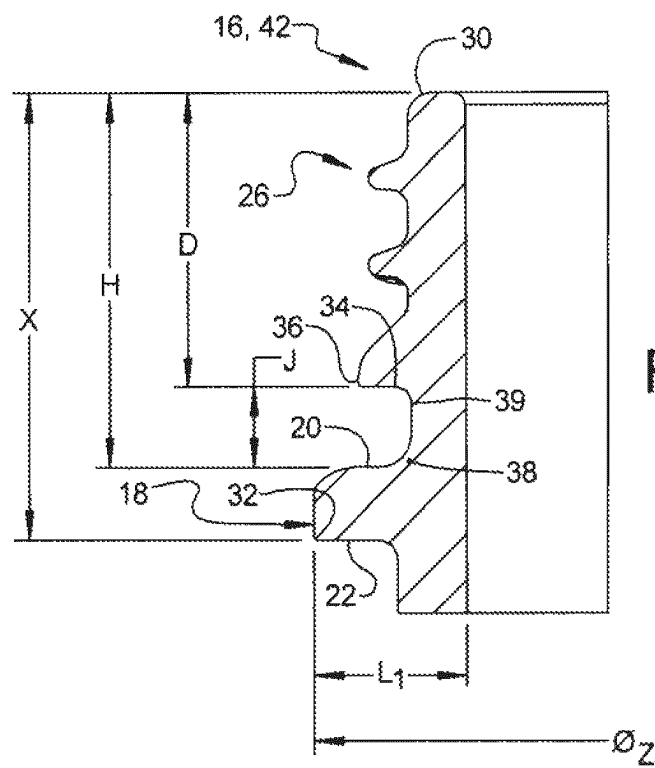


FIG 5

1

LIGHTWEIGHT PLASTIC CONTAINER AND PREFORM**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a continuation of U.S. patent application Ser. No. 18/377,493, filed Oct. 6, 2023, which is a continuation of U.S. patent application Ser. No. 18/084,064, filed Dec. 19, 2022, now U.S. Pat. No. 11,780,634, which is a continuation of U.S. patent application Ser. No. 17/314,721, filed May 7, 2021, now U.S. Pat. No. 11,560,250, which is a continuation of U.S. patent application Ser. No. 16/598,452, filed Oct. 10, 2019, which is a continuation of U.S. patent application Ser. No. 16/013,139, filed Jun. 20, 2018, now U.S. Pat. No. 10,457,437, which is a continuation of U.S. patent application Ser. No. 16/012,302, filed Jun. 19, 2018, now U.S. Pat. No. 10,266,299, which is a continuation of U.S. patent application Ser. No. 15/495,084, filed Apr. 24, 2017, now U.S. Pat. No. 10,023,345, which is a continuation of U.S. patent application Ser. No. 15/404,731, filed Jan. 12, 2017, now U.S. Pat. No. 9,738,409, which is a continuation of U.S. patent application Ser. No. 15/383,179, filed Dec. 19, 2016, now U.S. Pat. No. 9,850,019, which is a continuation of U.S. patent application Ser. No. 15/220,731, filed Jul. 27, 2016, now U.S. Pat. No. 9,522,759, which is a continuation of U.S. patent application Ser. No. 14/803,505, filed Jul. 20, 2015, now U.S. Pat. No. 9,403,310, which is a continuation of U.S. patent application Ser. No. 14/688,734, filed Apr. 16, 2015, now U.S. Pat. No. 9,139,326, which is a continuation of U.S. patent application Ser. No. 14/511,848, filed Oct. 10, 2014, now U.S. Pat. No. 9,033,168, which is a divisional of U.S. patent application Ser. No. 11/749,501, filed May 16, 2007, now U.S. Pat. No. 8,857,637, all of which are incorporated herein by reference in their entirety.

TECHNICAL FIELD

The present invention relates to plastic containers, including injection molded and/or blow molded containers.

BACKGROUND

It is desirable to improve the stability of plastic containers and the handling of preforms that are used to form containers. At the same time, for economic and efficiency reasons, it is also desirable to provide containers and preforms that are suitable for their intended applications yet have a reduced weight.

SUMMARY

A plastic container is provided that includes a hollow body portion including a lower supporting base portion; a sidewall portion extending upwardly from the base portion; and a neck portion extending upwardly from the sidewall portion. The neck portion includes a support flange having an upper and lower surface, at least one thread, and a dispensing opening at the top of the neck portion. In embodiments, a closure may be provided to form an assembly. In embodiments, the container may be comprised of PET, the weight of the neck portion from the lower surface of the support flange to a top of the dispensing opening may be 3.0 grams or less, and the vertical distance from the top of the dispensing opening to the lower surface of the support

2

flange may be 0.580 inches or less. A preform and method for making a container are also disclosed.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

FIG. 1 is a front elevational view of a plastic container according to an embodiment of the invention.

FIG. 2 is a front elevation view of a preform according to another embodiment of the invention.

FIG. 3 is a cross-sectional view of a preform according to an embodiment of the invention.

FIG. 4 is a partial enlarged view of the area illustrated in FIG. 2.

FIG. 5 is a partial cross sectional view of an upper portion of a container or preform according to an embodiment of the invention.

DETAILED DESCRIPTION

Reference will now be made in detail to embodiments of the present invention, examples of which are described herein and illustrated in the accompanying drawings. While the invention will be described in conjunction with embodiments, it will be understood that they are not intended to limit the invention to these embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims.

A representative container 10 according to an embodiment of the present invention is generally shown in FIG. 1. Container 10 includes a lower supporting base portion 12, a sidewall portion 14, and a neck portion 16.

The sidewall portion may be cylindrical or non-cylindrical, and may include various formations, for example, without limitation, label panels, strengthening ribs, etc. The neck portion 16 includes a support flange 18 having an upper surface 20 and a lower surface 22. Support flange 18 is generally provided to facilitate the handling of containers, during formation and thereafter. Neck portion 16 further includes a tamper-evident formation 28 and a dispensing opening 24 positioned at, and formed by, the top of the neck portion 16. In an embodiment, the dispensing opening has an inner diameter that is at least 22 mm. However, the dispensing opening may be of various conventional or non-conventional sizes and may for example, comprise a circular opening having an inner diameter from 22 mm to 29 mm.

Container 10 is comprised of plastic. In an embodiment, the container may be comprised of polymer, such as a polymer that provides good visual clarity when bi-axially oriented like polyethylene terephthalate (PET). However, the invention is not limited to a specific polymer, and containers and preforms that are provided according to the teachings of the present invention may be comprised of a wide number of polymers and/or blends, including those that included recycled material.

The tamper-evident formation 28, may be continuous, as generally illustrated, or may include one or more discontinuous formations. In other embodiments, the tamper-evident formation may comprise a formation (e.g., a lug or lugs) that extends from the upper and/or lower surface of the support ring. However, the invention is not limited to the illustrated means for indicating tampering and other means

for indicating tampering, such as a covering (e.g., a foil covering) may be used instead of or in addition to other tamper-evident formations.

Embodiments of the container may additionally include a shoulder portion **15**, a plurality of threads **26** for receiving a closure (not shown). Shoulder portion **15** may comprise an upper portion of the sidewall portion **14**, and may extend inwardly into the neck portion **16**, although many container configurations do not include a shoulder portion. A feature of containers according to embodiments of the present invention is a lowering of the center of gravity. For most configurations and applications, a lower center of gravity provides a container that is more stable and less likely to tip during manufacturing, processing, and/or handling. The center of gravity is the point at which if a body is suspended it would be perfectly balanced. For uniformly consistent, symmetrical bodies, the center of gravity is at the geometrical center. For non-consistent or non-symmetrical bodies, the center of gravity needs to be determined. Moreover, for purposes of the instant disclosure, the center of gravity is associated with preforms and with containers that are in an unfilled condition.

The center of gravity for container **10** illustrated in FIG. **1** is generally shown at **50**. It is noted that for the instant container configuration, the center of gravity **50** is above the mid-height of the container due to the additional material, and hence weight, that is provided in the container finish portion—i.e., the neck portion **16**. However, as described further herein, with a reduction in the vertical length and weight of the neck portion **16** (or elements thereof), the center of gravity for a container produced in accordance with the teachings of the present invention may have a center of gravity (e.g., **50**) that is vertically lower than that of a container that employs a conventional (vertically longer and heavier) neck portion. For example, without limitation, the ratio of the vertical height of the center of gravity to the vertical height of the container may be less than 0.57. Notably, for some embodiments the ratio may be less than 0.53.

Additionally, in an embodiment of the invention, portions of the container—exclusive of the neck portion—may be stretched (e.g., in a stretch blow molding operation) to more than 3 times their initial (i.e., preform component) length in the axial direction.

As one would also expect, with a reduction in the vertical length and weight of the neck portion, the center of gravity for an associated preform will also be reduced when compared to an preform of like material and design below the neck portion that includes a longer vertical and heavier neck portion.

FIGS. **2** and **3** generally illustrate a preform **40** according to an embodiment of the invention. Preform **40** can, for instance, be used to form a wide variety of containers, including a container such as that illustrated in FIG. **1**. By way of example, without limitation, preform **40** may be injection molded and/or blow molded, and may form an almost limitless number of container configurations. FIG. **4** depicts an enlarged portion of FIG. **2**.

Preform **40** is also shown including a neck portion **42**. For many applications, the neck portion provided in connection with a preform will remain substantially the same, and have substantially the same dimensions, as the neck portion of a molded container produced from the preform. Consequently, the neck portion **16** of the container **10** and the neck portion **42** of the preform may be substantially consistent, while the remaining portions of the preform and container—i.e., those below the respective neck portions—may change signifi-

cantly. For ease of reference, common elements in the neck portion of the illustrated container and the neck portion of the illustrated preforms are provided with common reference numerals.

FIG. **5** illustrates a partial cross sectional view of an upper portion of a preform or a container formed from preform. In an embodiment, such as that generally illustrated, the vertical distance **X** from the top of the dispensing opening/neck portion (e.g., point **30**) to the lower surface **22** of the support flange **18** (e.g., point **32**) is 0.580 inches or less. For some embodiments, **X** may be 0.500 inches or less; for other embodiments, vertical distance **X** may be less than 0.450 inches.

Moreover, as generally illustrated, the vertical distance **H** from the top of the dispensing opening/neck portion (e.g., point **30**) to the upper surface **20** of the support flange **18** may be 0.50 inches or less. For some embodiments, **H** may be 0.40 inches or less. Also, for some embodiments, the vertical distance **D** from the top of the dispensing opening/neck portion (e.g., point **30**) to the lower surface of the tamper-evident formation (e.g., point **34**) may be 0.30 inches or less.

In an embodiment, the vertical distance **J** from a furthest radially-extending portion of the lower surface of the tamper-evident formation **28** (e.g., point **36**) to the upper surface **20** of the support flange **18**, which generally equates to **H** minus **D**, may be 0.15 inches or less. For some embodiments, **J** may be 0.10 inches or less, and for other embodiments, vertical distance **J** may be less than 0.09 inches. For yet other embodiments, vertical distance **J** may be less than 0.08 inches.

Also, in an embodiment of the invention, the vertical distance between a furthest outwardly radially-extending portion of the lower surface of the tamper-evident formation (e.g., point **36**) to the lower surface **22** of the support flange **18** at the same outward radial distance—which may generally equate or coincide with **X** minus **D**—is 0.20 inches or less, and for some embodiments may be 0.15 inches or less.

In an embodiment, support flange **18** has a radially extending length **L₁** that is 0.20 inches or less. For some applications, length **L₁** may be further reduced to 0.17 inches or less. With further reference to support flange **18**, the angle—from horizontal—provided by a furthest outward radially extending portion of the lower surface **22** of support flange **18** (e.g., point **32**) to the nearest radially-extending portion of the upper surface **20** of the support flange **18** is 16° or greater, and may be 20.0°±2°. However, for some embodiments, such as that generally depicted in FIG. **5**, whereas a blending radius is provided to transition supporting flange **18** into an adjacent vertical portion of the neck (e.g., segment **39**), the nearest radially-extending portion of the upper surface **20** of support flange **18** may be a theoretical position within supporting flange **18**—e.g., point **38**. Furthermore, for some embodiment, the least distance from a furthest radially-extending portion of the support flange (e.g., point **32**) to the upper surface of the dispensing opening (e.g., at or about **30**) is 0.60 inches or less, and for some neck portions may be 0.50 inches or less.

Embodiments of preforms and containers may have a neck portion that weighs 3.0 grams or less. For some embodiments, the weight of the neck portion can be 2.3 grams or less. Further, for a 500 ml version of a container made in accordance with an embodiment of the invention, the total weight of the preform and an unfilled weight of a container produced from such a preform may be 11 grams or less, and for some embodiments may be 10 grams or less. Of

5

course, for many embodiments, without limitation, the pre-form and resulting container will weigh at least 9 grams.

By providing a neck portion **16** for a container **10** that incorporates one or more aspects of the foregoing embodiments, the center of gravity (see, e.g., **50** in FIG. 1) for the container may be lowered. For e.g., for a 500 ml container of with a configuration as generally shown in FIG. 1, the weight of the neck portion may be reduced from a conventional 3.4 to 2.0 g. Based on such a reduction in weight, the center of gravity (see, e.g., **50**) may become at least about 0.48 inches lower than that provided for a similarly configured container having a 3.4 g finish—and will likely be about 0.48 and 0.58 inches lower than with the heavier (e.g., 3.4 g) conventional finish. Providing a neck portion in accordance with embodiments disclosed herein for such a container can provide a lowering of center of gravity as a percentage of height from bottom that ranged from about 4.5% to about 6% when compared to a similar container with a conventional 3.4 g neck portion. Moreover, when a container such as that discussed in this paragraph (e.g., 2.0 g neck portion/finish) is compared to a conventional container (e.g. 3.4 g neck portion/finish), the calculations provide a drop or lowering in center of gravity that provides an approximately 10.5% to 12.2% relative percent change (i.e., percent improvement).

It is noted that in addition to the material and economic benefits that may be achieved by “light-weighting” and lowering a comparative center of gravity in a resultant container, a lowering in the center of gravity of a preform may also provide certain manufacturing benefits. For example, without limitation, a preform with a comparatively lower center of gravity may provide for improved sorting and/or handling during production and manufacturing. That is, among other things, a preform with a lower center of gravity can provide for comparatively more stable or improved retention and processing. Similarly, a container with a lower center of gravity may exhibit improved handling, for instance, without limitation, in connection with de-palletizing or with “table top” conveying systems. Further, a lower center of gravity can provide a container, filled or unfilled, with improved stability. It is further noted, however, that the present invention is not limited to containers that are blown and filled in distinct or separate operations. That is, without limitation, preforms and containers provided in accordance with the teachings of the present invention also lend themselves for use in connection with various conventional “blow-and-fill” operations, including those in which a container is filled just after formation (e.g., within seconds of formation) in close proximity to where the container is formed. The operation comprising the blow-and-fill may be a single, integrated machine, or may be comprised of two or more separate devices that are adjacent or in close proximity to one another.

The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and various modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to explain the principles of the invention and its practical application, to thereby enable others skilled in the art to utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the claims appended hereto and their equivalents.

6

What is claimed is:

1. A plastic preform comprising:
 - a lower supporting base portion;
 - a sidewall portion extending upwardly from the lower supporting base portion; and
 - a neck portion extending upwardly from the sidewall portion, the neck portion including:
 - a dispensing opening positioned at a top of the neck portion;
 - threads positioned below the dispensing opening;
 - a tamper-evident formation positioned directly below the threads, the tamper-evident formation having a lower surface; and
 - a support flange positioned below the tamper-evident formation, the support flange having an upper surface and a lower surface;
 wherein the plastic preform is formed of a material comprising polyethylene terephthalate (PET); a vertical distance from the lower surface of the support flange to the top of the neck portion is from 0.425 to 0.500 inches; a vertical distance from the top of the neck portion to the lower surface of the tamper-evident formation is 0.30 inches or less; an outside diameter of the support flange is greater than 22 mm and less than or equal to 39.2 mm, and a weight of the neck portion is 2.3 grams or less.

2. The plastic preform according to claim 1, wherein a vertical distance from the lower surface of the tamper-evident formation to the lower surface of the support flange is from 0.125 to 0.150 inches.

3. The plastic preform according to claim 1, wherein the threads comprise non-vented threads.

4. The plastic preform according to claim 1, wherein the threads comprise multiple-lead threads.

5. The plastic preform according to claim 1, wherein the threads comprise triple-lead threads.

6. The plastic preform according to claim 1, wherein a vertical distance from the upper surface of the support flange to the top of the neck portion is 0.40 inches or less.

7. The plastic preform according to claim 1, wherein a vertical distance from the lower surface of the tamper-evident formation to the upper surface of the support flange is from 0.08 to 0.10 inches.

8. The plastic preform according to claim 1, wherein a vertical distance from the lower surface of the support flange to the top of the neck portion is from 0.425 to 0.450 inches.

9. The plastic preform according to claim 1, wherein the plastic preform comprises recycled material.

10. A plastic preform comprising:
 - a lower supporting base portion;
 - a sidewall portion extending upwardly from the lower supporting base portion; and
 - a neck portion extending upwardly from the sidewall portion, the neck portion including:
 - a dispensing opening positioned at a top of the neck portion;
 - threads positioned below the dispensing opening;
 - a tamper-evident formation positioned directly below the threads, the tamper-evident formation having a lower surface; and
 - a support flange positioned below the tamper-evident formation, the support flange having an upper surface and a lower surface;
 wherein the plastic preform is formed of a material comprising polyethylene terephthalate (PET); a vertical distance from the lower surface of the support flange to the top of the neck portion is from 0.425 to 0.450

7

inches; a vertical distance from the top of the neck portion to the lower surface of the tamper-evident formation is 0.30 inches or less; and a weight of the neck portion is 2.3 grams or less.

11. The plastic preform according to claim 10, wherein a vertical distance from the lower surface of the tamper-evident formation to the lower surface of the support flange is from 0.125 to 0.150 inches.

12. The plastic preform according to claim 10, wherein the threads comprise non-vented threads.

13. The plastic preform according to claim 10, wherein the threads comprise multiple-lead threads.

14. The plastic preform according to claim 10, wherein the threads comprise triple-lead threads.

15. The plastic preform according to claim 10, wherein a vertical distance from the upper surface of the support flange to the top of the neck portion is from 0.40 inches or less.

8

16. The plastic preform according to claim 10, wherein a vertical distance from the lower surface of the tamper-evident formation to the upper surface of the support flange is from 0.08 to 0.10 inches.

17. The plastic preform according to claim 10, wherein an outside diameter of the support flange is greater than 22 mm and less than or equal to 39.2 mm.

18. The plastic preform according to claim 10, wherein the plastic preform comprises recycled material.

19. A method for blow molding a plastic container from a plastic preform, comprising:

blow molding the plastic preform as recited in claim 1 to form a plastic container.

20. A plastic container, comprising:

a plastic container blow molded from the plastic preform recited in claim 1.

* * * * *