

(12) **United States Patent**
Kikkawa

(10) **Patent No.:** **US 12,383,385 B2**
(45) **Date of Patent:** **Aug. 12, 2025**

(54) **INTERDENTAL CLEANING TOOL**

(71) Applicant: **Kobayashi Pharmaceutical Co., Ltd.**,
Osaka (JP)

(72) Inventor: **Tasuku Kikkawa**, Osaka (JP)

(73) Assignee: **Kobayashi Pharmaceutical Co., Ltd.**,
Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 364 days.

(21) Appl. No.: **17/418,435**

(22) PCT Filed: **Nov. 18, 2019**

(86) PCT No.: **PCT/JP2019/045067**

§ 371 (c)(1),

(2) Date: **Jun. 25, 2021**

(87) PCT Pub. No.: **WO2020/137252**

PCT Pub. Date: **Jul. 2, 2020**

(65) **Prior Publication Data**

US 2022/0087796 A1 Mar. 24, 2022

(30) **Foreign Application Priority Data**

Dec. 28, 2018 (JP) 2018-248342

(51) **Int. Cl.**

A61C 15/00 (2006.01)

A46B 1/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **A61C 15/00** (2013.01); **A46B 1/00**
(2013.01); **A46B 9/021** (2013.01); **A46D 3/005**
(2013.01); **A46B 2200/108** (2013.01)

(58) **Field of Classification Search**

CPC **A46B 2200/108**; **A46B 3/04**; **A46B 3/005**;
A46B 15/0069; **A46D 3/00**; **A46D 3/005**;
A61C 15/00; **A61C 15/02**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,280,518 A * 7/1981 Gambaro A46B 7/04
132/329

5,775,346 A 7/1998 Szyzskowski
(Continued)

FOREIGN PATENT DOCUMENTS

DE 202006019175 U1 * 8/2007 A46B 9/02
DE 102016005012 A1 * 10/2017 A46B 15/0069

(Continued)

OTHER PUBLICATIONS

Translation of JP 2017000775 A (Year: 2017).*

(Continued)

Primary Examiner — David S Posigian

Assistant Examiner — Steven Huang


(74) *Attorney, Agent, or Firm* — Wolf, Greenfield &
Sacks, P.C.

(57)

ABSTRACT

An interdental cleaning tool is provided, which is capable of suppressing from being broken. The interdental cleaning tool **1** includes: a base material portion **10** including a base section **11** and a shaft section **12** extending from the base section **11**; a soft portion **20** including a covering section **21** that covers a distal end part **12a** of the shaft section **12**, and a plurality of projections **22** extending from the covering section **21**; and an extension soft portion **30** covering a middle part **12b** of the shaft section **12**, the middle part being located further toward the proximal side than the soft portion **20** so as to extend the covering section **21** toward the proximal side of the shaft section **12**, the extension soft portion **30** not being provided with the projections **22**.

7 Claims, 7 Drawing Sheets

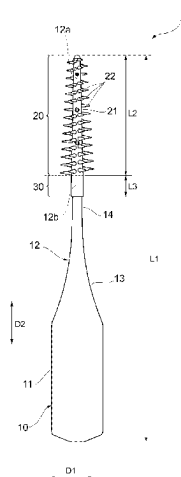

(51) **Int. Cl.**
A46B 9/02 (2006.01)
A46D 3/00 (2006.01)

WO WO 2016/167191 A1 10/2016
 WO WO 2018/124302 A1 7/2018
 WO WO-2022243505 A1 * 11/2022

OTHER PUBLICATIONS

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,085,761	A	7/2000	Inaba	
6,158,444	A	12/2000	Weihrauch	
10,195,005	B2	2/2019	Wallström et al.	
11,026,771	B2	6/2021	Kikkawa	
11,484,110	B2	11/2022	Butz et al.	
12,083,723	B2	9/2024	Kikkawa	
2009/0193603	A1	8/2009	Ponzini	
2009/0230756	A1	9/2009	Crossman	
2010/0015567	A1	1/2010	Elbaz et al.	
2010/0024839	A1	2/2010	Kalbfeld et al.	
2010/0043165	A1	2/2010	Juentgen et al.	
2011/0226276	A1	9/2011	Limongi et al.	
2014/0008837	A1 *	1/2014	Eatherton	 B29C 45/1671 264/243
2014/0123423	A1	5/2014	Morgott	
2015/0114428	A1 *	4/2015	Kato	 A46B 15/0093 264/243
2015/0238294	A1	8/2015	Coopersmith	
2015/0257861	A1	9/2015	Dishon	
2015/0282601	A1	10/2015	Butz et al.	
2015/0335141	A1	11/2015	Schär et al.	
2016/0058531	A1	3/2016	Adriano et al.	
2017/0172289	A1	6/2017	Habibi-Naini et al.	
2017/0216002	A1 *	8/2017	Butz	 A46B 3/005
2017/0319309	A1	11/2017	Gengyo et al.	
2017/0319310	A1	11/2017	Gengyo et al.	
2018/0168783	A1 *	6/2018	Kato	 A46B 3/005
2019/0090623	A1	3/2019	Görich et al.	
2019/0183617	A1	6/2019	Pötsch et al.	
2019/0289984	A1	9/2019	Fischer	
2019/0343608	A1	11/2019	Kikkawa et al.	
2020/0188071	A1	6/2020	Kikkawa	
2020/0189159	A1	6/2020	Kikkawa	
2020/0260853	A1	8/2020	Zwimpfer	
2020/0405462	A1	12/2020	Petersen	
2022/0047365	A1	2/2022	Kikkawa et al.	
2022/0063155	A1	3/2022	Kikkawa	
2023/0414334	A1	12/2023	Kikkawa et al.	

FOREIGN PATENT DOCUMENTS

EP	2882313	B1 *	11/2016	 A46B 3/005
JP	2001-506514	A	5/2001	
JP	D1421422	S	8/2011	
JP	2013-188299	A	9/2013	
JP	2013192866	A *	9/2013	
JP	D1489187	S	12/2013	
JP	D1492452	S	2/2014	
JP	D1492453	S	2/2014	
JP	D1492784	S	2/2014	
JP	2016-087362	A	5/2016	
JP	5929346	B2	6/2016	
JP	2016104383	A *	6/2016	
JP	2016-131602	A	7/2016	
JP	2017-000762	A	1/2017	
JP	2017-000775	A	1/2017	
JP	2017-000776	A	1/2017	
JP	2017-118959	A	7/2017	
JP	2017-119095	A	7/2017	
JP	2017-136202	A	8/2017	
JP	6292246	B2	3/2018	
JP	2018-140088	A	9/2018	
JP	2018-158004	A	10/2018	
WO	WO 2013/176297	A1	11/2013	
WO	WO 2014/005659	A1	1/2014	
WO	WO 2014/054011	A1	4/2014	
WO	WO-2016020029	A1 *	2/2016	 A46B 1/00
WO	WO 2016/076373	A1	5/2016	

Translation of JP 2013192866 A (Year: 2013).*

Translation of DE 102016005012 A1 (Year: 2017).*

Translation of Tachuljukin (Year: 2007).*

Translation of JP 2016104383 A (Year: 2016).*

Translation of EP 2882313 B1 (Year: 2016).*

Kikkawa et al., Interdental cleaning tool. Co-pending U.S. Appl. No. 17/418,373, filed Jun. 25, 2021.

Kikkawa et al., Interdental cleaning tool. Co-pending U.S. Appl. No. 18/463,481, filed Sep. 8, 2023.

International Search Report and Written Opinion for International Application No. PCT/JP2019/045067, mailed Jan. 21, 2020.

Notice of Submission of Publications for Japanese Application No. 2018-248342, dated May 19, 2023.

Reason for Submission for Japanese Application No. 2018-248342, dated May 23, 2023.

[No Author Listed] 2011 Good Design Award, Silicone Rubber Interdental Brush. Japan Institute of Design Promotion. <https://www.g-mark.org/en/gallery/winners/9d78119a-803d-11ed-862b-0242ac130002?years=2011>. 2011:1-8.

[No Author Listed] Labeled drawings corresponding to JPD1421422 S: front view, bottom view, A-A cross-sectional view, C-C partially enlarged view, and reference perspective view. Aug. 22, 2011:1-4.

[No Author Listed] Dental Pro Silicone Rubber Interdental Brush (12 pieces). Yodobashi. <https://www.yodobashi.com/product/100000001001664834/>. Date first available Dec. 16, 2012:1-4.

[No Author Listed] Photographs showing dimensions of Dental Pro Silicone Rubber Interdental Brush (12 pieces). Photos undated; product first available Dec. 2012:1-2.

Kikkawa, Method for manufacturing interdental cleaning tool. Co-pending U.S. Appl. No. 17/418,437, filed Jun. 25, 2021.

Notice of Submission of Information for Japanese Application No. 2018-248342, Appeal No. Fufuku 2023-14939, filed Dec. 7, 2023.

Reason for Submission for Japanese Application No. 2018-248342, Appeal No. Fufuku 2023-14939, filed Dec. 7, 2023.

Notice of Submission of Information for Japanese Application No. 2018-248343, Appeal No. Fufuku 2023-19212, filed Dec. 7, 2023.

Reason for Submission for Japanese Application No. 2018-248343, Appeal No. Fufuku 2023-19212, filed Dec. 7, 2023.

[No Author Listed] Detailed drawings of JPD1489187S: the front view, the plan view and the A-A' end view of JPD1489187S, with the name of each component, etc. being added. JPD1489187S issued Dec. 27, 2013. 1-6.

[No Author Listed] Detailed drawings of JPD1492452S: the front view and the right side view of JPD1492452S, with the name of each component, etc. being added. JPD1492452S issued Feb. 14, 2014. 1-4.

[No Author Listed] Detailed drawings of JPD1492453S: the front view and the right side view of JPD1492453S, with the name of each component, etc. being added. JPD1492453S issued Feb. 14, 2014. 1-4.

[No Author Listed] Detailed drawings of JPD1492784S: the front view and the right side view of JPD1492784S, with the name of each component, etc. being added. JPD1492784S issued Feb. 14, 2014. 1-4.

U.S. Appl. No. 17/418,437, filed Jun. 25, 2021, Kikkawa.

Notice of Submission of Information for Japanese Application No. 2018-248342, dated Jan. 30, 2025.

Translation of Submission of Information for Japanese Application No. 2018-248342, dated Jan. 30, 2025.

[No Author Listed] Dental Pro Silicone Rubber Interdental Brush Usable for All Teeth from Front Teeth to Back Teeth. dentalpro.com. The Wayback Machine—<https://web.archive.org/web/20130819212527/http://dentalpro.co.jp/product/interdentalbrush/silicon.html>. [last accessed Jan. 30, 2025] 4 pages.

(56)

References Cited

OTHER PUBLICATIONS

[No Author Listed] Transition Definition. Webster Dictionary, Merriam Webster. Dec. 25, 2024. <https://www.merriam-webster.com/dictionary/transition>. [last accessed Jan. 10, 2025] 6 pages.

* cited by examiner

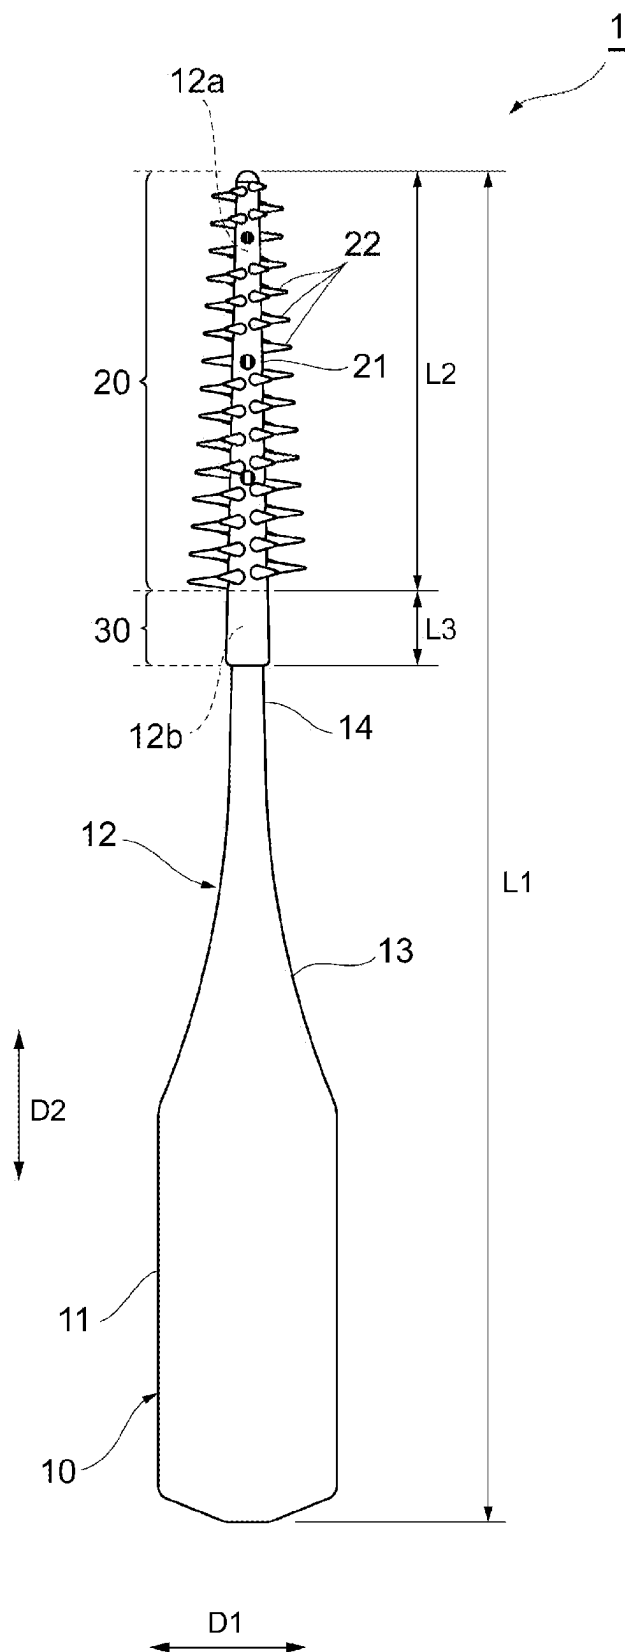


FIG. 1

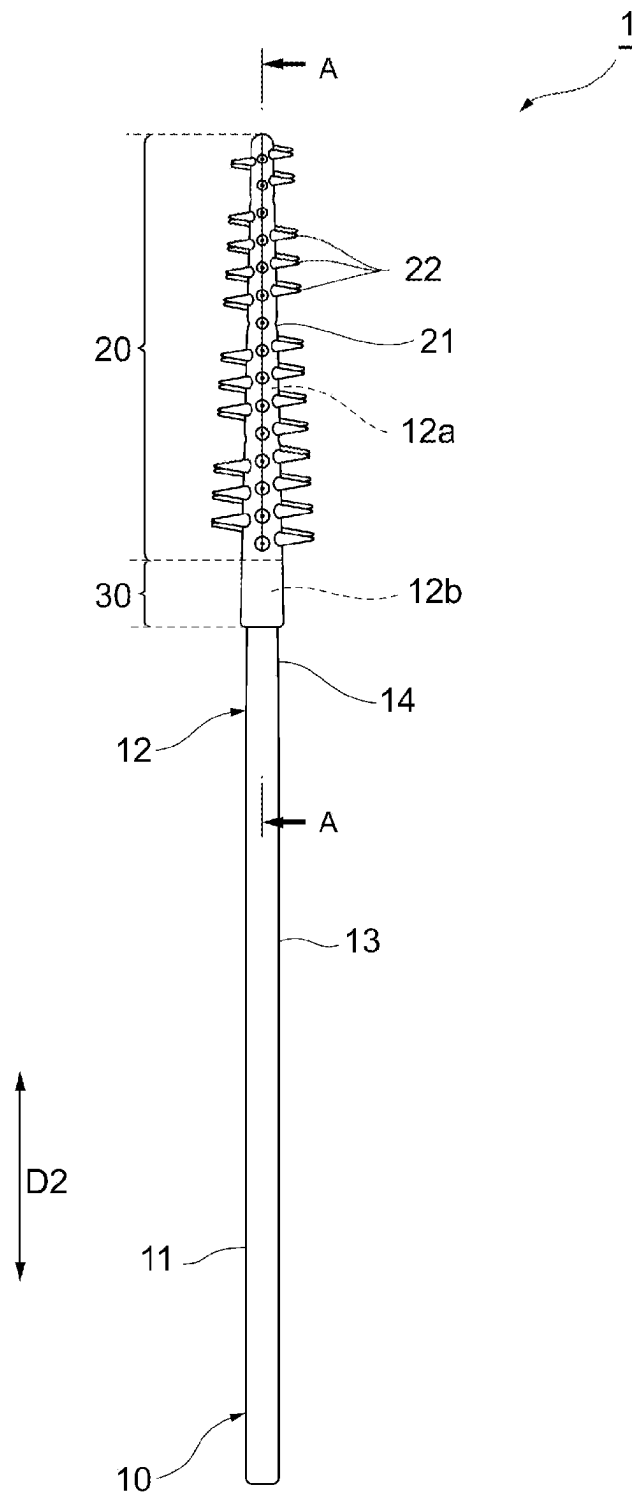


FIG. 2

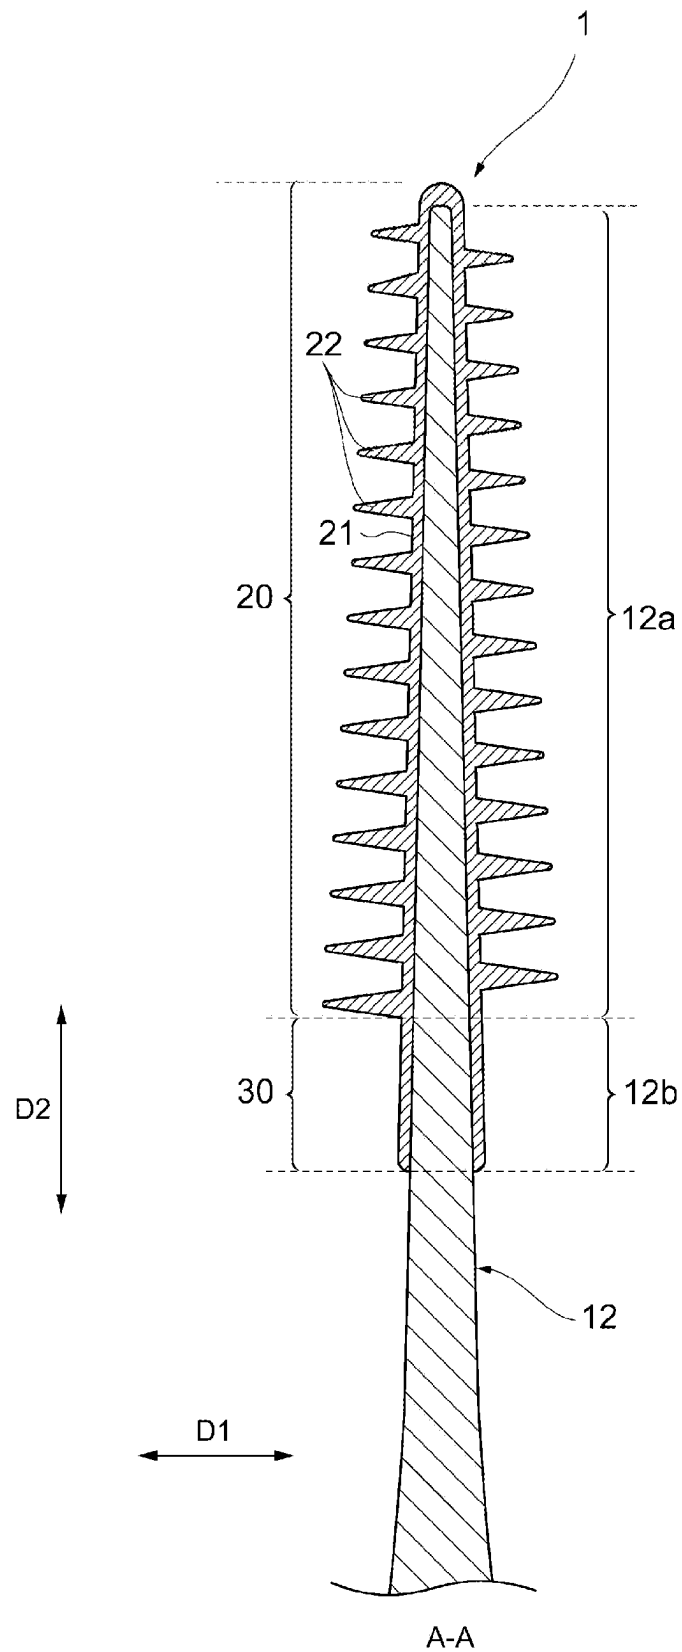


FIG. 3

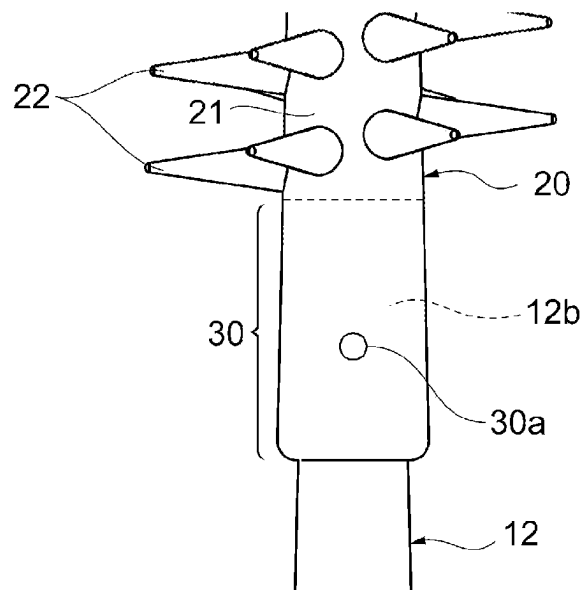


FIG. 4

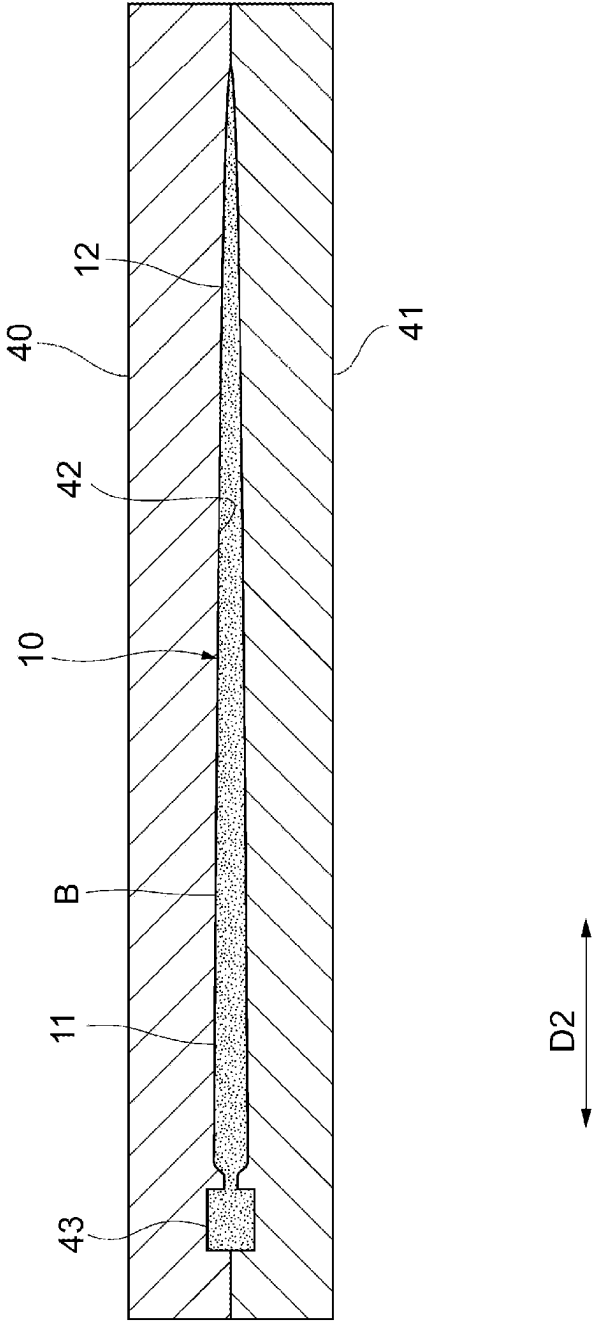


FIG. 5

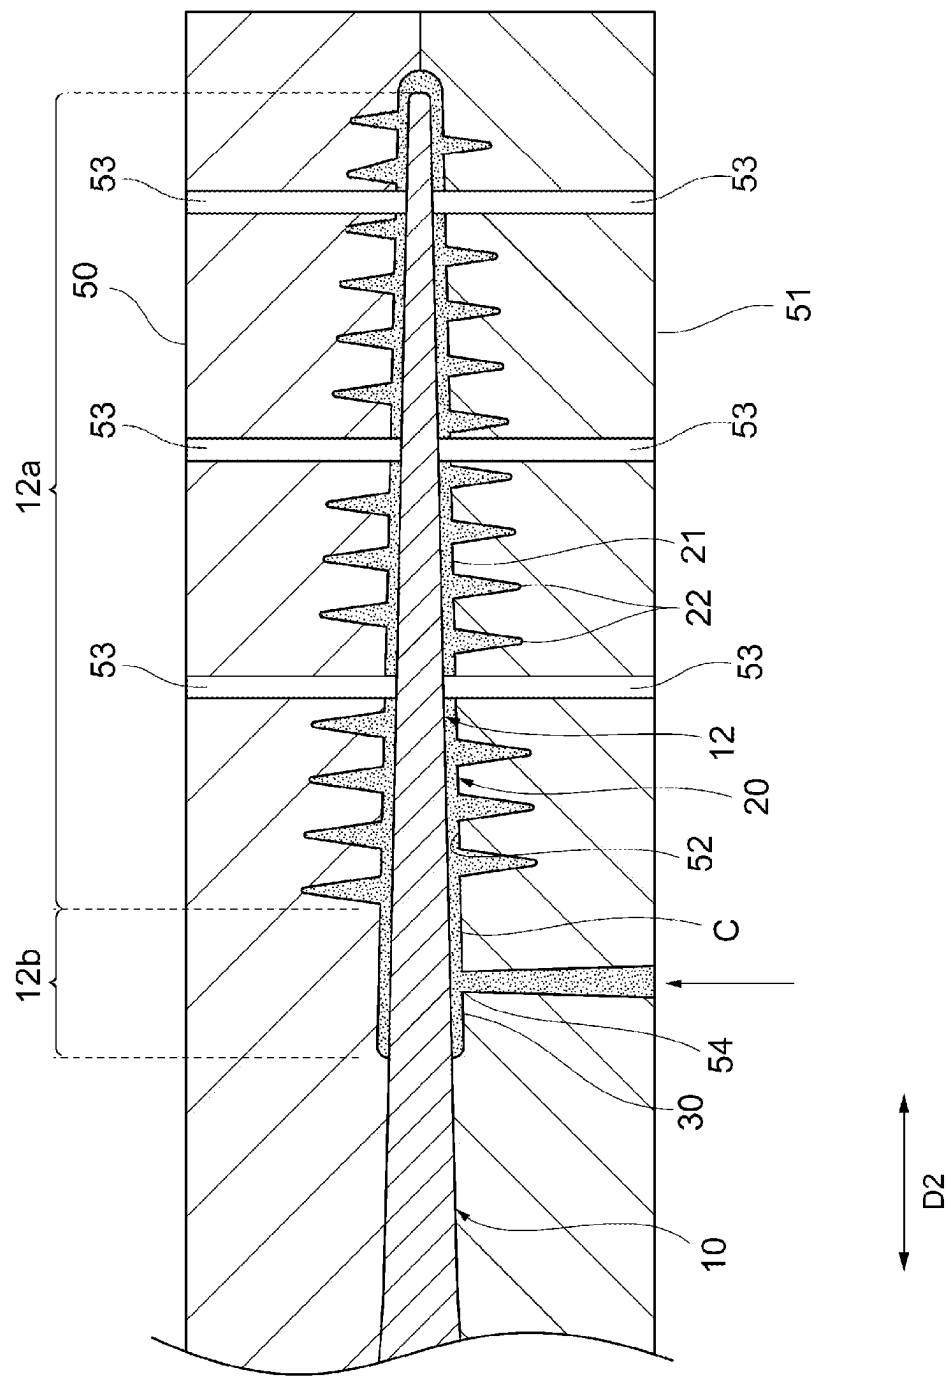


FIG. 6

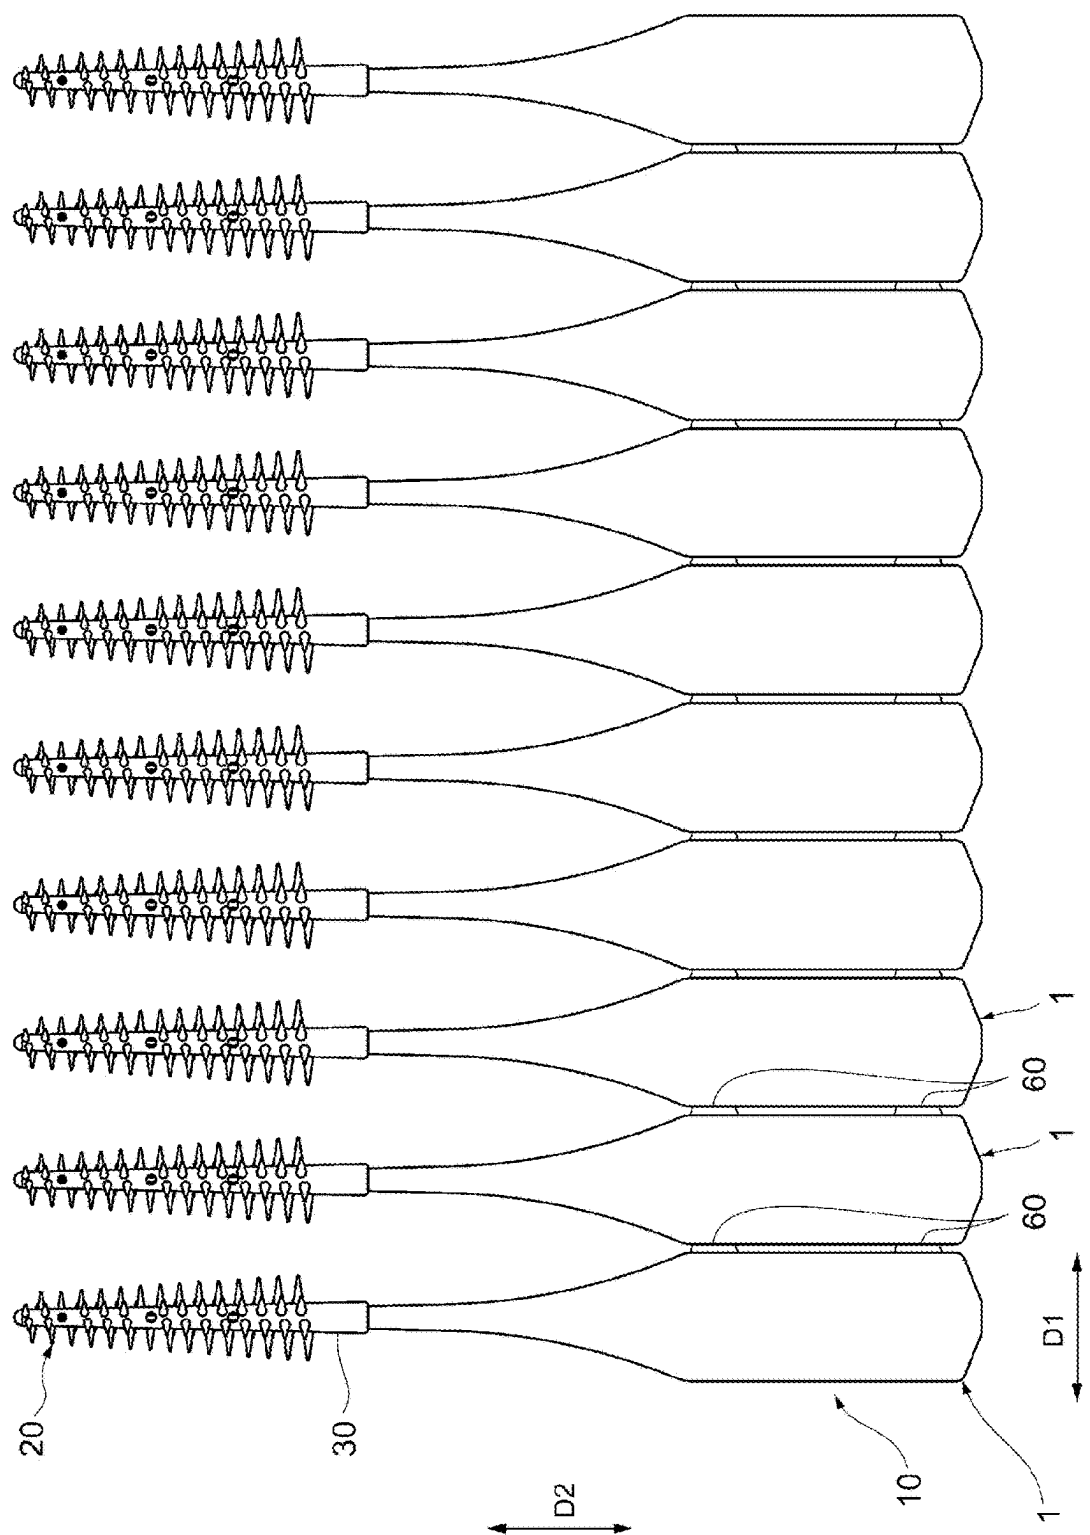


FIG. 7

INTERDENTAL CLEANING TOOL**CROSS-REFERENCE TO RELATED APPLICATIONS**

This Application is a national stage application filed under 35 U.S.C. § 371 of International Patent Application Serial No. PCT/JP2019/045067, filed Nov. 18, 2019, which claims the benefit of Japanese Application No. 2018-248342, filed Dec. 28, 2018.

TECHNICAL FIELD

The present invention relates to an interdental cleaning tool.

BACKGROUND ART

Conventionally, interdental cleaning tools for cleaning the spaces between the teeth are known. For example, Patent Document 1 discloses an interdental cleaning tool that includes a base material portion made of a synthetic resin and a soft portion made of an elastomer. The base material portion includes a flat handle section, which serves as a handle, and an elongated core base material section, which extends from the handle section. The soft portion includes a covering section, which covers the distal end part of the core base material section, and a plurality of projections, which extend outward from the covering section.

CITATION LIST

Patent Document

Patent Document 1: WO 2013/176297

SUMMARY**Technical Problem**

However, in the above-mentioned interdental cleaning tool, the position of the end of the region including the projections that is on the handle section side is substantially the same as the starting point of the soft portion (the boundary between the part of the base material portion where the soft portion is present and the part without the soft portion). For this reason, with the above-mentioned interdental cleaning tool, stress tends to be concentrated at the starting point of the soft portion, which is the end of the projections. Consequently, the interdental cleaning tool tends to break at the starting point of the soft portion when the projections are forcibly inserted deeply into a narrow space between teeth, for example. The broken soft portion can be undesirably stuck between the teeth, which is difficult to be taken out.

In view of the above, it is an objective of the present invention to provide an interdental cleaning tool capable of suppressing the interdental cleaning tool from being broken at the starting point of a soft portion.

Solution to Problem

An interdental cleaning tool according to one aspect of the present invention includes: a base material portion including a base section and a shaft section extending from the base section; a soft portion including a covering section that covers a distal end part of the shaft section, and a plurality

of projections projecting from the covering section; and an extension soft portion covering a part of the shaft section, the part being located further toward a proximal side than the distal end part so as to extend the covering section toward the proximal side of the shaft section, and the extension soft portion not being provided with the projections. Here, the covering section refers to a section that extends from the distal end to the position of the projection that is the closest to the proximal end and in which the soft portion covers the shaft section. The covering section does not include the extension soft portion.

According to this aspect, the interdental cleaning tool includes the extension soft portion which covers a part of the shaft section, the part being located further toward a proximal side than the soft portion and not being provided with the projections. As such, the position of the end of the soft portion having the projections is spaced apart from the starting point of the extension soft portion on the proximal side (the boundary between the part where the extension soft portion of the base material portion is present and the part without the extension soft portion). Consequently, the stress applied to the interdental cleaning tool during use is dispersed and not concentrated at the starting point of the soft portion. This suppresses the interdental cleaning tool from being broken at the starting point of the soft portion. Furthermore, even if the shaft section breaks at the starting point of the soft portion, the broken part of the shaft section remains connected to the rest of the shaft section by the soft portion and the extension soft portion, thereby suppressing the likelihood that the broken part remains between the teeth.

In the above aspect, the extension soft portion may have a cylindrical shape covering the circumference of the shaft section.

In the above aspect, the extension soft portion may have an outer diameter same as that of the proximal end of the covering section of the soft portion.

In the above aspect, the extension soft portion preferably has a length of 3 mm or more in a direction along the shaft section.

In the above aspect, the extension soft portion may have an injection mark at which a soft material has been injected during injection molding.

Advantageous Effects of Invention

According to the present invention, an interdental cleaning tool can be provided that is capable of suppressing the interdental cleaning tool from being broken at the starting point of a soft portion.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a front view schematically showing the configuration of an interdental cleaning tool according to an embodiment of the present invention.

FIG. 2 is a side view schematically showing the configuration of the interdental cleaning tool according to the embodiment of the present invention.

FIG. 3 is a cross-sectional view showing the distal side of the interdental cleaning tool taken along line A-A in FIG. 2.

FIG. 4 is a partially enlarged view showing an injection mark of a soft material in an extension soft portion.

FIG. 5 is a cross-sectional view showing primary molds for forming a base material portion.

FIG. 6 is a cross-sectional view showing secondary molds for forming a soft portion.

FIG. 7 is a front view showing a connected member including a plurality of interdental cleaning tools.

DESCRIPTION OF EMBODIMENTS

Referring to the drawings, preferred embodiments of the present invention are now described. As shown in FIGS. 1 and 2, an interdental cleaning tool 1 according to an embodiment of the present invention includes a base material portion 10, a soft portion 20, which covers a part of the base material portion 10, and an extension soft portion 30.

The base material portion 10 has a base section 11, which serves as a holding section to be held by a user, and a shaft section 12, which extends from the base section 11 in a longitudinal direction (the up-down direction as viewed in FIG. 1) D2 extending perpendicular to a lateral direction D1 (the right-left direction as viewed in FIG. 1) of the interdental cleaning tool 1 and is to be inserted between teeth of the user. As used herein, the side corresponding to the shaft section 12 relative to the base section 11 (the upper side in the longitudinal direction D2 shown in FIG. 1) is referred to as a distal side, and the side corresponding to the base section 11 relative to the shaft section 12 (the lower side in the longitudinal direction D2 shown in FIG. 1) is referred to as a proximal side.

The base section 11 is formed, for example, in the shape of a flat rectangular plate. There is no limitation to the shape of the base section 11 as long as the user can hold it.

The shaft section 12 includes a transition section 13, which has the shape of a flat plate whose width in a front view decreases toward the distal end of the base material portion 10, and a distal end section 14, which may be cylindrical, for example, and extends linearly from the distal end of the transition section 13 to the distal end of the base material portion 10. For example, the distal end section 14 is shaped such that its diameter gradually decreases from the proximal end to the distal end.

The base material portion 10 is formed from, for example, a synthetic resin material as a base material. Examples of the synthetic resin material include polypropylene, polyethylene, acrylonitrile butadiene styrene (ABS), polybutylene terephthalate, polycarbonate, polyethylene terephthalate, polystyrene, polyacetal, polyamide, or the like. A fiber material such as glass fiber may be added to the synthetic resin material at a proportion of about 1 to 30% by weight.

The soft portion 20 is inserted between teeth of the user and functions as a cleaning portion. As shown in FIGS. 1 to 3, the soft portion 20 includes a covering section 21, which covers the outer circumferential surface of the distal end part 12a of the shaft section 12 from the proximal end to the distal end, and a plurality of projections 22 projecting outward from the covering section 21. The distal end part 12a of the shaft section 12 covered with the covering section 21 may be the same as the distal end section 14, or may be a part of the distal end section 14.

The length L2 of the soft portion 20 shown in FIG. 1 in the longitudinal direction D2 is set to, for example, 4 mm or more and 26 mm or less, preferably 9 mm or more and 21 mm or less, and more preferably 14 mm or more and 16 mm or less. The length L2 of the soft portion 20 may be 8% or more and 80% or less, preferably 15% or more and 65% or less, and more preferably 30% or more and 50% or less of the overall length L1 of the interdental cleaning tool 1 in the longitudinal direction D2, for example. The overall length L1 of the interdental cleaning tool 1 may be set to 45 mm or more and 55 mm or less, for example.

As shown in FIG. 3, the covering section 21 covers the surface of the distal end part 12a of the shaft section 12. The thickness of the covering section 21 is set to, for example, 0.05 mm to 2 mm. In the soft portion 20, the thickness of the covering section 21 gradually increases from the distal end toward the proximal end, and the extension soft portion 30 has a uniform thickness. Each projection 22 is formed in a conical shape, for example. The projections 22 are spirally arranged around the axis of the distal end part 12a of the shaft section 12 from the proximal end to the distal end of the covering section 21. The heights of the projections 22 from the outer circumferential surface of the covering section 21 gradually decrease from the proximal end to the distal end of the covering section 21. The height of each projection 22 may be set to 0.1 mm or more and 5 mm or less, for example.

The extension soft portion 30 shown in FIGS. 1 to 3 is adjacent to the soft portion 20 and closer to the proximal end of the shaft section 12 than the soft portion 20. The extension soft portion 30 covers a middle part 12b of the shaft section 12 on the proximal side of the distal end part 12a so as to extend the covering section 21 toward the proximal end of the shaft section 12. The extension soft portion 30 has a uniform thickness, is cylindrical, covers the outer circumferential surface of the middle part 12b of the shaft section 12, and does not have projections 22 such as those of the soft portion 20. The extension soft portion 30 has the same thickness as the proximal end of the covering section 21 of the soft portion 20, and is smoothly connected to the covering section 21.

The length L3 of the extension soft portion 30 shown in FIG. 1 in the longitudinal direction D2 is set to 3 mm or more, preferably 4 mm or more, more preferably 5 mm or more and 15 mm or less in a direction along the shaft section 12 (longitudinal direction D2). The length L3 of the extension soft portion 30 is set to, for example, 8% or more and 80% or less, preferably 15% or more and 65% or less, and more preferably 30% or more and 50% or less of the length L2 of the soft portion 20. The thickness of the extension soft portion 30 is set to 0.05 mm to 2 mm, for example.

As shown in FIG. 4, the extension soft portion 30 has, in its surface, an injection mark 30a at which a soft material has been injected during injection molding. The injection mark 30a is located near the central part of the extension soft portion 30 in the longitudinal direction D2. There is no limitation to the position of the injection mark 30a as long as it is located in the extension soft portion 30.

The soft portion 20 and the extension soft portion 30 are formed of a resin material as a soft material having a lower hardness than the synthetic resin material of the base material portion 10. The resin material may be an elastomer, which may be a styrene-based elastomer, silicone, an olefin-based elastomer, a polyester-based elastomer, or the like. The hardness of the elastomer is preferably 10 to 50 with the durometer hardness type A (JISK6253), and more preferably 10 to 40. In this embodiment, the durometer hardness type A is 35.

A method for manufacturing the interdental cleaning tool 1 is now described. First, as shown in FIG. 5, primary molds 40 and 41 are prepared to form the base material portion 10. A filling space 42 corresponding to the outer shape of the base material portion 10 is formed in the primary molds 40 and 41. A molten synthetic resin material B as a base material is introduced into the filling space 42 through a gate 43, and the base material portion 10 is formed (the first step). The base material portion 10 is then taken out from the primary molds 40 and 41.

5

Subsequently, as shown in FIG. 6, secondary molds **50** and **51** are prepared to form the soft portion **20**. A filling space **52** corresponding to the outer shape of the soft portion **20** and the extension soft portion **30** is formed in the secondary molds **50** and **51**. The secondary molds **50** and **51** include respective holding pins **53** of a plurality of pairs, which are movable into and out of the filling space **52** in directions perpendicular to the axis of the base material portion **10**. Furthermore, the secondary molds **50** and **51** include a gate **54**, which is formed in a position corresponding to the middle part **12b** of the shaft section **12** of the base material portion **10**, which is closer to the proximal end than the distal end part **12a**.

The base material portion **10** formed in the first step is placed in the filling space **52** of the secondary molds **50** and **51**. The holding pins **53** sandwich and hold the base material portion **10** from the front side and the back side. Then, the filling space **52** of the secondary molds **50** and **51** is filled with a molten elastomer C as a soft material through the gate **54**, and the soft portion **20** and the extension soft portion **30** are formed (the second step). The interdental cleaning tool **1** is thus formed. The interdental cleaning tool **1** is then taken out from the secondary molds **50** and **51**.

In the present embodiment, the configuration and manufacturing method of the interdental cleaning tool are described focusing on the single interdental cleaning tool **1**, but the interdental cleaning tool **1** is one of a plurality of interdental cleaning tools that are formed as a connected member in which the interdental cleaning tools **1** are connected side by side in the lateral direction **D1** by connecting sections **60** formed in the base material portions **10** as shown in FIG. 7, for example. The interdental cleaning tool **1** has been separated from the connected member as a single piece.

According to the present embodiment, the interdental cleaning tool **1** includes the extension soft portion **30**, which covers the middle part **12b** of the shaft section **12** on the proximal side of the soft portion **20** and is free of the projections **22**. As such, the position of the end of the soft portion **20** including the projections **22** is spaced apart from the starting point of the extension soft portion **30** on the proximal side (the boundary between the part of the base material portion **10** where the extension soft portion **30** is present and the part without the extension soft portion **30**). Consequently, the stress applied to the interdental cleaning tool **1** during use is dispersed and not concentrated at the starting point of the soft portion **20**. This suppresses the interdental cleaning tool **1** from being broken. Furthermore, even if the shaft section **12** breaks at the starting point of the soft portion **20**, the broken part of the shaft section **12** remains connected to the rest of the shaft section **12** by the soft portion **20** and the extension soft portion **30**, reducing the likelihood that the broken part remains between the teeth.

Since the extension soft portion **30** has a cylindrical shape covering the circumference of the shaft section **12**, the stress applied to the interdental cleaning tool **1** during use is likely to be dispersed throughout the extension soft portion **30** regardless of its orientation in use. This further suppresses the interdental cleaning tool **1** from being broken.

The extension soft portion **30** may have the same outer diameter as the proximal end of the covering section **21** of the soft portion **20** by adjusting the thickness of the elastomer C or the thickness of the shaft section **12**. In this case, when the user inserts the extension soft portion **30** between teeth with the soft portion **20** with the cleaning function having passed the teeth, the lack of an increase in resistance helps the user to notice that the soft portion **20**, which serves

6

as the cleaning portion, has passed. Thus, the user can easily recognize the end point of the soft portion **20** with the cleaning function, so that the soft portion **20** can be efficiently used to clean between the teeth.

The extension soft portion **30** has a length of 3 mm or more in a direction along the shaft section **12**. The extension soft portion **30** is therefore sufficiently long, so that the interdental cleaning tool **1** is less likely to break, and the shaft section **12** (the soft portion **20**) is less likely to remain between the teeth even if it breaks.

The extension soft portion **30** has the injection mark **30a** at which the elastomer C has been injected during injection molding. That is, to form the soft portion **20**, the elastomer C is injected into the secondary molds **50** and **51** in which the base material portion **10** is placed through the gate **54** located at a position corresponding to the middle part **12b**, which is on the proximal side of the distal end part **12a** of the shaft section **12**. As such, the injected high-pressure elastomer C is not directly applied to the distal end of the shaft section **12**, sufficiently suppressing the distal end of the shaft section **12** from being swayed. Additionally, the high-temperature elastomer C is not directly applied to the distal end of the shaft section **12**, sufficiently suppressing the distal end of the shaft section **12** from being melt. Moreover, since the elastomer C is injected onto the middle part **12b** located on the proximal side of the distal end part **12a** of the shaft section **12** in which the projections **22** are formed, the elastomer C is not directly injected into the region where the projections **22** are formed. As a result, the projections **22** can be suitably formed without being affected by the injection of the elastomer C. This suppresses the molding defect of the interdental cleaning tool **1**.

The embodiments described above are intended to facilitate the understanding of the invention and are not intended to limit the interpretation of the present invention. The element of the embodiments, as well as their arrangements, materials, conditions, shapes, sizes, and the like are not limited to those illustrated and may be modified as appropriate. Additionally, the configurations shown in different embodiments can be partially replaced or combined.

For example, the shape of the interdental cleaning tool **1** is not limited to that of the above embodiments. For example, the shaft section **12** is formed linearly in the embodiments, but may be curved in an arc shape.

INDUSTRIAL APPLICABILITY

The present invention can provide an interdental cleaning tool capable of suppressing the interdental cleaning tool from being broken at the starting point of a soft portion.

REFERENCE SIGNS LIST

- 1** Interdental cleaning tool
- 10** Base material portion
- 11** Base section
- 12** Shaft section
- 12a** Distal end part of shaft section
- 12b** Middle part of shaft section
- 20** Soft portion
- 21** Covering section
- 22** Projection
- 30** Extension soft portion
- 40, 41** Primary mold
- 50, 51** Secondary mold
- 54** Gate

7

What is claimed is:

1. An interdental cleaning tool comprising:

a base material portion including a base section and a shaft section extending from the base section;

a soft portion including a covering section that covers a distal end part of the shaft section, the covering section having a plurality of projections projecting therefrom; and

an extension soft portion extending from the covering section, and covering a part of the shaft section, the part of the shaft section being located further toward a proximal side than the distal end part so as to extend the soft portion toward the proximal side of the shaft section, with the extension soft portion terminating in the shaft section before the base section such that the shaft section is exposed between the extension soft portion and the base portion; the extension soft portion being between 8% and 80% the length of the covering section, and the extension soft portion not being provided with the projections,

wherein a thickness of the covering section of the soft portion increases from a distal end of the covering section towards a proximal end of the covering section, wherein the extension soft portion has a uniform thickness, and wherein the extension soft portion has the same thickness as the proximal end of the covering section.

8

2. The interdental cleaning tool according to claim 1, wherein the extension soft portion has a cylindrical shape covering a circumference of the shaft section.

3. The interdental cleaning tool according to claim 1, wherein the extension soft portion has an outer diameter same as that of a proximal end of the covering section of the soft portion.

4. The interdental cleaning tool according to claim 1, wherein the extension soft portion has a length of 3 mm or more in a direction along the shaft section.

5. The interdental cleaning tool according to claim 4, wherein stress applied to the interdental cleaning tool during use is dispersed along a length of the extension soft portion and not concentrated at a starting point of the extension soft portion.

6. The interdental cleaning tool according to claim 4, wherein the extension soft portion is configured to retain a broken part of the shaft section, if a part of the shaft section breaks during use, thereby reducing a likelihood that the broken part remains between a user's teeth.

7. The interdental cleaning tool according claim 1, wherein the extension soft portion has an injection mark at which a soft material has been injected during injection molding.

* * * * *