



US012383463B1

(12) **United States Patent**
Vitello et al.

(10) **Patent No.:** **US 12,383,463 B1**

(45) **Date of Patent:** **Aug. 12, 2025**

(54) **TAMPER EVIDENT SEAL FOR A VIAL COVER**

USPC 220/212
See application file for complete search history.

(71) Applicants: **Jonathan Vitello**, Fort Lauderdale, FL (US); **Santiago Paredes**, Boca Raton, FL (US); **Peter Lehel**, Boca Raton, FL (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

722,943	A	3/1903	Chappell
732,662	A	6/1903	Smith
1,678,991	A	7/1928	Marschalek
1,970,631	A	8/1934	Sherman
2,186,888	A	1/1940	Tullar et al.

(Continued)

(72) Inventors: **Jonathan Vitello**, Fort Lauderdale, FL (US); **Santiago Paredes**, Boca Raton, FL (US); **Peter Lehel**, Boca Raton, FL (US)

(73) Assignee: **MEDICAL DEVICE ENGINEERING, LLC**, Pompano Beach, FL (US)

FOREIGN PATENT DOCUMENTS

DE	202008018507	2/2015
EP	0148116	7/1985

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

(21) Appl. No.: **18/414,244**

Arai Tsugio, Pilfering Proof Cap, Jan. 9, 1996.

(22) Filed: **Jan. 16, 2024**

Primary Examiner — Orlando E Aviles

Assistant Examiner — Niki M Eloshway

(74) *Attorney, Agent, or Firm* — Malloy & Malloy PL

Related U.S. Application Data

(63) Continuation of application No. 17/563,371, filed on Dec. 28, 2021, now Pat. No. 11,872,187.

(60) Provisional application No. 63/131,124, filed on Dec. 28, 2020.

(51) **Int. Cl.**
A61J 1/14 (2023.01)
B65D 41/46 (2006.01)
B65D 51/24 (2006.01)


(57) **ABSTRACT**

A tamper evident seal structure for a vial septum or other cover having a housing including a sidewall terminating in oppositely disposed open and closed ends. A retainer is fixedly disposed within the housing and structured for retaining engagement with a portion of a vial, substantially adjacent the vial cover. The housing also includes a pressure member disposed within an interior thereof in attached, relation to the closed-end. The pressure member and the retainer are cooperatively disposed and structured to respectively exert pressure on the vial cover concurrent to retaining engagement with the vial. Tamper evident capabilities are at least partially defined by a detachment of a removable sidewall section from a remainder of said sidewall.

(52) **U.S. Cl.**
CPC **A61J 1/1425** (2015.05); **B65D 41/465** (2013.01); **B65D 51/245** (2013.01); **A61J 2205/10** (2013.01)

(58) **Field of Classification Search**
CPC A61J 1/1425; A61J 1/2205; A61J 1/10; B65D 41/465; B65D 51/245

17 Claims, 2 Drawing Sheets

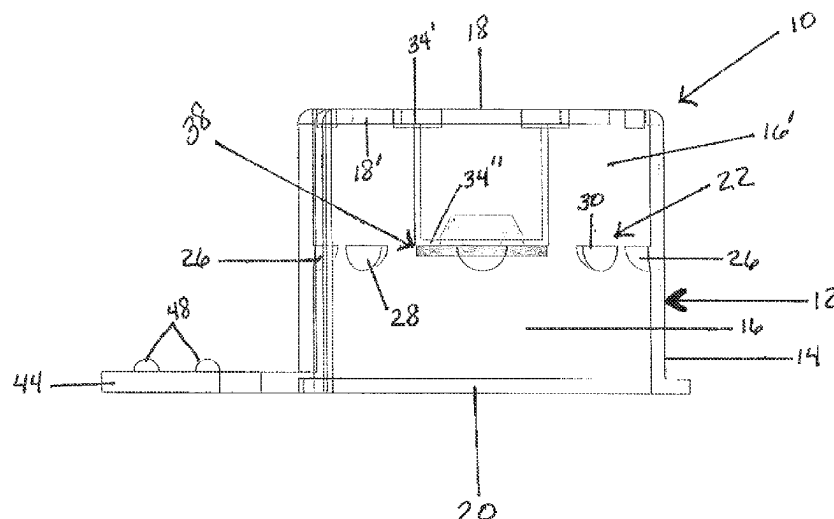

(56)

References Cited

U.S. PATENT DOCUMENTS

2,277,936 A	3/1942	Rosenblatt	4,842,592 A	6/1989	Caggiani et al.
2,459,304 A	1/1949	Blank	4,844,906 A	7/1989	Hermelin et al.
2,477,598 A	8/1949	Hain	4,863,451 A	9/1989	Marder
2,734,665 A	2/1956	Flamm	4,906,231 A	3/1990	Young
2,739,590 A	3/1956	Yochem	4,919,285 A	4/1990	Roof et al.
2,811,283 A	10/1957	Bowen	4,936,445 A	6/1990	Grabenkort
2,823,674 A	2/1958	Yochem	5,007,535 A	4/1991	Meseke et al.
2,834,346 A	5/1958	Adams	5,009,323 A	4/1991	Montgomery et al.
2,875,761 A	3/1959	Helmer et al.	5,024,323 A	6/1991	Bolton
2,888,015 A	5/1959	Hunt	5,049,129 A	9/1991	Zdeb et al.
2,952,255 A	9/1960	Hein, Jr.	5,057,093 A	10/1991	Clegg et al.
3,122,280 A	2/1964	Goda	D323,392 S	1/1992	Bryne
3,180,532 A	4/1965	Michel	5,078,696 A	1/1992	Nedbaluk
3,245,567 A	4/1966	Knight	5,085,332 A	2/1992	Gettig et al.
3,323,798 A	6/1967	Miller	5,090,564 A	2/1992	Chimienti
3,364,890 A	1/1968	Andersen	5,119,975 A	6/1992	Jemielita
3,368,673 A	2/1968	Johnson	5,133,454 A	7/1992	Hammer
3,489,268 A	1/1970	Meierhoefer	5,135,496 A	8/1992	Vetter et al.
3,568,673 A	3/1971	Cowley	5,148,652 A	9/1992	Herzog
3,574,306 A	4/1971	Alden	5,163,922 A	11/1992	McElveen, Jr. et al.
3,598,120 A	8/1971	Mass	5,165,560 A	11/1992	Ennis, III et al.
3,610,241 A	10/1971	LeMarie	5,230,429 A	7/1993	Etheredge, III
3,674,181 A	7/1972	Marks et al.	5,267,983 A	12/1993	Oilschlager et al.
3,700,215 A	10/1972	Hardman et al.	5,292,308 A	3/1994	Ryan
3,706,307 A	12/1972	Hasson	5,293,993 A	3/1994	Yates, Jr. et al.
3,712,749 A	1/1973	Roberts	5,295,599 A	3/1994	Smith
3,726,445 A	4/1973	Ostrowsky et al.	5,312,367 A	5/1994	Nathan
3,747,751 A	7/1973	Miller et al.	5,312,368 A	5/1994	Haynes
3,850,329 A	11/1974	Robinson	5,316,163 A	5/1994	von Schuckmann
3,872,867 A	3/1975	Killinger	5,328,466 A	7/1994	Denmark
3,904,033 A	9/1975	Haerr	5,328,474 A	7/1994	Raines
3,905,375 A	9/1975	Toyama	5,332,113 A	7/1994	Kusler, III et al.
3,937,211 A	2/1976	Merten	5,356,380 A	10/1994	Hoekwater et al.
3,987,930 A	10/1976	Fuson	5,370,226 A	12/1994	Gollobin et al.
4,005,739 A	2/1977	Winchell	5,380,295 A	1/1995	Vacca
4,043,334 A	8/1977	Brown et al.	5,402,887 A	4/1995	Shillington
4,046,145 A	9/1977	Choksi et al.	5,405,339 A	4/1995	Kohnen et al.
4,068,696 A	1/1978	Winchell	5,456,668 A	10/1995	Ogle, II
4,085,845 A	4/1978	Perfect	5,458,580 A	10/1995	Hajishoreh
4,106,621 A	8/1978	Sorenson	5,468,224 A	11/1995	Souryal
4,216,585 A	8/1980	Hatter	5,474,178 A	12/1995	DiViesti et al.
4,216,872 A	8/1980	Bean	5,505,705 A	4/1996	Galpin et al.
4,244,366 A	1/1981	Raines	5,531,695 A	7/1996	Swisher
4,252,122 A	2/1981	Halvorsen	5,540,324 A	7/1996	Knapp
4,271,972 A	6/1981	Thor	5,540,666 A	7/1996	Barta et al.
4,286,591 A	9/1981	Raines	5,549,571 A	8/1996	Sak
4,286,640 A	9/1981	Knox et al.	5,558,648 A	9/1996	Shields
4,313,539 A	2/1982	Raines	5,584,817 A	12/1996	van den Haak
4,369,781 A	1/1983	Gilson et al.	5,588,239 A	12/1996	Anderson
4,420,085 A	12/1983	Wilson et al.	5,611,445 A	3/1997	Kano et al.
4,430,077 A	2/1984	Mittleman et al.	5,617,954 A	4/1997	Kato et al.
4,433,790 A	2/1984	Gibson	5,624,402 A	4/1997	Imbert
4,457,445 A	7/1984	Hanks et al.	5,662,233 A	9/1997	Reid
4,482,071 A	11/1984	Ishiwatari	5,674,209 A	10/1997	Yarger
D277,783 S	2/1985	Beck	5,695,470 A	12/1997	Roussigne et al.
4,520,942 A	6/1985	Dwinell	5,699,913 A	12/1997	Richardson
4,521,237 A	6/1985	Logothetis	5,700,247 A	12/1997	Grimard et al.
4,530,697 A	7/1985	Kuhlemann et al.	5,702,374 A	12/1997	Johnson
4,558,554 A	12/1985	Herbert	5,706,985 A	1/1998	Feer
4,571,242 A	2/1986	Klien et al.	5,713,485 A	2/1998	Liff et al.
4,589,171 A	5/1986	McGill	5,776,124 A	7/1998	Wald
4,664,259 A	5/1987	Landis	5,785,691 A	7/1998	Vetter et al.
4,667,837 A	5/1987	Vitello et al.	5,797,885 A	8/1998	Rubin
4,676,530 A	6/1987	Nordgren et al.	5,807,343 A	9/1998	Tucker et al.
4,693,707 A	9/1987	Dye	5,829,589 A	11/1998	Nguyen et al.
4,726,483 A	2/1988	Droz	D402,766 S	12/1998	Smith et al.
4,735,617 A	4/1988	Nelson et al.	5,842,567 A	12/1998	Rowe et al.
4,742,910 A	5/1988	Staebler	5,876,381 A	3/1999	Pond et al.
4,743,229 A	5/1988	Chu	5,883,806 A	3/1999	Meador et al.
4,743,231 A	5/1988	Kay et al.	5,884,457 A	3/1999	Ortiz et al.
4,753,345 A	6/1988	Goodsir et al.	5,901,866 A	5/1999	Storar
4,760,847 A	8/1988	Vaillancourt	5,902,269 A	5/1999	Jentzen
4,813,564 A	3/1989	Cooper et al.	5,926,922 A	7/1999	Stottle
4,832,695 A	5/1989	Rosenberg et al.	5,951,522 A	9/1999	Rosato et al.
4,834,706 A	5/1989	Beck et al.	5,951,525 A	9/1999	Thorne et al.
			5,954,203 A	9/1999	Marconi
			5,954,657 A	9/1999	Rados
			5,957,166 A	9/1999	Safabash
			5,957,314 A	9/1999	Nishida et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,963,136	A	10/1999	O'Brien	7,608,057	B2	10/2009	Woehr et al.
5,983,596	A	11/1999	Corniani et al.	7,611,487	B2	11/2009	Woehr et al.
5,989,227	A	11/1999	Vetter et al.	7,632,244	B2	12/2009	Buehler et al.
5,993,437	A	11/1999	Raoz	D608,900	S	1/2010	Giraud et al.
6,000,548	A	12/1999	Tsals	7,641,636	B2	1/2010	Moesli et al.
D419,671	S	1/2000	Jansen	D612,939	S	3/2010	Boone, III et al.
6,021,824	A	2/2000	Larsen et al.	7,681,606	B2	3/2010	Khan et al.
6,027,482	A	2/2000	Imbert	7,698,180	B2	4/2010	Fago et al.
6,068,614	A	5/2000	Kimber et al.	7,708,035	B2	5/2010	Windmiller
D430,293	S	8/2000	Jansen	7,735,664	B1	6/2010	Peters et al.
6,112,951	A	9/2000	Mueller	7,748,892	B2	7/2010	McCoy
D431,864	S	10/2000	Jansen	7,762,988	B1	7/2010	Vitello
6,126,640	A	10/2000	Tucker et al.	7,766,919	B2	8/2010	Delmotte
6,190,364	B1	2/2001	Imbert	7,802,313	B2	9/2010	Czajka
6,193,688	B1	2/2001	Balestracci et al.	7,886,908	B2	2/2011	Farrar et al.
6,196,593	B1	3/2001	Petrick et al.	7,918,830	B2	4/2011	Langan et al.
6,196,998	B1	3/2001	Jansen et al.	7,922,213	B2	4/2011	Werth
6,216,885	B1	4/2001	Guillaume	7,988,004	B1	8/2011	Marret et al.
6,235,376	B1	5/2001	Miyazaki et al.	8,034,041	B2	10/2011	Domkowski et al.
6,279,746	B1	8/2001	Hussaini et al.	8,079,518	B2	12/2011	Turner et al.
6,280,418	B1	8/2001	Reinhard et al.	8,091,727	B2	1/2012	Domkowwski
6,287,671	B1	9/2001	Bright et al.	8,118,788	B2	2/2012	Frezza
6,322,543	B1	11/2001	Singh et al.	8,120,484	B2	2/2012	Chisholm
6,338,200	B1	1/2002	Baxa et al.	8,137,324	B2	3/2012	Bobst
6,358,241	B1	3/2002	Shapeton et al.	8,140,349	B2	3/2012	Hanson et al.
6,375,640	B1	4/2002	Teraoka	8,252,247	B2	8/2012	Ferlic
6,394,983	B1	5/2002	Mayoral et al.	8,257,286	B2	9/2012	Meyer et al.
6,439,276	B1	8/2002	Wood et al.	8,328,082	B1	12/2012	Bochenko et al.
6,485,460	B2	11/2002	Eakins et al.	8,348,895	B1	1/2013	Vitello
6,488,666	B1	12/2002	Geist	8,353,869	B2	1/2013	Ranalletta et al.
6,491,665	B1	12/2002	Vetter et al.	8,413,410	B2	4/2013	Ulm et al.
6,500,155	B2	12/2002	Sasso	8,413,811	B1	4/2013	Arendt
6,520,935	B1	2/2003	Jansen et al.	8,443,999	B1	5/2013	Reinders
6,540,697	B2	4/2003	Chen	D684,057	S	6/2013	Kwon
6,565,529	B1	5/2003	Kimber et al.	8,512,277	B2	8/2013	Del Vecchio
6,581,792	B1	6/2003	Limanjaya	8,528,757	B2	9/2013	Bisio
6,585,691	B1	7/2003	Vitello	8,556,074	B2	10/2013	Turner et al.
6,592,251	B2	7/2003	Edwards et al.	8,579,116	B2	11/2013	Pether et al.
6,666,852	B2	12/2003	Niedospial, Jr.	8,591,462	B1	11/2013	Vitello
6,682,798	B1	1/2004	Kiraly	8,597,255	B2	12/2013	Emmott et al.
6,726,652	B2	4/2004	Eakins et al.	8,597,271	B2	12/2013	Langan et al.
6,726,672	B1	4/2004	Hanly et al.	8,616,413	B2	12/2013	Koyama
6,764,469	B2	7/2004	Broselow	D701,304	S	3/2014	Lair et al.
6,796,586	B2	9/2004	Werth	8,672,902	B2	3/2014	Ruan et al.
6,821,268	B2	11/2004	Balestracci	8,702,674	B2	4/2014	Bochenko
D501,549	S	2/2005	McAllister et al.	8,777,910	B2	7/2014	Bauss et al.
6,921,383	B2	7/2005	Vitello	8,777,930	B2	7/2014	Swisher et al.
6,935,560	B2	8/2005	Andreasson et al.	8,852,561	B2	10/2014	Wagner et al.
6,942,643	B2	9/2005	Eakins et al.	8,864,021	B1	10/2014	Vitello
6,991,126	B2	1/2006	Jackel	8,864,707	B1	10/2014	Vitello
7,036,661	B2	5/2006	Anthony et al.	8,864,708	B1	10/2014	Vitello
7,055,273	B2	6/2006	Roshkoff	8,911,424	B2	12/2014	Weadock et al.
7,100,771	B2	9/2006	Massengale et al.	8,945,082	B2	2/2015	Geiger et al.
7,125,397	B2	10/2006	Woehr et al.	8,978,909	B2	3/2015	Kakutani et al.
7,141,286	B1	11/2006	Kessler et al.	9,016,473	B2	4/2015	Tamarindo
7,175,081	B2	2/2007	Andreasson et al.	9,027,769	B2	5/2015	Willows et al.
7,182,256	B2	2/2007	Andreasson et al.	9,082,157	B2	7/2015	Gibson
7,232,066	B2	6/2007	Andreasson et al.	9,101,534	B2	8/2015	Bochenko
7,240,926	B2	7/2007	Dalle et al.	D738,495	S	9/2015	Strong et al.
7,299,981	B2	11/2007	Hickle et al.	9,125,976	B2	9/2015	Uber, III et al.
7,374,555	B2	5/2008	Heinz et al.	D743,019	S	11/2015	Schultz
7,404,500	B2	7/2008	Marteau et al.	9,192,443	B2	11/2015	Tennican
7,410,803	B2	8/2008	Nollert et al.	9,199,042	B2	12/2015	Farrar et al.
7,425,208	B1	9/2008	Vitello	9,199,749	B1	12/2015	Vitello et al.
7,437,972	B2	10/2008	Yeager	9,220,486	B2	12/2015	Schweiss et al.
7,438,704	B1	10/2008	Kawashima et al.	9,220,577	B2	12/2015	Jessop et al.
D581,046	S	11/2008	Sudo	9,227,019	B2	1/2016	Swift et al.
D581,047	S	11/2008	Koshidaka	D750,228	S	2/2016	Strong et al.
D581,049	S	11/2008	Sudo	9,272,099	B2	3/2016	Limaye et al.
7,482,166	B2	1/2009	Nollert et al.	9,311,592	B1	4/2016	Vitello et al.
D589,612	S	3/2009	Sudo	D756,777	S	5/2016	Berge et al.
7,497,330	B2	3/2009	Anthony et al.	9,336,669	B2	5/2016	Bowden et al.
7,503,453	B2	3/2009	Cronin et al.	D759,486	S	6/2016	Ingram et al.
7,588,563	B2	9/2009	Guala	D760,384	S	6/2016	Niunoya et al.
7,594,681	B2	9/2009	DeCarlo	D760,902	S	7/2016	Persson
				9,402,967	B1	8/2016	Vitello
				9,427,715	B2	8/2016	Palazzolo et al.
				9,433,768	B2	9/2016	Tekeste et al.
				9,463,310	B1	10/2016	Vitello

(56)

References Cited

U.S. PATENT DOCUMENTS

D773,043	S	11/2016	Ingram et al.	2002/0046962	A1	4/2002	Vallans et al.
D777,903	S	1/2017	Schultz	2002/0079281	A1	6/2002	Hierzer et al.
9,662,456	B2	5/2017	Woehr	2002/0097396	A1	7/2002	Schafer
D789,529	S	6/2017	Davis et al.	2002/0099334	A1	7/2002	Hanson et al.
9,687,249	B2	6/2017	Hanlon et al.	2002/0101656	A1	8/2002	Blumenthal et al.
9,694,948	B1	7/2017	Pakhomov et al.	2002/0104770	A1	8/2002	Shapeton et al.
9,744,304	B2	8/2017	Swift et al.	2002/0133119	A1	9/2002	Eakins et al.
D797,928	S	9/2017	Davis et al.	2003/0041560	A1	3/2003	Kemnitz
D797,929	S	9/2017	Davis et al.	2003/0055685	A1	3/2003	Cobb et al.
9,764,098	B2	9/2017	Hund et al.	2003/0146617	A1	8/2003	Franko, Sr.
9,821,152	B1	11/2017	Vitello et al.	2003/0183547	A1	10/2003	Heyman
D806,241	S	12/2017	Swinney et al.	2003/0187403	A1	10/2003	Balestracci
D807,503	S	1/2018	Davis et al.	2004/0008123	A1	1/2004	Carrender et al.
9,855,191	B1	1/2018	Vitello et al.	2004/0064095	A1	4/2004	Vitello
D815,945	S	4/2018	Fischer	2004/0116858	A1	6/2004	Heinz et al.
9,987,438	B2	6/2018	Stillson	2004/0129738	A1	7/2004	Stukas
D825,746	S	8/2018	Davis et al.	2004/0173563	A1*	9/2004	Kim B65D 41/48 215/254
10,039,913	B2	8/2018	Yeh et al.	2004/0186437	A1	9/2004	Frenette et al.
D831,201	S	10/2018	Holtz et al.	2004/0225258	A1	11/2004	Balestracci
D834,187	S	11/2018	Ryan	2005/0146081	A1	7/2005	MacLean et al.
10,124,122	B2	11/2018	Zenker	2005/0148941	A1	7/2005	Farrar et al.
10,166,343	B1	1/2019	Hunt et al.	2005/0209555	A1	9/2005	Middleton et al.
10,166,347	B1	1/2019	Vitello	2006/0049948	A1	3/2006	Chen et al.
10,183,129	B1	1/2019	Vitello	2006/0084925	A1	4/2006	Ramsahoye
10,207,099	B1	2/2019	Vitello	2006/0089601	A1	4/2006	Dionigi
D842,464	S	3/2019	Davis et al.	2006/0169611	A1	8/2006	Prindle
D847,373	S	4/2019	Hurwit et al.	2006/0173415	A1	8/2006	Cummins
10,293,987	B2	5/2019	Sattig et al.	2006/0189933	A1	8/2006	Alheidt et al.
10,300,263	B1	5/2019	Hunt	2007/0060898	A1	3/2007	Shaughnessy et al.
10,307,548	B1	6/2019	Hunt et al.	2007/0106234	A1	5/2007	Klein
10,315,024	B1	6/2019	Vitello et al.	2007/0142786	A1	6/2007	Lampropoulos et al.
10,315,808	B2	6/2019	Taylor et al.	2007/0191690	A1	8/2007	Hasse et al.
10,376,655	B2	8/2019	Pupke et al.	2007/0219503	A1	9/2007	Loop et al.
D859,125	S	9/2019	Weagle et al.	2007/0257111	A1	11/2007	Ortenzi
10,478,262	B2	11/2019	Niese et al.	2008/0068178	A1	3/2008	Meyer
10,555,872	B1	2/2020	Thorne	2008/0078146	A1	4/2008	Cirio
10,695,490	B2	6/2020	Perazzo et al.	2008/0097310	A1	4/2008	Buehler et al.
10,758,684	B1	9/2020	Vitello et al.	2008/0106388	A1	5/2008	Knight
10,773,067	B2	9/2020	Davis et al.	2008/0140020	A1	6/2008	Shirley
10,800,556	B2	10/2020	Thorne et al.	2008/0243088	A1	10/2008	Evans
D903,865	S	12/2020	Banik et al.	2008/0302711	A1	12/2008	Windmiller
10,888,672	B1	1/2021	Vitello	2008/0303267	A1	12/2008	Schnell et al.
10,898,659	B1	1/2021	Vitello et al.	2008/0306443	A1	12/2008	Neer
10,912,898	B1	2/2021	Vitello et al.	2009/0008356	A1	1/2009	Gadzic et al.
10,933,202	B1	3/2021	Banik	2009/0084804	A1	4/2009	Caspary et al.
10,940,087	B2	3/2021	Thorne et al.	2009/0099552	A1	4/2009	Levy et al.
10,953,162	B1	3/2021	Hunt et al.	2009/0149815	A1	6/2009	Kiel et al.
11,040,149	B1	6/2021	Banik	2009/0166311	A1	7/2009	Claessens
11,040,154	B1	6/2021	Vitello et al.	2009/0212954	A1	8/2009	Adstedt et al.
11,097,071	B1	8/2021	Hunt et al.	2009/0326481	A1	12/2009	Swisher et al.
11,278,681	B1	3/2022	Banik et al.	2010/0050351	A1	3/2010	Colantonio et al.
D948,713	S	4/2022	Banik	2010/0051491	A1	3/2010	Lampropoulos et al.
11,357,588	B1	6/2022	Vitello et al.	2010/0084403	A1	4/2010	Popish et al.
11,413,406	B1	8/2022	Vitello et al.	2010/0089862	A1	4/2010	Schmitt
11,426,328	B1	8/2022	Ollmann et al.	2010/0126894	A1	5/2010	Koukol et al.
11,471,610	B1*	10/2022	Banik A61M 39/20	2010/0179822	A1	7/2010	Reppas
11,523,970	B1	12/2022	Vitello et al.	2010/0211016	A1	8/2010	Palmer-Felgate
11,541,180	B1	1/2023	Vitello et al.	2010/0228226	A1	9/2010	Nielsen
11,690,994	B1	7/2023	Banik et al.	2010/0252564	A1	10/2010	Martinez et al.
11,697,527	B1	7/2023	Hendren et al.	2010/0283238	A1	11/2010	Deighan et al.
11,779,520	B1	10/2023	Vitello	2010/0307108	A1	12/2010	Sink et al.
11,793,987	B1	10/2023	Vitello et al.	2011/0009836	A1	1/2011	Chebli et al.
11,857,751	B1	1/2024	Vitello	2011/0044850	A1	2/2011	Solomon et al.
11,872,187	B1	1/2024	Vitello et al.	2011/0046550	A1	2/2011	Schiller et al.
11,904,149	B1	2/2024	Vitello et al.	2011/0046603	A1	2/2011	Felsovalyi et al.
11,911,339	B1	2/2024	Lehel et al.	2012/0064515	A2	3/2012	Knapp et al.
12,070,591	B1	8/2024	Vitello	2012/0096957	A1	4/2012	Ochman
12,172,803	B1	12/2024	Vitello et al.	2012/0110950	A1	5/2012	Schraudolph
12,195,241	B1	1/2025	Vitello et al.	2013/0018356	A1	1/2013	Prince et al.
12,201,230	B2	1/2025	Bell	2013/0018536	A1	1/2013	Prince et al.
2001/0003150	A1	6/2001	Imbert	2013/0056130	A1	3/2013	Alpert et al.
2001/0034506	A1	10/2001	Hirschman et al.	2013/0088354	A1	4/2013	Thomas
2001/0056258	A1	12/2001	Evans	2013/0145725	A1	6/2013	Bianco et al.
2002/0007147	A1	1/2002	Capes et al.	2013/0237949	A1	9/2013	Miller
2002/0023409	A1	2/2002	Py	2013/0269592	A1	10/2013	Heacock et al.
				2014/0000781	A1	1/2014	Franko, Jr.
				2014/0034536	A1	2/2014	Reinhardt et al.
				2014/0069202	A1	3/2014	Fisk

(56)

References Cited**U.S. PATENT DOCUMENTS**

2014/0069829	A1	3/2014	Evans		
2014/0076840	A1 *	3/2014	Graux	B65D 41/465 215/341	
2014/0135738	A1	5/2014	Panian		
2014/0155868	A1	6/2014	Nelson et al.		
2014/0163465	A1	6/2014	Bartlett, II et al.		
2014/0257843	A1	9/2014	Adler et al.		
2014/0319141	A1	10/2014	Stratis et al.		
2014/0326727	A1	11/2014	Jouin et al.		
2014/0353196	A1	12/2014	Key		
2015/0013811	A1 *	1/2015	Carrel	A61J 1/1425 137/798	
2015/0048045	A1	2/2015	Miceli et al.		
2015/0112296	A1 *	4/2015	Ishiwata	A61J 1/1425 604/406	
2015/0136632	A1	5/2015	Moir et al.		
2015/0182686	A1	7/2015	Okihara		
2015/0191633	A1	7/2015	De Boer et al.		
2015/0246185	A1	9/2015	Heinz		
2015/0251820	A1	9/2015	Glaser et al.		
2015/0302232	A1	10/2015	Strassburger et al.		
2015/0305982	A1	10/2015	Bochenko		
2015/0310771	A1	10/2015	Atkinson et al.		
2016/0067144	A1	3/2016	Chang		
2016/0067422	A1 *	3/2016	Davis	A61M 5/3134 604/192	
2016/0090456	A1	3/2016	Ishimaru et al.		
2016/0136352	A1	5/2016	Smith et al.		
2016/0144119	A1	5/2016	Limaye et al.		
2016/0158110	A1	6/2016	Swisher et al.		
2016/0158449	A1	6/2016	Limaye et al.		
2016/0176550	A1	6/2016	Viitello et al.		
2016/0194121	A1 *	7/2016	Ogawa	A61J 1/05 215/249	
2016/0250420	A1	9/2016	Maritan et al.		
2016/0279032	A1	9/2016	Davis		
2016/0328586	A1	11/2016	Bowden et al.		
2016/0361235	A1	12/2016	Swisher		
2016/0367439	A1	12/2016	Davis et al.		
2017/0007771	A1	1/2017	Duinat et al.		
2017/0014310	A1	1/2017	Hyun et al.		
2017/0124289	A1	5/2017	Hasan et al.		
2017/0173321	A1	6/2017	Davis et al.		
2017/0203086	A1	7/2017	Davis		
2017/0225843	A1	8/2017	Glaser et al.		
2017/0239141	A1	8/2017	Davis et al.		
2017/0297781	A1 *	10/2017	Kawamura	B65D 51/18	
2017/0319438	A1	11/2017	Davis et al.		
2017/0328758	A1	11/2017	Fuchs		
2017/0349335	A1 *	12/2017	Sattig	B65B 55/10	
2017/0354792	A1	12/2017	Ward		
2018/0001540	A1	1/2018	Byun		
2018/0014998	A1	1/2018	Yuki et al.		
2018/0064604	A1	3/2018	Drmanovic		
2018/0078684	A1	3/2018	Peng et al.		
2018/0089593	A1	3/2018	Patel et al.		
2018/0098915	A1	4/2018	Rajagopal et al.		
2018/0147115	A1 *	5/2018	Nishioka	A61J 1/1425	
2018/0312305	A1	11/2018	Rognard		
2019/0308006	A1	10/2019	Erekovcanski et al.		
2019/0388626	A1	12/2019	Okihara		
2022/0008645	A1	1/2022	Ukai et al.		
2022/0024630	A1	1/2022	Bohamed		
2022/0339067	A1 *	10/2022	Christie	B65B 7/2821	

FOREIGN PATENT DOCUMENTS

EP	269920	6/1988
EP	571980	12/1993
EP	2724977	4/2014
GB	486367	6/1938
JP	08002544	1/1996
KR	101159987	6/2012
WO	WO2008000279	1/2008
WO	WO2017086607	5/2015

* cited by examiner

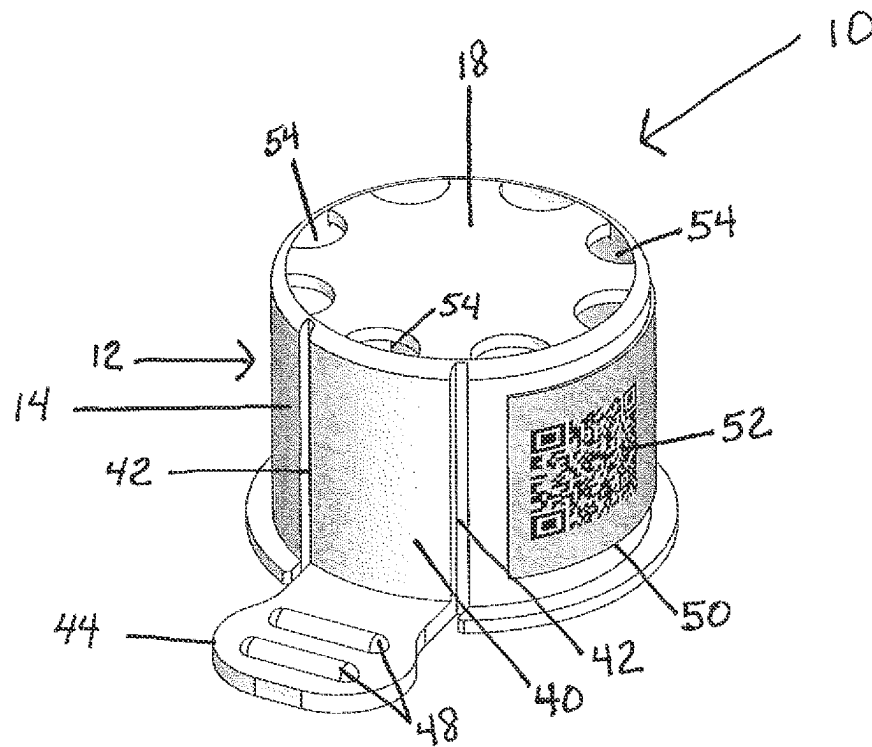


Figure 1:


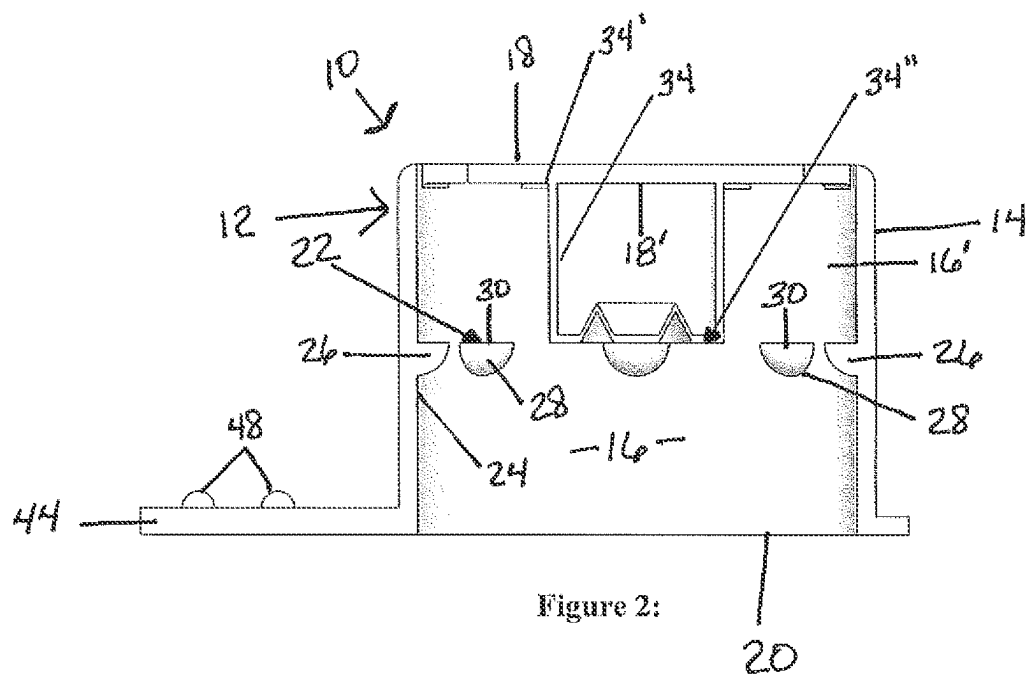


Figure 2:

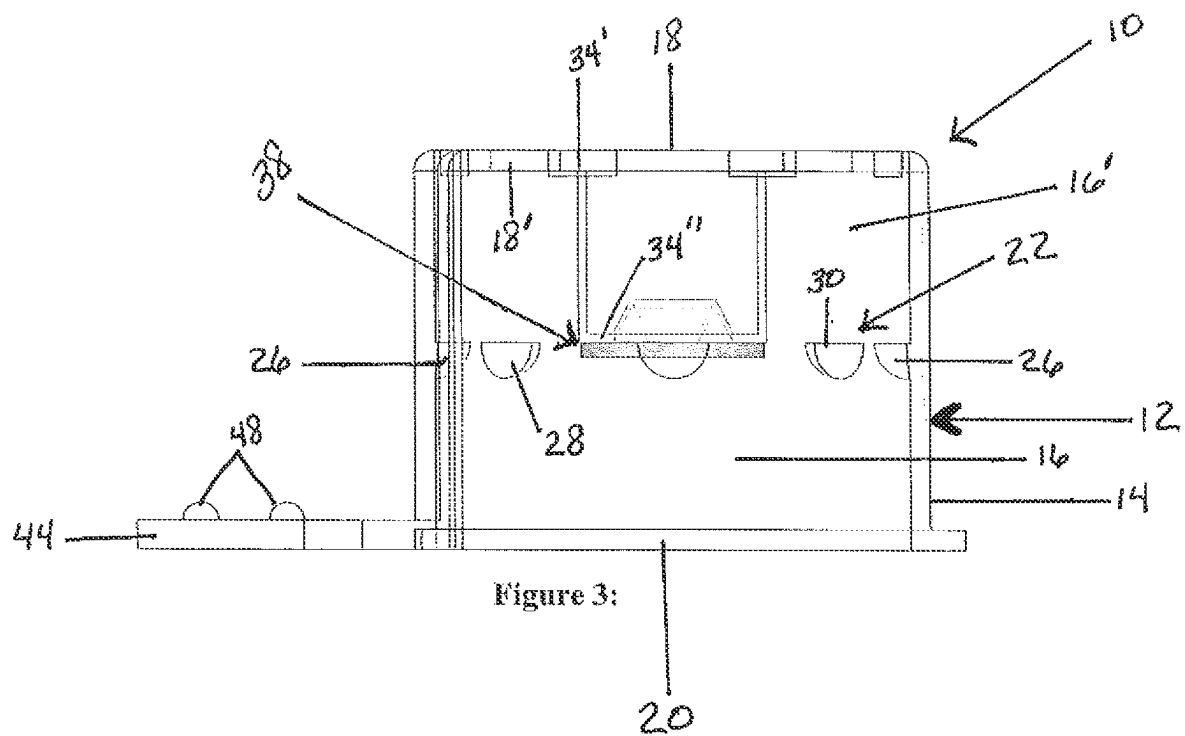

1

TAMPER EVIDENT SEAL FOR A VIAL COVER

The present application is a Continuation Patent Application of and claims priority to a previously filed U.S. Non-Provisional patent application, namely, that having Ser. No. 17/563,371 and a filing date of Dec. 28, 2021, which is set to mature into U.S. Pat. No. 11,872,187, on Jan. 16, 2024, and further claims priority under 35 U.S.C. Section 119(e) to a U.S. Provisional patent application, namely, that having Ser. No. 63/131,124 and a filing date of Dec. 28, 2020, with the contents of both prior applications being incorporated herein by reference in their entireties.

BACKGROUND OF THE INVENTION

Field of the Invention

This invention is directed to a closure or cover type of seal structure for a septum or other cover for a vial including a housing disposable in enclosing, retaining engagement with the upper end of the vial and the septum or cover attached thereto. The housing further includes tamper evident capabilities, which prevent reattachment or reuse of the housing in the intended manner.

DESCRIPTION OF THE RELATED ART

In the medical field, it is relatively common procedure to administer fluids to a patient by syringes, intravenous infusion (IV), etc. Such administration devices or assemblies are useful in the treatment of a number of medical conditions because a variety of fluids and/or medications can be administered to a patient utilizing such assemblies. By way of example, it is common for medical personnel to order that a patient be given a medication by injection. However, there are a number of safety issues associated with administering injections. One concern relates to avoiding contamination by bacteria, germs, or other harmful organisms. Because of this, and also due to the potential for theft of the medication and/or tampering in order to access the medication, one important concern relates to minimizing the number of people handling syringes. This concern is perhaps even more pronounced with regard to pre-filled syringes.

More specifically it is relatively common in a number of hospital settings for a number of syringes to be pre-loaded or pre-filled with certain medications by pharmacists or other authorized personnel, at an appropriate location, for subsequent dispensing of such prefilled syringes to one or more nursing stations or distribution areas and then, subsequently to the patient for direct use. The pharmacy or location where syringes are filled are often located in a remote part of the health facility relative to the location of the patient and the site of administration of the injection. From the foregoing, it may be understood that during the course of loading a syringe with a drug, and also afterwards when a prefilled syringe is delivered to a nurse's station, the syringe can easily be handled by a number of different individuals. This, in turn, increases the chance for the syringe to become contaminated which in turn, could possibly result in introduction of a contaminated substance into the body tissues of a patient. Consequently, a high level of importance is associated with maintaining the sterility of a syringe, from the time of it being filled to the time of injection administration.

Also, in the case of a very expensive drug or addictive drug such as, but not limited to, morphine, there is some

2

danger that a prefilled syringe will be tampered with by person seeking to improperly gain access to the drug. A resulting danger also exists in the possibility of a saline solution or other substance being substituted for a dose of the medication intended to be administered. This could have extremely serious consequences to the patient, possibly including death. Therefore, the growing use of prefilled syringes raises problems relating to the determination of whether a prefilled syringe has been tampered with and and/or exposed to contamination. In order to address such problems, there is a need in the medical field for closures for syringes and/or other medical containers or administering devices, which maintain sterility while providing sufficient assurances that the contents of the syringe, medical container, administering devices, etc. have not been compromised.

Accordingly, tamper evident capabilities and/or structures associated with medical closures, covers, caps, etc. are important to protect the integrity of prefilled syringes, as well as other types of medical containers. Thus, and as a further example, vials are often filled with a previously prepared medication and are utilized in combination with a syringe. In use, the needle of the syringe penetrates and passes through a septum and into the interior of vial to establish access to the medication contained therein. As is well recognized in the medical profession, vials are medical containers recognized by appropriate governmental bodies and/or legislation (e.g., 503b) and hospital pharmacies for the containment of medications such as, but not limited to, medication prepared for the distribution of vaccines. As such, the open-end or access opening of the vial include a lid crimped or otherwise secured to the open end of the vial, wherein a penetrable septum may be structured as part of the vial lid.

In many cases, vials contain more than one dose of the contained medication or drug. After the first use, medical personnel commonly use tape placed over the septum and other portions of the vial lid to protect the contents of the vial. In other instances, and by way of example, a vial lid can also be utilized with a chemo vent needle, which is used to reconstitute medication at the hospital pharmacy. More specifically, vials used for chemotherapy drugs may contain a powder material. In order to accomplish conversion to a final drug it must be reconstituted, which in turn may involve breaking the original vial lid. To practice the aforementioned procedure, needles are required to prevent any toxic fumes escaping during the preparation and/or conversion. Once preparation is complete, an additional closure, cover, seal, etc. can be applied to the fully converted or prepared medication.

In order to address the problems and disadvantages of the type set forth above, especially with regard to protecting the contents of a vial containing one or more doses and/or the aforementioned chemotherapy medication, there is a need in the medical profession and related supply industries for a cover type seal structured to be secured to the vial and/or lid or cover of the vial in a manner which closes or seals the septum associated with the vial lid or cover. In addition, if any such proposed seal structure were developed, it would preferably also include tamper evident capabilities and/or structure which provides clear evidence that authorized or unauthorized prior access to the vial has been attempted.

SUMMARY OF THE INVENTION

The present invention is directed to a cover or closure type seal structure for a vial and/or vial cover including a

3

housing. The housing includes a sidewall surrounding and at least partially defining the boundaries of the interior of the housing, wherein the interior of the housing is at least partially hollow. In addition, the sidewall terminates in a closed-end and an open-end which are substantially, oppositely disposed to one another. As will be explained in greater detail hereinafter, the open-end is dimensioned and configured to facilitate passage therethrough of the vial and a vial cover or lid, secured to the open-end or access opening of the vial.

Additional features of the seal structure include a retainer disposed within the interior of the housing. In at least one embodiment, the retainer is fixedly or integrally secured to the interior surface of the housing and more specifically, to the interior surface of the sidewall. Also, the retainer extends therefrom, inwardly towards the center of the open or hollow interior of the housing. In the one or more preferred embodiments of the retainer, as explained in greater detail hereinafter, it is disposed and structured for retaining engagement with the vial and/or the vial cover or lid.

It is emphasized that the term "vial", as used herein, is meant to include the vial itself as well as the cover or lid secured in overlying relation to the open end thereof. Moreover, as typically structured, the vial cover or lid may include a septum formed of a penetrable material which facilitates passage of a needle of a syringe or other medical device to pass therethrough into direct contact and/or communication with the medication contained within the vial. Accordingly, when describing the retainer being disposed in retaining engagement with the vial it is to be recognized that the actual "retaining engagement" may comprise the retainer being disposed, in whole or in part, in operative engagement with the vial itself or in the alternative with the vial cover and more specifically the periphery thereof, as will be described in greater detail hereinafter.

One or more embodiments of the retainer include it being at least partially defined by a plurality of retainer segments disposed in spaced, substantially coplanar relation to one another and collectively having an annular or circular configuration. As indicated, each of the retainer segments may be fixedly or integrally secured to the interior surface of the sidewall and extend inwardly, substantially towards the center of the hollow interior of the housing. The plurality of retainer segments are cooperatively disposed and structured to establish the aforementioned "retaining engagement" of the retainer with the vial and/or more specifically with an under portion of the outer periphery of the vial cover or lid.

The plurality of retainer segments may vary in size and configuration, and may be collectively dimensioned with a remainder of the housing to accommodate a vial and/or vial cover or lid of different sizes. Further, in order to establish the intended "retaining engagement" with the vial each or at least a majority of the retainer segments have a cooperative configuration. In more specific terms, the undersurface portion of each of the retainer segments has a curved or beveled configuration which facilitates a sliding engagement of the vial and/or vial cover or lid with such beveled undersurface. In addition, the sidewall of the housing is structured to include at least a minimal degree of outward flexure. As a result, as the vial and/or vial cover or lid enter through the open end of the housing, they will be forced into the aforementioned sliding engagement with the beveled or curved undersurface portions of each or at least a majority of the plurality of retainer segments. Such forced, sliding engagement will cause at least a minimal outward flexure of the housing, which in turn will allow passage of at least a portion of the vial, such as the vial cover or lid to pass

4

through the retainer and/or plurality of retainer segments and be operatively disposed between the retainer and the inner surface of the closed-end.

The aforementioned retaining engagement is further facilitated by the upper surface of each or at least a majority of the retainer segments being configured to establish an abutting, "removal preventing" engagement with the vial and/or vial cover or lid. More specifically, the upper surface of the one or more retainer segments may be substantially flat or planar and be operatively disposed immediately beneath and in engagement with the under portion of the neck of the vial and/or most probably the undersurface of the outer periphery of the vial cover and/or lid. It is to be noted that both the undersurface and upper surface of the plurality of retainer segments may vary in configuration from that specifically described herein. However, the configurations of the undersurface and the upper surface of the plurality of retainer segments should be sufficient to respectively facilitate the aforementioned sliding engagement of the undersurface of the retainer segments with the vial and the removal preventing engagement of the upper surface.

In addition, and in cooperation with the retainer, one or more preferred embodiments of the seal structure of the present invention further includes a pressure member. The pressure member has an at least minimally elongated configuration fixedly secured to the interior surface of the housing. As such, the pressure member includes a proximal end fixedly or integrally secured to the interior surface of the closed-end and extending downwardly or inwardly therefrom and in depending relation thereto. Moreover, the pressure member includes a distal end substantially oppositely located to the proximal end and in outwardly spaced relation from the interior surface of the closed-end of the housing. The dimension and configuration of the pressure member is cooperatively determined relative to the location and structure of the retainer. Therefore, the distal end of the pressure member is disposed in substantially aligned relation to the retainer and/or plurality of retainer segments so as to be substantially coplanar or minimally spaced out of such a coplanar relation with the retainer.

Accordingly, the pressure member is disposed, configured and structured such that the aforementioned distal end thereof is disposed in a pressure exerting engagement with the vial cover or lid and more specifically with the septum of the vial. Due to the cooperative configurations and dispositions of the retainer and the pressure member, specifically including the distal end of the pressure member, the distal end will be disposed in the aforementioned pressure exerting, at least partially sealing engagement with the vial cover or lid and even more specifically the septum associated with the vial cover or lid. Concurrently the retainer, including the plurality of retainer segments, will be disposed in the retaining engagement comprising the engaging relation with an under portion of the outer periphery of the vial cover or lid. As a result, the vial and more specifically the vial cover or lid will be securely retained on the interior of the housing by virtue of a substantially clamping action and engagement between the retainer and/or plurality of retainer segments and the pressure member and/or distal end thereof exerting pressure on the septum or other portion of the vial cover or lid. Such clamping action will result in a sealing engagement and or action of the vial cover and in particular the sealing, pressure exerting engagement of the distal end of the pressure member with the septum.

With further reference to the pressure member, at least one embodiment includes the provision of an antiseptic or disinfected connected to, mounted on or otherwise opera-

5

tively associated with the distal end. Moreover, the antiseptic, disinfectant or like composition may be on or within a pad, wherein the pad is fixedly secured to the distal end at a location which facilitates its direct engagement with the exterior surface of the septum, during the pressure exerting engagement of the pressure member/distal end with the vial cover. The aforementioned antiseptic, etc. pad may be made of a foam or other appropriate cushion-like material in order to engage the septum of the vial cover or lid without causing damage thereto.

As emphasized herein, the seal structure of the present invention includes tamper evident capabilities and/or structure. In at least one embodiment the tamper evident capability or structure includes a removable sidewall section initially integral with a remainder of the sidewall. Further, the removable sidewall section includes a detachable connection to the remainder of the sidewall. Such a detachable connection may comprise at least one, but preferably two elongated weakened seam lines each disposed on a different opposite side of the removable section and extending along a length thereof from the open end to the closed-end of the housing. The weakened seam lines are structured such that exertion of a pulling or other appropriately directed force on the removable section will cause a breakage, disconnection and/or separation of one or both of the weakened seam lines from the remainder of the sidewall, due to at least in part to reduction in the thickness of the sidewall along and entirety or at least a portion of the length of the weakened seam lines. In addition, the aforementioned pulling or other appropriately directed force exerted on the removable sidewall section may be facilitated by the inclusion of a pull tab secured to the removable section preferably at one end thereof coincident with the open end of the housing. The pull tab will extend outwardly from the exterior surface of the sidewall and otherwise be structured to facilitate the gripping or securement thereof by the hand or fingers of a user.

As should be apparent, partial or complete removal of the removable sidewall section will result in an inability to reconnect the replaceable sidewall section with remainder of the housing. As a result, the housing will not be able to be reconnected in its original operative configuration. In turn, the retainer and the pressure member will not be able to be disposed in retaining, clamping, sealing engagement with the vial and/or the vial cover. Clear evidence of authorized or unauthorized prior attempted access to or tampering with the vial will thereby be apparent.

Yet additional features of one or more embodiments of the seal structure of the present invention may include the dimensioning and configuring of the sidewall to include a display field disposed on the exterior surface of the sidewall. In addition, a machine-readable code will be disposed on the display field. The machine-readable code may take a variety of different code configurations or structures including conventional barcode, quick response code (QR), RFID tag, etc. As a result, the code may be an operative part of a tracking system or tracking capabilities associated with the seal structure of the present invention. Such a tracking system or tracking capability may be operative to facilitate the tracking of each such seal structure along a "path of distribution" from an initial point of manufacture, assembly, distribution, etc. to an endpoint such as a location of authorized use. Such a machine-readable code may be on or at least partially within the display field and include visually observable coded indicia providing adequate information or data regarding the origin, structure, utilization, etc. of the seal structure.

6

These and other objects, features and advantages of the present invention will become clearer when the drawings as well as the detailed description are taken into consideration.

BRIEF DESCRIPTION OF THE DRAWINGS

For a fuller understanding of the nature of the present invention, reference should be had to the following detailed description taken in connection with the accompanying drawings in which:

FIG. 1 is a perspective view of a tamper evident seal structure for a vial cover of the present invention.

FIG. 2 is an interior sectional view of the embodiment of FIG. 1.

FIG. 3 is an interior sectional view of another preferred embodiment of the present invention including an antiseptic component.

Like reference numerals refer to like parts throughout the several views of the drawings.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The invention will now be described more fully herein-after with reference to the accompanying drawings in which illustrative embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

The present invention is directed to a cover or closure type seal structure generally indicated as **10** for a vial and/or vial cover (not shown in FIG. 1). The seal structure **10** includes a housing generally indicated as **12** having a sidewall **14** surrounding and at least partially defining the boundaries of the interior **16** of the housing **12**. The interior **16** of the housing **12** is at least partially hollow, as represented in at least FIGS. 2 and 3. In addition, the sidewall **14** terminates in a closed-end **18** and an open-end **20** which are substantially oppositely disposed to one another. Further, the open-end **20** is dimensioned and configured to facilitate passage therethrough of the vial and a vial cover or lid secured to the open-end or access opening of the vial.

Additional features of the seal structure **10** include a retainer generally indicated as **22** disposed within the interior **16** of the housing **12**. In at least one embodiment, the retainer **22** is fixedly or integrally secured to the interior surface **24** of the sidewall and extends therefrom inwardly towards the center of the hollow interior **16** of the housing **12**. In one or more embodiments and as will be explained in greater detail hereinafter, the retainer **22** is disposed and structured for retaining engagement with the vial and/or the vial cover or lid.

It is emphasized that the term "vial" as used herein is meant to include the vial itself as well as the cover or lid crimped or otherwise secured in overlying, covering relation to the open end thereof. Moreover, as typically structured, the vial cover or lid may include a septum formed of a penetrable material which facilitates passage of a needle of a syringe or other medical device to pass therethrough into direct contact, access and/or communication with the medication contained within the vial. Accordingly, when describing the retainer **22** being disposed in retaining engagement with the vial, it is to be recognized that the actual "retaining engagement" may comprise the retainer **22** being disposed,

in whole or in part, in operative engagement with the vial cover or lid and more specifically the periphery thereof, as described hereinafter.

One or more additional embodiments of the retainer 22 include it being at least partially defined by a plurality of retainer segments 26 disposed in spaced relation to one another and collectively having an annular or circular configuration, as represented in FIGS. 2 and 3. As indicated, each of the retainer segments 26 may be fixedly or integrally secured to the interior surface 24 of the sidewall and extend inwardly, substantially towards the center of the hollow interior 16 of the housing 12. The plurality of retainer segments 26 are cooperatively disposed and structured to establish the aforementioned "retaining engagement" of the retainer 22 with the vial and/or more specifically with an under portion of the outer periphery of the vial cover or lid.

The plurality of retainer segments 26 may vary in size and configuration and may be collectively dimensioned with a remainder of the housing 12 to accommodate a vial and/or vial cover or lid of different sizes. Further, in order to establish the intended "retaining engagement" with the vial, each or at least a majority of the retainer segments have a cooperative configuration. In more specific terms, the undersurface portion 28 of each of the retainer segments 26 has a curved or beveled configuration, as represented in FIGS. 2 and 3, which facilitates a sliding engagement of the vial and/or vial cover or lid with such beveled undersurface 28. In addition, the sidewall 14 of the housing is structured to include at least a minimal degree of flexibility in order to facilitate an outward flexure. As a result, as the vial and/or vial cover or lid enter through the open end 20 of the housing 12, it will be forced into the aforementioned sliding engagement with the beveled or curved undersurface portion 28 of each or at least a majority of the plurality of retainer segments 26. Such forced, sliding engagement will cause at least a minimal outward flexure of the sidewall 14 and/or the housing 12, which in turn will allow passage of at least a portion of the vial, such as the vial cover or lid to pass through and beyond the plurality of retainer segments 26 and be operatively disposed with in an interior portion 16' of the housing 12, located between the retainer 22 and the inner surface of the closed-end 18'.

The aforementioned retaining engagement is further facilitated by the upper surface of each or at least a majority of the retainer segments 26 being configured to establish an abutting, "removal preventing" engagement with the vial and/or vial cover or lid. More specifically, the upper surface 30 of the one or more retainer segments 26 may be substantially flat or planar and be operatively disposed immediately beneath and in engagement with the under portion of the neck of the vial and/or most probably the undersurface of the outer periphery of the vial cover and/or lid. It is to be noted that both the undersurface portion 28 and upper surface portion 30 of the plurality of retainer segments 26 may vary in configuration from that specifically described herein. However, the configurations of the undersurface 28 and the upper surface 30 of the plurality of retainer segments 26 should be sufficient to respectively facilitate the aforementioned sliding engagement of the undersurface 28 of the retainer segments 26 with the vial and the removal preventing, abutting engagement of the upper surface 30.

In addition, and in cooperation with the retainer 22, one or more preferred embodiments of the seal structure 10 of the present invention further includes a pressure member 34. The pressure member 34 has an at least minimally elongated configuration fixedly secured to the interior surface of the housing 12. As such, the pressure member 34 includes a

proximal end 34' fixedly or integrally or fixedly secured to the interior surface 18' of the closed-end 18 and extending downwardly or inwardly therefrom and in depending relation thereto. Moreover, the pressure member 34 includes a distal end 34" substantially oppositely located to the proximal end 34' and in outwardly spaced relation from the interior surface 18' of the closed-end 18 of the housing 12. The dimension and configuration of the pressure member 34 is cooperatively determined relative to the location and structure of the retainer 22. Therefore, the distal end 34" of the pressure member 34 is disposed in substantially aligned relation to the retainer 22 and/or plurality of retainer segments 26 so as to be substantially coplanar or minimally spaced out of such a coplanar relation with the retainer 22.

Accordingly, the pressure member 34 is disposed, configured and structured such that the aforementioned distal end 34" thereof is disposed in a pressure exerting engagement with the vial cover or lid and more specifically with the septum of the vial lid. Due to the cooperative configurations and dispositions of the retainer 22 and the pressure member 34, specifically including the distal end 34" of the pressure member 34, the distal end 34" will be disposed in the aforementioned pressure exerting, at least partially sealing engagement with the vial cover or lid and the septum associated therewith. Concurrently, the retainer 22, including the plurality of retainer segments 26 will be disposed in the retaining engagement, which comprises the engaging relation of the upper surfaces 30 with an under portion of the outer periphery of the vial cover or lid. As a result, the vial and the vial cover or lid will be securely retained on the interior 16 of the housing 12 by virtue of a substantially clamping action and engagement between the retainer 22 and plurality of retainer segments 26 and the pressure member 34 and distal end 34" thereof exerting pressure on the septum or other portion of the vial cover or lid. Such clamping action will result in a sealing engagement and or action of the vial cover and in particular the sealing, pressure exerting engagement of the distal end 34" of the pressure member 34 with the septum.

With further reference to the pressure member 34 and as represented in FIG. 3, at least one embodiment includes the provision of an antiseptic or disinfectant composition and/or solution operatively associated with the distal end 34". Moreover, the antiseptic, disinfectant or like composition/solution may be on or within a pad 38 which is fixedly secured to the distal end 34" at a location which facilitates the direct engagement of the pad 38 with the exterior surface of the septum, during the pressure exerting engagement of the pressure member 34 or more specifically the distal end 34" with the vial cover.

As emphasized herein, the seal structure 10 of the present invention includes tamper evident capabilities and/or structure. Therefore, in at least one embodiment the tamper evident capability or structure includes a removable sidewall section 40 initially integral with a remainder of the sidewall 14. Further, the removable sidewall section 40 includes a detachable connection to the remainder of the sidewall 14. Such a detachable connection may be defined by and/or comprise at least one but preferably two elongated weakened seam lines 42 each disposed on a different opposite side of the removable section 40 and extending along a length thereof from the open end to the closed-end 18 of the housing 12. The weakened seam lines 42 are structured such that exertion of a pulling or other appropriately directed force on the removable section 40 will cause a breakage, disconnection and/or separation of one or both of the weakened seam lines 42 from the remainder of the sidewall 14,

9

due to at least in part to a reduction in the thickness of the sidewall 14 along and entirety or at least a portion of the length of the weakened seam lines 42. In addition, the aforementioned pulling or other appropriately directed force exerted on the removable sidewall section 40 may be facilitated by the inclusion of a pull tab 44 secured to the removable section 40 preferably at one end thereof which is aligned and/or coincident with the open end 20 of the housing 12. The pull tab 44 is fixedly secured to the removable sidewall section 40 and movable/removable there with as the removable section 40 breaks away from the remainder of the sidewall 14. As represented throughout the Figures, the pull tab 44 will extend outwardly from the exterior surface of the sidewall. To facilitate gripping of the pull tab 44, the exterior surface or other portion of the full tab 44 may be raised, roughened or otherwise structured, as at 48, to facilitate the gripping or securement thereof by the hand or fingers of a user.

As should be apparent, partial or complete removal of the removable sidewall section 40 will result in an inability to reconnect the replaceable sidewall section 40 with remainder of the sidewall 14 or housing 12. As a result, the housing 12 and/or sidewall 14 will not be able to be "closed" or reconnected in its original operative configuration, as represented in at least FIG. 1. In turn, the retainer 22 and the pressure member 34 will not be able to be disposed in retaining, clamping, sealing engagement with the vial and/or the vial cover, as described herein. Clear evidence of authorized or unauthorized prior attempted access to or tampering with the vial will thereby be apparent.

Yet additional features of one or more embodiments of the seal structure of the present invention may include the dimensioning and configuring of the sidewall 14 to include a display field 50 disposed on the exterior surface of the sidewall 14, as clearly represented in FIG. 1. In addition, a machine-readable code 52 will be disposed on or within the display field 50. The machine-readable code 52 may take a variety of different code configurations or structures including a conventional barcode, a quick response code (QR), an RFID tag, etc. As a result, the code 52 may be an operative part of a tracking system or tracking capabilities associated with the seal structure 10 of the present invention.

Yet another structural and operative feature which may be included in at least one embodiment of the seal structure 10 is represented in FIG. 1 and includes at least one but preferably a plurality of openings 54 formed in the closed-end 18 and disposed in communicating relation with the interior 16 and/or 16' of the housing 12.

Since many modifications, variations and changes in detail can be made to the described preferred embodiment of the invention, it is intended that all matters in the foregoing description and shown in the accompanying drawings be interpreted as illustrative and not in a limiting sense. Thus, the scope of the invention should be determined by the appended claims and their legal equivalents.

What is claimed is:

1. A seal structure for a vial cover, said seal structure comprising:

- a housing including a sidewall disposed in surrounding relation to an interior of said housing,
- said housing including an open-end and a closed-end oppositely disposed to one another,
- a retainer fixedly disposed to the interior of said housing and structured for retaining engagement with a vial,
- a pressure member disposed within said housing in attached relation to said closed-end,

10

said pressure member dimensioned and disposed in pressure exerting relation to the vial cover concurrent to said retaining engagement of said retainer with the vial cover, and

said pressure member including a distal end, said distal end disposed in substantially aligned relation with said retainer, concurrent to pressure exerting engagement with the vial cover.

2. The seal structure as recited in claim 1 wherein said retainer is fixedly secured to an inner surface of said housing and extends inwardly therefrom in substantially surrounding relation to said pressure member.

3. The seal structure as recited in claim 2 wherein said retainer comprises a plurality of retainer segments disposed in spaced relation to one another and collectively disposed in substantially surrounding relation to said pressure member.

4. The seal structure as recited in claim 3 wherein each of said plurality of retainer segments includes a substantially beveled undersurface portion, said beveled undersurface portions collectively configured to facilitate sliding engagement of the vial through said retainer, into said retaining engagement.

5. The seal structure as recited in claim 4 wherein each of said plurality of retainer segments include an upper surface configured to prevent passage of the vial out of said retaining engagement and through said open-end.

6. The seal structure as recited in claim 3 wherein each of said plurality of retainer segments include an upper surface configured to prevent passage of the vial out of said with retaining engagement.

7. The seal structure as recited in claim 1 wherein said sidewall comprises a removable section, said removable section including a detachable connection to a remainder of said sidewall.

8. The seal structure as recited in claim 7 wherein said removable connection comprises weakened seam lines disposed on opposite sides of and extending along a length of said removable section, from said open-end to said closed-end.

9. The seal structure as recited in claim 7 further comprising a pull tab, said pull tab fixedly connected to said removable section and removable there with upon detachment of said removable section from a remainder of said sidewall.

10. The seal structure as recited in claim 9 wherein said pull tab is fixedly connected to said removable section at one end thereof adjacent said open-end; said pull tab extending transversely outward from said removable section.

11. The seal structure as recited in claim 9 wherein said detachment of said removable section and said pull tab at least partially defines a tamper evident structure.

12. The seal structure as recited in claim 7 further comprising tamper evident capabilities at least partially defined by a detachment of said removable section from a remainder of said sidewall.

13. The seal structure as recited in claim 1 wherein said sidewall comprises a display field at least partially disposed on an exterior surface thereof, said display field including a machine-readable code.

14. The seal structure as recited in claim 1 wherein said pressure member includes a proximal end fixedly connected to an interior surface of said closed-end and wherein said distal end is disposed into said interior of said housing, in spaced, depending relation to said closed-end.

15. The seal structure as recited in claim 1 further comprising an antiseptic composition disposed on said pressure

11

member in engaging relation to the vial cover, concurrent to said retaining engagement of said retainer with said vial.

16. The seal structure as recited in claim **15** said antiseptic composition disposed on said distal end, in engaging relation to the vial cover.

5

17. The seal structure as recited in claim **15** wherein said antiseptic composition comprises an antiseptic composition disposed in a pad, said pad connected to a distal end of said pressure member and disposed in engageable relation to the vial cover.

10

* * * * *

12