



(12) **United States Patent**
Wilson et al.

(10) **Patent No.:** **US 12,399,304 B2**
(45) **Date of Patent:** **Aug. 26, 2025**

(54) **STACK OF STERILE PEELABLE LENSES WITH LOW CREEP**

(71) Applicant: **Laminated Film LLC**, Las Vegas, NV (US)

(72) Inventors: **Stephen S. Wilson**, Las Vegas, NV (US); **Bart E. Wilson**, Las Vegas, NV (US); **Roger Cone**, Las Vegas, NV (US)

(73) Assignee: **Laminated Film LLC**, Las Vegas, NV (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 10 days.

(21) Appl. No.: **18/442,824**

(22) Filed: **Feb. 15, 2024**

(65) **Prior Publication Data**
US 2024/0319410 A1 Sep. 26, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/823,413, filed on Aug. 30, 2022, now Pat. No. 11,933,943.

(60) Provisional application No. 63/365,909, filed on Jun. 6, 2022.

(51) **Int. Cl.**
G02B 1/14 (2015.01)
G02B 3/00 (2006.01)

(52) **U.S. Cl.**
CPC **G02B 1/14** (2015.01); **G02B 3/0062** (2013.01)

(58) **Field of Classification Search**
CPC G02B 3/0068; B32B 7/12; B32B 7/06
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,337,036 A	4/1920	Bergmann
1,366,907 A	2/1921	Dunand
2,138,086 A	11/1938	Blodjer
2,248,331 A	7/1941	Blodjer

(Continued)

FOREIGN PATENT DOCUMENTS

AU	2005244595 A1	7/2006
AU	2015277196 A1	1/2017

(Continued)

OTHER PUBLICATIONS

Racing Optics, Inc. v. Aevoe Corp. Db a Moshi; Case 2:15-cv-01774-R CJ-VCF; “Answer to Aevoe’s Counterclaims—Jury Trial Demanded”; Nov. 2, 2015; 15 pages.

(Continued)

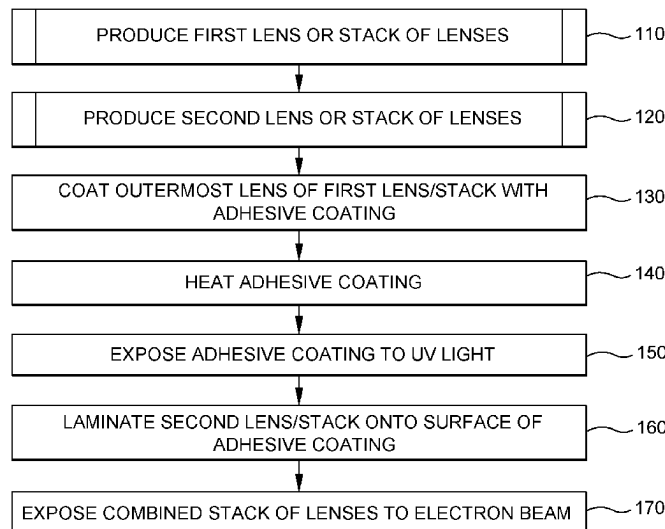
Primary Examiner — Alex A Rolland

(74) *Attorney, Agent, or Firm* — Stetina Garred Brucker & Newboles

(57) **ABSTRACT**

A method of manufacturing a sterile stack of peelable lenses includes coating a first lens (or stack of lenses) with a first adhesive coating, heating the first adhesive coating to initiate curing, exposing the first adhesive coating to ultraviolet light to continue curing, laminating a second lens (or stack of lenses) onto a surface of the first adhesive coating to produce a stack of lenses, coating the second lens with a second adhesive coating, heating the second adhesive coating to initiate curing, exposing the second adhesive coating to ultraviolet light to continue curing, laminating a third lens (or stack of lenses) onto a surface of the second adhesive coating to add the third lens to the stack of lenses, and exposing the stack of lenses to an electron beam to continue curing of the first and second adhesive coatings.

21 Claims, 1 Drawing Sheet



(56)

References Cited

U.S. PATENT DOCUMENTS

2,328,687	A	9/1943	Serr	4,965,887	A	10/1990	Paoluccio et al.
2,339,280	A	1/1944	Madson	4,973,511	A	11/1990	Farmer et al.
2,354,415	A	7/1944	Woodard	4,975,981	A	12/1990	Ray
2,461,604	A	2/1949	Huntsman	5,000,528	A	3/1991	Kawakatsu
2,511,329	A	6/1950	Craig	5,002,326	A	3/1991	Spicer et al.
2,546,117	A	3/1951	Whelan	D318,147	S	7/1991	Russell
2,563,125	A	8/1951	Malcom, Jr.	5,035,004	A	7/1991	Koester
2,569,715	A	10/1951	Green	D319,449	S	8/1991	Millar
2,640,068	A	5/1953	Schaefer et al.	5,046,195	A	9/1991	Koritan
2,736,109	A	2/1956	Scholl	D321,268	S	10/1991	Nix, Jr.
2,923,944	A	2/1960	Lindblom	5,052,054	A	10/1991	Birum
2,963,708	A	12/1960	Herbine et al.	5,054,480	A	10/1991	Bare et al.
3,095,575	A	7/1963	Radov	5,067,475	A	11/1991	Posnansky
3,298,031	A	1/1967	Morgan	5,071,206	A	12/1991	Hood et al.
3,475,766	A	11/1969	Raschke	H1023	H	3/1992	Wiseman
3,577,565	A	5/1971	Feldmann et al.	5,104,929	A	4/1992	Bilkadi
3,605,115	A	9/1971	Bohner	5,113,528	A	5/1992	Burke, Jr. et al.
3,685,054	A	8/1972	Raschke	D331,820	S	12/1992	Scanlon
3,774,239	A	11/1973	Kotzar	D333,366	S	2/1993	Brown
3,785,102	A	1/1974	Amos	5,183,700	A	2/1993	Austin
3,797,042	A	3/1974	Gager	5,194,293	A	3/1993	Foster
3,810,815	A	5/1974	Welhart et al.	5,201,077	A	4/1993	Dondlinger
3,868,293	A	2/1975	Selph	5,206,956	A	5/1993	Olson
3,937,863	A	2/1976	Moore	5,208,916	A	5/1993	Kelman
3,948,662	A	4/1976	Alston et al.	5,239,406	A	8/1993	Lynam
3,950,580	A	4/1976	Boudet	5,318,685	A	6/1994	O'Shaughnessy
3,987,569	A	10/1976	Chase	D349,177	S	7/1994	Russell
4,063,740	A	12/1977	Mader	D349,178	S	7/1994	Russell
4,076,373	A	2/1978	Moretti	5,327,180	A	7/1994	Hester, III et al.
4,090,464	A	5/1978	Bishopp et al.	D349,362	S	8/1994	Russell
D249,597	S	9/1978	Dillon	5,364,671	A	11/1994	Gustafson
4,138,746	A	2/1979	Bergmann	5,365,615	A	11/1994	Piszkin
D254,638	S	4/1980	Bay, Jr.	D353,691	S	12/1994	Scanlon
4,204,231	A	5/1980	Permenter	D354,588	S	1/1995	Russell
4,248,762	A	2/1981	Hornibrook et al.	D354,589	S	1/1995	Russell
4,248,918	A	2/1981	Hornibrook et al.	5,420,649	A	5/1995	Lewis
4,268,134	A	5/1981	Gulati et al.	D359,586	S	6/1995	Lofton
4,273,098	A	6/1981	Silverstein	D361,160	S	8/1995	Russell
4,301,193	A	11/1981	Zuk	5,443,877	A	8/1995	Kramer et al.
4,332,861	A	6/1982	Franz et al.	D362,086	S	9/1995	Russell
4,333,983	A	6/1982	Allen	5,468,247	A	11/1995	Matthai et al.
4,380,563	A	4/1983	Ayotte	5,471,036	A	11/1995	Sperbeck
4,528,701	A	7/1985	Smith	5,473,778	A	12/1995	Bell
4,557,980	A	12/1985	Hodnett, III	5,486,883	A	1/1996	Candido
4,582,764	A	4/1986	Allerd et al.	5,507,332	A	4/1996	Mckinnon
4,625,341	A	12/1986	Broersma	5,510,173	A	4/1996	Pass et al.
4,658,515	A	4/1987	Oatman	5,512,116	A	4/1996	Campfield
4,696,860	A	9/1987	Epperson	5,523,132	A	6/1996	Zhang et al.
4,701,965	A	10/1987	Landis	RE35,318	E	8/1996	Warman
4,716,601	A	1/1988	Mcneal	5,544,361	A	8/1996	Fine et al.
4,726,074	A	2/1988	Baclit et al.	5,553,608	A	9/1996	Reese et al.
4,729,179	A	3/1988	Quist, Jr.	5,555,570	A	9/1996	Bay
4,769,265	A	9/1988	Coburn, Jr.	5,557,683	A	9/1996	Eubanks
D299,767	S	2/1989	Hsin	5,584,130	A	12/1996	Perron
4,842,919	A	6/1989	David et al.	5,592,698	A	1/1997	Woods
4,850,049	A	7/1989	Landis et al.	5,593,786	A	1/1997	Parker et al.
4,852,185	A	8/1989	Olson	5,622,580	A	4/1997	Mannheim
4,852,186	A	8/1989	Landis	5,633,049	A	5/1997	Bilkadi et al.
4,853,974	A	8/1989	Olim	5,668,612	A	9/1997	Hung
4,856,535	A	8/1989	Forbes	5,671,483	A	9/1997	Reuber
4,864,653	A	9/1989	Landis	5,673,431	A	10/1997	Batty
4,867,178	A	9/1989	Smith	5,687,420	A	11/1997	Chong
4,884,296	A	12/1989	Nix, Jr.	5,694,650	A	12/1997	Hong
4,884,302	A	12/1989	Foehl	5,702,415	A	12/1997	Matthai et al.
4,889,754	A	12/1989	Vargas	5,709,825	A	1/1998	Shih
D306,363	S	2/1990	Stackhouse et al.	5,740,560	A	4/1998	Muoio
4,907,090	A	3/1990	Ananian	5,792,535	A	8/1998	Weder
4,911,964	A	3/1990	Corbo	5,806,102	A	9/1998	Park
D307,065	S	4/1990	Friedman	5,815,848	A	10/1998	Jarvis
4,920,576	A	5/1990	Landis	5,819,311	A	10/1998	Lo
4,934,792	A	6/1990	Tovi	5,846,659	A	12/1998	Hartmut et al.
4,945,573	A	8/1990	Landis	D404,849	S	1/1999	Desy
4,950,445	A	8/1990	Salce et al.	5,885,704	A	3/1999	Peiffer et al.
D311,263	S	10/1990	Russell	5,896,991	A	4/1999	Hippely et al.
4,964,171	A	10/1990	Landis	5,924,129	A	7/1999	Gill
				5,937,596	A	8/1999	Leeuwenburgh et al.
				5,956,175	A	9/1999	Hojnowski
				5,972,453	A	10/1999	Akiwa et al.
				5,991,072	A	11/1999	Solyntjes et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,991,081	A	11/1999	Haaland et al.	7,344,241	B2	3/2008	Baek
5,991,930	A	11/1999	Sorrentino	7,351,470	B2	4/2008	Draheim et al.
D418,256	S	12/1999	Caruana	D569,557	S	5/2008	Cho
6,008,299	A	12/1999	Mcgrath et al.	7,389,869	B2	6/2008	Mason, Jr.
6,049,419	A	4/2000	Wheatley et al.	7,410,684	B2	8/2008	Mccormick
6,085,358	A	7/2000	Cogan	7,425,369	B2	9/2008	Oakey et al.
6,173,447	B1	1/2001	Arnold	D586,052	S	2/2009	Elias
6,217,099	B1	4/2001	Mckinney et al.	7,495,895	B2	2/2009	Carnevali
6,221,112	B1	4/2001	Snider	7,597,441	B1	10/2009	Farwig
6,237,147	B1	5/2001	Brockman	7,629,052	B2	12/2009	Brumwell
6,250,765	B1	6/2001	Murakami	7,631,365	B1	12/2009	Mahan
6,305,073	B1	10/2001	Badders	7,663,047	B2	2/2010	Hanuschak
6,347,401	B1	2/2002	Joyce	7,709,095	B2	5/2010	Persoon et al.
6,375,865	B1	4/2002	Paulson et al.	7,722,921	B2	5/2010	Shimoda et al.
6,378,133	B1	4/2002	Daikuzono	7,727,615	B2	6/2010	Kato et al.
6,381,750	B1	5/2002	Mangan	7,735,156	B2	6/2010	VanDerWoude et al.
6,385,776	B2	5/2002	Linday	7,752,682	B2	7/2010	Vanderwoude et al.
6,388,813	B1	5/2002	Wilson et al.	7,812,077	B2	10/2010	Borade et al.
6,403,005	B1	6/2002	Mientus et al.	7,858,001	B2	12/2010	Qin et al.
6,416,872	B1	7/2002	Maschwitz	7,937,775	B2	5/2011	Manzella, Jr. et al.
6,432,522	B1	8/2002	Friedman et al.	7,957,524	B2	6/2011	Chipping
6,461,709	B1	10/2002	Janssen et al.	8,024,818	B1	9/2011	Davenport
6,469,752	B1	10/2002	Ishikawa et al.	8,044,942	B1	10/2011	Leonhard et al.
6,481,019	B2	11/2002	Diaz et al.	8,101,277	B2	1/2012	Logan et al.
6,491,390	B1	12/2002	Provost	8,234,722	B2	8/2012	VanDerWoude et al.
6,531,180	B1	3/2003	Takushima et al.	8,261,375	B1	9/2012	Reaux
6,536,045	B1	3/2003	Wilson et al.	8,282,234	B2	10/2012	VanDerWoude et al.
6,536,589	B2	3/2003	Chang	8,292,347	B1	10/2012	Drake
6,555,235	B1	4/2003	Aufderheide et al.	8,294,843	B2	10/2012	Hollaway
6,559,902	B1	5/2003	Kusuda et al.	8,316,470	B2	11/2012	McNeal et al.
6,576,349	B2	6/2003	Lingle et al.	8,361,260	B2	1/2013	Wilson et al.
6,584,614	B2	7/2003	Hogg	8,407,818	B2	4/2013	VanDerWoude et al.
6,592,950	B1	7/2003	Toshima et al.	D683,077	S	5/2013	Klotz et al.
6,614,423	B1	9/2003	Wong et al.	8,455,105	B2	6/2013	Hobeika et al.
6,622,311	B2	9/2003	Diaz et al.	D692,187	S	10/2013	Isobe
D480,838	S	10/2003	Martin	D692,189	S	10/2013	Isobe
6,654,071	B2	11/2003	Chen	8,567,596	B1	10/2013	Mason, Jr.
6,660,389	B2	12/2003	Liu et al.	8,693,102	B2	4/2014	Wilson et al.
6,662,371	B2	12/2003	Shin	8,819,869	B2	9/2014	VanDerWoude et al.
6,667,738	B2	12/2003	Murphy	8,889,801	B2	11/2014	Liao et al.
6,739,718	B1	5/2004	Jung	8,918,198	B2	12/2014	Atanasoff
6,745,396	B1	6/2004	Landis et al.	8,974,620	B2	3/2015	Wilson et al.
6,750,922	B1	6/2004	Benning	D726,378	S	4/2015	Wako
6,773,778	B2	8/2004	Onozawa et al.	8,999,509	B2	4/2015	Port et al.
6,773,816	B2	8/2004	Tsutsumi	9,023,162	B2	5/2015	Mccormick et al.
6,777,055	B2	8/2004	Janssen et al.	9,104,256	B2	8/2015	Wilson et al.
6,800,378	B2	10/2004	Hawa et al.	9,128,545	B2	9/2015	Wilson et al.
6,838,610	B2	1/2005	de Moraes	9,150,763	B2	10/2015	Lopez et al.
6,841,190	B2	1/2005	Liu et al.	9,161,858	B2	10/2015	Capers et al.
6,847,492	B2	1/2005	Wilson et al.	9,170,415	B2	10/2015	Mansuy
6,864,882	B2	3/2005	Newton	9,173,437	B2	11/2015	VanDerWoude et al.
6,870,686	B2	3/2005	Wilson et al.	9,204,823	B2	12/2015	Derenne et al.
6,879,319	B2	4/2005	Cok	9,274,625	B2	3/2016	Wilson et al.
6,907,617	B2	6/2005	Johnson	9,295,297	B2	3/2016	Wilson
6,911,593	B2	6/2005	Mazumder et al.	D759,900	S	6/2016	Cummings et al.
6,922,850	B1	8/2005	Arnold	9,442,306	B1	9/2016	Hines et al.
6,952,950	B2	10/2005	Doe et al.	9,471,163	B2	10/2016	Wilson et al.
6,967,044	B1	11/2005	O'Brien	9,526,290	B2	12/2016	Wilson
D512,797	S	12/2005	Canavan et al.	9,575,231	B2	2/2017	Chu et al.
6,973,677	B2	12/2005	Diaz et al.	D781,507	S	3/2017	Huh
6,995,976	B2	2/2006	Richardson	D781,508	S	3/2017	Huh
7,070,837	B2	7/2006	Ross	9,629,407	B2	4/2017	Foster
7,071,927	B2	7/2006	Blanchard	9,671,622	B1	6/2017	Vetrini et al.
D526,446	S	8/2006	Cowan et al.	9,706,808	B2	7/2017	Sclafani et al.
7,097,080	B2	8/2006	Cox	9,726,940	B2	8/2017	Tomiyasu
7,101,810	B2	9/2006	Bond et al.	D805,256	S	12/2017	Yang
7,103,920	B1	9/2006	Otterson	9,905,297	B2	2/2018	Best
7,143,979	B2	12/2006	Wood et al.	D815,190	S	4/2018	Dellemann
7,184,217	B2	2/2007	Wilson et al.	9,968,155	B2	5/2018	Wilson
D541,991	S	5/2007	Lawrence	10,070,678	B2	9/2018	Wilson
7,215,473	B2	5/2007	Fleming	10,165,819	B2	1/2019	Klotz et al.
7,226,176	B1	6/2007	Huang	10,201,207	B2	2/2019	VanDerWoude et al.
7,238,401	B1	7/2007	Dietz	10,226,095	B2	3/2019	Wilson
7,311,956	B2	12/2007	Pitzen	10,227,501	B2	3/2019	Hwang et al.
D559,442	S	1/2008	Regelbrugge et al.	D849,240	S	5/2019	Guo et al.
				D850,256	S	6/2019	Ryszawy
				10,321,731	B2	6/2019	Wilson
				10,345,934	B2	7/2019	Wilson et al.
				10,384,084	B2	8/2019	Isham et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

10,427,385 B2	10/2019	Wilson et al.	2007/0234888 A1	10/2007	Rotolo De Moraes
10,449,397 B2	10/2019	VanDerWoude et al.	2007/0286995 A1	12/2007	Li et al.
10,520,756 B2	12/2019	Gallina et al.	2008/0014446 A1	1/2008	Donea et al.
10,537,236 B2	1/2020	Bennett et al.	2008/0030631 A1	2/2008	Gallagher
D879,384 S	3/2020	Sato	2008/0030675 A1	2/2008	Dillon
D882,182 S	4/2020	Fekete	2008/0055258 A1	3/2008	Sauers
10,620,670 B2	4/2020	Wilson et al.	2008/0118678 A1	5/2008	Huang et al.
10,687,569 B1	6/2020	Mcdirmid	2008/0151177 A1	6/2008	Wang
10,716,986 B2	7/2020	Winter et al.	2008/0160321 A1	7/2008	Padiyath et al.
10,874,163 B2	12/2020	VanDerWoude et al.	2008/0176018 A1	7/2008	Enniss et al.
D907,299 S	1/2021	Brown, II et al.	2008/0192351 A1	8/2008	Miyagawa et al.
D907,300 S	1/2021	Brown, II et al.	2008/0231979 A1	9/2008	Chen
D925,129 S	7/2021	Wilson	2008/0256688 A1	10/2008	Bruce
D925,834 S	7/2021	Babin et al.	2008/0286500 A1	11/2008	Sussner et al.
11,090,516 B2	8/2021	VanDerWoude et al.	2008/0292820 A1	11/2008	Padiyath et al.
11,141,959 B2	10/2021	Wilson et al.	2009/0011205 A1	1/2009	Thiel
11,147,323 B1	10/2021	Wilson	2009/0026095 A1	1/2009	Lofland et al.
11,307,329 B1	4/2022	Wilson	2009/0054115 A1	2/2009	Horrdin et al.
11,480,801 B1	10/2022	Morris et al.	2009/0086415 A1	4/2009	Chipping
11,490,667 B1	11/2022	Wilson	2009/0087655 A1	4/2009	Yamada et al.
11,510,718 B2	11/2022	Childers et al.	2009/0105437 A1	4/2009	Determan et al.
11,548,356 B2	1/2023	Wilson et al.	2009/0119819 A1	5/2009	Thompson
11,579,339 B2	2/2023	Thothadri et al.	2009/0181242 A1	7/2009	Enniss et al.
11,709,296 B2	7/2023	Wilson et al.	2009/0233032 A1	9/2009	Craig
11,723,420 B2	8/2023	Wilson et al.	2009/0239045 A1	9/2009	Kato et al.
11,807,078 B2	11/2023	Wilson et al.	2009/0239048 A1	9/2009	Sugihara et al.
11,988,850 B2	5/2024	Wilson et al.	2010/0026646 A1	2/2010	Xiao et al.
2001/0035936 A1	11/2001	Maisnik	2010/0033442 A1	2/2010	Kusuda et al.
2002/0025441 A1	2/2002	Hieda et al.	2010/0102197 A1	4/2010	Mcintyre
2002/0036362 A1	3/2002	Chigira et al.	2010/0102476 A1	4/2010	Higgins
2002/0101411 A1	8/2002	Chang	2010/0122402 A1	5/2010	Tipp
2002/0109922 A1	8/2002	Wilson et al.	2010/0146679 A1	6/2010	Heil
2002/0114934 A1	8/2002	Liu et al.	2010/0238119 A1	9/2010	Dubrovsky et al.
2002/0122925 A1	9/2002	Liu et al.	2010/0245273 A1	9/2010	Hwang et al.
2002/0159159 A1	10/2002	Wilson et al.	2010/0270189 A1	10/2010	Pedersen, II et al.
2002/0195910 A1	12/2002	Hus et al.	2011/0007388 A1	1/2011	Wilson et al.
2003/0012936 A1	1/2003	Draheim et al.	2011/0010994 A1	1/2011	Wilson et al.
2003/0087054 A1	5/2003	Janssen et al.	2011/0012841 A1	1/2011	Lin
2003/0110613 A1	6/2003	Ross	2011/0013273 A1	1/2011	Wilson et al.
2004/0004605 A1	1/2004	David	2011/0014481 A1	1/2011	Wilson et al.
2004/0109096 A1	6/2004	Anderson et al.	2011/0035936 A1	2/2011	Lee
2004/0121105 A1	6/2004	Janssen et al.	2011/0052864 A1	3/2011	Son
2004/0139530 A1	7/2004	Yan	2011/0097574 A1	4/2011	Faldysta et al.
2004/0202812 A1	10/2004	Congard et al.	2011/0119801 A1	5/2011	Wright
2004/0227722 A1	11/2004	Friberg et al.	2011/0165361 A1	7/2011	Sherman et al.
2004/0238690 A1	12/2004	Wood et al.	2011/0168261 A1	7/2011	Welser et al.
2004/0246386 A1	12/2004	Thomas et al.	2011/0267793 A1	11/2011	Cohen et al.
2004/0258933 A1	12/2004	Enniss et al.	2011/0271497 A1	11/2011	Suh et al.
2005/0002108 A1	1/2005	Wilson et al.	2011/0277361 A1	11/2011	Nichol et al.
2005/0015860 A1	1/2005	Reaux	2011/0279383 A1	11/2011	Wilson et al.
2005/0071909 A1	4/2005	Diaz et al.	2012/0003431 A1	1/2012	Huang
2005/0133035 A1	6/2005	Yahiaoui et al.	2012/0030095 A1	2/2012	Marshall et al.
2005/0180877 A1	8/2005	Usami et al.	2012/0047614 A1	3/2012	Choi
2005/0186415 A1	8/2005	Mccormick et al.	2012/0070603 A1	3/2012	Hsu
2005/0188821 A1	9/2005	Yamashita et al.	2012/0081792 A1	4/2012	Neuffer
2005/0200154 A1	9/2005	Barbee et al.	2012/0137414 A1	6/2012	Saylor
2005/0249957 A1	11/2005	Jing et al.	2012/0180204 A1	7/2012	Hawkins
2005/0260343 A1	11/2005	Han	2012/0183712 A1	7/2012	Leonhard et al.
2006/0024494 A1	2/2006	Amano et al.	2012/0188743 A1	7/2012	Wilson et al.
2006/0052167 A1	3/2006	Boddicker et al.	2012/0200816 A1	8/2012	Krasnov et al.
2006/0056030 A1	3/2006	Fukuda et al.	2012/0291173 A1	11/2012	Gleason et al.
2006/0057399 A1	3/2006	Persoone et al.	2013/0045371 A1	2/2013	O'Donnell
2006/0114245 A1	6/2006	Masters et al.	2013/0083285 A1	4/2013	McNeal et al.
2006/0138694 A1	6/2006	Biernath et al.	2013/0089688 A1	4/2013	Wilson et al.
2006/0158609 A1	7/2006	Heil	2013/0098543 A1	4/2013	Reuter et al.
2006/0177654 A1	8/2006	Shoshi	2013/0141693 A1	6/2013	McCabe et al.
2006/0204776 A1	9/2006	Chen et al.	2013/0145525 A1	6/2013	Arenson et al.
2006/0254088 A1	11/2006	Mccormick	2013/0222913 A1	8/2013	Tomoda et al.
2006/0285218 A1	12/2006	Wilson et al.	2013/0247286 A1	9/2013	Vanderwoude et al.
2007/0019300 A1	1/2007	Wilson et al.	2013/0293959 A1	11/2013	Mcdonald
2007/0181456 A1	8/2007	Kusuda et al.	2014/0020153 A1	1/2014	Romanski et al.
2007/0211002 A1	9/2007	Zehner et al.	2014/0050909 A1	2/2014	Choi et al.
2007/0212508 A1	9/2007	Mase	2014/0220283 A1	8/2014	Wilson et al.
2007/0229962 A1	10/2007	Mason	2014/0259321 A1	9/2014	Arnold
2007/0234592 A1	10/2007	Crates	2014/0289937 A1	10/2014	Capers et al.
			2015/0033431 A1	2/2015	Hofer Kraner et al.
			2015/0103474 A1	4/2015	Cho
			2015/0131047 A1	5/2015	Saylor et al.
			2015/0202847 A1	7/2015	Johnson et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2015/0234209 A1 8/2015 Miyamoto et al.
 2015/0258715 A1 9/2015 Ohta
 2015/0294656 A1 10/2015 Hanuschak
 2015/0309609 A1 10/2015 Wilson et al.
 2015/0349147 A1 12/2015 Xi et al.
 2015/0359675 A1 12/2015 Wilson
 2016/0023442 A1 1/2016 Faris
 2016/0050990 A1 2/2016 Hayes
 2016/0073720 A1 3/2016 Niedrich
 2016/0231834 A1 8/2016 Hardi
 2016/0259102 A1 9/2016 Taka
 2016/0271922 A1 9/2016 Uzawa et al.
 2016/0291543 A1 10/2016 Saito
 2016/0318227 A1 11/2016 Kim et al.
 2017/0052286 A1 2/2017 Hines et al.
 2017/0071792 A1 3/2017 Wilson et al.
 2017/0079364 A1 3/2017 Paulson
 2017/0129219 A1 5/2017 Uebelacker et al.
 2017/0173923 A1 6/2017 Davis et al.
 2017/0192131 A1 7/2017 Wilson et al.
 2017/0208878 A1 7/2017 Kakinuma et al.
 2017/0232713 A1 8/2017 Mannheim Astete et al.
 2017/0281414 A1 10/2017 Wilson
 2017/0299898 A1 10/2017 Gallina et al.
 2017/0318877 A1 11/2017 Yahiaoui et al.
 2018/0029337 A1 2/2018 Wilson et al.
 2018/0042324 A1 2/2018 King
 2018/0052334 A1 2/2018 Repko
 2018/0094164 A1 4/2018 Ito et al.
 2018/0148578 A1 5/2018 Ohta et al.
 2018/0161208 A1 6/2018 Huh
 2018/0229480 A1 8/2018 Chung
 2018/0236753 A1 8/2018 Wykoff, II et al.
 2018/0295925 A1 10/2018 Gagliardo et al.
 2018/0338550 A1 11/2018 Boulware et al.
 2019/0021430 A1 1/2019 Elliott
 2019/0037948 A1 2/2019 Romanski et al.
 2019/0116300 A1 4/2019 Okuno
 2019/0118057 A1 4/2019 Winter et al.
 2019/0209912 A1 7/2019 Isserow et al.
 2019/0212474 A1 7/2019 Le Quang et al.
 2019/0346591 A1 11/2019 Thothadri et al.
 2019/0389182 A1 12/2019 Wilson et al.
 2020/0100657 A1 4/2020 Lee et al.
 2020/0115519 A1 4/2020 Phillips et al.
 2020/0124768 A1 4/2020 Wilson
 2020/0134773 A1 4/2020 Pinter et al.
 2020/0154808 A1 5/2020 Inouye
 2020/0178622 A1 6/2020 Jascomb et al.
 2020/0247102 A1 8/2020 Wilson et al.
 2020/0261055 A1 8/2020 Zwierstra et al.
 2020/0281301 A1 9/2020 Wynalda, Jr.
 2020/0310494 A1 10/2020 Ahn et al.
 2020/0359718 A1 11/2020 Jefferis et al.
 2020/0375272 A1 12/2020 Ulmer et al.
 2020/0384747 A1 12/2020 Fukuda et al.
 2021/0030095 A1 2/2021 Reicher
 2021/0162645 A1 6/2021 Wilson et al.
 2021/0283994 A1 9/2021 Wilson
 2021/0298380 A1 9/2021 Brown, II et al.
 2021/0298390 A1 9/2021 Sup, IV et al.
 2021/0307425 A1 10/2021 Keim
 2021/0315291 A1 10/2021 Votolato et al.
 2021/0318553 A1 10/2021 Gharabegian
 2021/0321692 A1 10/2021 Wilson
 2021/0321693 A1 10/2021 Wilson et al.
 2021/0329999 A1 10/2021 Ackerman
 2021/0368886 A1 12/2021 Swart et al.
 2021/0386155 A1 12/2021 Rose
 2021/0393440 A1 12/2021 Leatt et al.
 2021/0394427 A1 12/2021 Frisco et al.
 2022/0015472 A1 1/2022 Boza
 2023/0106407 A1 4/2023 Arima et al.

FOREIGN PATENT DOCUMENTS

CA 2386043 A1 11/2003
 DE 3637188 A1 5/1988
 DE 19808535 A1 9/1999
 DE 202004010014 U1 4/2005
 DE 202020101562 U1 4/2020
 DE 202020101794 U1 4/2020
 EP 192075 A2 8/1986
 EP 671258 A2 9/1995
 EP 1471415 A2 10/2004
 EP 1517791 A2 3/2005
 EP 1047537 B1 3/2010
 EP 3157480 A1 4/2017
 GB 2310862 A 9/1997
 GB 2492574 A 1/2013
 JP 61017860 A 1/1986
 JP S6117860 A 1/1986
 JP 62053832 A 3/1987
 JP 04314537 A 11/1992
 JP 06143496 A 5/1994
 JP 07021456 A 1/1995
 JP 10167765 A 6/1998
 JP 2000334812 A 12/2000
 JP 2002328613 A 11/2002
 JP 2012183822 A 9/2012
 JP 2014032222 A 2/2014
 JP 2015128896 A 7/2015
 JP 2018200329 A 12/2018
 JP 6767596 B1 10/2020
 KR 20120001292 A 1/2012
 TW 200700793 A 1/2007
 TW 201027992 A 7/2010
 WO 0024576 A1 5/2000
 WO 03052678 A1 6/2003
 WO 2009008857 A1 1/2009
 WO 2015009114 A1 1/2015
 WO 2015091425 A1 6/2015
 WO 2015093413 A1 6/2015
 WO 2015195814 A1 12/2015
 WO 2019006151 A1 1/2019
 WO 2019055267 A1 3/2019
 WO 2021176316 A1 9/2021

OTHER PUBLICATIONS

Gregory Brower et al.; "Complaint for Patent Infringement"; Sep. 15, 2015; 15 pages.
 Jeffrey A. Silverstri et al.; "Answer to Complaint for Patent Infringement"; Oct. 7, 2015; 59 pages.
 United States Patent and Trademark Office; Office Action for U.S. Appl. No. 15/090,681; Aug. 26, 2016; 8 pages.
 List of References for U.S. Appl. No. 15/090,681; Receipt date Jun. 30, 2016; 3 pages.
 List of References for U.S. Appl. No. 15/090,681; Receipt date Apr. 27, 2016; 4 pages.
 Examiner's search strategy and results for U.S. Appl. No. 15/090,681; Aug. 21, 2016; 2 pages.
Aevoe Corp. v. Racing Optics, Inc.; Case No. IPR2016-01164; Petition for Inter Partes Review of U.S. Pat. No. 9,104,256 (including Exhibits 1001-1011 and Petitioner Power of Attorney Pursuant to 37 C.F.R. 42. 10(b) for Petition for Inter Partes Review); Jun. 21, 2016.
Aevoe Corp. v. Racing Optics, Inc.; Case No. IPR2016-01165; Petition for Inter Partes Review of U.S. Pat. No. 9,128,545 (including Exhibits 1001-1006 and Petitioner Power of Attorney Pursuant to 37 C.F.R. 42. 10(b) for Petition for Inter Partes Review); Jun. 21, 2016.
Aevoe Corp. v. Racing Optics, Inc.; Case No. IPR2016-01166; Petition for Inter Partes Review of U.S. Pat. No. 9,274,625 (including Exhibits 1001-1011 and Petitioner Power of Attorney Pursuant to 37 C.F.R. 42. 10(b) for Petition for Inter Partes Review); Jun. 21, 2016.
 Exhibit 1—Invalidity Contentions re: '545 Patent Under LPR 1-8(b)-(d); at least as early as Jul. 1, 2016.

(56)

References Cited**OTHER PUBLICATIONS**

Exhibit 2—Invalidity Contentions re: '256 Patent Under LPR 1-8(b)-(d); at least as early as Jul. 1, 2016.

Exhibit 3—Invalidity Contentions re: '620 Patent Under LPR 1-8(b)-(d); at least as early as Jul. 1, 2016.

Exhibit 4—Invalidity Contentions re: '625 Patent Under LPR 1-8(b)-(d); at least as early as Jul. 1, 2016.

Exhibit 1002—U.S. Pat. No. 5,364,671 to Gustafson; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-6.

Exhibit 1004—U.S. Pat. No. 7,351,470 to Draheim et al.; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-15.

Exhibit 1001—U.S. Pat. No. 8,974,620 to Wilson et al.; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-15.

Exhibit 1003—U.S. Pat. No. 6,250,765 to Murakami; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; p. 1-8.

Exhibit 1005—U.S. Pat. No. 7,957,524 to Chipping; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2017; pp. 1-20.

Aevoe Corp., *Racing Optics, Inc.*; Petition for Inter Partes Review; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-55.

Exhibit 1006—Japanese Application No. JP 2002-328613 to Kitaguchi Translation; IPR2016-01745; at least as early as Sep. 7, 2016; pp. 1-10.

Exhibit 1009—U.S. Appl. No. 13/838,311; Interview Summary; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; p. 1-3.

Exhibit 1010—U.S. Appl. No. 15/838,311; Notice of Allowance; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-8.

Aevoe Corp. v. Racing Optics, Inc.; Declaration of Darran Cairns; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-32.

Aevoe Corp. v. Racing Optics, Inc.; Petitioner's Power of Attorney; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-3.

Exhibit 1007—U.S. Appl. No. 13/838,311; Response to Office Action; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; p. 1-19.

Exhibit 1008—U.S. Appl. No. 13/838,311; Response and Request for Continued Examination; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-21.

Aevoe Corp. v. Racing Optics, Inc.; Mandatory Notices; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-4.

Aevoe Corp. v. Racing Optics, Inc.; Power of Attorney; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 7, 2016; pp. 1-4.

Aevoe Corp. v. Racing Optics, Inc.; Notice of Filing Date; Case IPR2016-01745; Inter Partes Review of U.S. Pat. No. 8,974,620; at least as early as Sep. 6, 2016; p. 1-5.

Aevoe Corp. v. Racing Optics, Inc.; Decision; Case IPR2016-01164; Inter Partes Review of U.S. Pat. No. 9,104,256; at least as early as Nov. 7, 2016; p. 1-24.

Aevoe Corp. v. Racing Optics, Inc.; Decision; Case IPR2016-01166; Inter Partes Review of U.S. Pat. No. 9,274,625; at least as early as Nov. 7, 2016; p. 1-23.

Aevoe Corp. v. Racing Optics, Inc.; Decision; Case IPR2016-01165; Inter Partes Review of U.S. Pat. No. 9,128,545; at least as early as Nov. 7, 2016; p. 1-25.

Settlement and License Agreement, Dec. 21, 2007, 28 pgs.

United States Patent and Trademark Office; Office Action dated Dec. 21, 2016 pertaining to U.S. Appl. No. 15/090,681, filed Apr. 5, 2016; 8 pages.

PCT Search Report and Written Opinion for US2020/016245 (Apr. 28, 2020).

Professional Plastics (<http://www.professionalplastics.com/MelinexPETFilmDupont>) 2012.

Whitney, Frank D., Preliminary Injunction, Aug. 21, 2007, 5 pgs.

Higgins, John P., Answer and Counterclaims to First Amended Complaint, Sep. 4, 2007, 27 pgs.

Ballato, John, Expert Report of John Ballato, Ph.D., Nov. 12, 2007, 5 pgs.

Russell, Geoffrey A., Rebuttal Report of Geoffrey A. Russell, Ph.D., on issues raised in the Export Report of John Ballato, Ph.D., Nov. 21, 2007, 15 pgs.

Higgins, John P., Defendants' Second Supplement to Its Response to Plaintiffs' First Set of Interrogatories, Dec. 7, 2007, 25 pgs.

Barnhardt, John J. III, Redacted Version Defendants' Memorandum in Support of Motion for Partial Summary Judgment, Dec. 3, 2007, 36 pgs.

Higgins, John P., Defendants' Second Supplement to its Response to Plaintiffs' First Set of Interrogatories, Dec. 7, 2007, 26 pgs.

Whitney, Frank D., Consent Judgment Order, Jan. 3, 2008, 5 pgs.

Ballato, John, Supplemental Expert Report of John Ballato, Ph.D., Nov. 19, 2007, 10 pgs.

Moore, Steven D., Plaintiffs' Motion to Strike Defendants' New and Untimely Invalidity Theory, Dec. 19, 2007, 3 pgs.

Moore, Steven D., Plaintiffs' Brief in Support of Motion to Strike Defendants' New and Untimely Invalidity Theory, Dec. 19, 2007, 10 pgs.

Barnhardt, John J. III, Notice Pursuant to 35 U.S.C. 282, Dec. 18, 2007, 3 pgs.

Office Action for Canadian Patent Application No. 2,952,436; Jul. 8, 2020.

www.wikipedia.org. "Black Body", Jul. 2009, 11 pages.

www.wikipedia.org. "Infrared", Jul. 2009, 12 pages.

www.wikipedia.org. "PET Film (biaxially oriented)", Jul. 2009, 4 pages.

PCT International Application No. PCT/US99/25128 with International Search Report, Date of Completion Jan. 18, 2000, 54 Pages.

English translation of TW201027992, "Monitor Protection Device for a Flat Panel Display", 11 pgs.

Pulse Racing Innovations, EZ Tear Universal Single Pull Tearoff Ramp, webpage <<https://www.pulseracinginnovations.com>>, Dec. 30, 2020, 6 pages.

PCT International Search Report and Written Opinion for International Application No. PCT/US20/24639, Jun. 11, 2020, 13 pages.

PCT International Search Report and Written Opinion for International Application No. PCT/US2020/049919; Nov. 27, 2020.

Tian-Chi Chang, Xun Cao, Shan-Hu Bao, Shi-Dong Ji, Hong-Jie Luo, Ping Jin; "Review on Thermochromic Vanadium Dioxide Based Smart Coatings: From Lab to Commercial Application"; Dec. 16, 2017.

PCT International Search Report and Written Opinion for International Application No. PCT/US2020/062230; Feb. 8, 2021.

"Anti-reflective coating," Wikipedia, last updated Jul. 13, 2017 by Andy Dingley, <https://en.m.wikipedia.org/wiki/Anti-reflective_coating>.

"Monotonic function," Wikipedia, accessed May 24, 2017, <https://en.wikipedia.org/wiki/Monotonic_function>.

"Thin Film," Wikipedia, last updated Jun. 20, 2017, <https://en.wikipedia.org/wiki/Thin_film>.

"Tips to Get Quality Anti-Reflection Optical Coatings," Penn Optical Coatings, accessed May 24, 2017, <<http://www.pennoc.com/tipsgetqualityantireflectionopticalcoatings/>>.

Langlet, M., "Antireflective Films", from Chapter 15 of Handbook of Sol-Gel Science and Technology Processing Characterization and Applications, copyright 2005, pp. 332-334, 337, 339-341., taken from website <<https://books.google.com/books?id=i9swy1D2HxIC&pg=PA339&dq=AR%20thick%20film%20coatings&pg=PA339#v=onepage&q=AR%20thick%20film%20coatings&f=false>>.

Li, H.-M. et al., "Influence of weight ratio in polymer blend film on the phase separation structure and its optical properties", The European Physical Journal Applied Physics, 45, 20501, published Jan. 31, 2009, EDP Sciences, 4 pages.

(56)

References Cited

OTHER PUBLICATIONS

MDS Nordion, "Gamma Compatible Materials," Datasheet, Aug. 2007, 4 pages, <https://ab-div-bdi-bl-blm.web.cern.ch/Radiation/Gamma-Compatible_Materials_List_company.pdf>, retrieved on Sep. 29, 2021.

Zhang, Xin_Xiang et al., Abstract of "One-step sol-gel preparation of PDMS-silica ORMOSILs as environment-resistant and crack-free thick antireflective coatings," Journal of Materials Chemistry, Issue 26, 2012, <<http://pubs.rsc.org/en/content/articlelanding/2012/m/c2jm31005h#!divAbstract>>.

PCT International Search Report and Written Opinion for International Application No. PCT/US2017/044438, dated Oct. 23, 2017, 12 pages.

Chemical Book, "Benzophenone", https://www.chemicalbook.com/ChemicalProductProperty_EN_CB5744679.htm, available at least as of 2017, accessed online on Dec. 15, 2021 (Year: 2017).

Chemical Book, "Polymethylhydrosiloxane", https://www.chemicalbook.com/ChemicalProductProperty_EN_CB3694969.htm, available at least as of 2017, accessed online on Dec. 15, 2021 (Year: 2017).

Guide Chem, "UV Stabilizer", <https://wap.guidechem.com/trade/uv-stabilizer-uv-absorber-ligh-id3578792.html>, available at least as of 2018, accessed online on Dec. 15, 2021 (Year: 2018).

Hostaphan RBB biaxially oriented film data sheet (Year: 2011).

PCT International Search Report and Written Opinion for International Application No. PCT/US2020/024639, Jun. 11, 2020.

PCT International Search Report and Written Opinion for International Application No. PCT/US2021/026165, dated Jul. 9, 2021, 10 pages.

PCT International Search Report and Written Opinion for International Application No. PCT/US21/20421, May 20, 2021, 8 pages.

Wiseman, Sr., United States Statutory Invention Registration No. H1023, published Mar. 3, 1992, 7 pages.

Chemical Book, Bis(1,2,2,6,6-pentamethyl-4-piperidyl) sebacate, available online at least as of 2017, https://www.chemicalbook.com/ChemicalProductProperty_EN_CB8121619.htm, accessed online Mar. 15, 2022 (Year: 2017).

Pearson Dental, "UV Protection Face Shields", https://www.pearsondental.com/catalog/subcat_thumb.asp?majcatid=750&catid=10149, available online at least as of Jan. 27, 2021 per Internet Archive, accessed online on Sep. 15, 2021. (Year: 2021).

Patent Cooperation Treaty, International Search Report and Written Opinion for International Application No. PCT/US2022/031823, mailed Jul. 14, 2022, 11 pages.

Patent Cooperation Treaty, International Search Report and Written Opinion for International Application No. PCT/US2022/046171, mailed Jan. 18, 2023, 15 pages.

Patent Cooperation Treaty, International Search Report and Written Opinion for International Application No. PCT/US2023/012316, mailed Apr. 14, 2023, 11 pages.

Patent Cooperation Treaty, International Search Report and Written Opinion for International Application No. PCT/US2023/26598, mailed Sep. 12, 2023, 7 pages.

Prosecution History of U.S. Re-Examination Application No. 95/002,073 titled Touch Screen Protector; pp. 1-1,980.

www.store.moshimonde.com; "iVisor AG for iPad 2 Black"; 2004-2010.

Defendant's Motion for Summary Judgment; Oct. 25, 2013; pp. 1-31.

Jake Gaecke; "Appletell Reviews the iVisor for iPad"; www.appletell.com; Sep. 15, 2010 at 12:32 p.m. www.technologytell.com/apple/60407/appletell-reviews-ag-for-ipad/; 2 pages.

www.nushield.com/technology.php; "What Makes NuShield Screen Protectors Superior"; 2 pages.

www.spigen.com; "Something You Want"; 2 pages.

www.zagg.com; "Apple iPad 2 (Wi-Fi 3G) Screen Protector"; 2 pages.

www.gadgetguard.com; "Invisible Gadget Guard, the Original"; 1 page.

www.incipotech.com; "Protect Your iPhone 4 with Screen Protectors from Incipotech"; 3 pages.

www.store.moshimonde.com; "iVisor AG iPad Screen Protector"; Jul. 2010; 7 pages.

www.store.moshimonde.com; "iVisor XT Crystal Clear Protector for iPad"; Aug. 2010; 3 pages.

www.store.moshimonde.com; "iVisor AG for iPad 2 Black"; Mar. 2011; 5 pages.

www.store.moshimonde.com; "iVisor AG for iPad 2 White"; Mar. 2011; 3 pages.

www.store.moshimonde.com; "iVisor AG for iPhone 4/4S Black"; Nov. 2010; 5 pages.

www.store.moshimonde.com; "iVisor AG for iPhone 4/4S White"; May 2010; 4 pages.

Dictionary.com (<http://dictionary.reference.com>) 2012.

Racing Optics, Inc. v. Aevoe, Inc., d/b/a/ Moshi; Case No. 15-cv-017744-JCM-VCF; Aevoe's Initial Disclosure Non-Infringement, Invalidity and Unenforceability Contentions (Redacted) dated Jan. 7, 2016.

Defendant Aevoe Corp.'s Non-Infringement Contentions and Responses to Racing Optic's Disclosure of Asserted Claims and Infringement Contentions (U.S. Pat. No. 9,128,545) dated Jan. 7, 2016.

Defendant Aevoe Corp.'s Non-Infringement Contentions and Responses to Racing Optic's Disclosure of Asserted Claims and Infringement Contentions (U.S. Pat. No. 9,104,256) dated Jan. 7, 2016.

Defendant Aevoe Corp.'s Non-Infringement Contentions and Responses to Racing Optic's Disclosure of Asserted Claims and Infringement Contentions (U.S. Pat. No. 8,974,620) dated Jan. 7, 2016.

I-Blason LLC v. Aevoe, Inc. and Aevoe Corp.; Case IPR2016-TBA; Petition for Inter Partes Review of U.S. Pat. No. 8,044,942 (including Exhibits 1001-1019).

Dupont Teijin Films, "Mylar Polyester Film—Optical Properties", Jun. 2003, 2 pages.

https://en.wikipedia.org/wiki/Black_body, "Black Body", Jul. 2009, 11 pages.

<https://en.wikipedia.org/wiki/Infrared>, "Infrared", Jul. 2009, 12 pages. <https://en.wikipedia.org/wiki/BoPET>, "PET Film (biaxially oriented)", Jul. 2009, 4 pages.

Instashield LLC, Bionic Wrench® Inventor Creates Low-Cost Face Shield for Masses, Apr. 15, 2020, 3 pages.

Tom Zillich, Surrey manufacturer hopes to hit home run with face shield that clips to baseball cap, Apr. 29, 2020, 3 pages.

Opentip, Opromo Safety Face Shield Visor for Adult Kids, Protective Cotton Hat with Removable PVC Face Cover <https://www.opentip.com/product.php?products_id=11699030>, May 5, 2020, 3 pages.

Hefute, Hefute 5 PCS Protective Face Cover with Shield Comfortable Full Protection Face Compatible with Glasses Anti-Droplet Anti-Pollution and Windproof Transparent Safety Face Cover with Shield (Style B) <https://www.amazon.com/dp/B086GSG8DH/ref=sspa_dk_detail_9?psc=1&pd_rd_i=B086GSG8DH&pd_rd_w=Ocdm2&pf_rd_p=48d372c1-f7e1-4b8b-9d02-4bd86f5158c5&pd_rd_wg=qkB2b&pf_rd_r=M%E2%80%A6>, May 6, 2020, 7 pages.

Geanbaye, Geanbaye Safety Full Face Shield Cap Detachable Baseball Cap Anti-Saliva Anti-Spitting Eye Protective Hat Windproof Dustproof <https://www.amazon.com/dp/B086DV32B8/ref=sspa_dk_detail_8?psc=1&pd_rd_i=B086DV32B8&pd_rd_w=MwjfT&pf_rd_p=48d372c1-f7e1-4b8b-9d02-4bd86f5158c5&pd_rd_wg=pxuOs&pf_rd_r=PND%A%E2%80%A6>, May 5, 2020, 8 pages.

Leigh Buchanan, These 2 Companies Are Making Face Shields for Everyone <<https://www.inc.com/leigh-buchanan/face-shields-coronavirus-protection-open-source.html>>, May 6, 2020, 8 pages.

Brim Shield, photographs, Apr. 21, 2020, 1 page.

Hatshield, Shield Yourself With The Hatshield <https://www.hatshield.com/?gclid=CjwKCAjwp-X0BRAFEiwAheRui1u89v_3URuiwEVvBRGa9TaEfWoZVMJXRkWsZgPTUw-0fHJ5HD-SuhoCc84QAvD_BwE>, Apr. 17, 2020, 11 pages.

Eli N. Perencevich, Moving Personal Protective Equipment Into the Community Face Shields and Containment of COVID-19, Apr. 29, 2020, 2 pages.

(56)

References Cited

OTHER PUBLICATIONS

Chang, Tian-Ci; Cao, Xun; Bao, Shan-Hu; Ji, Shi-Dong; Luo, Hong-Jie; Jin, Ping; Review of Thermochromic Vanadium Dioxide Based Smart Coatings: From Lab to Commercial Application; Dec. 16, 2017.

Saudi Basic Industries Corporation (SABIC); "The Department of Transportation [DOT] Guidebook"; Oct. 2016.

Hostaphan RBB, "Transparent, Temperature Stable Polyester Film for Cooking & Roasting Bags" Jul. 2016.

Hostaphan WIN, "White, Long-Term Stable, Thermally Stable Polyester Film for PV Back Sheet Laminates"; Jul. 2016.

PCT Search Report & Written Opinion for PCT/US2019/054565 (Dec. 20, 2019).

PCT Search Report & Written Opinion for PCT/US2015/036248 (Sep. 16, 2015).

"Declaration of Jerome Aho"; Filed Aug. 3, 2007; Case 3:07-cv-00221-FDW-DCK; Includes: Exhibit A, Nascar Postcard (1 page), Exhibit B, 50th Anniversary Nascar letter sent Jan. 7, 1998 (1 page),

and Exhibit C, Front page of "The Official Nascar Preview and Press Guide" (1 page); 9 pages.

Racing Optics, Inc. v. David Leon O'Neal, Edward M. Wallace and Clear View Racing Optics, LLC; Case 3:07 CV 221; Includes: Exhibit A, Wilson et al. U.S. Pat. No. 6,847,492; and Exhibit B, Wilson et al. U.S. Pat. No. 7,184,217; 34 pages.

International Search Report; International Application No. PCT/US99/95128; Date of Completion: Jan. 18, 2000; 54 pages.

International Search Report; International Application No. PCT/US02/10971; Date of Completion: Nov. 20, 2002; 3 pages.

International Search Report; International Application No. PCT/US03/16284; Date of Completion: Mar. 9, 2004; 3 pages.

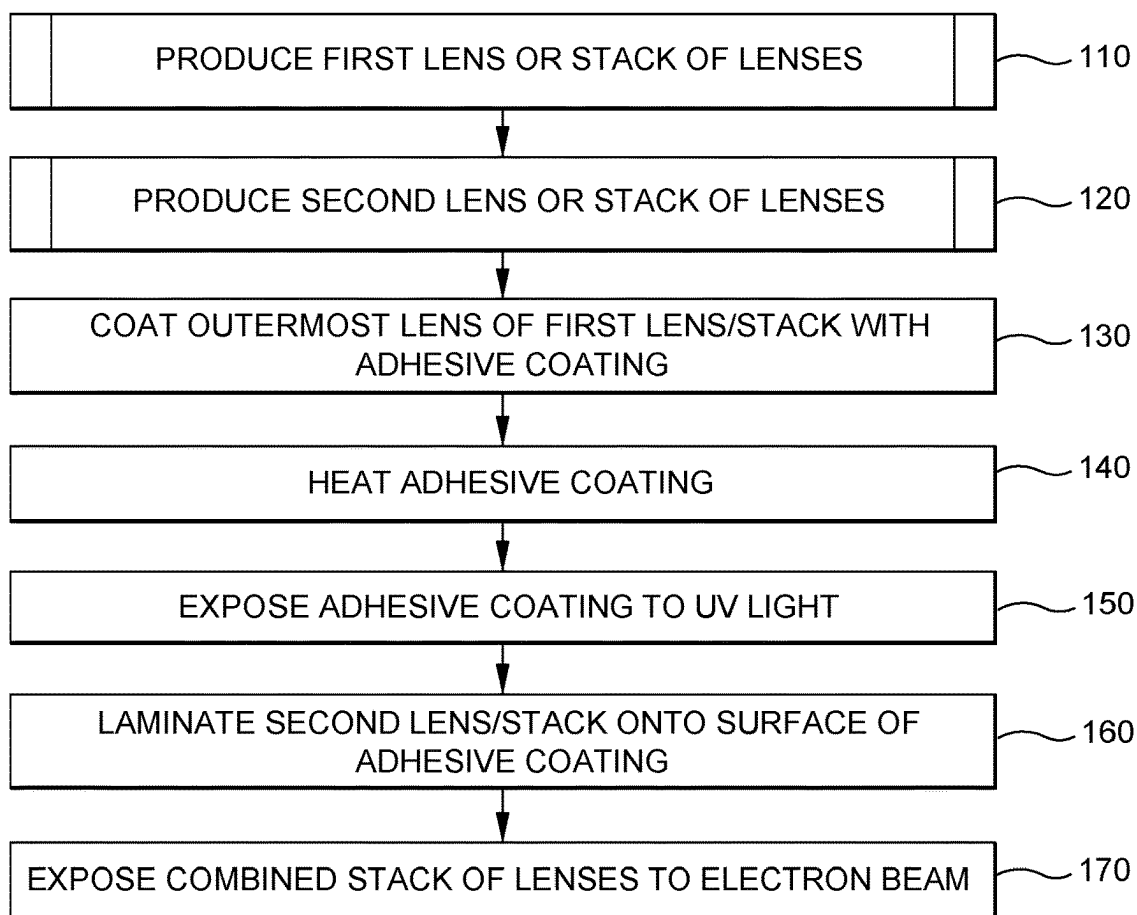
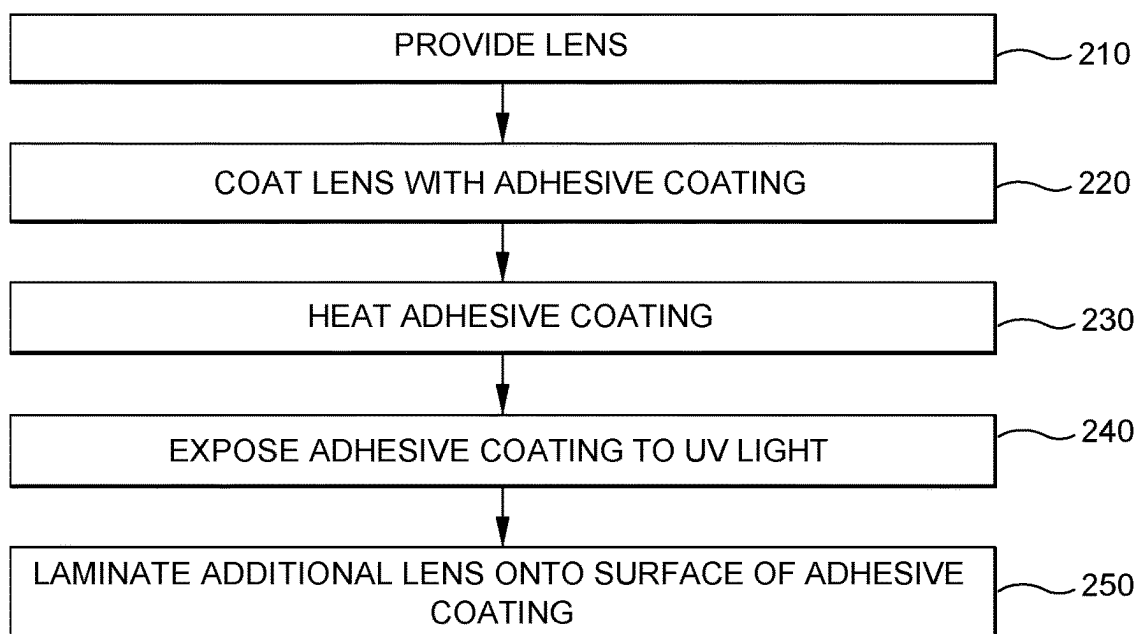
European Search Report for Application No. 15809930.9-107 / 3157480 (Dec. 15, 2017).

Canadian Office Action for Application Serial No. 2,952,436 (Nov. 15, 2019).

Canadian Office Action for Application Serial No. 2,952,436 (May 3, 2019).

Australian Examination Report for Application Serial No. 2015277196 (Oct. 18, 2018).

www.wikipedia.org, Refractive Index, Oct. 31, 2014.

**FIG. 1****FIG. 2**

1

**STACK OF STERILE PEELABLE LENSES
WITH LOW CREEP****CROSS-REFERENCE TO RELATED
APPLICATIONS**

This application is a continuation of U.S. application Ser. No. 17/823,413, filed Aug. 30, 2022, which relates to and claims the benefit of U.S. Provisional Application No. 63/365,909, filed Jun. 6, 2022 and entitled "Stack of Sterile Peelable Lenses with Low Creep," the entire contents of which is expressly incorporated by reference herein.

**STATEMENT RE: FEDERALLY SPONSORED
RESEARCH/DEVELOPMENT**

Not Applicable

BACKGROUND

Laminated, peelable, low peel strength (e.g., 30-80 gram-in) optical lens stacks may be employed in various contexts, such as in connection with protective eyewear or vehicle windshields. The low peel strength allows each lens to be removed from the stack one at a time. (As the peel strength increases above 600 gram-in, for example, the bond may be considered permanent.) As each lens is added to produce the stack, the heating and ultraviolet exposure that is used to cure each successive layer of adhesive may affect the already-cured adhesive layers as well. For instance, in a four-layer stack, the first layer may effectively be exposed to curing processes three or more times while the last layer is only exposed once. This can lead to under-cured layers which can lead to peel creep (i.e., increase in peel strength) over time and at normal storage temperatures (e.g., 59° F. to 86° F.).

BRIEF SUMMARY

The present disclosure contemplates various methods for overcoming the above drawbacks accompanying the related art. One aspect of the embodiments of the disclosure is a method of manufacturing a stack of peelable lenses. The method may comprise coating a first lens with a first adhesive coating (e.g., comprising at least 30% solvent), heating the first adhesive coating to evaporate at least some solvent of the first adhesive coating and to initiate curing of the first adhesive coating, and, after the heating of the first adhesive coating, exposing the first adhesive coating to ultraviolet light to continue curing of the first adhesive coating. The method may further comprise, after the exposing of the first adhesive coating to ultraviolet light, laminating a second lens onto a surface of the first adhesive coating to produce a stack of lenses. The method may further comprise coating the second lens with a second adhesive coating (e.g., comprising at least 30% solvent), heating the second adhesive coating to evaporate at least some solvent of the second adhesive coating and to initiate curing of the second adhesive coating, and, after the heating of the second adhesive coating, exposing the second adhesive coating to ultraviolet light to continue curing of the second adhesive coating. The method may further comprise, after the exposing of the second adhesive coating to ultraviolet light, laminating a third lens onto a surface of the second adhesive coating to add the third lens to the stack of lenses. The method may further comprise, after the laminating of the third lens onto the surface of the second adhesive coating,

2

exposing the stack of lenses to an electron beam to continue curing of the first adhesive coating and the second adhesive coating.

The exposing of the stack of lenses to the electron beam may be performed while the stack of lenses is on roll-to-roll processing equipment. A temperature of the heating of the second adhesive coating may be greater than a temperature of the heating of the first adhesive coating. An exposure time of the exposing of the second adhesive coating to ultraviolet light may be greater than an exposure time of the exposing of the first adhesive coating to ultraviolet light. After the heating of the second adhesive coating, a thickness of the first adhesive coating may be 20 microns or less and a thickness of the second adhesive coating may be 20 microns or less. After the heating of the second adhesive coating, a thickness variation of the first adhesive coating may be less than 0.5 microns in a 12-millimeter period and a thickness variation of the second adhesive coating may be less than 0.5 microns in a 12-millimeter period. Each of the first, second, and third lenses may comprise polyethylene terephthalate (PET). Each of the first and second adhesive coatings may comprise an optically clear adhesive (OCA). Each of the first and second adhesive coatings may comprise an acrylate.

The method may comprise additional steps after the laminating of the third lens onto the surface of the second adhesive coating and prior to the exposing of the stack of lenses to the electron beam. The additional steps may comprise coating the third lens with a third adhesive coating (e.g., comprising at least 30% solvent), heating the third adhesive coating to evaporate at least some solvent of the third adhesive coating and to initiate curing of the third adhesive coating, and after the heating of the third adhesive coating, exposing the third adhesive coating to ultraviolet light to continue curing of the third adhesive coating. The additional steps may further comprise, after the exposing of the third adhesive coating to ultraviolet light, laminating a fourth lens onto a surface of the third adhesive coating to add the fourth lens to the stack of lenses. The exposing of the stack of lenses to the electron beam may further be to continue curing of the third adhesive coating.

In some cases, the third and fourth lenses may already be adhered together before the third lens is laminated onto the surface of the second adhesive. That is, two stacks of two (or more) lenses may be combined together. In this regard, another aspect of the embodiments of the present disclosure is a method of manufacturing a stack of peelable lenses in which the method may include coating a first lens with a first adhesive coating (e.g., comprising at least 30% solvent), heating the first adhesive coating to evaporate at least some solvent of the first adhesive coating and to initiate curing of the first adhesive coating, and, after the heating of the first adhesive coating, exposing the first adhesive coating to ultraviolet light to continue curing of the first adhesive coating. The method may further comprise, after the exposing of the first adhesive coating to ultraviolet light, laminating a second lens onto a surface of the first adhesive coating to produce a first stack of lenses. The method may further comprise coating a third lens with a third adhesive coating (e.g., comprising at least 30% solvent), heating the third adhesive coating to evaporate at least some solvent of the third adhesive coating and to initiate curing of the third adhesive coating, and, after the heating of the third adhesive coating, exposing the third adhesive coating to ultraviolet light to continue curing of the third adhesive coating. The method may further comprise, after the exposing of the third adhesive coating to ultraviolet light, laminating a fourth lens onto a surface of the third adhesive coating to produce a

second stack of lenses. The method may further comprise coating the second lens with a second adhesive coating (e.g., comprising at least 30% solvent), heating the second adhesive coating to evaporate at least some solvent of the second adhesive coating and to initiate curing of the second adhesive coating, and, after the heating of the second adhesive coating, exposing the second adhesive coating to ultraviolet light to continue curing of the second adhesive coating. The method may further comprise, after the exposing of the second adhesive coating to ultraviolet light, laminating the second stack of lenses onto a surface of the second adhesive coating to produce a combined stack of lenses from the first and second stacks of lenses. The method may further comprise exposing the combined stack of lenses to an electron beam to continue curing of the first adhesive coating, the second adhesive coating, and the third adhesive coating.

The exposing of the combined stack of lenses to the electron beam may be performed while the combined stack of lenses is on roll-to-roll processing equipment. A temperature of the heating of the second adhesive coating may be greater than a temperature of the heating of the first adhesive coating (e.g., by 20%). An exposure time of the exposing of the second adhesive coating to ultraviolet light may be greater than an exposure time of the exposing of the first adhesive coating to ultraviolet light (e.g., by 50%). After the heating of the second adhesive coating, a thickness of the first adhesive coating may be 20 microns or less and a thickness of the second adhesive coating may be 20 microns or less. After the heating of the second adhesive coating, a thickness variation of the first adhesive coating may be less than 0.5 microns in a 12-millimeter period and a thickness variation of the second adhesive coating may be less than 0.5 microns in a 12-millimeter period, resulting in reduced optical distortion. Each of the first, second, third, and fourth lenses may comprise polyethylene terephthalate (PET). Each of the first, second, and third adhesive coatings may comprise an optically clear adhesive (OCA). Each of the first, second, and third adhesive coatings may comprise an acrylate.

More generally in regard to combining stacks of two or more lenses together, another aspect of the embodiments of the present disclosure may include a method of manufacturing a stack of peelable lenses in which the method comprises producing first and second stacks of lenses. The producing of the first stack may include providing a lens and performing the following sequence of steps one or more times, with the lens initially defining an outermost lens of the first stack: coating the outermost lens of the first stack with an adhesive coating (e.g., comprising at least 30% solvent), heating the adhesive coating to evaporate at least some solvent of the adhesive coating and to initiate curing of the adhesive coating, exposing the adhesive coating to ultraviolet light to continue curing of the adhesive coating, and laminating an additional lens onto a surface of the adhesive coating, the additional lens redefining the outermost lens of the first stack. Similarly, the producing of the second stack may include providing a lens and performing the following sequence of steps one or more times, with the lens initially defining an outermost lens of the second stack: coating the outermost lens of the second stack with an adhesive coating (e.g., comprising at least 30% solvent), heating the adhesive coating to evaporate at least some solvent of the adhesive coating and to initiate curing of the adhesive coating, exposing the adhesive coating to ultraviolet light to continue curing of the adhesive coating, and laminating an additional lens onto a surface of the adhesive coating, the additional lens redefining the outermost lens of

the second stack. The method may further comprise coating the outermost lens of the first stack with an adhesive coating (e.g., comprising at least 30% solvent), heating the adhesive coating that is coated on the outermost lens of the first stack to evaporate at least some solvent of the adhesive coating and to initiate curing of the adhesive coating, and, after the heating of the adhesive coating that is coated on the outermost lens of the first stack, exposing the adhesive coating to ultraviolet light to continue curing of the adhesive coating. The method may further comprise, after the exposing of the adhesive coating that is coated on the outermost lens of the first stack, laminating the second stack of lenses onto a surface of the adhesive coating to combine the first and second stacks into a combined stack of lenses. The method may further comprise exposing the combined stack of lenses to an electron beam to continue curing of the adhesive coatings contained within the combined stack of lenses.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features and advantages of the various embodiments disclosed herein will be better understood with respect to the following description and drawings, in which like numbers refer to like parts throughout, and in which:

FIG. 1 is an example operational flow for manufacturing a stack of peelable lenses according to an embodiment of the present disclosure; and

FIG. 2 is an example sub-operational flow that may represent sub-steps of either or both of steps 110 and 120 in FIG. 1.

DETAILED DESCRIPTION

The present disclosure encompasses various embodiments of methods of manufacturing a stack of peelable lenses, in particular, a stack that may exhibit low peel creep. The detailed description set forth below in connection with the appended drawings is intended as a description of several currently contemplated embodiments and is not intended to represent the only form in which the disclosed invention may be developed or utilized. The description sets forth the functions and features in connection with the illustrated embodiments. It is to be understood, however, that the same or equivalent functions may be accomplished by different embodiments that are also intended to be encompassed within the scope of the present disclosure. It is further understood that relational terms such as first and second and the like are used solely to distinguish one from another entity without necessarily requiring or implying any actual such relationship in order between such entities.

FIG. 1 is an example operational flow for manufacturing a stack of peelable lenses according to an embodiment of the present disclosure. Unlike conventional processes, the operational flow of FIG. 1 includes a final step of exposing the stack of lenses to an electron beam in order to force crosslinking to occur and complete the curing processes in all of the layers of the stack. As a result, under-curing may be avoided and peel creep may be greatly reduced. Advantageously, the electron beam exposure may simultaneously provide sterilization of any micro-organisms trapped between the laminated layers of the stack, making later radiation sterilization unnecessary.

The stack of peelable lenses may serve as or be affixed to protective eyewear such as goggles, glasses, or facemasks for off-road vehicle use or surgical and other medical procedures. Display screens of mobile phones, personal computers, ATMs and vending terminals, etc. may likewise

employ stacks of peelable lenses to prevent damage to the underlying screen or block side viewing (e.g., for privacy and security in public places). In other cases, the stack of peelable lenses may serve as or be affixed to a larger size window of building or a vehicle windshield for tinting (e.g., for privacy), for thermal insulation, to block ultraviolet (UV) radiation, or for decoration. In any such setting, as the outermost lens of the stack becomes dirty and obstructs the wearer's or operator's vision, it may be peeled away to reveal the next pristine lens underneath. Examples of stacks of peelable lenses that may be manufactured as described herein, as well as methods of manufacturing and installation that may be used together with the processes described herein, may include those described in U.S. Pat. No. 8,361,260, entitled "Automobiles having a Radiant Barrier," U.S. Pat. Nos. 9,128,545, 9,274,625, and 10,620,670, all entitled "Touch Screen Shield," U.S. Pat. No. 9,295,297, entitled "Adhesive Mountable Stack of Removable Layers," U.S. Patent Application Pub. No. 2020/0124768, entitled "Transparent Covering Having Anti-Reflective Coatings," U.S. Patent Application Pub. No. 2020/0247102, entitled "Thermofilm Windshield Stack with Integrated Formable Mold," U.S. Pat. No. 11,364,715, entitled "Polymer Safety Glazing for Vehicles," U.S. Patent Application Pub. No. 2021/0070017, entitled "Nano Particle Solar Control Film," U.S. Patent Application Pub. Nos. 2021/0162645 and 2022/0032591, both entitled "Method and Apparatus for Reducing Non-Normal Incidence Distortion in Glazing Films," U.S. Patent Application Pub. No. 2021/0283994, entitled "Protective Barrier for Safety Glazing," U.S. Patent Application Pub. No. 2022/0040956, entitled "Protective Barrier for Surfaces," U.S. patent application Ser. No. 17/210,241, entitled "Tearoff Tab Tensioner," U.S. patent application Ser. No. 17/342,373, entitled "Low Haze UV Blocking Removable Lens Stack," U.S. Pat. No. 11,307,329, entitled "Low Reflectance Removable Lens Stack," and U.S. Pat. No. 10,427,385, entitled "Low Reflectance Optical Web," the entire contents of each of which is incorporated by reference herein.

The operational flow of FIG. 1 may begin with producing first and second lenses or stacks of lenses (steps 110, 120). In the simplest case of manufacturing only a two-layer stack, steps 110 and 120 may each only produce a single lens, for example, which may thereafter be combined according to steps 130-170. In the case of manufacturing a stack of three or more lenses, one or both of steps 110 and 120 may itself produce a stack of lenses (which will be a sub-stack of the final stack of lenses produced by steps 130-170).

By way of illustration, a stack of three lenses may be manufactured according to the operational flow of FIG. 1 as follows. The operational flow may begin with producing a first stack of two lenses (step 110). For example, referring to the sub-operational flow of FIG. 2, step 110 may begin with providing a first lens (step 210), such as a polyethylene terephthalate (PET) lens or other optically clear substrate, which may be provided as a roll-to-roll processing web. The first lens may be 25-400 microns thick, for example. The first lens may be coated with a first adhesive coating (step 220) comprising a laminating adhesive such as an optically clear adhesive (OCA), which may be in the family of pressure sensitive adhesives (PSAs). To meet criteria for high transmission, low haze, and low distortion, a very thin coating of the laminating adhesive on the order of 10-20 microns (or even 5-20 microns) may be preferred, especially given that optical error such as haze and distortion is additive with each layer added to the stack. To this end, the adhesive coating may comprise a high content of solvent to

solids such as at least 30% solvent. In order to produce a thin PSA, for example, 30%-60% solvents may be mixed into acrylates to reduce the viscosity of the liquid and may be deposited onto the first lens via gravure, rods, or slot dies in a roll-to-roll process. The surface of the first lens may be nano-roughened to promote a high peel strength of the PSA so that when the first lens is peeled away from the next laminated lens the PSA stays permanently affixed to the first lens surface.

The coated first lens may then pass through several curing stages. For example, as shown in FIG. 2, the adhesive coating may first be heated (e.g., by one or more ovens at 150-220° F.) to evaporate at least some of the solvent (step 230). This may reduce the thickness by 40%-70% and may allow the coating to level out to have a consistent thickness, minimizing optical distortion. After heating (or after a later heating step, as the effects may be cumulative), the thickness of the adhesive coating may be 20 microns or less (e.g., 5-20 microns) and the thickness variation may be less than 0.5 microns in a 12-millimeter period across the web, for example. The heating may also initiate curing of the first adhesive coating as some crosslinking may begin to occur at this point. Next, the adhesive coating may be exposed to ultraviolet (UV) light (e.g., 0.1-1.0 Mj/m²) to continue curing of the adhesive coating (step 240), for example, by starting photoinitiation of the crosslinking process.

With the first adhesive coating in this partially cured state, the operational flow may continue with laminating an additional lens onto the surface of the partially cured adhesive coating (step 250), for example, by a nipping roller. At this stage, the subprocess of FIG. 2 has produced a stack of two lenses, which will serve as the first stack of lenses produced by step 110 of FIG. 1.

The operational flow of FIG. 1 may then continue with producing a second lens or stack (step 120), which may be simply a single lens in the case of manufacturing a three-layer stack. In this regard, the operational flow of FIG. 2 may begin again, this time as a subprocess of step 120. Since only one lens will be produced in this step, the lens may simply be provided in step 210, with steps 220-250 omitted. Thus, in the relatively simple example of a three-layer stack, a two-layer stack may be produced by step 110 while a single lens is produced by step 120. The operational flow of FIG. 1 may then proceed with coating the outermost lens of the first stack (produced by step 110) with an adhesive coating (step 130). In this case, the outermost lens of the first stack may be the additional lens that was laminated onto the first lens in step 250 during the sub-operational flow of step 110. The adhesive coating (second adhesive coating) may be the same as described above and may likewise be heated (step 140) and exposed to UV light (step 150). The single lens produced by step 120 may then be laminated onto the surface of the partially cured second adhesive coating to add a third lens to the stack of lenses (step 160), for example, by a nipping roller.

Unlike conventional processes of manufacturing stacks of peelable lenses, the operational flow of FIG. 1 may conclude with exposing the entire combined stack of lenses to an electron beam to continue curing of the adhesive coatings contained within (step 170), namely, the first and second adhesive coatings in the example of a three-layer stack. The electron beam exposure may preferably be performed while the stack of lenses is still on roll-to-roll processing equipment that was used to assemble it. Advantageously, the electron beam exposure may complete the curing function equally in all layers of the stack. Since the stack is relatively thin (e.g., 10-25 mils) the electron beam exposure may be

very uniform from top to bottom of the stack. If UV absorbing compounds are present in the adhesive coating (e.g., to improve weatherability) the electron beam may still provide a uniform exposure, unlike what is found to be the case with UV exposure processes in the presence of UV absorbing compounds.

It can be appreciated that the processing time for each adhesive layer may be different as each added layer undergoes fewer heating and UV processes than those before it. As described above, the electron beam curing may help to even out the curing between the layers by completing the curing function in the entire stack. It is also contemplated that the uniformity of curing may be further enhanced by varying the curing processes throughout the operational flow of FIG. 1. For example, temperatures of later heating processes (e.g., step 140) may be greater than temperatures of earlier heating processes (e.g., step 230). That is, using the above three-layer stack as an example, the temperature of the heating of the second adhesive coating may be greater than the temperature of heating the first adhesive coating. Instead, or additionally, exposure times of later UV exposure processes (e.g., step 150) may be greater than exposure times of earlier UV exposure processes (e.g., step 240). For example, continuing with the above three-layer example, the exposure time of exposing the second adhesive coating to UV light may be greater than the exposure time of exposing the first adhesive coating to UV light. In this way, the greater temperature and/or longer UV exposure experienced by later adhesive coatings can help the later adhesive coatings “catch up” with the curing of the earlier adhesive coatings that have already undergone some heating and/or UV exposure. By modifying the thermal and UV curing at each layer, a more uniform partial curing can be achieved before the entire stack is exposed to the final curing of the electron beam (step 170) in order to more precisely meet the target peel strength at each layer of the stack.

Along the same lines, it should be noted, in general, that the thermal and UV cure times and other parameters may be selected in consideration of the later electron beam curing. In particular, the thermal and UV curing may be less than in conventional manufacturing processes in order that the electron beam curing does not over-cure the stack and increase the peel strength too much. In general, the electron beam curing may adjust the peel strength of the adhesive coatings toward a target peel strength, with the prior thermal and UV curing thus being aimed only to begin the curing process but not to reach the target peel strength.

As a further outcome of exposing the stack of lenses to the electron beam while it is still in the roll-to-roll processing, the electron beam exposure may also provide sterilization of any microorganisms trapped between the laminated layers of the stack, thus ensuring a sterile lens stack. This greatly increases the efficiency of the manufacturing process as compared to first cutting desired shapes out of the rolls (e.g., eyewear lens shapes) and then shipping them to a lab for gamma sterilization of the interlayers, for example. In this regard, it should be noted that electron beam exposure would typically not be used for this kind of downstream sterilization because it would be unknown if the peel strength might be affected by further crosslinking of the adhesive.

In the above example, a stack of three lenses was manufactured according to the operational flow of FIG. 1, with step 110 producing a sub-stack of two lenses (by performing steps 210-250) and step 120 producing a single lens (by performing only step 210). If a stack of four lenses, five lenses, or more is desired, the operational flow of FIG. 1 may be performed in essentially the same way but with steps

220-250 repeated as desired during step 110, with each new adhesive coating being successively applied to each additional lens. So, for example, a stack of four lenses may be manufactured according to the operational flow of FIG. 1 as follows. First a stack of three lenses may be produced (step 110), referring to the sub-operational flow of FIG. 2, by providing a first lens (step 210), coating the first lens with a first adhesive coating (step 220), heating the first adhesive coating to evaporate at least some of the solvent (step 230), exposing the first adhesive coating to UV light to continue curing of the first adhesive coating (step 240), laminating a second lens onto the surface of the first adhesive coating (step 250), coating the second lens with a second adhesive coating (step 220 again), heating the second adhesive coating to evaporate at least some of the solvent (step 230 again), exposing the second adhesive coating to UV light to continue curing of the second adhesive coating (step 240 again), and laminating a third lens onto the surface of the first adhesive coating (step 250 again). The operational flow of FIG. 1 may then continue with producing a single lens as described above (step 120, consisting only of the subprocess of step 210), followed by coating the outermost lens of the first stack (produced by step 110) with a third adhesive coating (step 130), heating and exposing the third adhesive coating to UV light (steps 140 and 150), laminating the single lens produced by step 120 onto the surface of the partially cured third adhesive coating to add a fourth lens to the stack of lenses (step 160), and, finally, exposing the combined stack of lenses to an electron beam (step 170). Larger stacks can be produced simply by repeating steps 220-250 additional times during step 110.

The stack of lenses may also be manufactured by combining two sub-stacks of two or more lenses each (e.g., a two-by-two stack, a two-by-three stack, etc.). To illustrate this, another way of manufacturing a stack of four lenses according to the operational flow of FIG. 1 is as follows. First a stack of two lenses may be produced (step 110), referring to the sub-operational flow of FIG. 2, by performing steps 210-250 one time through without repeating steps 220-250. Then, a second stack of two lenses may be produced (step 120) in exactly the same way, that is, by performing steps 210-250 one time through without repeating steps 220-250. The operational flow of FIG. 1 may then continue with coating the outermost lens of the first sub-stack of two lenses (produced by step 110) with an adhesive coating (step 130), heating and exposing the adhesive coating to UV light (steps 140 and 150), laminating the second sub-stack of two lenses (produced by step 120) onto the surface of the partially cured adhesive coating to combine the two sub-stacks into a stack of four lenses (step 160), and, finally, exposing the combined stack of lenses to an electron beam (step 170). Larger stacks of this type can be produced simply by repeating steps 220-250 additional times during either or both of steps 110 and 120.

In a case where one or both of steps 110 and 120 involve the repetition of steps 220-250 of FIG. 2, each successive repetition of the heating and UV exposure processes (steps 230 and 240) may have different parameters in order to achieve a more even partial curing as described above. Thus, for example, an earlier repetition of step 230 may be at a lower temperature, a later repetition of step 230 may be at a higher temperature, and the final heating in step 140 may be at the highest temperature. Similarly, an earlier repetition of step 240 may have a shorter UV exposure time, a later repetition of step 240 may have a longer UV exposure time, and the final UV exposure in step 150 may have the longest UV exposure time. In this way, a more uniform partial

curing can be achieved before the entire stack is exposed to the final curing of the electron beam (step 170) in order to more precisely meet the target peel strength at each layer of the stack.

It should be noted that, in general, any of the above processes and sub-process may be repeated until the desired number of lenses are laminated into a peelable stack. In some cases, sub-stacks may be combined to form stacks that are themselves sub-stacks to be combined into larger stacks. For example, one possible process may be to combine two stacks of two lenses each and then to combine the resulting stack of four lenses with another stack of four lenses to produce a stack of eight lenses. The resulting combined stack may then be exposed to the electron beam (step 170) in order to complete the curing process in all adhesive coatings contained within.

The above description is given by way of example, and not limitation. Given the above disclosure, one skilled in the art could devise variations that are within the scope and spirit of the invention disclosed herein. Further, the various features of the embodiments disclosed herein can be used alone, or in varying combinations with each other and are not intended to be limited to the specific combination described herein. Thus, the scope of the claims is not to be limited by the illustrated embodiments.

What is claimed is:

1. A method of manufacturing a stack of peelable lenses, the method comprising:

coating a first lens with a first adhesive coating;
heating the first adhesive coating to evaporate at least some solvent of the first adhesive coating and to initiate curing of the first adhesive coating;
after said heating the first adhesive coating, exposing the first adhesive coating to ultraviolet light to continue curing of the first adhesive coating;
after said exposing the first adhesive coating to ultraviolet light, laminating a second lens onto a surface of the first adhesive coating to produce a stack of lenses;
coating the second lens with a second adhesive coating;
heating the second adhesive coating to evaporate at least some solvent of the second adhesive coating and to initiate curing of the second adhesive coating;
after said heating the second adhesive coating, exposing the second adhesive coating to ultraviolet light to continue curing of the second adhesive coating, wherein parameters of the heating and the exposing of the first and second adhesive coatings are selected such that the first and second adhesive coatings are only partially cured to result in respective peel strengths that are less than respective target peel strengths;
after said exposing the second adhesive coating to ultraviolet light, laminating a third lens onto a surface of the second adhesive coating to add the third lens to the stack of lenses; and,
after said laminating the third lens onto the surface of the second adhesive coating, exposing the stack of lenses to an electron beam to sterilize the stack of lenses and to continue curing of the first adhesive coating and the second adhesive coating.

2. The method of claim 1, wherein said exposing the stack of lenses to the electron beam is performed while the stack of lenses is on roll-to-roll processing equipment.

3. The method of claim 1, wherein a temperature of said heating the second adhesive coating is greater than a temperature of said heating the first adhesive coating.

4. The method of claim 1, wherein an exposure time of said exposing the second adhesive coating to ultraviolet light

is greater than an exposure time of said exposing the first adhesive coating to ultraviolet light.

5. The method of claim 1, wherein, after said heating the second adhesive coating, a thickness of the first adhesive coating is 20 microns or less and a thickness of the second adhesive coating is 20 microns or less.

6. The method of claim 1, wherein, after said heating the second adhesive coating, a thickness variation of the first adhesive coating is less than 0.5 microns in a 12-millimeter period and a thickness variation of the second adhesive coating is less than 0.5 microns in a 12-millimeter period.

7. The method of claim 1, wherein each of the first, second, and third lenses comprises polyethylene terephthalate (PET).

8. The method of claim 1, wherein each of the first and second adhesive coatings comprises an optically clear adhesive (OCA).

9. The method of claim 1, wherein each of the first and second adhesive coatings comprises an acrylate.

10. The method of claim 1, further comprising, after said laminating the third lens onto the surface of the second adhesive coating and prior to said exposing the stack of lenses to the electron beam:

coating the third lens with a third adhesive coating;
heating the third adhesive coating to evaporate at least some solvent of the third adhesive coating and to initiate curing of the third adhesive coating;
after said heating the third adhesive coating, exposing the third adhesive coating to ultraviolet light to continue curing of the third adhesive coating; and,
after said exposing the third adhesive coating to ultraviolet light, laminating a fourth lens onto a surface of the third adhesive coating to add the fourth lens to the stack of lenses,
wherein said exposing the stack of lenses to the electron beam is further to continue curing of the third adhesive coating.

11. A method of manufacturing a stack of peelable lenses to have a target peel strength, the method comprising:

coating a first lens with a first adhesive coating;
heating the first adhesive coating to evaporate at least some solvent of the first adhesive coating and to initiate curing of the first adhesive coating;
after said heating the first adhesive coating, exposing the first adhesive coating to ultraviolet light to continue curing of the first adhesive coating;
after said exposing the first adhesive coating to ultraviolet light, laminating a second lens onto a surface of the first adhesive coating to produce a first stack of lenses;
coating a third lens with a third adhesive coating;
heating the third adhesive coating to evaporate at least some solvent of the third adhesive coating and to initiate curing of the third adhesive coating;
after said heating the third adhesive coating, exposing the third adhesive coating to ultraviolet light to continue curing of the third adhesive coating;
after said exposing the third adhesive coating to ultraviolet light, laminating a fourth lens onto a surface of the third adhesive coating to produce a second stack of lenses;
coating the second lens with a second adhesive coating;
heating the second adhesive coating to evaporate at least some solvent of the second adhesive coating and to initiate curing of the second adhesive coating;
after said heating the second adhesive coating, exposing the second adhesive coating to ultraviolet light to continue curing of the second adhesive coating,

11

wherein parameters of the heating and the exposing of the first, second, and third adhesive coatings are selected such that the first, second, and third adhesive coatings are only partially cured to result in respective peel strengths that are less than respective target peel strengths;

after said exposing the second adhesive coating to ultraviolet light, laminating the second stack of lenses onto a surface of the second adhesive coating to produce a combined stack of lenses from the first and second stacks of lenses; and

exposing the combined stack of lenses to an electron beam to sterilize the combined stack of lenses and to continue curing of the first adhesive coating, the second adhesive coating, and the third adhesive coating.

12. The method of claim 11, wherein said exposing the combined stack of lenses to the electron beam is performed while the combined stack of lenses is on roll-to-roll processing equipment.

13. The method of claim 11, wherein a temperature of said heating the second adhesive coating is greater than a temperature of said heating the first adhesive coating.

14. The method of claim 11, wherein an exposure time of said exposing the second adhesive coating to ultraviolet light is greater than an exposure time of said exposing the first adhesive coating to ultraviolet light.

15. The method of claim 11, wherein, after said heating the second adhesive coating, a thickness of the first adhesive coating is 20 microns or less and a thickness of the second adhesive coating is 20 microns or less.

16. The method of claim 11, wherein, after said heating the second adhesive coating, a thickness variation of the first adhesive coating is less than 0.5 microns in a 12-millimeter period and a thickness variation of the second adhesive coating is less than 0.5 microns in a 12-millimeter period.

17. The method of claim 11, wherein each of the first, second, third, and fourth lenses comprises polyethylene terephthalate (PET).

18. The method of claim 11, wherein each of the first, second, and third adhesive coatings comprises an optically clear adhesive (OCA).

19. The method of claim 11, wherein each of the first, second, and third adhesive coatings comprises an acrylate.

20. A method of manufacturing a stack of peelable lenses, the method comprising:

producing a first stack of lenses, said producing the first stack including:

providing a lens, the lens initially defining an outermost lens of the first stack; and

performing the following sequence of steps one or more times:

coating the outermost lens of the first stack with an adhesive coating;

heating the adhesive coating to evaporate at least some solvent of the adhesive coating and to initiate curing of the adhesive coating;

12

exposing the adhesive coating to ultraviolet light to continue curing of the adhesive coating; and laminating an additional lens onto a surface of the adhesive coating, the additional lens redefining the outermost lens of the first stack;

producing a second stack of lenses, said producing the second stack including:

providing a lens, the lens initially defining an outermost lens of the second stack; and

performing the following sequence of steps one or more times:

coating the outermost lens of the second stack with an adhesive coating;

heating the adhesive coating to evaporate at least some solvent of the adhesive coating and to initiate curing of the adhesive coating;

exposing the adhesive coating to ultraviolet light to continue curing of the adhesive coating; and

laminating an additional lens onto a surface of the adhesive coating, the additional lens redefining the outermost lens of the second stack;

coating the outermost lens of the first stack with an adhesive coating;

heating the adhesive coating that is coated on the outermost lens of the first stack to evaporate at least some solvent of the adhesive coating and to initiate curing of the adhesive coating;

after said heating the adhesive coating that is coated on the outermost lens of the first stack, exposing the adhesive coating to ultraviolet light to continue curing of the adhesive coating, wherein parameters of the heating and the exposing of the adhesive coatings are selected such that the adhesive coatings are only partially cured to result in respective peel strengths that are less than respective target peel strengths;

after said exposing the adhesive coating that is coated on the outermost lens of the first stack, laminating the second stack of lenses onto a surface of the adhesive coating to combine the first and second stacks into a combined stack of lenses; and

exposing the combined stack of lenses to an electron beam to sterilize the combined stack of lenses and to continue curing of the adhesive coatings contained within the combined stack of lenses.

21. A method of manufacturing a stack of peelable lenses to have a target peel strength, the method comprising:

providing a stack of lenses with adhesive coatings disposed between each pair of adjacent lenses of the stack, wherein the adhesive coatings are only partially cured to result in respective peel strengths that are less than respective target peel strengths; and

exposing the stack of lenses to an electron beam to simultaneously adjust the respective peel strengths of the adhesive coatings toward the respective target peel strength and sterilize the stack of lenses.

* * * * *