

DECISIONLOGIC

Integration Guide V 1.13

Restful APIs

Q3 2026
© Clarilogic, Inc.
DecisionLogic

Legal Info

The recipient of this guide (hereinafter "the Guide") acknowledges that it contains confidential and proprietary data the disclosure to, or use of which by, third parties will be damaging to DecisionLogic and its affiliated companies (hereinafter "DecisionLogic"). Therefore, recipient agrees to hold the Material in strictest confidence, not to make use of it other than for the purpose for which it is being provided, to release it only to employees requiring such information, and not to release or disclose it to any other party.

DecisionLogic shall not be liable for technical or editorial errors or omissions contained herein. The information in this publication is subject to change without notice and is provided "as-is" without a warranty of any kind. Nothing herein should be construed as constituting a warranty, as any applicable warranty is exclusively contained in your signed agreement with DecisionLogic. All names in the text, or on the sample reports and screens shown in this document, are of fictitious persons and entities. Any similarity to the name of any real person, address, school, business or other entity is purely coincidental.

Copyright © 2026 Clarilogic, Inc. (d.b.a. DecisionLogic)

Overview Summary

DecisionLogic provides a 'Service of Record' for your company. DecisionLogic's IAV (Instant Account Verification) service provides you the ability to verify an individual's identity, account number and account balance(s) in real time. This document is intended to help you integrate DecisionLogic's IAV service into your existing web-based workflow.

Prerequisites & Intended Audience

- In order to use this guide, you must meet the following requirements:
- Be a current client of DecisionLogic with your account in good standing
- Have access to the 'Integration Starter Kit' for your company or if you do not have a starter kit, you can request one by sending an e-mail to: *support@decisionlogic.com* . Please include your company code in the request.
- This guide is written for general users as well as programmers and developers who maintain a working knowledge of HTML.
    - General users will gain a lot of understanding about workflow and processes from the first section of this guide. (up to page 2)
    - The pages that describe the *detailed JSON input and return values* are intended for developers only.
- Experience with C#, PHP, and SOAP web services are recommended.
- Your production and development servers must have HTTPS enabled and working.

Styles of Integration

Front-End Integration: Consumer Facing

Front End integration is fairly simple to implement. In most scenarios you will only need to implement one of our APIs in order to create a request. This will also require some minor code snippets to be added to your existing web page source code in order to embed our Widget UI. The DecisionLogic IAV process can be integrated into your consumer facing website or intranet portal.

Back-End Integration: Internal Client Portal / Intranet / CRM / Software / Etc.

Back-End Integration varies for every DecisionLogic client depending on their needs, resources, workflow, infrastructure, and current software solutions being used. In order to accommodate as many of these scenarios DecisionLogic provides a suite of APIs whose data can be parsed in a number of ways in order to fit the requirements of a client.

Integration Support

DecisionLogic provides integration support for its clients in order to help them understand how to use our APIs and talk through different scenarios and solutions the client may require. DecisionLogic does not write custom APIs for clients nor does DecisionLogic provide custom development/programming services for clients. Currently all of our APIs are JSON Web Services. We do offer SOAP/XML services as well.

Customization of the DecisionLogic Widget Experience

AKA: Profiles Settings

Some of the consumer facing DecisionLogic experience can be customized to your needs. The prompts that a consumer sees, and capabilities of the DecisionLogic service page, are controlled by "Profile settings". You can have as many DecisionLogic profiles as you need. Every consumer verification request code that is created must be associated with a profile. DecisionLogic support can configure several different profiles for you to fulfill varying requirements. Most clients only need one or two, however some clients find it necessary to maintain several profiles depending on their development & production workflows.

Workflow settings:

- How Terms and Conditions are displayed
- Default bank search by name or routing number
- Which input fields are required from the consumer (Account Number, First and Last Name)
- Number of login attempts a consumer is allowed (default is 3)
- What happens after the consumer completes the DecisionLogic process
    - Static success page displayed in the widget
    - Redirect URLs (browser is redirected to a URL of your choice)
    - Webhook URLs (Webserver to Webserver calls that include status changes)

It is important to work with the DecisionLogic Support Department on our best practices in order to learn what works best to increase consumer participation and conversion rates. Certain portions of the consumer experience require our support department to change and update settings and files for you.

Additional Customization

Limitations

- WordPress: No DecisionLogic WordPress module is available at this time. In order to have a successful WordPress integration, you will need to have your own PHP developer(s) write a custom module that addresses your workflow needs.

- LMS (Loan Management Systems): Please speak with the DecisionLogic Support Department about any LMS software you use and how we may be able to integrate within that environment. We have helped integrate with several solutions and can provide valuable insight and support.

Whitelisting IPs for Access to DecisionLogic Resources

We can whitelist IPs at 2 different resource levels within DecisionLogic; The DL Client Portal, and our APIs. Once a single IP is whitelisted with DecisionLogic, all other IPs will be denied access to your selected resource.

You must have at least one IP listed for both Client Portal and API access in order to fully restrict access to your environment.

1. Whitelisting IPs for the Client portal means that anyone trying to log into your company account via the web at: https://portal.decisionlogic.com/login.aspx will only be able to do so from behind a whitelisted IP. If your company maintains branch offices, you will need to make sure that all the relevant IPs have been submitted to support. If individuals in your organization log into DecisionLogic via mobile devices from the road, or access DecisionLogic from behind a router that does not maintain a static IP, then you will want to make sure that these individuals have VPN access to a location with a whitelisted IP and that they select the option to route 'All Internet Traffic' through the VPN.

2. Whitelisting IPs for access to our APIs means that any servers or development applications must come from behind a whitelisted IP in order to access your company data from any DecisionLogic APIs located at *https://integration.decisionlogic.com/restful/v1*

If your organization has any developers, remote developers, intranet servers, or production websites that require access to these resources, please make sure that they are behind a static IP that you have whitelisted with support. If your organization is integrated into DecisionLogic through a 3rd party, you must make sure that you submit their IPs to support as well in order to not encounter a disruption of service.

To add or update your company IP whitelists, contact support via e-mail: *support@decisionlogic.com* *For security purposes, this e-mail must be sent from your company e-mail address and include your DL Company Code in the body of the message.*

Helpful Links:

DecisionLogic Client Portal

https:/Portal.DecisionLogic.com/login.aspx

DecisionLogic Integration RESTful Swagger Endpoints

https://integration.decisionlogic.com/restful/swagger/index.html

How to Contact DecisionLogic Support:

E-mail:

General support: *support@decisionlogic.com*

Integration specific support:*integration@decisionlogic.com*

Or

Use our Online Contact Form

Phone: (858) 586-0202
7:30 am to 4:30pm PST.
Monday through Friday

Front-End Integration

(AKA: The Consumer Facing Experience)

Front-End integration of DecisionLogic uses a few lines of JavaScript that are added to a web page on your company website. You must create a Request Code prior to invoking the widget UI.

Initially you will need to consume one of our APIs to create a 'Request Code'. Which API you consume depends on whether or not you are utilizing the DL Match® Identity Verification product. DL Match® is discussed later in this document.

To create a unique Request Code for a consumer, use the following web method:

- CreateAndVerifyRequest – Creates a Request Code and an optional "DL Match" verification
    - You can use this API for creating a request with or without a "DL Match" by passing in specific values for matchType
    - This will allow you to use the same web service in multiple scenarios.

In each of the web service methods mentioned above you can supply as much consumer-specific information as your workflow deems necessary in order to create a Request Code. The Request Code you receive from our Web Services will be a 6-character string. You will then need to insert this 6-character string into the code snippet in the HTML of your web page when the consumer reaches that stage in the process. If for some reason the Request Code cannot be created by the API then a human readable error message will be returned instead of the 6-character string.

After a consumer has successfully completed the DecisionLogic process and provided correct credentials, the account data is pulled into the DecisionLogic cloud, parsed, categorized, and stored in our database. Once complete, DecisionLogic will release the consumer and send them onto the next step in your workflow as designated by the settings that were set up in your profile. Upon releasing the consumer, their account and transaction data is immediately available for your use via the DecisionLogic client portal and can be consumed through our APIs.

When the consumer completes the DecisionLogic Widget UI process, there are a few options that can happen next.

The Widget UI can:

1. ...Display a custom "Success" message
    a. This option is only recommended in scenarios where the consumer is expected to close their browser or end their session completely.

2. ...Send a 'Redirect URL' to the parent page.
    - This option is the recommended scenario for 90% of all workflows.
    - The "Redirect URLs" can be customized at the "Profile" level and can contain information such as the Request Code and Success or Failure Status.

In order for the consumer to move forward after the DecisionLogic widget UI process in scenario 2 ("Redirect URLs") listed above, you will need to add a snippet of JavaScript to the Parent Page hosting the widget UI link. This snippet is available in this document. This snippet of code is required, as it is the only way for the widget UI to pass any information to the parent page. You can modify the JavaScript snippet as you see fit, however DecisionLogic support professionals can only help you troubleshoot issues with the original snippet. Some clients modify the snippet to merely grab the Redirect URL and its associated parameters, then move the consumer onto the next step in their workflow as opposed to merely redirecting the consumer's browser to the success or failure URL. To get set up with one of the above options, you will need to reach out to DecisionLogic's support department.

Widget Integration

Integrating widget into your own web page

Place the following script for widgetUI.js file in the header of the web page. This will gather the latest version of the Widget embedded code.

```
<!-- Include the JS file for widget UI element -->
<script src="https://assets.decisionlogic.com/cdn/widgetui/widgetUI.js"></script> <!--
Include the JS file for widget UI element -->
```

Then add the below script to the section of the webpage where you want to display widget UI.

```
<!—widget section -->
<div id="widgetHeight" class="widget_section" style="height:614px;">
        <widget-ui id="widget3" request_code=" " widget_mode="LIVE"></widget-ui> <div
        class="text-center"></div></div>
<!—widget section -->
```

Parameter Definitions:

widgetHeight: Id of div element to manage widget UI height.

request_code: A 6-digit alpha numeric code associated with each request. We can pass request code as a parameter of Widget-UI tag or using query parameter. You will need to create a request using the CreateAndVerifyRequest API method. You can only display the widget UI for a valid request code. widget_mode: This needs to be passed to display the Widget.

- LIVE: (Live mode is the only mode currently available.)

You will need to write your own code in order to place the Request Code you previously generated via the API inside the request_code=" " parameter.

Please note: The widget UI will render an ERROR if the URL for the parent web page has not been whitelisted for the profile used to create the request code. In order to facilitate this, you will need to give your customer service representative at DecisionLogic the URL of the parent page that will host the widget UI so that the DecisionLogic integration team can grant it security access. Each profile can contain more than one Parent Page URL. You may also have as many Profiles as you need, and the Parent Page URL can contain a wildcard (*) at the directory level, if necessary, for example:

https://www.SampleLenderWebsite.com/*.

DecisionLogic does not wildcard subdomains for security purposes.

Using the widget UI with Redirect URLs

If the profile you are using is set to redirect the user after either a successful or failed IAV, then the postMessage function will receive the appropriate command and redirect the parent page to one of two URLs that you specify. Successful URLs can include a URL parameter. Failed URLs can add the Request Code as well as the Error Code ("account" or "financial institution").

Successful redirect URLs may look like this:

https://www.yourwebsitehere.com/yoursuccesspage.aspx?requestCode=ABCDEF

Post-failure redirect URLs may look like this:

https://www.yourwebsitehere.com/yourfailurepage.aspx?errorCode=BANK&requestCode=ABCDEF

You will need to add script (below) to the header section of your web page to receive event details from the widget on completion of the process.

```
<script>
        window.onload = function () {
                var widget3 = document.getElementById('widget3');
                if (widget3 != null) {
                        if (widget3.addEventListener) {
                                widget3.addEventListener('getEvent', getWidgetEvent, false);
                        } else {
                                if (widget3.attatchEvent) {
                                        widget3.attachEvent('getEvent', getWidgetEvent);
                                }
                        }
                }
        }
        function getWidgetEvent() {
        // Objects returned do not contain private information.
        //Use GetReportDetailsFromRequestCode API call to get data for request code.
        // In the development environment, for a visual confirmation of the JSON
        // object, insert the line of code below.
        //However, you must remove code before deploying to production.
        alert(event.detail);
        }
</script>
```

Sample result object from the JSON function

Below is the JSON return format. The payload is classified as "json". The JSON object is separated by a |.


```
Json|{
        "requestCode": "1A2B3C",
        "customerId": "",
        "profileGuid": "45678910-012a-3b45-678c-123d45ef-678g",
        "status": 3,
        "institutionName": "WorldWide Savings",
        "numberOfAccounts": 11,
        "isCheckingAccountFound": true,
        "isPayrollFound": true,
        "isIDVSuccessful": false,
        "nextRefreshDate": "2023-07-05T22:00:51.433"
    }
```


Utilizing the result object from the JSON function

If your profile is set to call the JSON function, you will receive a JSON object parameter with multiple properties, described below. You will still require the JavaScript from the previous page to receive the results.

- RequestCode (string) - a 6-character Identifier of the request.
- CustomerId (string) - identifier for the customer, as inputted in the Create Request form in Portal. The value can be an empty string.
- ProfileGuid (guid) - identifier for the profile selected for the request.
- Status – (int) the status of the request. *(See chart for possible values.)*
- InstitutionName (string) - name of the financial institution used to verify financial transactions.
- NumberOfAccounts (int) - the number of account types found associated with the selected financial institution.
- IsCheckingAccountFound (bool) - checks whether any of the account types of the selected financial institution is a checking account.
- IsPayrollFound (bool) - checks for any financial institution transactions that are classified as payroll.
- IsIDVSuccessful (bool) - checks if the identity verification (IDV) process ran successfully. The value is false if IDV is not included in the request, or if the IDV process failed.
- NextRefreshDate (datetime) - Date and time for when the next account refresh can be performed. The value is null if the request process failed.

Notification URLs

When the consumer has completed the widget UI process, an email is sent, just like it is when using the DecisionLogic landing pages. We also have the ability to call a notification URL (using an https GET request) and ping a page on your website with some query string parameters to tell you specifically who has completed a request and the status. This notification URL is entered into your profile and needs to be set-up by your DecisionLogic customer support specialist.

This same notification URL will also alert your system when an initiated Instant Refresh has completed.

Example notification URL:
https://www.yourwebsitehere.com/notification.aspx?rc={requestcode}&s={status}&pg={profileguid}&sug={siteuserguid}&cid={customerid}&isfinal={isfinal}&lasterrorcode={lasterrorcode}

Flow Monitoring

The Flow Monitoring suite offers 2 features: Request History and Drop-out Notifications. Request History is a feature that shows granular flow meters in real time, in the dashboard. Drop-out notifications are automated webhooks and email flags to ping your website when to follow up with the consumer.

This is the JSON object that you will receive at your specified webhook endpoint through an HTTP POST request:

Main object

```
{
  "requestCode": string, // The DL request code related to the notification.
  "notificationType": string, // The type of notification sent.
  "notificationObjectJson": string // Serialized JSON object that contains additional details related to the notificationType.
}
```

The notificationObjectJson property will vary depending on the notificationType property, we're currently only handling the "dropout_notification" type.

NotificationObjectJson
dropout_notification

```
{
  "lastSeenAction": string, // The last event captured for the specified request code.
  "lastSeenDateTime": DateTime // DateTime of the lastSeenAction (UTC)
}
```

Flow Monitoring Events

widget_loaded
widget_unloaded
institution_search_by_name_displayed
institution_search_by_routing_number_displayed
terms_and_conditions_displayed
terms_and_conditions_accepted
institution_selected
user_info_screen_displayed
user_info_submitted
login_screen_displayed
credentials_submitted
open_banking_consent_displayed
gathering_data_from_provider
mfa_submitted
account_error
widget_complete
redirected_to_fi
open_banking_landing_page_displayed
open_banking_redirected_back_from_fi
redirect_triggered
json_callback_triggered

Bank Change Notification

Bank Change Notification webhook will notify you when a consumer needs to change the bank that was pre-selected when the request was generated.

This is the JSON object that you will receive at your specified website endpoint through an HTTP POST request:

Main object


```
{
  "RequestCode": "A1B2C3",
  "NotificationType": "bank_change",
  "NotificationObjectJson": ""
}
```


Balance Notification

Balance Notification webhook will be sent after a successful refresh and have account-level information (including Balances).

This is the JSON object that you will receive at your specified website endpoint through an HTTP POST request:

Main object


```
{
 "requestCode": "string",
 "notificationType": "string",
 "notificationObjectJson":"
 "numberOfAccounts": 0,
 "numberOfCheckingAccounts": 0,
 "isError": true,
```

"accounts": [
{
"accountName": "string",
"routingNumber": "string",
"accountNumber": "string",
"asOfDate": "2025-02-27T18:10:38.321Z",
"accountType": "string",
"isCheckingAccount": true,
"currentBalance": 0,
"availableBalance": 0,
"foundInLatestRefresh": true,
"isTokenizedAccountNumber": 0,
"isRTP": 0,
"isACH": 0
}
]
"
}

Balance Notification Notes:

- When receiving the webhook, the type expected notification type for this workflow is "balance_update".
- Any relevant account information needs to be deserialized from the "notificationObjectJson" property.
- The possible numerical values for the "isRTP" and "isACH" properties are:
  - 0 (false)
  - 1 (true)
  - 2 (unknown)

DL NextCheck


The DL NextCheck webhook fires every time an automated update is performed. The client then receives specific account data pulled from the request. See API section for DL NextCheck webhook details.

Widget Walkthrough


Widget allows the consumer to enter information to be used to identify and capture account information from the financial institution. Certain prompts may or may not be shown depending on the profile and settings used with the request. The following scenario shows our default workflow and styling.

Upon launching the Widget UI the user is prompted to select their institution or search for it by name.

Initial selection screen.

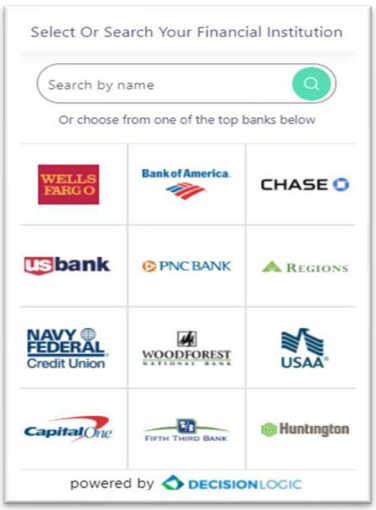


Screen showing predictive search.

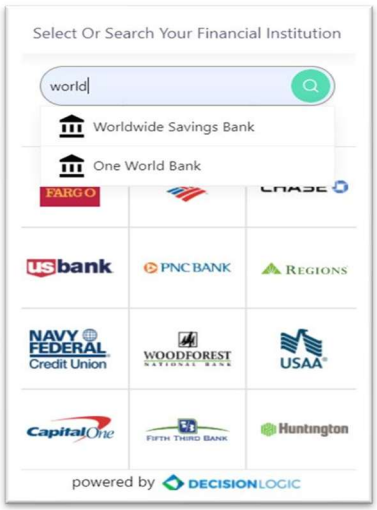


Ideally, the Request Code will have been created with the bank data required, then this screen below is the first screen the applicant sees, as the prior screens would then not be required.

After the consumer selects a bank, they are asked for the login credentials for their financial institution. The login text prompts will match the prompts the applicant would see on their financial institution's website.

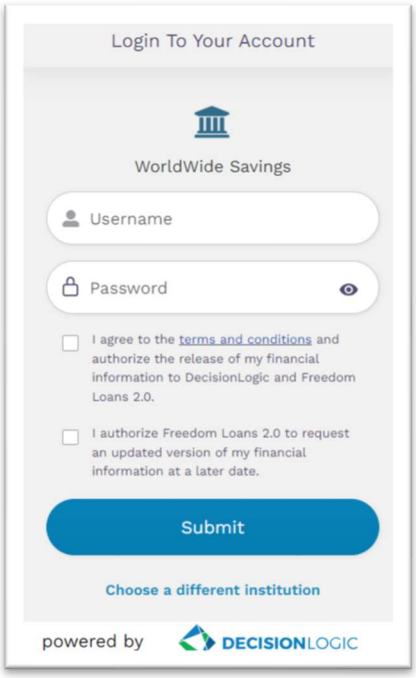


Below you will see that the consumer has incorrectly entered their financial institution's credentials and the DecisionLogic widget UI has presented them with an error message to retry.

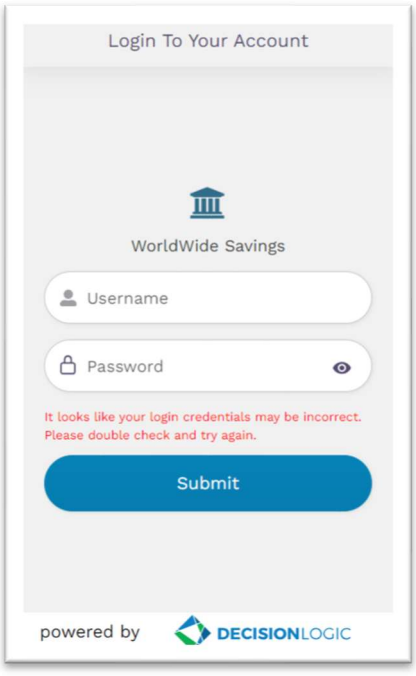

After the user logs into the financial institution, they may be presented with prompts for additional security information *(MFA: Multi Factor Authentication)* per the financial institution's normal login process.

After the user has successfully logged into their account and the application has gathered their statement history the DecisionLogic widget UI will present the user with a success message.

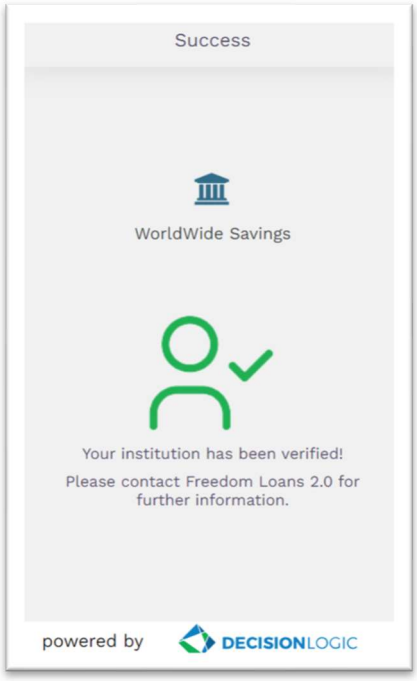

If you have Redirect URLs set, the user will be redirected upon clicking continue. If you do not have redirect URLs the continue button will not be displayed.

Frequently Asked Questions

1. Question: Do you have a way to notify us when the consumer is done?

Answer: Yes. When the consumer has completed the process the widget UI an email is sent, just like it is when using the DecisionLogic landing pages. We also have the ability to call a notification URL (using an http GET request) and ping a page on your website with some query string parameters to tell you specifically who has completed a request. This notification URL is entered into your profile and needs to be set-up by your DecisionLogic customer support specialist.

Example notification URL:
https://www.yourwebsitehere.com/notification.aspx?rc={requestcode}&fn={firstname}&ln={lastname}&an={accountnumber}&rn={routingnumber}&csid={contentserviceid}&s={status}&pg={profileguid}&s ug={siteuserguid}&cid={customerid}&isfinal={isfinal}&lasterrorcode={lasterrorcode}

2. Question: What happens to the consumer when they are done with the widget UI?

Answer: You can choose to merely display a message in the widget UI or redirect your parent page to a different URL based on success or failure. As soon as the consumer is redirected after a successful verification, the full report and transactional data is available on the DecisionLogic website and through the web service APIs.

Testing for DL

AKA: Sandbox Credentials

DecisionLogic invites you to develop and test using our live production environment. This makes things simpler for all concerned. In order to facilitate testing, we have the following sandbox credentials for US-formatted ($) reports:

Testing credentials

1. The testing credentials below are set to never fail and always produces a successful/completed report: (First name, Last name, and financial institution must match below)

Routing Number:	999999963
Financial institution:	WorldWide Savings
Account Number:	(anything)
Username:	michael.draper
Password:	(anything)

2. The testing credentials below can generate an account error if password is entered incorrectly: (First name, Last name, and financial institution must match below)

Account Number:	(anything)
Routing Number:	999999963
Financial institution:	WorldWide Savings
Username:	A.persona
Password:	(anything)

3. This is an MFA account (it asks some challenge questions):

Account Number:	(anything)
Routing Number:	999999963
Login:	charles.dickens
Password:	(anything)
MFA Questions & Answers	
Q1: In what year did America celebrate the bicentennial?	
A1: 1976	
Q2: What famous British rock group was formed by four fabulous Liverpool lads in 1960?	
A2: Beatles	

4. The testing credentials below are set to never fail and always produces a successful/completed report for a "High Income" transaction history: (First name, Last name, and financial institution must match below)

Account Number:	(anything)
Routing Number:	999999963
Financial institution:	WorldWide Savings
Username:	cldagtest.bank7
Password:	bank7

*At the moment, we do not have testing credentials that will duplicate a true bank error.

Testing DL Match® Integration

If you would like to test the DL Match system® you may use the following examples to replicate possible returns. Add an asterisk and the desired numeric character to the <MatchFirstName> field (ex. *1Bob or *3Janet) followed by any information in the proceeding 'match' fields. Based on the testing character that is passed at the beginning of first name, fields will return either valid or invalid depending on the test character selected despite what additional information was entered. We recommend you use our sandbox credentials Michael Draper statement in order to push the DL Match® request.

Result Status		
Verified	Partially Verified	Unverified
✔	☐	✖

Test Character	DL Match Result Description	DL Match Plus Result Description
*0	All fields verified	SSN partially verified, Street partially verified, Email unverified
*1	All fields verified	Zip code validation error
*2	Phone unverified	Phone validation error, Zip code validation error
*3	Street unverified, City unverified, State unverified, Zip unverified	Street unverified, City unverified, State unverified, Zip unverified, email unverified, SSN partially verified
*4	Street unverified	Street unverified, Email unverified, SSN partially verified
*5	Street unverified, City unverified, State unverified, Zip unverified	Street unverified, City unverified, State unverified, Zip unverified, email unverified, SSN partially verified, Phone partially verified
*6	Street unverified, City unverified, State unverified, Zip unverified, Phone unverified	Zip code validation error
*7	Street unverified, City unverified, State unverified, Zip unverified, Phone unverified	*Phone validation error*
*8	Phone Unverified	Zip code validation error
*9	Phone Unverified	*Phone validation error*

JSON Web Service Information

Service Key

Each client has a unique service key to use when accessing the web service. Your service key can be provided by your integration team at DecisionLogic.

Site Users

Your company users are referred to as "Site Users". New Site User accounts can be created through the DecisionLogic company portal by company users that are in the administrator (Admin) role. You can also create and manage Site Users using several of our APIs.

SiteUserGuid

Several calls to the web service require a valid SiteUserGuid. You can retrieve these from the web service using the GetUsers web method or from your account page on DecisionLogic.com.

ProfileGuid

Some calls to the web service require a ProfileGuid. Profiles are created and provided by your customer support specialist at DecisionLogic. You can retrieve a list of available Profiles through the GetProfiles web method, or from your company admin pages on DecisionLogic.com.

Required vs. Optional JSON Fields

(Hint: Both are Required)

Required fields must contain the appropriate data requested in order for the JSON request to be processed correctly. If a required field is not populated, you will receive an error.

Optional fields are a bit tricky. The data contained within the field is optional, however the field itself is required in the JSON call. The JSON package MUST contain all fields, however optional fields can contain an empty string, or a '0' for fields of type integer. If you do not include the optional fields in the JSON package, the request will fail.


API Overview

RESTful Endpoint Structure

The endpoint of our RESTful API's will have the following URL structure:
https://integration.decisionlogic.com/restful/v1

- /restful – represents the server at which the endpoint is being run
- /v1 – indicates what version of the endpoint of which there may be multiple.

When using our endpoints in Swagger you will see the dropdown for the server, shown in the bottom left of the screenshot, and the ability to change the version shown in the top right of the screenshot.

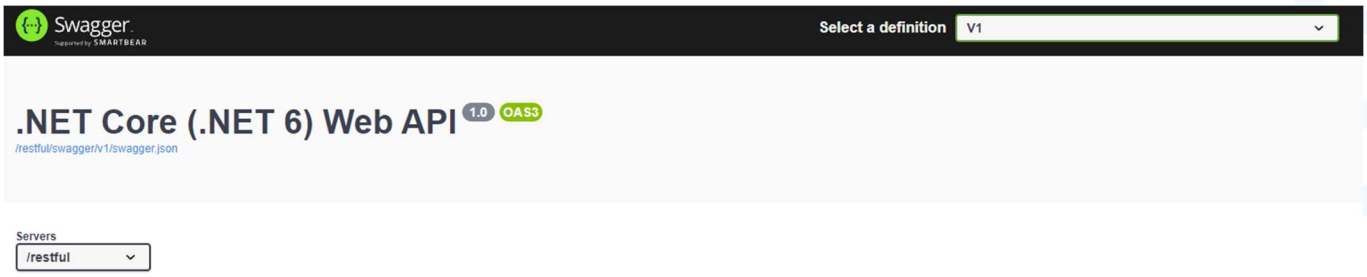

The Status of a Request "status"

This numeric value indicates the status of the Request and is referenced a lot in our APIs. Valid values are:

Code	Description	Status Code Color
-3	Other Error (Request failed due to some other system failure. Typically, this error is not related to a data provider but is at the bank level)	Red #CC3333
-2	Financial Institution Error (Requests that failed while attempting to get data from the financial institution)	Red #CC3333
-1	Account Error (Requests that failed because of an account error, including invalid credentials, account is closed, etc.)	Amber #FFBF00
0	Not Started (Requests that have been created but have not been started)	Light Gray #D0D0D0
1	Started, Not Completed (Requests that have been started by the end user but not completed)	Dark Gray #A0A0A0
3	Login Verified (Requests that were completed, and the end user was able to login to their financial institution account, and met the profile's verification standard)	Dark Green #228822
Code	**Refresh Notification Status Description**	
600	Refresh Successful (Refresh request is complete, you can now pull any new transaction data available)	
601	Refresh Failed (Request refresh could not be completed, review request notes for further details)	

The Status of a DL Match® when attached to an IAV request code

Here is a list of the possible displayed statuses for DL Match® Reports in the portal.

Status	Description
Grey	Request has not yet been run
Red	All match fields were returned as not verified
Yellow	A minimum of one match field was not verified
Green	All match fields were successfully verified

Account Related APIs

GetProfiles

- Returns profiles for a given company's service key.

GetUsers

- Returns Site Users for a given company's service key.

Verification Related APIs

CreateAndVerifyRequest

- This endpoint is used to create a DecisionLogic Request Code.
- Required if you are processing a DL Match® request in conjunction with a DL Request Code.
- This endpoint can be used to create the following types of Request Codes:
- DecisionLogic Request Code Only (No DL Match®)
- DL Request Code with DL Match® or DL Match Plus® Recommended.

DLMatch

- Generates a standalone DL Match® and DL Match Plus® Identity Verification separate from a Request Code
- This API allows you to pass specific details about an individual and receive verification of its validity.

InstantRefresh

- Initiates a forced refresh for a Request Code

SendRequestBySMS

- Sends a pre-formatted link via SMS to a consumer for a specific Request Code.

Reporting and Scoring APIs

GetIncomeStabilityScore

- Retrieves Extra Data Points Returned for certain Request Codes:
- Income Stability Score for a Request Code.
- If available, the name of this API will be returned in the additionalAPI field of other APIs.

GetReportDetailsFromRequestCode

- Returns all transaction history and account details for a particular Request Code.
- Returns ALL accounts found.
- Returns the results of the new Summary Analytic Stability Scores in the array.

GetReportDetailsFromCustomerId

- Returns all transaction history and account details for based on a customerId.
- Returns ALL accounts found.
- Returns the results of the new Summary Analytic Stability Scores in the array.

SearchReports

- Returns the results of search based on your criteria.

GetIDVByRequestCode

- Returns DL Match® and DL Match Plus® Identity Verification results for a Request Code
    - Request must have been created using CreateAndVerifyRequest web service or through the DecisionLogic Portal with a DL Match® request.

GetIncomeStabilityScore

- Returns the results of the Income Stability Score based on the Request Code.

GetFirstPaymentDefaultScoresFromRequestCode

- Retrieves Extra Data Points Returned for certain Request Codes:
- First Payment Default Score for a Request Code.
- If available, the name of this API will be returned in the <AdditionalAPI> field of other APIs.

Bank Specific APIs

GetFIById

- Retrieves all information for a particular institution by FI ID #.

IsRoutingNumberSupported

- Returns true if the routing number is supported.

SearchFIsByName

- Returns a full list of supported financial institutions matching the 'Name'.

SearchFIsByCountry

- Returns a full list of supported financial institutions by country code.
- Current Country codes: ALL, US, CA, GB, NZ, AU

Detailed JSON Web Service Information

The following pages are intended for developer use only.

All requests will return the following 4 data points. These can be largely ignored in the case of a successful response, in which the httpStatusCode will be 200. If there is an error, we can use the other parameters to help troubleshoot an issue.

```
"trackingId": string,
"isError": bool,
"errorMessage": string,
"httpStatusCode": int
```

JSON Endpoints & Responses

GetProfiles

Returns a full list of current 'Profiles'

Request Body

```
{
 "serviceKey": string
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

Response Body

```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": [
    {
      "profileGuid": string,
      "name": string,
      "showSearch": bool,
```

```
        "showName": bool,
        "minAccountConfidence": int,
        "minAccountNumberDigits": int,
        "minNameConfidence": int,
        "validateAmount": bool,
        "returnAccountNumber": bool,
        "returnHolderName": bool,
        "returnBalance": bool,
        "gatherTransactions": bool,
        "transactionDays": int,
        "maxLoginAttempts": int,
        "bypassPrelogin": int,
        "sendParentResults": bool,
        "parentFunctionType": int,
        "widgetURL": string,
        "successRedirect": bool,
        "successURL": string,
        "successHTML": string,
        "failureRedirect": bool,
        "failureURL": string,
        "failureHTML": string,
        "notificationURL": string,
        "notifyEmailAddress": string
      },
  ],
  "httpStatusCode": 200
}
```


Return Field Descriptions:

· **profileGuid** – The globally unique identifier (Guid) of the profile.

· **name** – The name of the profile.

· **showSearch** – Specifies whether the applicant will be allowed to search for financial institutions from when entering information for a request.

· **showName** – Specifies whether the applicant will be able to enter their name when entering information for a request.

· **minAccountConfidence** – Deprecated.

· **minAccountNumberDigits** – Deprecated.

· **minNameConfidence** – Deprecated.

· **validateAmount** – Deprecated.

· **returnAccountNumber** – Specifies whether the account number found is returned with a request.

· **returnHolderName** – Specifies whether the account holder name is returned with a request.

· **returnBalance** – Specifies whether the available balance is returned with a request.

· **gatherTransactions** – Specifies whether to return account transactions with a request.

· **transactionDays** – Specifies the maximum number of days of transactions to return with a request.

· **maxLoginAttempts** – Specifies the maximum number of account login attempts allowed to the applicant.

· **bypassPrelogin** – Specifies whether to bypass the pre-login page and jump straight to the account credentials page for the applicant.

· **sendParentResults** – Specifies whether to send the results to the parent page of the widget (see IAVResult Object).

· **parentFunctionType** – Specifies the type of parent function to call. This value is 1 when sending the results to the IAVResult JSON function.

· **widgetURL** – Specifies the URL of the page on which the widget (widget UI) can be placed (Parent Page URL).

· **successRedirect** – Specifies whether to redirect to the URL specified in SuccessURL upon a successful verification.

· **successURL** – Specifies the destination URL used with success redirect.

· **successHTML** – Specifies the HTML to present upon a successful verification.

· **failureRedirect** – Specifies whether to redirect to the URL specified in FailureURL upon a failed verification.

· **failureURL** – Specifies the destination URL used with failure redirect.

· **failureHTML** – Specifies the HTML to present upon a failed verification.

· **notificationURL** – Specifies the URL that will be called at the end of the process.

· **notifyEmailAddress** – Specifies an override Email Address (to the Site User's Email Address) where notification e-mails will be sent.

GetUsers

Returns a current list of DecisionLogic Site Users

Request Body

```
{
 "serviceKey": string
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

Response Body

```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": [
    {
      "siteUserGuid": string,
      "username": string,
      "emailAddress": string,
      "firstName": string,
      "lastName": string,
      "address": string,
      "city": string,
      "state": string,
      "postalCode": string,
      "country": string,
      "phone": string,
      "status": int,
      "dateCreated": string,
```

```
        "dateModified": string
      }
    ],
    "httpStatusCode": 200
}
```


Return Field Descriptions:

· **siteUserGuid** – The globally unique identifier (Guid) associated with the site user.

· **username** – The username of the site user.

· **emailAddress** – The email address of the site user.

· **firstName** – The first name of the site user.

· **lastName** – The last name of the site user.

· **address** – The street address of the site user.

· **city** – The city of the site user.

· **state** – The state of the site user.

· **postalCode** – The postal or zip code of the site user.

· **country** – The country name of the site user.

· **phone** – The phone number of the site use

· **status** – The status of the site user.

1	Pending
2	Active
3	Suspended
4	Terminated

· **dateCreated** – The date and time the site user was created in coordinated universal time (UTC).

· **dateModified** – The date and time the site user was last modified in coordinated universal time (UTC).

GetFIById

Returns institution information based on the institution's id.

Request Body

```
{
  "serviceKey": string,
  "institutionId": int
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **institutionId** – Unique Id used to match to a financial institution.

Response Body

```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": {
      "institutionId": int,
      "institutionName": string,
      "homeURL": string,
      "countryCode": string
   },
   "httpStatusCode": 200
}
```

Return Field Descriptions:

· **institutionId** – Unique Id used to match to a financial institution.

· **institutionName** – Institution name returned that matches the institutionId.

· **homeURL** – URL of the institution.

· **countryCode** – Code for the country of the institution.

IsRoutingNumberSupported

Returns a true or false response based on the given routing number and if it is supported.

Request Body

```
{
  "serviceKey": string,
  "routingNumber": string
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **routingNumber** – Routing number used to match to a financial institution.

Response Body

```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": {
      "isRoutingNumberSupported": bool
   },
   "httpStatusCode": 200
}
```

Return Field Descriptions:

· **isRoutingNumberSupported** – Will show true or false if the routing number is support or not.

SearchFIsByName

Returns institution information based on the institution's name.

Request Body

```
{
  "serviceKey": string,
  "bankName": string
}
```

Return Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **bankName** –The banking institution name that you are searching for.

Response Body

```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": [
      {
         "institutionId": int,
         "institutionName": string,
         "homeURL": string,
         "countryCode": string
      },
   ],
   "httpStatusCode": 200
}
```

Return Field Descriptions:

· **institutionId** – Unique Id used to match to a financial institution.

· **institutionName** – Institution name returned that matches the institutionId.

· **homeURL** – URL of the institution.

· **countryCode** – Code for the country of the institution.

SearchFIsByCountry

Returns institution information based on the institution's country.

Request Body

```
{
 "serviceKey": string,
 "countryCode": string
}
```

Return Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **countryCode** – Code for the country of the institution. Current Country codes: ALL, US, CA, GB, NZ, AU

Response Body

```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": [
    {
      "institutionId": int,
      "institutionName": string,
      "homeURL": string,
      "countryCode": string
    },
  ],
  "httpStatusCode": 200
}
```

Return Field Descriptions:

· **institutionId** – Unique Id used to match to a financial institution.

· **institutionName** – Institution name returned that matches the institutionId.

· **homeURL** – URL of the institution.

· **countryCode** – Code for the country of the institution.

GetReportDetailsFromRequestCode

This method returns detailed information about the account verification request. If the request is complete and successful, information about all the accounts associated with the user's login credentials and their corresponding transactions can be returned. Uses the Request Code to locate the information.

Request Body

```
{
  "serviceKey": string,
  "requestCode": string
}
```

Return Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **requestCode** – Request code to be reported on.

Response Body

```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": [
      {
         "requestCode": string,
         "customerIdentifier": string,
         "emailAddress": string,
         "institutionName": string,
         "accountName": string,
         "routingNumberEntered": string,
         "routingNumberReturned": string,
         "accountType": string,
         "accountNumberEntered": string,
         "accountNumberFound": string,
         "accountNumberConfidence": int,
```

```
"nameEntered": string,
"nameFound": string,
"nameConfidence": int,
"amountInput": int,
"availableBalance": int,
"averageBalance": float,
"averageBalanceRecent": float,
"isLoginValid": bool,
"isVerified": bool,
"asOfDate": string,
"activityStartDate": string,
"activityEndDate": string,
"totalCredits": float,
"totalDebits": float,
"currentBalance": int,
"isActivityAvailable": bool,
"transactionAnalysisSummaries": [
  {
    "typeName": string,
    "typeCode": string,
    "totalCount": int,
    "totalAmount": float,
    "recentCount": int,
    "recentAmount": float,
    "displayOrder": int,
    "score": string,
    "message": "",
    "transactionInterval": int,
    "numberOfMissingIntervals": int,
    "mostRecentTransactionAmount": float,
```

```
        "mostRecentTransactionDate": string,
        "averageTransactionAmount": float
    },
"transactionSummaries": [
    {
        "transactionDate": string,
        "amount": float,
        "runningBalance": int,
        "description": string,
        "typeCodes": string,
        "isRefresh": bool,
        "status": string,
        "category": string
    },
],
"processedStatus": int,
"isStarted": bool,
"isCompleted": bool,
"notes": string,
"status": int,
"statusText": string,
"statusCodeColor": string,
"lastRefreshErrorMessage": string,
"isError": bool,
"errorMessage": string,
"isACHSupported": bool,
"accountExpenses": [
    {
        "category": string,
        "amount": float,
```

```
            "percent": float
          },
        ],
        "chartsId": int,
        "additionalAPI": string,
        "isRequestRefreshable": bool
      },
   "httpStatusCode": 200
}
```


Return Field Descriptions:

· **requestCode** – The code that identifies this request

· **customerIdentifier** – The client provided customer identifier, typically a key to data within the client's customer tracking system.

· **emailAddress** – The email address of the account verification request applicant.

· **institionName** – The name of the financial institution.

· **accountName** – The name of the account at the financial institution if found.

· **routingNumberEntered** – The routing number input initially for the request.

· **routingNumberReturned** – The routing number returned by the financial institution.

· **accountType** – The type of account if found.

· **accountNumberEntered** – The account number entered for the request.

· **accountNumberFound** – The account number found at the financial institution if complete.

· **accountNumberConfidence** – The confidence level of the account number found if complete.

4	All digits are an exact match.
3	Partial match was found where digits not hidden or masked match exactly.
2	Partial match was found with only the last digits matching.
1	An empty account number was returned from the online account so a matching determination could not be made.
0	An account number was returned but no match was found.

· **nameEntered** – The account holder name entered for the request.

· **nameFound** – The account holder name found to be associated with the account if complete.

· **nameConfidence** – The confidence level of the account holder name found if complete.

5	This is an exact match.
4	The first and last names were both found in the account holder name.
3	The last name was found in the account holder name.
2	The first name was found in the account holder name.
1	An empty account holder name was returned from the online account so a matching
0	An account holder name was returned but there was no first or last name match.

· **amountInput** – The amount to be verified as an available balance.

· **availableBalance** – The available balance found for the account if the request was completed.

· **averageBalance** – The average balance calculated from all found transactions if the request was completed.

· **averageBalanceRecent** – The average balance calculated from the last month of transactions if the request was completed.

· **isLoginValid** – This value indicates whether the login operation was successful for the credentials the user entered.

· **isVerified** – This value indicates whether the account was deemed "verified" by meeting all of the requirements specified in the profile. The requirements include a valid login to the financial institution account, account number and name confidence levels that meet or exceed the minimum levels specified, and an available balance that is equal to or greater than the amount input.

· **asOfDate** – The date as of when the account balance is accurate.

· **activityStartDate** – The earliest date for when transactions are returned.

· **activityEndDate** – The latest date for when transactions are returned.

· **totalCredits** – The total of all returned credit transactions.

· **totalDebits** – The total of all returned debit transactions.

· **currentBalance** – The current balance in the account (may be different from the available balance).

· **isActivityAvailable** – This value indicates whether transaction activity has been returned.

· **transactionAnalysisSummaries** – This is an array of transaction analysis summaries as detailed below.

o **typeName** – The name of the type of category.

o **typeCode** – The code used the flag the matching transactions for the type with the transaction summary array. Below are the top 8 type codes in our system. If you would like a current full list of type codes, please contact your DecisionLogic support department.

Note: These codes and descriptions are constantly being updated by DecisionLogic and should be consumed as an array.

py	Payroll
ld	Loan Debit
lc	Loan Credit
ov	Overdraft
ad	ACH Debit
ac	ACH Credit
dp	Deposit

o **totalCount** – The number of transactions in the transaction summary array that match the type.

o **totalAmount** – The sum of the transaction amounts of all the transactions in the transaction summary array that match the type.

o **recentCount** – The number of transactions for the last month in the transaction summary array that match the type.

o **recentAmount** –The number of transactions for the last month of all the transactions in the transaction summary array that match the type.

o **displayOrder** – The default order that the summary analytics are displayed in the DL portal.

· **transactionSummaries** –This is an array of transaction summaries as detailed below.

o **transactionDate** – The date of the transaction.

o **amount** – The amount of the transaction.

o **runningBalance** – The calculated running balance.

o **description** – The transaction description returned by the financial institution.

o **typeCodes** – The type codes that apply to this transaction separated by commas.

o **isRefresh** – Indicates whether transaction was added to list as part of a refresh operation.

o **status** – Indicates whether transaction is “pending” or “posted”.

o **category** – The transaction income or expense category (e.g. Utilities, Groceries, etc.)

· **processedStatus** – The current process status for the request.

· **isStarted** – Indicates whether the applicant started the request process.

· **isCompleted** – Indicates whether the applicant completed the request process.

· **notes** – May show additional information about the account including detected account number changes over time.

· **status** – This numeric value indicates the status of the Request. (see Status of a Request)

· **statusText** – The display name of the Status code. (see Status above)

· **statusCodeColor** – The html color code of the Status. (see Status above)

· **lastRefreshErrorMessage** – A friendly message that explains the reason the verification failed.

· **isError** – The value indicates whether an error occurred during the operation.

· **errorMessage** – The message indicating the type of error that occurred during the operation.

· **isACHSupported** – Defines whether the specified account is expected to be valid for ACH credits and debits.

· **accountExpenses** – An array of accountExpenses objects (see below).

  o **category** – the name of the category (e.g. Utilities, Groceries, etc.).

  o **amount** – the total amount of transactions in that expense category.

  o **percent** – the percentage of the total amount of transactions in the expense category compared to the total of all expenses found.

· **chartsId** – the unique identifier that can be used to call the Charts API to return any one of four Chart Types.

· **additionalAPI** – A comma separated list of additional APIs that can be called to retrieve additional data points found for this request.

· **isRequestRefreshable** – Indicates if the consumer has opted-in to allow refreshing of the account.

GetReportDetailsFromCustomerId

This method returns detailed information about the account verification request. If the request is complete and successful, information about all the accounts associated with the user's login credentials and their corresponding transactions can be returned. Uses the customerIdentifier to locate the information.

Request Body

```
{
  "serviceKey": string,
  "customerIdentifier": string
}
```

· **serviceKey** – Specify your unique client service key. (required)

• **customerIdentifier** - identifier for the customer, as inputted in the Create Request form in Portal. The value can be an empty string.

Response Body

```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": [
```

DECISION LOGIC


```
{
  "requestCode": string,
  "customerIdentifier": string,
  "emailAddress": string,
  "institutionName": string,
  "accountName": string,
  "routingNumberEntered": string,
  "routingNumberReturned": string,
  "accountType": string,
  "accountNumberEntered": string,
  "accountNumberFound": string,
  "accountNumberConfidence": int,
  "nameEntered": string,
  "nameFound": string,
  "nameConfidence": int,
  "amountInput": int,
  "availableBalance": int,
  "averageBalance": float,
  "averageBalanceRecent": float,
  "isLoginValid": bool,
  "isVerified": bool,
  "asOfDate": string,
  "activityStartDate": string,
  "activityEndDate": string,
  "totalCredits": float,
  "totalDebits": float,
  "currentBalance": int,
  "isActivityAvailable": bool,
  "transactionAnalysisSummaries": [
    {
```

```
        "typeName": string,
        "typeCode": string,
        "totalCount": int,
        "totalAmount": float,
        "recentCount": int,
        "recentAmount": float,
        "displayOrder": int,
        "score": string,
        "message": "",
        "transactionInterval": int,
        "numberOfMissingIntervals": 0,
        "mostRecentTransactionAmount": float,
        "mostRecentTransactionDate": string,
        "averageTransactionAmount": float
    },
"transactionSummaries": [
    {
        "transactionDate": string,
        "amount": float,
        "runningBalance": int,
        "description": string,
        "typeCodes": string,
        "isRefresh": bool,
        "status": string,
        "category": string
    },
],
"processedStatus": int,
"isStarted": bool,
"isCompleted": bool,
```

```
        "notes": string,
        "status": int,
        "statusText": string,
        "statusCodeColor": string,
        "lastRefreshErrorMessage": string,
        "isError": bool,
        "errorMessage": string,
        "isACHSupported": bool,
        "accountExpenses": [
          {
            "category": string,
            "amount": float,
            "percent": float
          },
        ],
        "chartsId": int,
        "additionalAPI": string,
        "isRequestRefreshable": bool
    },
  "httpStatusCode": 200
}
```


Return Field Descriptions:

· **requestCode** – The code that identifies this request

· **customerIdentifier** – The client provided customer identifier, typically a key to data within the client's customer tracking system.

· **emailAddress** – The email address of the account verification request applicant.

· **institionName** – The name of the financial institution.

· **accountName** – The name of the account at the financial institution if found.

· **routingNumberEntered** – The routing number input initially for the request.

· **routingNumberReturned** – The routing number returned by the financial institution.

· **accountType** – The type of account if found.

· **accountNumberEntered** – The account number entered for the request.

· **accountNumberFound** – The account number found at the financial institution if complete.

· **accountNumberConfidence** – The confidence level of the account number found if complete.

4	All digits are an exact match.
3	Partial match was found where digits not hidden or masked match exactly.
2	Partial match was found with only the last digits matching.
1	An empty account number was returned from the online account so a matching determination could not be made.
0	An account number was returned but no match was found.

· **nameEntered** – The account holder name entered for the request.

· **nameFound** – The account holder name found to be associated with the account if complete.

· **nameConfidence** – The confidence level of the account holder name found if complete.

5	This is an exact match.
4	The first and last names were both found in the account holder name.
3	The last name was found in the account holder name.
2	The last name was found in the account holder name.
1	An empty account holder name was returned from the online account so a matching
0	An account holder name was returned but there was no first or last name match.

· **amountInput** – The amount to be verified as an available balance.

· **availableBalance** – The available balance found for the account if the request was completed.

· **averageBalance** – The average balance calculated from all found transactions if the request was completed.

· **averageBalanceRecent** – The average balance calculated from the last month of transactions if the request was completed.

· **isLoginValid** – This value indicates whether the login operation was successful for the credentials the user entered.

· **isVerified** – This value indicates whether the account was deemed “verified” by meeting all of the requirements specified in the profile. The requirements include a valid login to the financial

institution account, account number and name confidence levels that meet or exceed the minimum levels specified, and an available balance that is equal to or greater than the amount input.

· **asOfDate** – The date as of when the account balance is accurate.

· **activityStartDate** – The earliest date for when transactions are returned.

· **activityEndDate** – The latest date for when transactions are returned.

· **totalCredits** – The total of all returned credit transactions.

· **totalDebits** – The total of all returned debit transactions.

· **currentBalance** – The current balance in the account (may be different from the available balance).

· **isActivityAvailable** – This value indicates whether transaction activity has been returned.

· **transactionAnalysisSummaries** – This is an array of transaction analysis summaries as detailed below.

o **typeName** – The name of the type of category.

o **typeCode** – The code used the flag the matching transactions for the type with the transaction summary array. Below are the top 8 type codes in our system. If you would like a current full list of type codes, please contact your DecisionLogic support department.

Note: These codes and descriptions are constantly being updated by DecisionLogic and should be consumed as an array.

py	Payroll
ld	Loan Debit
lc	Loan Credit
ov	Overdraft
ad	ACH Debit
ac	ACH Credit
dp	Deposit

o **totalCount** – The number of transactions in the transaction summary array that match the type.

o **totalAmount** – The sum of the transaction amounts of all the transactions in the transaction summary array that match the type.

o **recentCount** – The number of transactions for the last month in the transaction summary array that match the type.

o **recentAmount** –The number of transactions for the last month of all the transactions in the transaction summary array that match the type.

o **displayOrder** – The default order that the summary analytics are displayed in the DL portal.

· **transactionSummaries** –This is an array of transaction summaries as detailed below.

o **transactionDate** – The date of the transaction.

o **amount** – The amount of the transaction.

o **runningBalance** – The calculated running balance.

- **description** – The transaction description returned by the financial institution.
- **typeCodes** – The type codes that apply to this transaction separated by commas.
- **isRefresh** – Indicates whether transaction was added to list as part of a refresh operation.
- **status** – Indicates whether transaction is “pending” or “posted”.
- **category** – The transaction income or expense category (e.g. Utilities, Groceries, etc.)

· **processedStatus** – The current process status for the request.

· **isStarted** – Indicates whether the applicant started the request process.

· **isCompleted** – Indicates whether the applicant completed the request process.

· **notes** – May show additional information about the account including detected account number changes over time.

· **status** – This numeric value indicates the status of the Request. (see Status of a Request)

· **statusText** – The display name of the Status code. (see Status above)

· **statusCodeColor** – The html color code of the Status. (see Status above)

· **lastRefreshErrorMessage** – A friendly message that explains the reason the verification failed.

· **isError** – The value indicates whether an error occurred during the operation.

· **errorMessage** – The message indicating the type of error that occurred during the operation.

· **isACHSupported** – Defines whether the specified account is expected to be valid for ACH credits and debits.

· **accountExpenses** – An array of accountExpenses objects (see below).

- **category** – the name of the category (e.g. Utilities, Groceries, etc.).
- **amount** – the total amount of transactions in that expense category.
- **percent** – the percentage of the total amount of transactions in the expense category compared to the total of all expenses found.

· **chartsId** – the unique identifier that can be used to call the Charts API to return any one of four Chart Types.

· **additionalAPI** – A comma separated list of additional APIs that can be called to retrieve additional data points found for this request.

· **isRequestRefreshable** – Indicates if the consumer has opted-in to allow refreshing of the account.

SearchReports

Returns summary information for Request Codes matching specified criteria.

Request Body

```
{
  "serviceKey": string,
  "siteUserGuid": string,
  "searchTerm": string,
  "fromDateCreated": string,
  "toDateCreated": string,
  "timeZoneOffset": int,
  "status": int,
  "processStatus": int
}
```

· **serviceKey** – Specify your unique client service key. (required)

· **siteUserGuid** – Specify the globally unique identifier (Guid) for the site user you are searching.

· **searchTerm** – Specify the earliest date to search for requests.

· **fromDateCreated** – Specify the earliest date to search for requests.

· **toDateCreated** – Specify the latest date to search for requests.

· **timeZoneOffset** – Specify the hours offset from Coordinated Universal Time (UTC). Requests are recorded with a timestamp in UTC time. For example, Pacific Standard Time is 8 hours offset from UTC (during non-daylight savings). (required)

· **status** – Specify the status to use in searching requests.

99	Any
-3	Other Error
-2	Financial Institution Error
-1	Account Error
0	Not Started
1	Started, Not Completed
2	Login, Not Verified
3	Login, Verified
20	In Progress
100	Complete Success, Login Verified

· **processStatus** – Specify the workflow process step to filter the requests.

0	All
1	New
2	Pending Review
3	Accepted
4	Rejected
5	Escalated

Response Body


```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": {
      "errorMessage": string,
      "searchResults": [
         {
            "requestCode": string,
            "dateCreated": string,
            "customerIdentifier": string,
            "contentServiceDisplayName": string,
            "routingNumberInput": string,
            "accountNumberInput": string,
            "holderNameInput": string,
            "siteUserGuid": string,
            "status": int,
            "lastRefreshError": int,
            "profileGuid": string,
            "profileName": string,
            "dateCompleted": string
         },
]
   },
   "httpStatusCode": 200
}
```

· **searchResults** – returns list of responses that match search criteria.

· **requestCode** – The request code assigned to the account verification request.

· **dateCreated** – The date and time the request was created in Coordinated Universal Time (UTC).

· **customerIdentifier** – The customer identifier that was assigned to the request when it was created.

· **contentServiceDisplayName** – The name of the financial institution.

· **routingNumberInput** – The routing number entered of the financial institution.

· **accountNumberInput** – The account number entered for the request.

· **holderNameInput** – The account holder name entered for the request.

CreateAndVerifyRequest

This web service can be used as a single endpoint for creating a 'Request Code' with a DL Match® or DL Match Plus® as well as creating a 'Request Code' without a DL Match® or DL Match Plus®. This means you do not need to use both the CreateRequest4 API as well as the CreateAndVerifyRequest2 API in order to generate requests with and without DL Match®/DL Match Plus® identity verification.

NOTE: Make sure you maintain a local record of the input values you use for the DL Match® fields. None of our APIs will return your original input values for security purposes.

Request Body

```
{
 "serviceKey": string,
 "siteUserGuid": string,
 "profileGuid": string,
 "customerId": string,
 "firstName": string,
 "lastName": string,
 "accountNumber": string,
 "routingNumber": string,
 "institutionId": int,
 "emailAddress": string,
 "matchType": int,
 "matchConsumerReferenceId": string,
 "matchFirstName": string,
 "matchMiddleName": string,
 "matchLastName": string,
```

```
 "matchSuffix": string,
 "matchAddressStreet": string,
 "matchAddressCity": string,
 "matchAddressState": string,
 "matchAddressZip": string,
 "matchPhoneNumber": string,
 "matchSocialSecurityNumber": string,
 "matchEmailAddress": string,
 "matchDobDay": int,
 "matchDobMonth": int,
 "matchDobYear": int,
 "matchDriversLicenseState": string,
 "matchDriversLicenseNumber": string
}
```

Input Field Descriptions:

· **serviceKey** – Your company's unique client service key. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user to use when creating the request. (required)

· **profileGuid** – The globally unique identifier (Guid) of the profile to use when creating the request. (required)

· **customerId** – The customer identifier to use when creating the request. (optional)This can be any value that you use from your own tracking system. If you do not provide a value, a unique value will be generated automatically.

· **firstName** – The first name of the applicant to be used when creating the request. (optional)

· **lastName** – Specify the last name of the applicant to be used when creating the request. (optional)

· **accountNumber** – Specify the account number of the applicant to be used when creating the request. (optional)

· **routingNumber** – Specify the routing number of the applicant's financial institution to be used when creating the request. (optional)

· **institutionId** – Specify the content service id of the applicant's financial institution to be used when creating the request. (optional) String cannot be empty. If not entering a content service ID enter 0.

· **emailAddress** – Specify the email address of the applicant. (optional)

· **matchType** – Specify what type of a DL Match® request to create, if any. (required)

-1	Create an IAV request code without DL Match or DL Match Plus validation.
4	DL Match Verification: Name, Address, Phone and Social Security # and Date of Birth Only
5	DL Match Plus Verification: Name Address, Phone< Social Security #, Driver's License, and Date of Birth with any dynamic return details

· **matchConsumerReferenceId**- The customer identifier to use when creating the request. (optional)This can be any value that you use from your own tracking system.

· **matchFirstName**– First name of consumer being verified. This does not have to match the consumer's name for the request code. * Required for match type 4,5

· **matchMiddleName** - Middle name of consumer being verified. This does not have to match the consumer's name for the request code.

· **matchLastName** – Last name consumer being verified. This does not have to match the consumer's name for the request code. * Required for match type 4,5

· **matchSuffix** - Suffix of consumer being verified. This does not have to match the consumer's name for the request code.

· **matchAddressStreet** – Street address of consumer being verified * Required for match type 4,5

· **matchAddressCity** – City of consumer being verified. * Required for match type 4,

· **matchAddressState** – State of consumer being verified. * Required for match type 4,5

· **matchAddressZip** – Zip code of consumer being verified. * Required for match type 4,5

· **matchPhoneNumber** – Phone number of consumer being verified. * Required for match type 4,5

· **matchSocialSecurityNumber** – Social security number of consumer being verified. * Required for match type 4,5

· **matchEmailAddress**- Email Address of consumer being verified.

· **matchDobDay**- Date of birth, day, of consumer being verified. * Required for match type 4,5

· **matchDobMonth**- Date of birth, month, of consumer being verified. * Required for match type 4,5

· **matchDobYear**- Date of birth, year, of consumer being verified. * Required for match type 4,5

· **matchDriversLicenseState** - Driver's License State of consumer being verified.

· **matchDriversLicenseNumber** - Driver's License Number of consumer being verified.

Response Body

```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": string,
  "httpStatusCode": 200
}
```

· **data** – will contain a string with your newly created Request Code.

DLMatch

Standalone DL Match® and DL Match Plus® APIs that allow you to pass specific details about an individual and receive verification of its validity without creating a Request Code.

Request Body

```
{
 "serviceKey": string,
 "siteUserGuid": string,
 "matchType": int,
 "matchCustomerID": string,
 "matchFirstName": string,
 "matchMiddleName": string,
 "matchLastName": string,
 "matchAddressStreet": string,
 "matchAddressCity":  string,
 "matchAddressState": string,
 "matchAddressZip": string,
 "matchPhone": string,
 "matchSSN": string,
 "matchEmail": string,
 "matchDobDay": int,
 "matchDobMonth": int,
```

```
 "matchDobYear": int,
 "matchDriversLicenseState": string,
 "matchDriversLicenseNumber": string
}
```

Input Field Descriptions:

· **serviceKey** –Your company's unique client service key. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user to use when creating the request. (required)

· **matchType** – Specify what type of a DL Match® request to create, if any. (required)

-1	Create an IAV request code without DL Match or DL Match Plus validation.
4	DL Match Verification: Name, Address, Phone and Social Security # and Date of Birth Only
5	DL Match Plus Verification: Name Address, Phone< Social Security #, Driver's License, and Date of Birth with any dynamic return details

· **matchCustomerId** – The customer identifier to use when creating the request. (optional)This can be any value that you use from your own tracking system. If you do not provide a value, a unique value will be generated automatically.

· **matchFirstName** – The first name of the applicant to be used when creating the request. * Required for match type 4,5

· **matchMiddleName** – Specify the last name of the applicant to be used when creating the request. (optional)

· **matchLastName** – Specify the last name of the applicant to be used when creating the request. * Required for match type 4,5

· **matchAddressStreet** – Street address of consumer being verified * Required for match type 4,5

· **matchAddressCity** – City of consumer being verified. * Required for match type 4,5

• **matchAddressState – State of consumer being verified.** * Required for match type 4,5

· **matchAddressZip** – Zip code of consumer being verified. * Required for match type 4,5

· **matchPhone** – Phone number of consumer being verified. * Required for match type 4,5

· **matchSSN** – Social security number of consumer being verified. * Required for match type 4,5

· **matchEmail** - Email Address of consumer being verified.

· **matchDobYear**- Date of birth, year, of consumer being verified. * Required for match type 4,5

· **matchDobMonth**- Date of birth, month, of consumer being verified. * Required for match type 4,5

· **matchDobDay**- Date of birth, day, of consumer being verified. * Required for match type 4,5

· **matchDriversLicenseNumber** - Driver's License Number of consumer being verified.

· **matchDriversLicenseState** - Driver's License State of consumer being verified.

Response Body

```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": {},
  "httpStatusCode": 200
}
```

The response for this API will be blank if successful, otherwise you will see an error.

InstantRefresh

Initiates a forced refresh for a Request Code

Request Body

```
{
 "serviceKey": string,
 "siteUserGuid": string,
 "requestCode": string
}
```

Input Field Descriptions:

· **serviceKey** – Your company's unique client service key. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user to use when creating the request. (required)

· **requestCode** – The Request Code you want to refresh. (required)

Response Body


```
{
  "trackingId": "592caaca-3e4f-464a-9f49-36b6613835ed",
  "isError": false,
  "errorMessage": "",
  "data": "",
  "httpStatusCode": 200
}
```


The response for this API will be blank if successful, otherwise you will see an error.

GetIDVByRequestCode

It returns the DL Match® and DL Match Plus® Identity Verification results for a Request Code.

Request Body


```
{
 "serviceKey": string,
 "siteUserGuid": string,
 "requestCode": string
}
```


Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user gathering the request. (required)

· **requestCode** – Request code or report ID associated with the DL Match verification request. (required)

Response Body


```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": {
    "reportId": string,
    "responseSummary": {
```

DECISION LOGIC


```
"response": {
    "id": int,
    "requestId": int,
    "verFirstName": int,
    "verLastName": int,
    "verStreet": int,
    "verCity": int,
    "verState": int,
    "verZip": int,
    "verPhone": int,
    "verSSN": int,
    "verDriversLicense": int,
    "verDOB": int,
    "ssnDeceased": int,
    "verEmailAddress": int,
    "verOFAC": int,
    "changeOfAddress": int,
    "phoneNumbersFoundCSV": string,
    "emailAddressesFoundCSV": string,
    "dateCreated": string,
    "statusCode": string,
    "statusMessage": string
},
"addresses": [],
"decisionLogic": {
    "id": int,
    "responseId": int,
    "nameFound": bool,
    "phoneFound": bool,
    "emailFound": bool,
```

```
    "ssnFound": bool,
    "addressFound": bool,
    "driversLicenseFound": bool,
    "previousCustomerConfidenceLevel": int,
    "previousDLAttempt": bool,
    "previousDLSuccess": bool,
    "previousIncomeFound": bool,
    "previousPayrollFound": bool
  },
  "doBs": [],
  "driversLicenses": [],
  "names": [],
  "notes": [],
  "riskIndicators": [],
  "ssNs": [],
  "velocity": {
    "id": int,
    "responseId": int,
    "day1": int,
    "day2": int,
    "day3": int,
    "day7": int,
    "day14": int,
    "day30": int,
    "day60": int,
    "day90": int,
    "day120": int,
    "day180": int,
    "day365": int
  },
```

```
"errorMessage": string,
"isError": bool,
"request": {
   "id": int,
   "companyId": int,
   "consumerReferenceId": string,
   "requestCode": string,
   "matchType": int,
   "firstName": string,
   "middleName": string,
   "lastName": string,
   "suffix": string,
   "dobYear": int,
   "dobMonth": int,
   "dobDay": int,
   "addressStreet": string,
   "addressCity": string,
   "addressState": string,
   "addressZip": string,
   "ssn": string,
   "phoneNumber": string,
   "emailAddress": string,
   "driversLicenseNumber": string,
   "driversLicenseState": string,
   "dateCreated": string,
   "isDemo": bool,
   "salt": string,
   "statusCode": string,
   "statusMessage": string
}
```

```
    }
  },
  "httpStatusCode": 200
}
```


Return Field Descriptions

· **reportId** – The unique alphanumeric code assigned to the report.

· **matchType** - specifies which type of a DL Match® request was performed.

-1	Create an IAV request code without DL Match or DL Match Plus validation.
4	DL Match Verification: Name, Address, Phone and Social Security # and Date of Birth Only.
5	DL Match Plus Verification: Name Address, Phone, Social Security #, Driver's License, and Date of Birth with any dynamic return details.

· **verFirstName** – Indicates if the first name was verified.

· **verLastName** – Indicates if the last name was verified.

· **verStreetAddress** – Indicates if the street address was verified.

· **verCity** – Indicates if the city was verified.

· **verState** – Indicates if the state was verified.

· **verZip** – Indicates if the zip code was verified.

· **verPhone** – Indicates if the phone number was verified.

· **verSSN** – Indicates if the social security number was verified.

· **verDriversLicense** - Indicates if the driver's license was verified.

· **verDOB** - Indicates if the Date of Birth was verified.

· **ssnDeceased** – Indicates if the social security number owner is listed as Deceased.

· **verEmailAddress** - Indicates if the email address was verified.

· **verOFAC** - Indicates if OFAC was verified.

· **changeOfAddress** - Change of Address verified

· **phoneNumbersFoundCSV** - Phone numbers found associated with the inputs

· **emailAddressesFoundCSV** - Email found associated with the inputs

· **dateCreated** - Date request created

· **nameFound** – Returns true/false if the name is found

· **phoneFound** - Returns true/false if the phone is found

· **emailFound** - Returns true/false if the email is found

· **ssnFound** - Returns true/false if the SSN# is found

· **addressFound** - Returns true/false if the address is found

· **driversLicenseFound** - Returns true/false if the driver's license # is found

· **previousCustomerConfidenceLevel** – Not currently utilized returns default data

· **previousDLAttempt**– Not currently utilized returns default data

· **previousDLSuccess** – Not currently utilized returns default data

· **previousIncomeFound** – Not currently utilized returns default data

· **previousPayrollFound** – Not currently utilized returns default data

· **responseDOB** - Additional associated data

· **responseDriversLicense** - Additional associated data

· **responseName** - Additional associated data

· **responseNote** - Additional associated data

· **responseRiskIndicator** - Additional associated data

· **responseSSN** - Additional associated data

· **responseId** - Additional associated data

· **day1, 2, 3, 7, 14, 39, 60, 90, 120, 180, 365** – Not currently utilized returns default data

· **consumerReferenceId** – The customer identifier to use when creating the request. (optional) This can be any value that you use from your own tracking system.

· **requestCode** – Unique alphanumeric request code associated with IAV report

· **firstName** - First name of consumer being verified.

· **middleName**-Middle name of consumer being verified.

· **lastName**- Last name of consumer being verified.

· **suffix** - Suffix of consumer being verified.

· **dobYear** - Date of birth, year, of consumer being verified.

· **dobMonth**- Date of birth, month, of consumer being verified.

· **dobDay**- Date of birth, day, of consumer being verified.

· **addressStreet** – Street address of consumer being verified

· **addressCity** – City of consumer being verified.

· **addressState** – State of consumer being verified.

· **addressZip** – Zip code of consumer being verified.

· **ssn** – Social security number of consumer being verified.

· **phoneNumber** – Phone number of consumer being verified.

· **emailAddress** - Email Address of consumer being verified.

· **driversLicenseNumber** - Driver's License Number of consumer being verified.

· **driversLicenseState** - Driver's License State of consumer being verified

· **dateCreated** – Date request was created

· **isDemo** – Returns true/false if the report is a sandbox demonstration report

---

GetIncomeStabilityScore

It returns the income stability score for a request code and if this value has been found.

Request Body

```
{
  "serviceKey": string,
  "requestCode": string
}
```

Request Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **requestCode** – Request code to be reported on.

Response Body

```
{
   "trackingId": string,
   "isError": bool,
   "errorMessage": string,
   "data": {
      "score": float,
      "isIncomeStabilityScoreFound": bool,
      "message": string
   },
   "httpStatusCode": 200
}
```

Response Field Descriptions

· **score** – A decimal representing your income stability score.

· **isIncomeStabilityScoreFound** – A Boolean value returning true if the score was found.

GetFirstPaymentDefaultScoresFromRequestCode

If available for a request code the name of this API will be returned in the <AdditionalAPI> field of other APIs. It returns the First Payment Default score for a request code and if this value has been found.

Request Body


```
{
 "serviceKey": "string",
 "requestCode": "string",
 "paymentAmount": "string"
}
```


Request Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **requestCode** – Request code to be reported on.

· **paymentAmount –** The loan payment amount you want to get a score for. (required)

Response Body


```
{
 "trackingId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
 "isError": true,
 "errorMessage": "string",
 "httpStatusCode": 0,
 "data": {
  "isError": true,
  "errorMessage": "string",
  "firstPaymentDefaultScores": [
   {
    "accountName": "string",
    "accountNumber": "string",
    "firstPaymentDefault": {
     "score": "string",
```

```
      "presetPaymentAmount": 0,
      "positiveDailyBalance": 0,
      "greaterThanPpa": 0,
      "lessThanPpa": 0,
      "nsf": 0
    }
   }
  ]
 }
}
```


Return Field Descriptions

· **AccountName** – The name of the account at the financial institution if found.

· **AccountNumber** – The account number found at the financial institution if available.

· **Score –** Indicates the first payment default score.

· **PresetPaymentAmount** – The input loan payment amount.

· **PositiveDailyBalance** – The number of days out of 30 that the balance was positive.

· **GreaterThanPpa** – The number of days out of 30 that the end of day balance was more than the loan payment amount.

· **LessThanPpa** – The number of days out of 30 that the end of day balance was less than the loan payment amount.

· **Nsf** – The number of NSF transactions in the last 30 days.

· **ErrorMessage** – The message indicating the type of error that occurred during the operation.

SendRequestBySMS

Sends a preformatted link via SMS to a consumer for a specific Request Code. Consumer will be taken to the DecisionLogic website to complete their request.

Request Body


```
{
 "serviceKey": "string",
 "toPhone": "string",
 "requestCode": "string"
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **toPhone** – The phone number to send the SMS link to. (required)

· **requestCode** – The Request Code to send to the consumer. (required)

Response Body

```
{
  "trackingId": string,
  "isError": bool,
  "errorMessage": string,
  "data": string,
  "httpStatusCode": 200
}
```

The response for this API will be blank if successful, otherwise you will see an error.

DLNextCheckPipeline

The DL NextCheck pipeline API adds a request to the pipeline to be automatically updated.

Request Body

```
{
 "serviceKey": "string",
 "siteUserGuid": "string",
 "requestCode": "string",
 "enableNextCheck": bool
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user who created the request. (required)

· **requestCode** - Request code to have DL NextCheck enabled or disabled for. (required)

· **enableNextCheck** - Flag to enable or disable DL NextCheck for request code. (required)

Response Body


```
{
  "trackingId": "string",
  "isError": false,
  "errorMessage": null,
  "data": "",
  "httpStatusCode": 200
}
```


The response for this API will be blank if successful, otherwise you will see an error.

GetLatestData

The DL NextCheck data API pulls specific details from a request when an automated update is performed.

Request Body


```
{
 "serviceKey": "string",
 "siteUserGuid": "893e2ee2-96ec-49d5-b9e3-728c3735ab44",
 "requestCode": "ZBLVXY"
}
```


Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user who created the request. (required)

· **requestCode** - Request code to get latest data for. (required)

Response Body


```
{
  "trackingId": "string",
  "isError": false,
  "errorMessage": "",
  "data": "",
  "httpStatusCode": 200
}
```


The response for this API will be blank if successful, otherwise you will see an error.

DL NextCheck Webhook

The DL NextCheck webhook fires every time an automated update is performed. The client then receives specific account data pulled from the request.

Main object


```
{
"RequestCode": "A1B2C3",
"NotificationType": "nextcheck",
"NotificationObjectJson": {
"MonitoringStatus": "int",
"ErrorMessage": "string",
"Accounts": [
{
"AccountName": "string",
"CurrentBalance": "decimal?",
"AvailableBalance": "decimal?",
"AsOfDate": "DateTime",
"RuleSets": [
{
"Identifier": "string",
"DisplayName": "string",
"Type": "int",
"Triggered": "bool",
"AdditionalDataJson": "string"
}
]
}
]
}
```


- **RequestCode** - A 6-character Identifier of the request.
- **NotificationType** - The type of notification sent.
- **NotificationObjectJson** - Serialized JSON object that contains additional details related to the notificationType.
- **MonitoringStatus**

0	Failed The snapshot failed to gather data.
1	Success no match The snapshot gathered data successfully, but no rules were triggered.
2	SuccessAndMatch The snapshot gathered data successfully, rules were triggered.

- **ErrorMessage** - Error message.
- **Accounts** - List of basic account data and ruleset evaluation results.
- **AccountName** - Name of the borrower's financial institution account.
- **CurrentBalance** - Current balance of the borrower's financial institution account.
- **AvailableBalance** - Available balance of the borrower's financial institution account.
- **AsOfDate** - Timestamp of when the data for the specified account was gathered.

- **RuleSets** - List of ruleset evaluation results.
- **Identifier** - Custom identifier used to identify the ruleset, helpful for code integration.
- **DisplayName** - User-friendly label used to identify the ruleset.
- **Type** - Used to help with deserialization of the AdditionalDataJson property.
- **Triggered** - Indicates whether or not the ruleset
- **AdditionalDataJson** - JSON string containing additional data specific to the Type.

How do I use DLNextCheckRuleset.Type?

- When DLNextCheckRuleset.Type is 1, you should be able to deserialize the AdditionalDataJson property into a list of DLNextCheckTransaction objects
- TransactionDescription - Transaction description obtained from the data provider.
- TransactionAmount - Transaction amount obtained from the provider.

GetBankStatementPDFBytes

Generates a PDF version of the DecisionLogic report.

Request Body

```
{
 "serviceKey": "string",
 "requestCode": "string",
 "siteUserGuid": "string",
}
```

Input Field Descriptions:

· **serviceKey** – Specify your unique client service key. (required)

· **requestCode** - Request code to pull data for PDF. (required)

· **siteUserGuid** – The globally unique identifier (Guid) of the site user who created the request. (required)

Response Body

```
{
 "httpStatusCode": 200
}
```

The response for this API will be 200 and the PDF in the payload.