

Write simple Android program for Android Activity Life Cycle.

MainActivity.java

```
package com.technoboy.androidactivitylifecycle;

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;
import android.util.Log;

public class MainActivity extends AppCompatActivity {

    //CSRPSRD
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        Log.i("Life Cycle","onCreate Method Called");
    }
    @Override
    protected void onStart() {
        super.onStart();
        Log.i("Life Cycle","onStart Method Called");
    }
    @Override
    protected void onResume() {
        super.onResume();
        Log.i("Life Cycle","onResume Method Called");
    }
    @Override
    protected void onPause() {
        super.onPause();
        Log.i("Life Cycle","onPause Method Called");
    }
    @Override
    protected void onStop() {
        super.onStop();
        Log.i("Life Cycle","onStop Method Called");
    }
    @Override
    protected void onRestart() {
        super.onRestart();
        Log.i("Life Cycle","onRestart Method Called");
    }
    @Override
    protected void onDestroy() {
        super.onDestroy();
        Log.i("Life Cycle","onDestroy Method Called");
    }
}
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

Write a simple Android program for Activity overloading

activit_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <TextView
        android:text="@string/name"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"/>

    <EditText
        android:id="@+id/edittext1"
        android:layout_width="214dp"
        android:layout_height="wrap_content"/>

    <Button
        android:id="@+id/btn1"
        android:layout_width="106dp"
        android:layout_height="wrap_content"
        android:text="@string/ok"/>

    <Button
        android:id="@+id/btn2"
        android:layout_width="106dp"
        android:layout_height="wrap_content"
        android:text="@string/cancel"/>

</LinearLayout>
```

ActivityMain.java

```
package com.technoboy.activityoverloading;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.KeyEvent;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    Button btn1,btn2;
    EditText editText;
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
@Override
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);

    btn1=findViewById(R.id.btn1);
    btn2=findViewById(R.id.btn2);
    editText=findViewById(R.id.edittxt1);

    btn1.setOnClickListener(btnListner);
    btn2.setOnClickListener(btnListner);
    editText.setOnFocusChangeListener(
        new View.OnFocusChangeListener() {
            @Override
            public void onFocusChange(View v, boolean hasFocus) {
                Toast.makeText(getApplicationContext(), v.getId()+" has focus "+ hasFocus,
Toast.LENGTH_SHORT).show();
            }
        }
    );
}

private View.OnClickListener btnListner=new View.OnClickListener() {
    @Override
    public void onClick(View v) {
        Toast.makeText(getApplicationContext(), ((Button)v).getText()+" was Clicked",
Toast.LENGTH_SHORT).show();
    }
};

@Override
public boolean onKeyDown(int keyCode, KeyEvent event) {
    switch (keyCode){
        case KeyEvent.KEYCODE_DPAD_CENTER:
            Toast.makeText(getApplicationContext(), "Center was Clicked",
Toast.LENGTH_SHORT).show();
            break;
        case KeyEvent.KEYCODE_DPAD_LEFT:
            Toast.makeText(getApplicationContext(), "Left Arrow was Clicked",
Toast.LENGTH_SHORT).show();
            break;
        case KeyEvent.KEYCODE_DPAD_RIGHT:
            Toast.makeText(getApplicationContext(), "Right Arrow was Clicked",
Toast.LENGTH_SHORT).show();
            break;
        case KeyEvent.KEYCODE_DPAD_UP:
            Toast.makeText(getApplicationContext(), "Up Arrow was Clicked",
Toast.LENGTH_LONG).show();
            break;
        case KeyEvent.KEYCODE_DPAD_DOWN:
            Toast.makeText(getApplicationContext(), "Down Arrow was Clicked",
Toast.LENGTH_SHORT).show();
            break;
    }
    return false; }
}
```

Write an android code to fetch weblurl into mobile screen using webview.

AndroidManifest.xml

<uses-permission android:name="android.permission.INTERNET"></uses-permission>
activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

    <TextView
        android:id="@+id/input_layout_URL_Name"
        android:layout_width="wrap_content"
        android:layout_height="0dp"
        android:layout_marginTop="60dp"
        android:text="@string/welcome_to_webview"
        android:textSize="24sp"
        android:textStyle="bold"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent"
        app:layout_editor_absoluteX="88dp" />

    <EditText
        android:id="@+id/URL_Name"
        android:layout_width="wrap_content"
        android:layout_height="0dp"
        android:layout_marginTop="44dp"
        android:ems="10"
        android:hint="@string/enter_url"
        android:inputType="textPersonName"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@id/input_layout_URL_Name"
        app:layout_editor_absoluteX="99dp"
        tools:ignore="TextFields" />

    <Button
        android:id="@+id/button"
        android:layout_width="wrap_content"
        android:layout_height="39dp"
        android:layout_marginTop="72dp"
        android:text="@string/enter"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@id/URL_Name"
        app:layout_editor_absoluteX="161dp" />

    <WebView
        android:id="@+id/webview"
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
android:layout_width="319dp"
android:layout_height="192dp"
android:layout_marginStart="8dp"
android:layout_marginEnd="8dp"
android:layout_marginTop="10dp"
android:layout_marginBottom="8dp"
app:layout_constraintBottom_toBottomOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toBottomOf="@id/button"/>
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.technoboy.webview;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.View;
import android.webkit.WebView;
import android.widget.Button;
import android.widget.EditText;

public class MainActivity extends AppCompatActivity {

    EditText editText;
    Button button;
    WebView webView;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        editText=findViewById(R.id.URL_Name);
        button=findViewById(R.id.button);
        webView=findViewById(R.id.webview);
        webView.setWebViewClient(new MyBrowser());
        button.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View v) {
                    webView.getSettings().setLoadsImagesAutomatically(true);
                    webView.setScrollBarStyle(View.SCROLLBARS_INSIDE_OVERLAY);
                    webView.loadUrl(editText.getText().toString());
                }
            }
        );
    }
}
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

MyBrowser.java


```
package com.technoboy.webview;

import android.os.Build;
import android.webkit.WebResourceRequest;
import android.webkit.WebView;
import android.webkit.WebViewClient;
import androidx.annotation.RequiresApi;

class MyBrowser extends WebViewClient {
    @RequiresApi(api = Build.VERSION_CODES.LOLLIPOP)
    @Override
    public boolean shouldOverrideUrlLoading(WebView view, WebResourceRequest request) {
        view.loadUrl(request.getUrl().toString());
        return true;
    }
}
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

Write an android code for Android Google Maps Current Location.

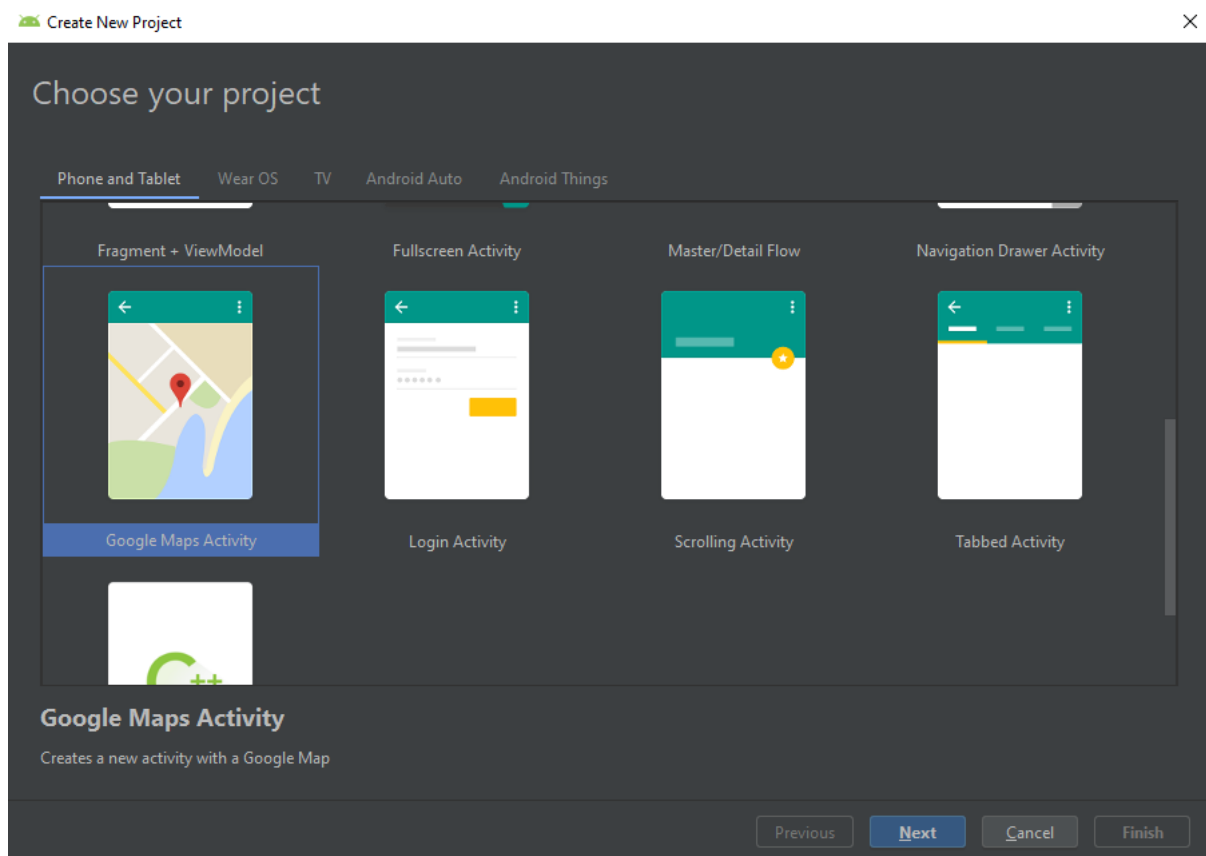

For detail: Practical No:21 Link: <https://github.com/TechnoJunior/Android-PDF>

MapsActivity.java

```
package com.technoboy.googlemapscurrentlocation;

import androidx.fragment.app.FragmentActivity;

import android.os.Bundle;
import com.google.android.gms.maps.CameraUpdateFactory;
import com.google.android.gms.maps.GoogleMap;
import com.google.android.gms.maps.OnMapReadyCallback;
import com.google.android.gms.maps.SupportMapFragment;
import com.google.android.gms.maps.model.LatLng;
import com.google.android.gms.maps.model.MarkerOptions;

public class MapsActivity extends FragmentActivity implements OnMapReadyCallback {

    private GoogleMap mMap;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_maps);
        // Obtain the SupportMapFragment and get notified when the map is ready to be used.
```

-TechnoBoy

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
SupportMapFragment mapFragment = (SupportMapFragment) getSupportFragmentManager()
    .findFragmentById(R.id.map);
mapFragment.getMapAsync(this);
}
@Override
public void onMapReady(GoogleMap googleMap) {
    mMap = googleMap;

    // Add a marker in Sydney and move the camera
    LatLng imcost= new LatLng(19.1876505, 72.9548407);
    mMap.addMarker(new MarkerOptions().position(imcost).title("IMCOST
College,Thane"));
    mMap.moveCamera(CameraUpdateFactory.newLatLng(imcost));
}
}
```


Write an android program for Simple calculator.

Activity main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

<EditText
    android:id="@+id/editText"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="number"
    android:hint="@string/no1"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.123" />

<EditText
    android:id="@+id/editText2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="number"
    android:hint="@string/no2"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.241" />

<Button
    android:id="@+id/button"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="@string/add"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toStartOf="@+id/button2"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent" />

<Button
    android:id="@+id/button2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="@string/minus"
    app:layout_constraintBottom_toBottomOf="parent"
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
app:layout_constraintEnd_toStartOf="@+id/button3"
app:layout_constraintHorizontal_bias="0.9"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent" />
```

```
<Button
    android:id="@+id/button3"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="@string/multiply"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.693"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent" />
```

```
<Button
    android:id="@+id/button4"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="@string/divide"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.965"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.technoboy.simplecalculator;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    Button add,sub,div,mul;
    EditText no1,no2;
    int num1,num2;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        add=findViewById(R.id.button);
        sub=findViewById(R.id.button2);
        mul=findViewById(R.id.button3);
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
div.mul=findViewById(R.id.button4);

no1=findViewById(R.id.editText);
no2=findViewById(R.id.editText2);

add.setOnClickListener(
    new View.OnClickListener() {
        @Override
        public void onClick(View v) {
            num1= Integer.parseInt(no1.getText().toString());
            num2=Integer.parseInt(no2.getText().toString());
            Toast.makeText(MainActivity.this, "Addition : "+ (num1 + num2),
Toast.LENGTH_SHORT).show();
        }
    }
);
sub.setOnClickListener(
    new View.OnClickListener() {
        @Override
        public void onClick(View v) {
            num1= Integer.parseInt(no1.getText().toString());
            num2=Integer.parseInt(no2.getText().toString());
            Toast.makeText(MainActivity.this, "Subtraction : "+ (num1 - num2),
Toast.LENGTH_SHORT).show();
        }
    }
);
mul.setOnClickListener(
    new View.OnClickListener() {
        @Override
        public void onClick(View v) {
            num1= Integer.parseInt(no1.getText().toString());
            num2=Integer.parseInt(no2.getText().toString());
            Toast.makeText(MainActivity.this, "Multiplication : "+ (num1 * num2),
Toast.LENGTH_SHORT).show();
        }
    }
);
div.setOnClickListener(
    new View.OnClickListener() {
        @Override
        public void onClick(View v) {
            num1= Integer.parseInt(no1.getText().toString());
            num2=Integer.parseInt(no2.getText().toString());
            Toast.makeText(MainActivity.this, "Division : "+ (num1 / num2),
Toast.LENGTH_SHORT).show();
        }
    }
);
}
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

Write an android program for temperature converter from Fahrenheit to Celsius and vice versa

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

<EditText
    android:id="@+id/editText"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="number"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.454"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.179" />

<Button
    android:id="@+id/button"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:text="@string/ftc"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.412" />

<Button
    android:id="@+id/button2"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:text="@string/ctf"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.technoboy.temperatureconverter;

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    EditText temp;
    Button ftc,ctf;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        temp=findViewById(R.id.editText);
        ftc=findViewById(R.id.button);
        ctf=findViewById(R.id.button2);

        ftc.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View v) {
                    double temperature=Integer.parseInt(temp.getText().toString());
                    Double b=temperature-32;
                    Double c=b*5/9;
                    String r=String.valueOf(c);
                    Toast.makeText(MainActivity.this,r+"°C",Toast.LENGTH_SHORT).show();
                }
            });

        ctf.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View v) {
                    double temperature=Integer.parseInt(temp.getText().toString());
                    Double b=temperature*9/5+32;
                    String r=String.valueOf(b);
                    Toast.makeText(MainActivity.this,r+"°F",Toast.LENGTH_SHORT).show();
                }
            });
    }
}
```

Strings.xml

```
<resources>
    <string name="app_name">Temperature Converter</string>
    <string name="ctf">Celsius to Fahrenheit</string>
    <string name="ftc">Fahrenheit to Celsius</string>
</resources>
```

Write an android program for shared preference to store value in name-value pair.

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

    <EditText
        android:id="@+id/editText"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:ems="10"
        android:inputType="textPersonName"
        android:hint="@string/name"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent"
        app:layout_constraintVertical_bias="0.173" />

    <Button
        android:id="@+id/button"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="@string/add"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintHorizontal_bias="0.526"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/editText"
        app:layout_constraintVertical_bias="0.225" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.technoboy.sharedpreferences;

import androidx.appcompat.app.AppCompatActivity;

import android.content.SharedPreferences;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
public class MainActivity extends AppCompatActivity {
```

```
    EditText name;
```

```
    Button add;
```

```
    @Override
```

```
    protected void onCreate(Bundle savedInstanceState) {
```

```
        super.onCreate(savedInstanceState);
```

```
        setContentView(R.layout.activity_main);
```

```
        name=findViewById(R.id.editText);
```

```
        add=findViewById(R.id.button);
```

```
        add.setOnClickListener()
```

```
            new View.OnClickListener() {
```

```
                @Override
```

```
                public void onClick(View v) {
```

```
                    SharedPreferences
```

```
sharedPreferences=getSharedPreferences("Data",MODE_PRIVATE);
```

```
String nm=name.getText().toString();
```

```
SharedPreferences.Editor editor=sharedPreferences.edit();
```

```
editor.putString("Name",nm);
```

```
editor.commit();
```

```
Toast.makeText(MainActivity.this, "Name added in Shared Preferences",
```

```
Toast.LENGTH_SHORT).show();
```


```
        }
```

```
    }
```

```
};
```

Output:

After clicking on Add Button

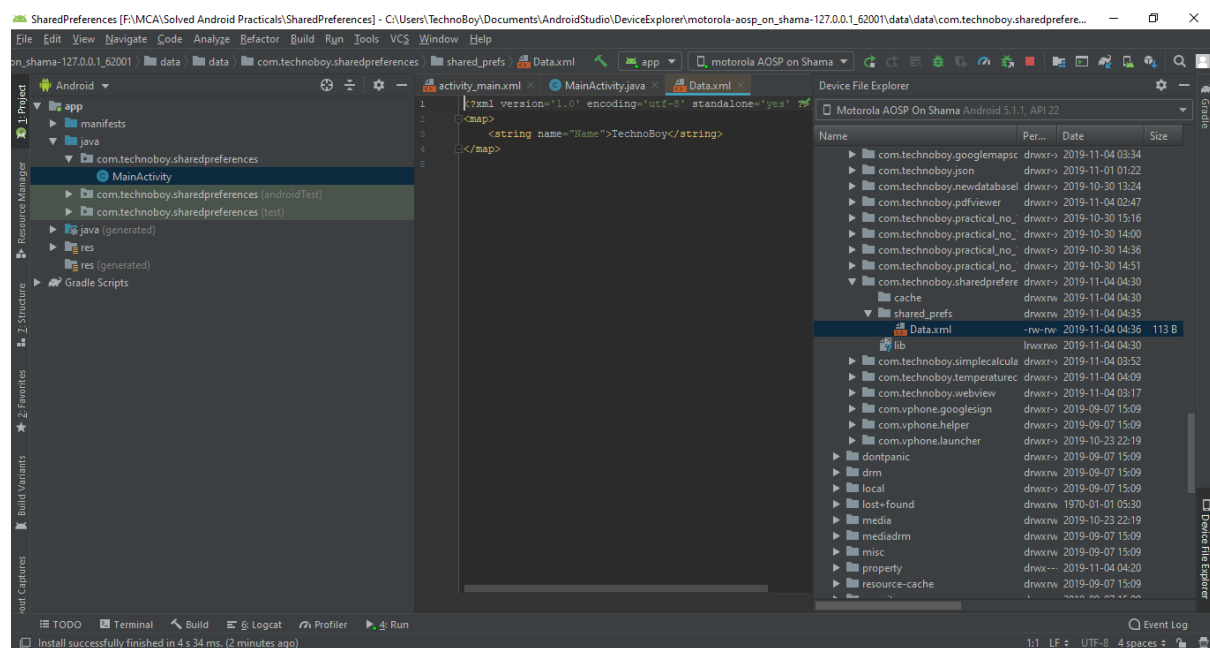

Write a simple Login page program using android code.

Create an application for login form. For successful login, display welcome page and in the cast of failure display alert box indicating the error message and attempts made. Disable the submit button after 3 wrong attempts and display the alert indicating the same.

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">
```

```
<EditText
    android:id="@+id/editText"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="textPersonName"
    android:hint="@string/username"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.404"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.204"
    android:importantForAutofill="no" />
```

```
<EditText
    android:id="@+id/editText2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:hint="@string/password"
    android:inputType="textPassword"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.404"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.306"
    android:importantForAutofill="no" />
```

```
<Button
    android:id="@+id/button"
    android:layout_width="wrap_content"
```


UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
        android:layout_height="wrap_content"
        android:text="@string/login"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

<TextView
    android:id="@+id/textView2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.255"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.415" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.technoboy.loginpage;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;
import android.annotation.SuppressLint;
import android.content.DialogInterface;
import android.content.Intent;
import android.content.SharedPreferences;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;

import static android.content.SharedPreferences.*;

public class MainActivity extends AppCompatActivity {

    EditText username,password;
    TextView attempts;
    Button login;
    int counter=3;

    @SuppressLint("SetTextI18n")
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        username=findViewById(R.id.editText);
        password=findViewById(R.id.editText2);
        login=findViewById(R.id.button);
        attempts=findViewById(R.id.textView2);
        attempts.setText("No. of Attempts Remaining : "+counter);
    }
}
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
login.setOnClickListener(  
    new View.OnClickListener() {  
        @Override  
        public void onClick(View v) {  
            if(username.getText().length()==0){  
                username.setError("Username cannot be Blank");  
            }  
            else if(password.getText().length()==0){  
                password.setError("Password cannot be Blank");  
            }  
            else{  
                if(username.getText().toString().equals("admin") &&  
password.getText().toString().equals("admin")){  
                    Intent intent=new Intent(MainActivity.this,Welcome.class);  
                    startActivity(intent);  
                }  
                else  
                {  
                    counter--;  
                    attempts.setText("No. of Attempts Remaining : "+counter);  
                    if(counter==0){  
                        login.setEnabled(false);  
                        AlertDialog.Builder builder=new AlertDialog.Builder(MainActivity.this);  
                        builder.setMessage("Invalid Login Details")  
                            .setPositiveButton("Ok", new DialogInterface.OnClickListener() {  
                                @Override  
                                public void onClick(DialogInterface dialog, int which) {  
                                    dialog.cancel();  
                                }  
                            })  
                        .show();  
                    }  
                }  
            }  
        }  
    });  
}
```

activity_welcome.xml

```
<?xml version="1.0" encoding="utf-8"?>  
<androidx.constraintlayout.widget.ConstraintLayout  
xmlns:android="http://schemas.android.com/apk/res/android"  
xmlns:app="http://schemas.android.com/apk/res-auto"  
xmlns:tools="http://schemas.android.com/tools"  
android:layout_width="match_parent"  
android:layout_height="match_parent"  
tools:context=".Welcome">  
  
    <TextView  
        android:id="@+id/textView"  
        android:layout_width="wrap_content"  
        android:layout_height="wrap_content"  
        android:text="@string/welcome"
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
android:textSize="36sp"  
app:layout_constraintBottom_toBottomOf="parent"  
app:layout_constraintEnd_toEndOf="parent"  
app:layout_constraintStart_toStartOf="parent"  
app:layout_constraintTop_toTopOf="parent" />  
</androidx.constraintlayout.widget.ConstraintLayout>
```

Create a login form with remember me checkbox. Save the user name and password if the check box is checked using shared preference and show the welcome page when login button is clicked.

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">
```

```
<EditText
    android:id="@+id/editText"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="textPersonName"
    android:hint="@string/username"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.404"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.204"
    android:importantForAutofill="no" />
```

```
<EditText
    android:id="@+id/editText2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:hint="@string/password"
    android:inputType="textPassword"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintHorizontal_bias="0.404"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    app:layout_constraintVertical_bias="0.306"
    android:importantForAutofill="no" />
```

```
<Button
    android:id="@+id/button"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="@string/login"
    app:layout_constraintBottom_toBottomOf="parent"
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent" />
```

```
<CheckBox
    android:id="@+id/checkBox"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="284dp"
    android:layout_marginEnd="240dp"
    android:layout_marginRight="240dp"
    android:text="@string/remember_me"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toTopOf="parent" />
```

```
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.technoboy.loginsharedpreferences;

import androidx.appcompat.app.AppCompatActivity;
import android.content.Intent;
import android.content.SharedPreferences;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.CheckBox;
import android.widget.CheckedTextView;
import android.widget.EditText;
import android.widget.TextView;

public class MainActivity extends AppCompatActivity {

    EditText username,password;
    TextView attempts;
    Button login;
    CheckBox checkBox;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        username=findViewById(R.id.editText);
        password=findViewById(R.id.editText2);
        login=findViewById(R.id.button);
        checkBox=findViewById(R.id.checkBox);

        login.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View v) {
                    SharedPreferences
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
sharedPreferences=getSharedPreferences("LoginDetails",MODE_PRIVATE);
    SharedPreferences.Editor editor=sharedPreferences.edit();

    if(username.getText().length()==0){
        username.setError("Username cannot be Blank");
    }
    else if(password.getText().length()==0){
        password.setError("Password cannot be Blank");
    }
    else{
        if(username.getText().toString().equals("technoboy") &&
password.getText().toString().equals("technoboy")){
            if(checkBox.isChecked()){
                editor.putString("username",username.getText().toString());
                editor.putString("password",password.getText().toString());
                editor.commit();
            }
            Intent intent=new Intent(MainActivity.this,Welcome.class);
            startActivity(intent);
        }
    }
}
);
}
```

activity_welcome.xml

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".Welcome">


    <TextView
        android:id="@+id/textView"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="@string/welcome"
        android:textSize="36sp"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

Strings.xml

```
<resources>
    <string name="app_name">LoginSharedPreferences</string>
    <string name="login">Login</string>
    <string name="password">Enter Password</string>
    <string name="username">Enter UserName</string>
    <string name="remember_me">Remember Me</string>
    <string name="welcome">Welcome</string>
</resources>
```

After Clicking on Login

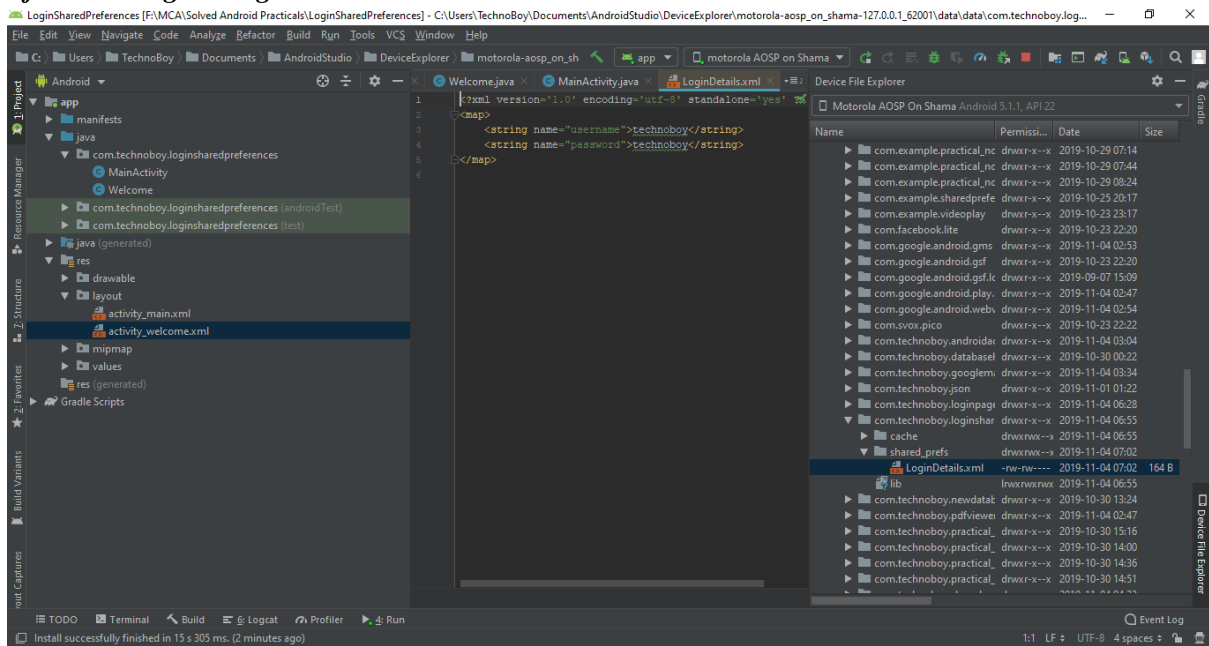

Write an android application to parse JSON data using JSON objects and set it in Textview. Create JSON data with the following information: employee name, age, department and salary

Write an Android Program to Demonstrate Parsing a Json Object

JSON Urls :

GOT: <https://api.myjson.com/bins/v8v8g>

AndroidManifest.xml

```
<uses-permission android:name="android.permission.INTERNET"></uses-permission>
```

Activiy_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <Button
        android:id="@+id/button"
        android:text="@string/show"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginBottom="10dp"/>

    <ScrollView
        android:layout_width="match_parent"
        android:layout_height="match_parent"
        android:layout_below="@id/button">
        <TextView
            android:id="@+id/textview"
            android:padding="5dp"
            android:textSize="24sp"
            android:hint="@string/data"
            android:layout_width="match_parent"
            android:layout_height="wrap_content"/>
    </ScrollView>

</RelativeLayout>
```

MainActivity.java

```
package com.technoboy.jsonobject;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.View;
```

-TechnoBoy

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
import android.widget.Button;
import android.widget.TextView;

public class MainActivity extends AppCompatActivity {

    public static TextView show;
    Button fetch;
    fetchData fd;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        show=findViewById(R.id.textview);
        fetch=findViewById(R.id.button);

        fetch.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View v) {
                    fd=new fetchData();
                    fd.execute();
                }
            }
        );
    }
}
```

fetchData.java

```
package com.technoboy.jsonobject;

import android.os.AsyncTask;

import org.json.JSONArray;
import org.json.JSONException;
import org.json.JSONObject;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStreamReader;
import java.net.HttpURLConnection;
import java.net.URL;

public class fetchData extends AsyncTask<Void, Void, Void> {
    String data="",singleline,alldata;
    @Override
    protected Void doInBackground(Void... voids) {
        try {
            URL url=new URL("https://api.myjson.com/bins/v8v8g");
            HttpURLConnection httpURLConnection=(HttpURLConnection) url.openConnection();
            BufferedReader br=new BufferedReader(new
            InputStreamReader(httpURLConnection.getInputStream()));
        }
    }
}
```

UNVIERSITY OF MUMBAI Practical Examination – November 2018 M.C.A Semester – V (CHOICE BASED) LABORATORY MCA L501 Mobile Application and User Experience Design Lab

```
String line="";
while(line!=null){
    line=br.readLine();
    data=data+line;
}

JSONArray jsonArray=new JSONArray(data);
for(int i=0;i<jsonArray.length();i++){
    JSONObject jsonObject=jsonArray.getJSONObject(i);
    singleline=jsonObject.getString("emp_name")+" --> "+jsonObject.getString("emp_age")+" -->
"
    +jsonObject.getString("emp_dept")+" --> "+jsonObject.getString("emp_sal")+"\n";
    alldata=alldata+singleline;
}
} catch (IOException | JSONException e) {
    e.printStackTrace();
}

return null;
}

@Override
protected void onPostExecute(Void aVoid) {
    super.onPostExecute(aVoid);
    MainActivity.show.setText(alldata);
}
}
```