inhibitory_receptors

- Timestamp: `2026-04-21 07:14:54`
- Source file: `/ceph/project/sharmalab/dnimrich/cd8atlas/code/pipeline_elements.py`

Loading from ../../data/qc+subsampled_100000.h5ad

Loaded adata with with shape (91098, 14025)

Preserved existing `counts` layer from loaded adata

Labeled 13256 genes from protein-coding_gene.txt

---

3. Feature selection

3.3 Highly Variable Gene selection

HVGs selected: 4000 (including 27 whitelisted genes)

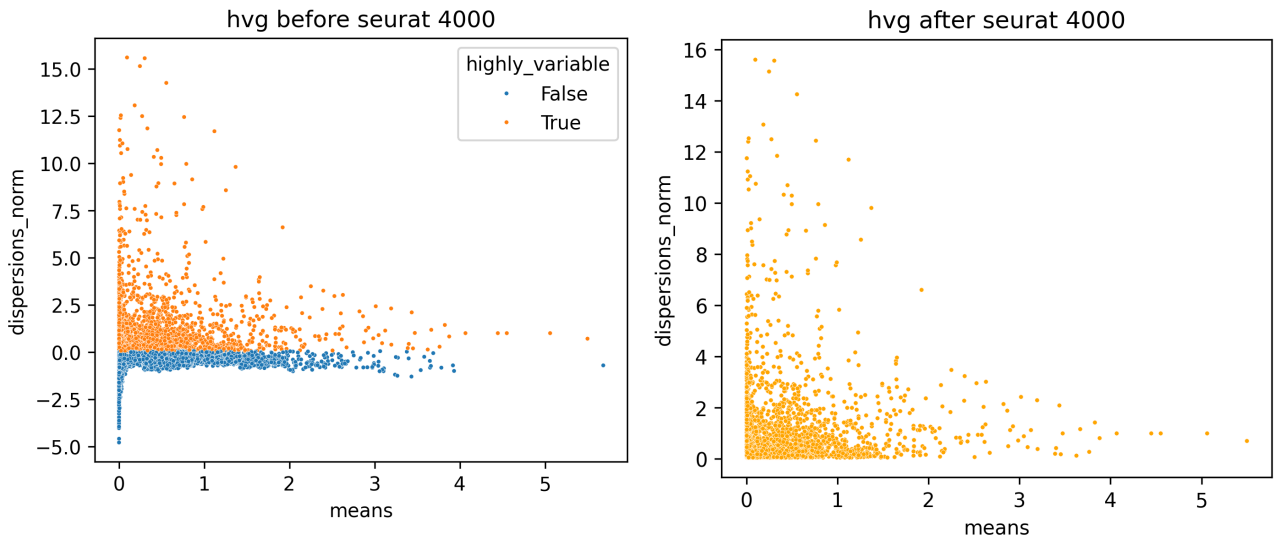

Top 20 expressed genes after selection:

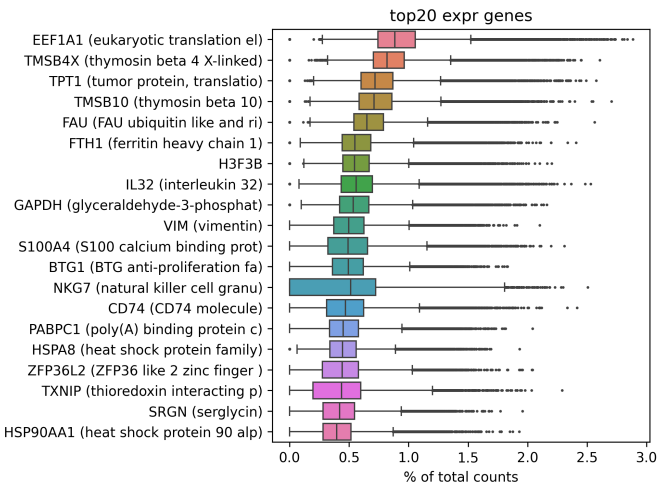

Loading from ../../code/inhibitory_receptors/inhibitory_receptor_list.csv

Missing inhibitory receptor genes after HVG selection: 1

4. Dimensional reduction

Principal component analysis (PCA)

Scaled data with max variance cutoff 10

Calculated PCA with 25 components

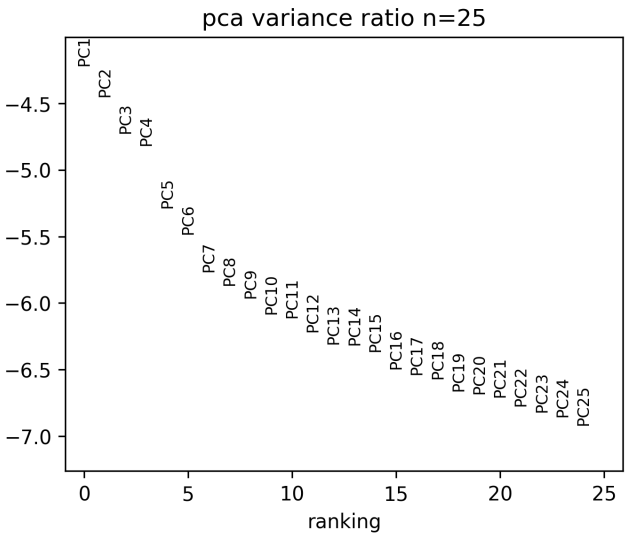

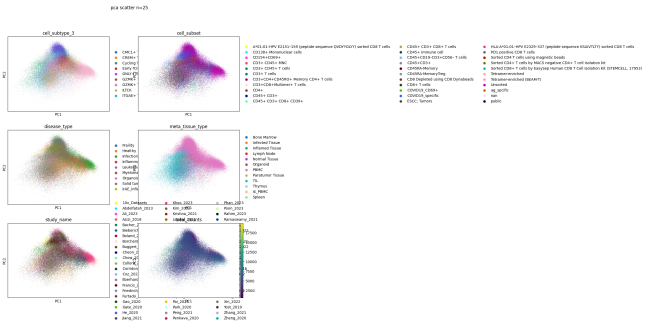

UMAP

Calculated nearest 12 neighbours using 25 PCs

Calculated UMAP with min_dist 0.1 and spread 1.0

5. Clustering

Detected 20 clusters with leiden at resolution 0.4

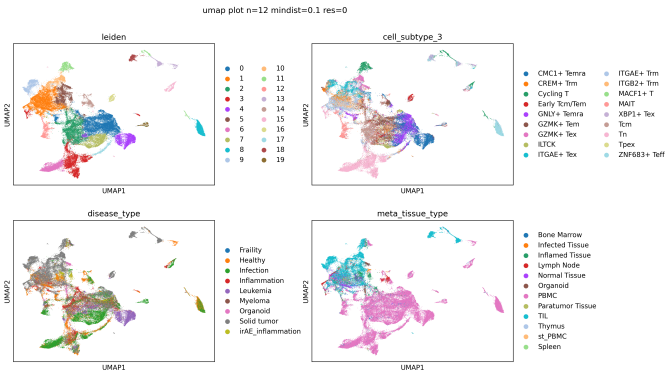

Saving into [inhibitory_receptors_20260421_071454_data/adata_umap_clustering_n=12_mindist=0.1_res=0.4.h5ad]

> Saved adata with shape (91098, 4000)