


Entity Relationship Diagram

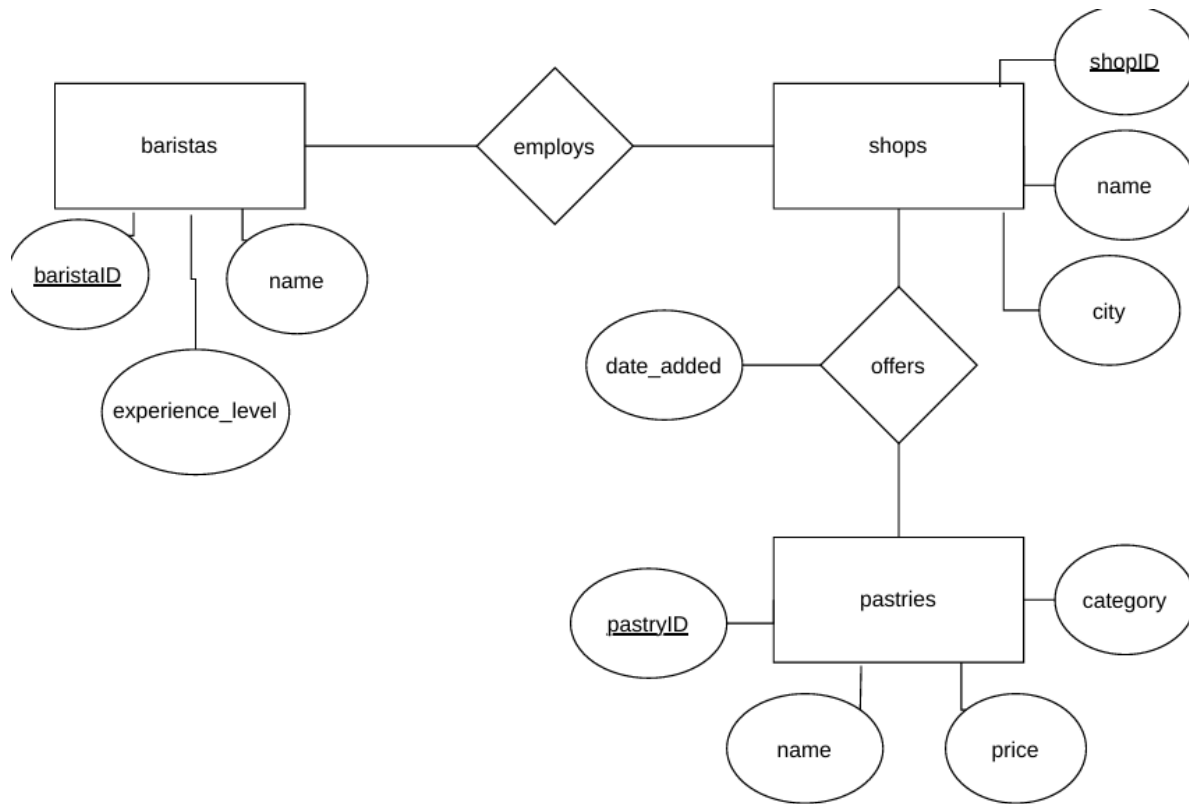

Find the average price of pastries for each category from the pastries table.

```
9 • select category, avg(price) as 'Average price'
10   from pastries pas
11   group by category
12   having category = pas.category;
```

result Grid		Filter Rows:	Export:	Wrap Cell
category	Average price			
Pastry	4.666666666666667			
Muffin	3.625			
Bakery	4.25			
Scone	3.85			
Breakfast	8			
Cake	3.875			

Find the total number of baristas at each experience level from the baristas table.

```
15 • select experience_level, count(*) as 'baristas with this experience'
16     from baristas
17     group by experience_level;
```

Result Grid	
Filter Rows:	Export: Wrap Cell Content: IA
experience_level	baristas with this experience
Junior	2
Senior	2
Mid-Level	2


Count the total number of shops located in each city from the shops table.

```
20 • select city, count(*) as 'shops in city'
21     from shops
22     group by city;
```

Result Grid	
Filter Rows:	Export:
city	shops in city
Seattle	1
Portland	1
Austin	1
Chicago	1
Denver	1
Boston	1

Find the maximum price among pastries for each category from the pastries table.

```
25 • select category, max(price)
26     from pastries
27     group by category;
```

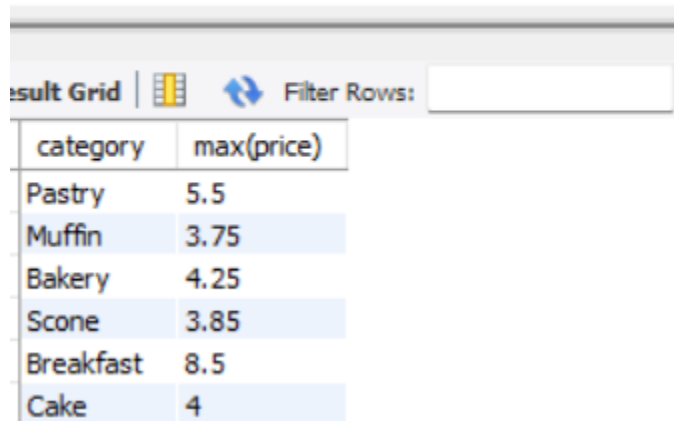


The screenshot shows a database interface with a 'Result Grid' tab. Above the grid is a 'Filter Rows' input field. The grid contains two columns: 'category' and 'max(price)'. The data rows are: Pastry (5.5), Muffin (3.75), Bakery (4.25), Scone (3.85), Breakfast (8.5), and Cake (4).

category	max(price)
Pastry	5.5
Muffin	3.75
Bakery	4.25
Scone	3.85
Breakfast	8.5
Cake	4

Count how many pastries have been added by each shop using the shopID column from the offers table.

```
30 • select shopID, count(*)
31     from offers
32     group by shopID;
```

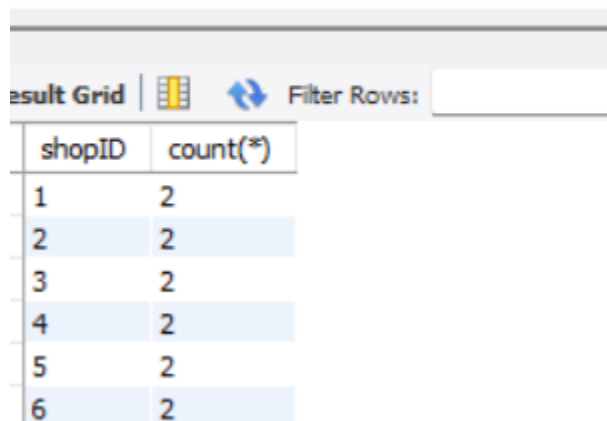

The screenshot shows a database interface with a 'Result Grid' tab. Above the grid is a 'Filter Rows' input field. The grid contains two columns: 'shopID' and 'count(*)'. The data rows are: 1 (2), 2 (2), 3 (2), 4 (2), 5 (2), and 6 (2).

shopID	count(*)
1	2
2	2
3	2
4	2
5	2
6	2

Find the name, category, and price of any pastry whose price matches the maximum price within its category.

```
5 • select name, category, price
6     from pastries pas
7     where price >= all(
8         select price
9         from pastries
10        where category = pas.category
11        group by category
12    );
```

Result Grid  Filter Rows: Export:  Wrap Cell C		
name	category	price
Almond Croissant	Pastry	5.5
Blueberry Muffin	Muffin	3.75
Cinnamon Roll	Bakery	4.25
Chocolate Scone	Scone	3.85
Blueberry Scone	Scone	3.85
Breakfast Burrito	Breakfast	8.5
Lemon Loaf	Cake	4

Find the unique shop IDs from the offers table that have offered at least one pastry whose price is strictly greater than the overall average price of all pastries.

```
15 • select shopID
16     from offers join pastries
17     using(pastryID)
18     where price > (select avg(price) from pastries);
```

Result Grid  Filter Rows: Export:  Wrap C	
shopID	
1	
5	
5	

Find the shop ID and pastry ID for the records in the offers table that have the earliest date_added (minimum date).

```
51 • select *
52   from offers
53   order by date_added limit 1;
```

Result Grid			Filter Rows:
shopID	pastryID	date_added	
1	1	1/10/2026	

Find the shop ID(s) that offer the highest number of pastries, utilizing a subquery to evaluate the maximum count per shop.

```
56 • with shop_count as (select shopID, count(*) as 'num'
57                        from offers
58                        group by shopID
59                        )
60   select shopID, num
61   from shop_count
62   where num >= all
63          (select num from shop_count);
```

Result Grid			Filter Rows:	Export:	Wrap Cell Content:
shopID	num				
1	2				
2	2				
3	2				
4	2				
5	2				
6	2				

Find the names of baristas who work at shops located in 'Seattle' using nested subqueries.

```
56 • select name
57   from baristas
58  where baristaID = any (select baristaID
59                        from employs
60                       where shopID = any (select shopID
61                                         from shops
62                                         where city = 'Seattle'
63                                         )
64                        );
65
66 -- would be easier to use the join function:
67 -- select baristas.name from baristas join employs using (baristaID)
68 -- join shops using (shopID) where city = 'Seattle';
```

Result Grid			Filter Rows:	Export: 	Wrap Cell Content: 
name					
Emma Watson					
Liam Chen					