First Reading

The cat **sees** the tree **with the binoculars**.






Second Reading


The cat sees **the tree with the binoculars**.



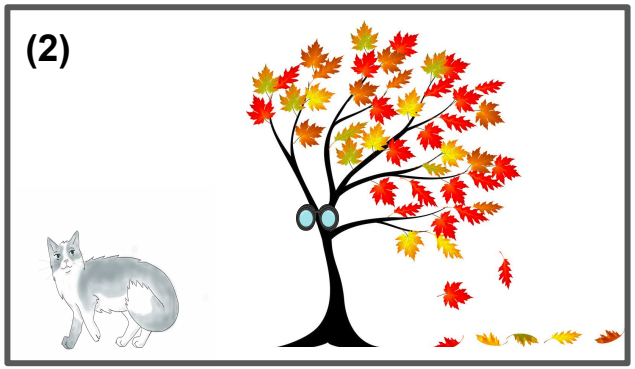


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. T' ⇐ MST(G', root, scores')
9. T ⇐ Expand(T', C)

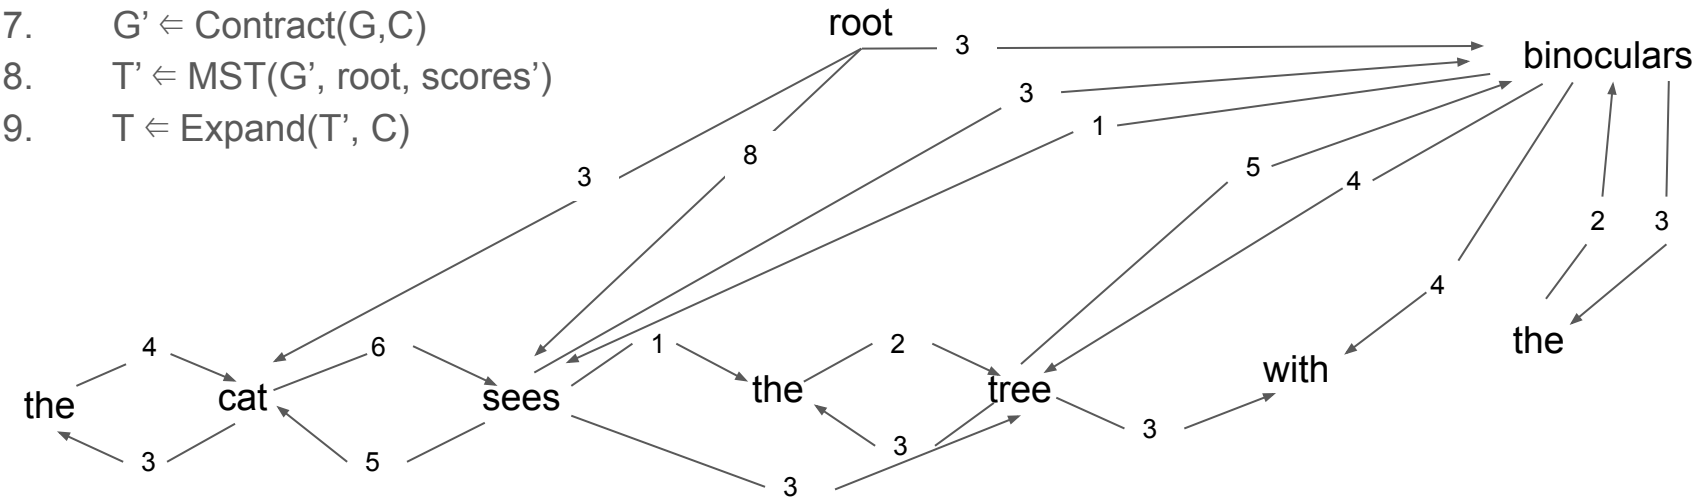


Ex. 2 Find the MST for these scores:

1. **Pick the highest incoming edge for each node in V**
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. T' ⇐ MST(G', root, scores')
9. T ⇐ Expand(T', C)

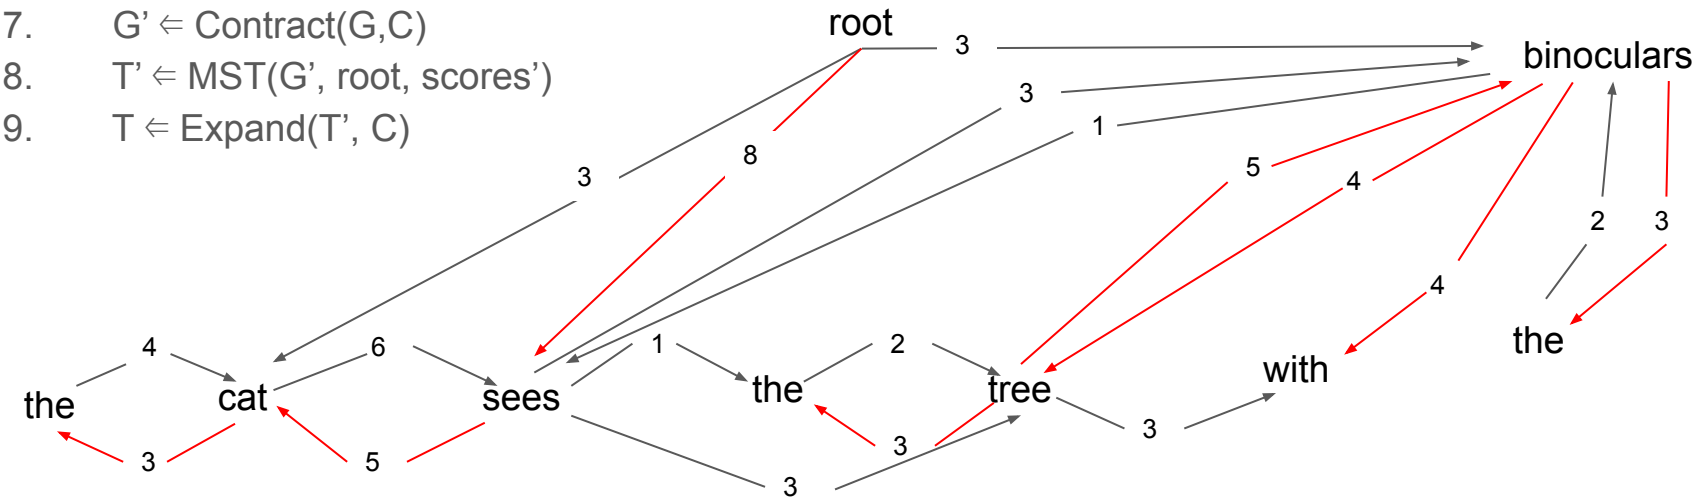


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. **scores' ⇐ Subtract best edge scores from all incoming edges**
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. T' ⇐ MST(G', root, scores')
9. T ⇐ Expand(T', C)

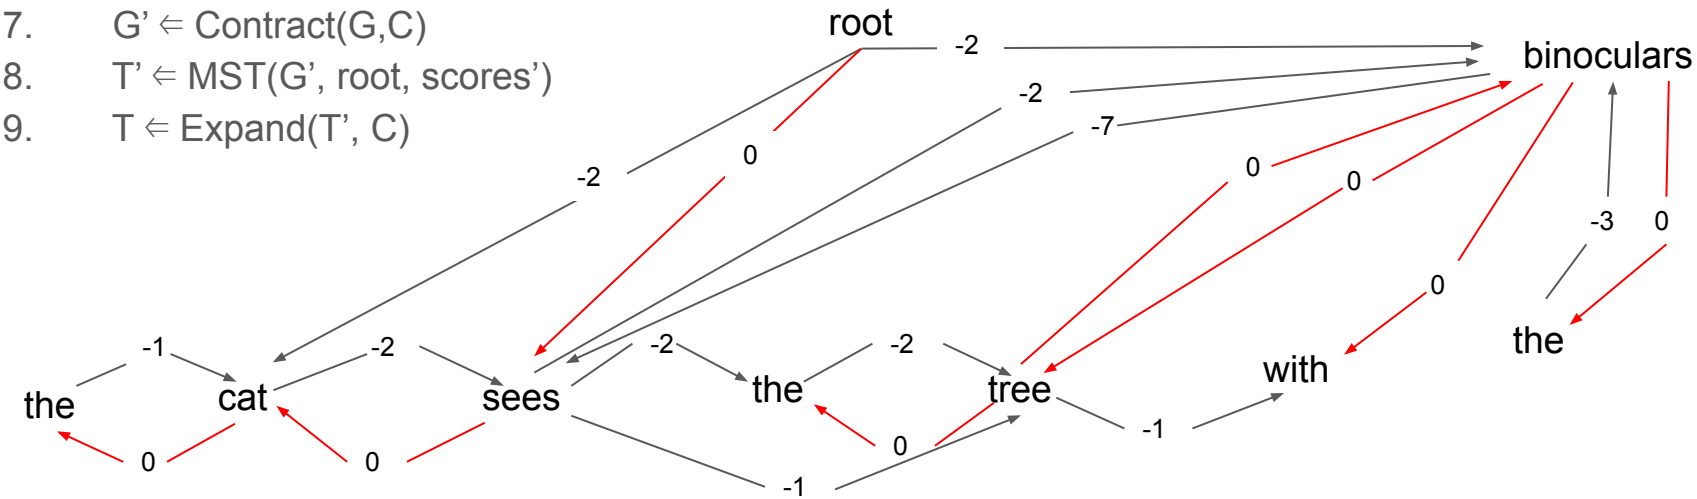


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. **Else:**
6. **C ⇐ cycle**
7. G' ⇐ Contract(G,C)
8. T' ⇐ MST(G', root, scores')
9. T ⇐ Expand(T', C)

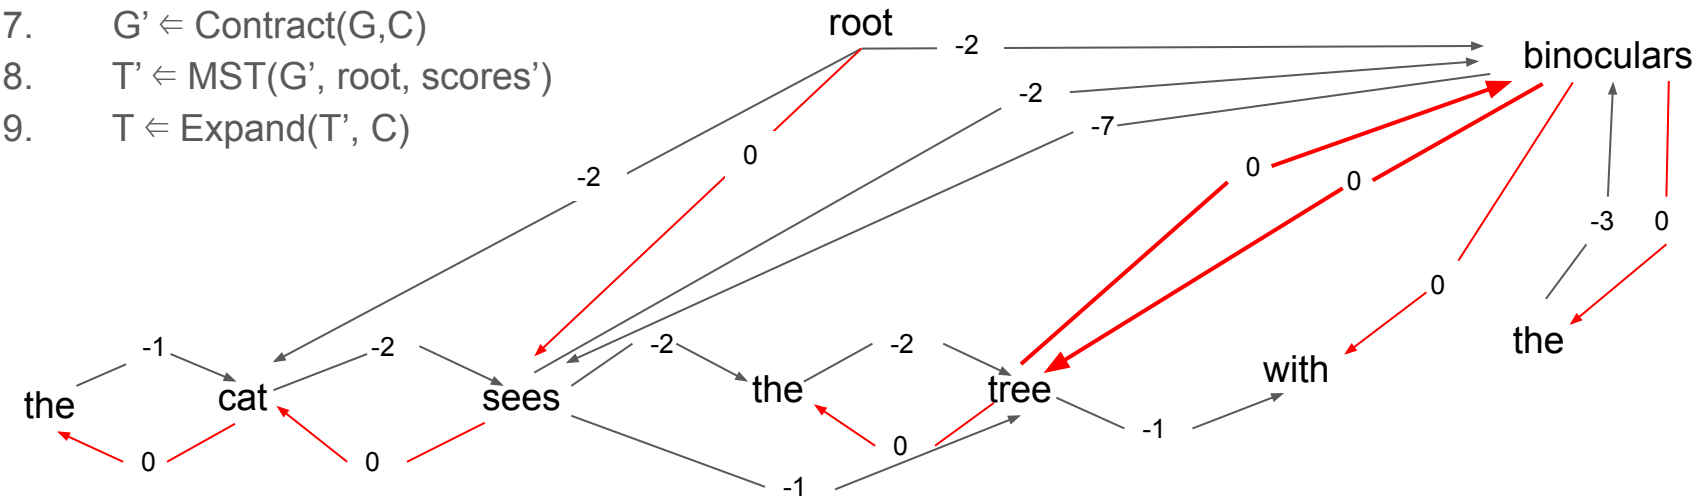


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. **G' ⇐ Contract(G,C)**
8. T' ⇐ MST(G', root, scores')
9. T ⇐ Expand(T', C)

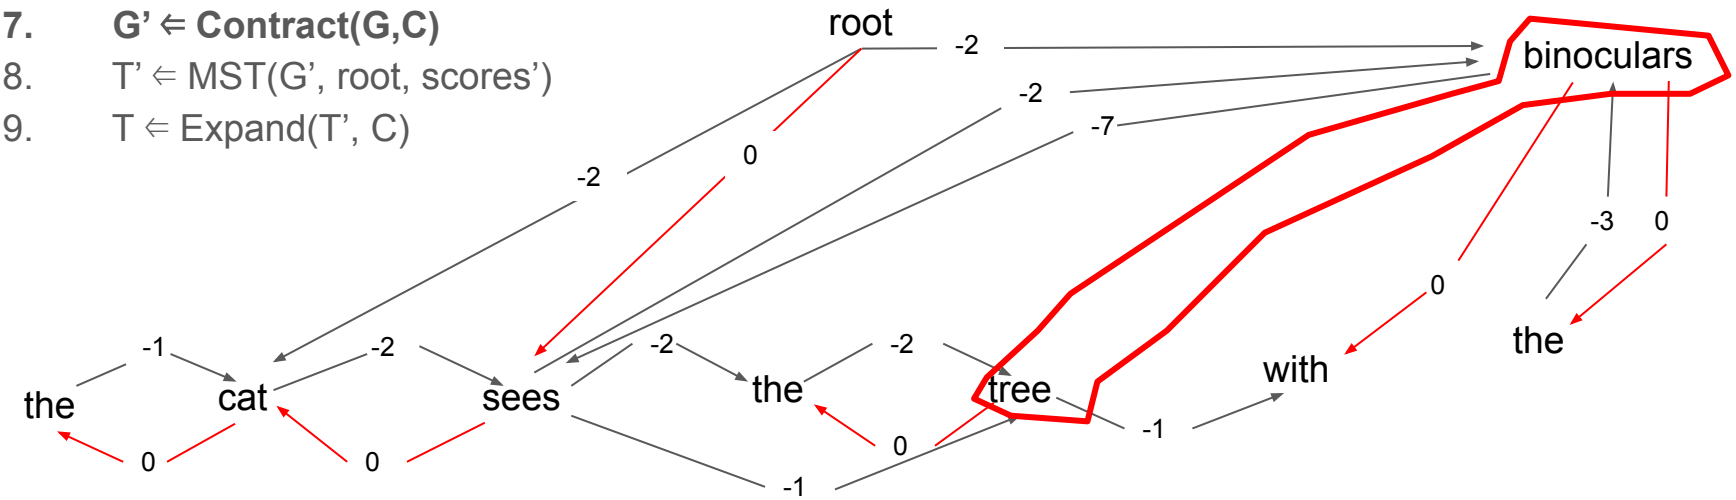


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. **T' ⇐ MST(G', root, scores')**
9. T ⇐ Expand(T', C)

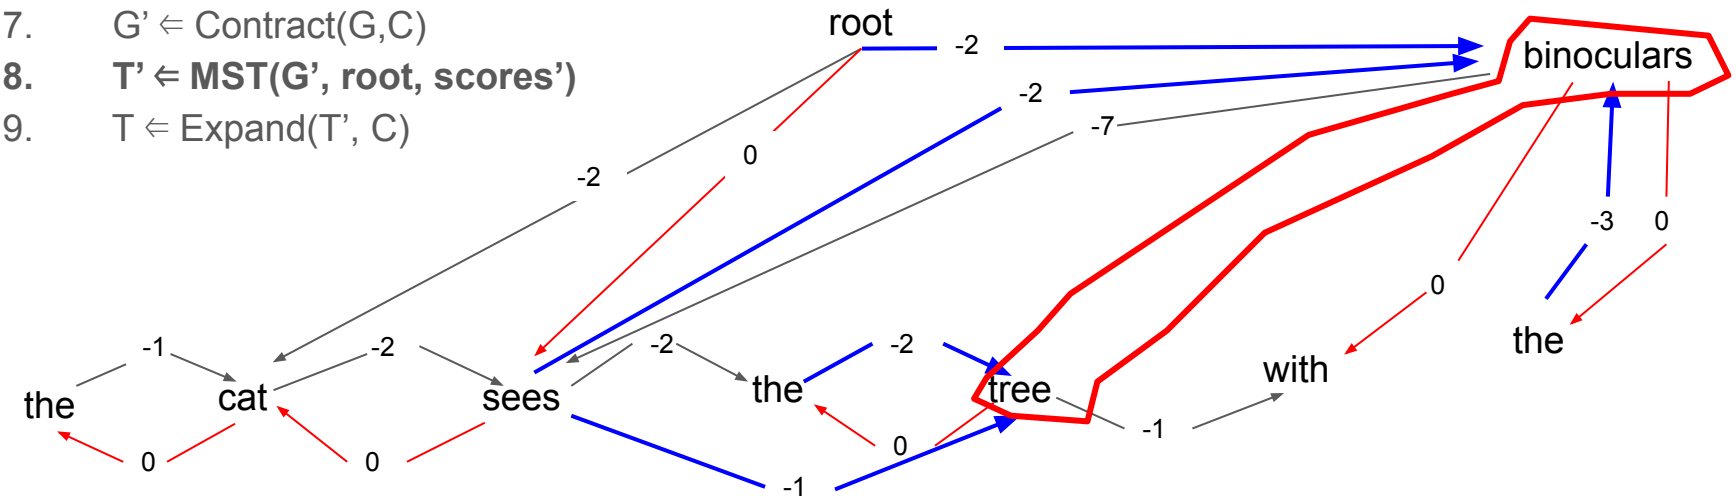


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. **T' ⇐ MST(G', root, scores')**
9. T ⇐ Expand(T', C)

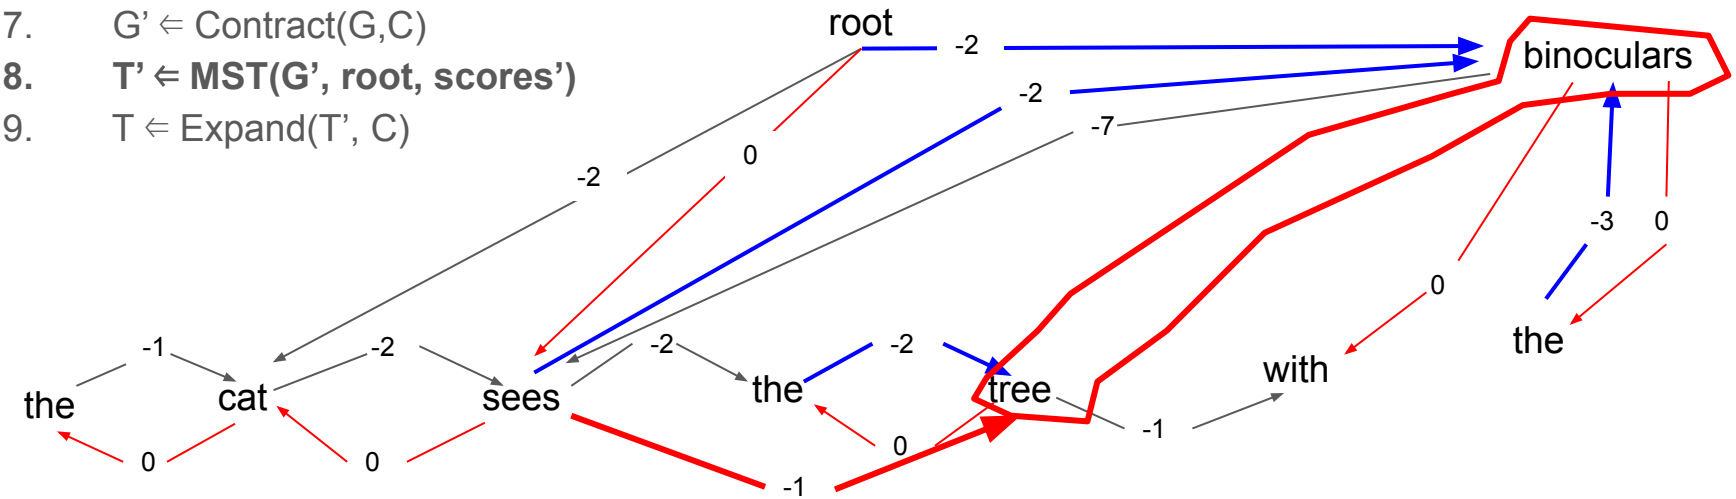


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. **T' ⇐ MST(G', root, scores')**
9. T ⇐ Expand(T', C)

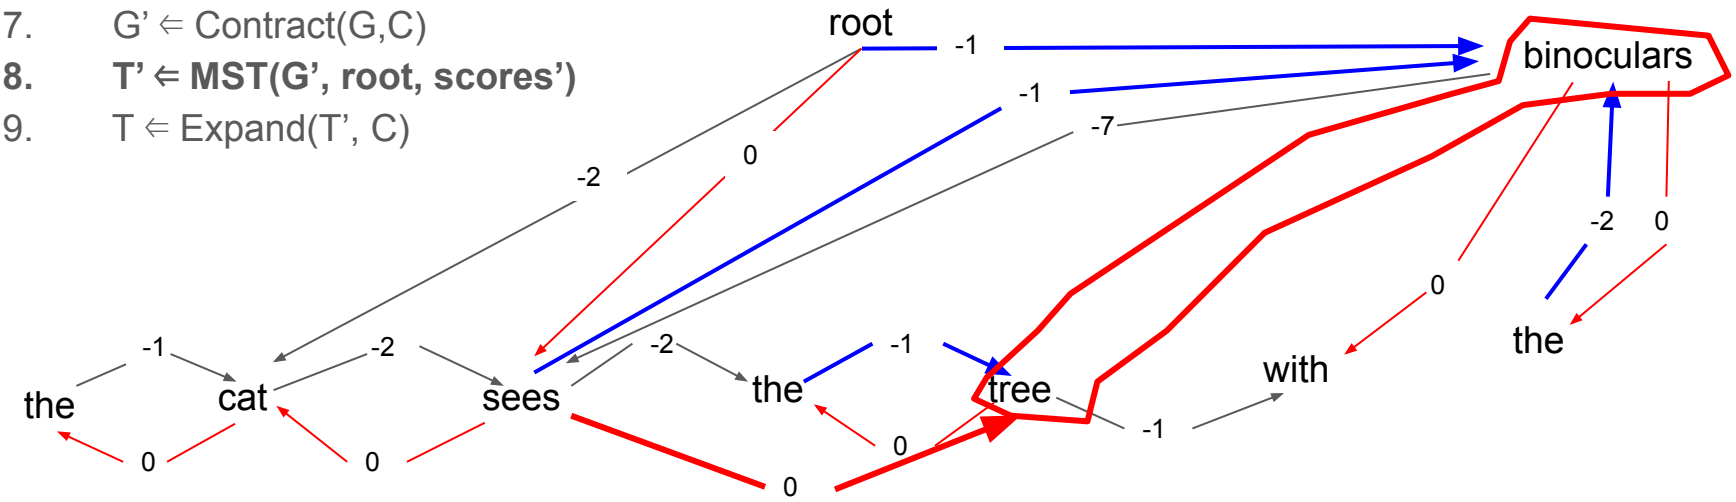


Ex. 2 Find the MST for these scores:

1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. **T' ⇐ MST(G', root, scores')**
9. T ⇐ Expand(T', C)

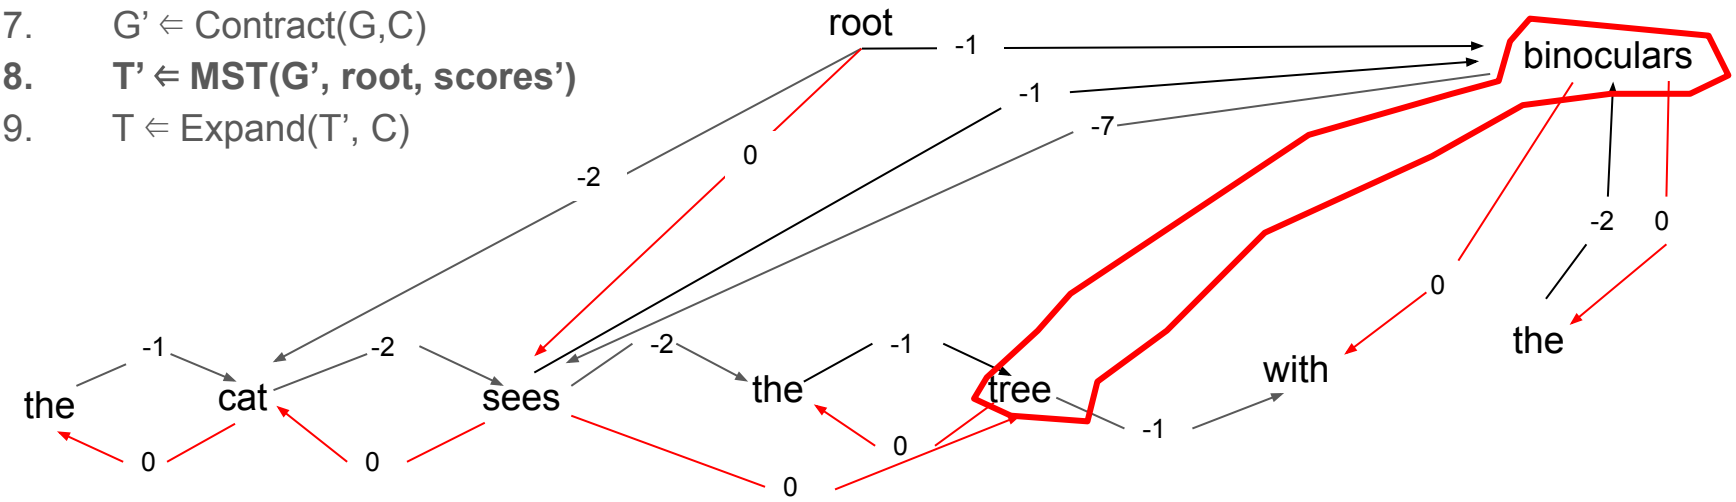


Ex. 2 Find the MST for these scores:


1. Pick the highest incoming edge for each node in V
2. scores' ⇐ Subtract best edge scores from all incoming edges
3. If no cycles:
4. 0-edges constitute the MST
5. Else:
6. C ⇐ cycle
7. G' ⇐ Contract(G,C)
8. T' ⇐ MST(G', root, scores')
9. **T ⇐ Expand(T', C)**

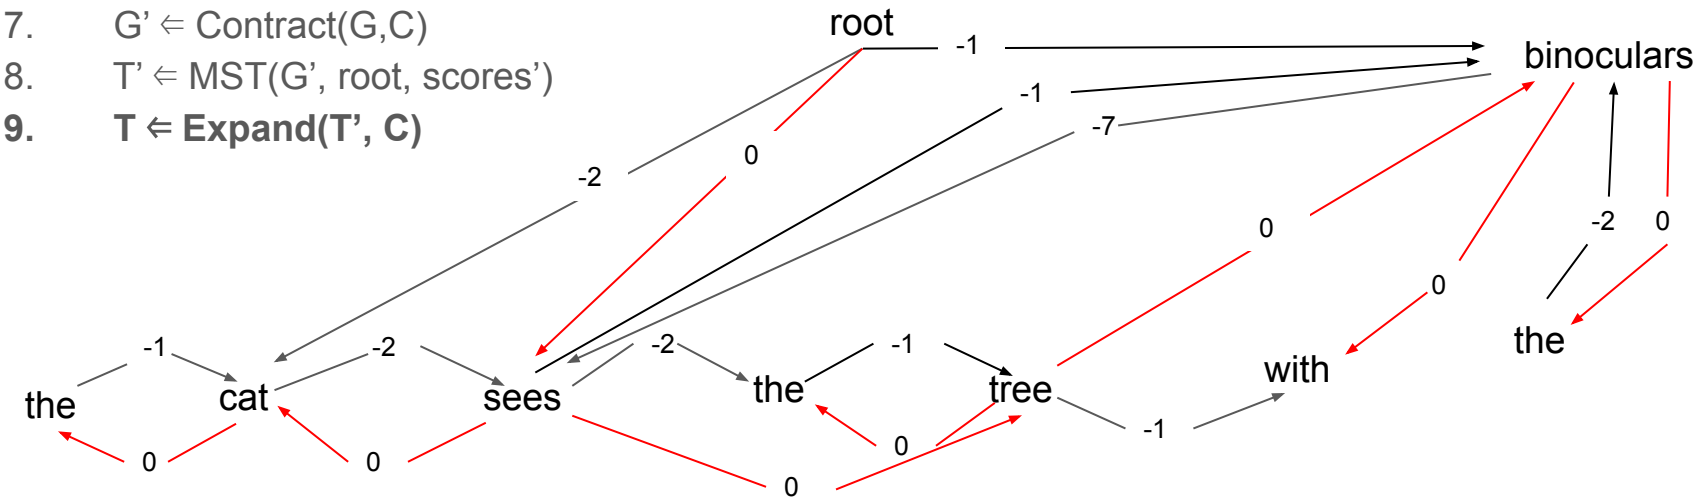

Ex. 2

The cat sees **the tree with the binoculars**.

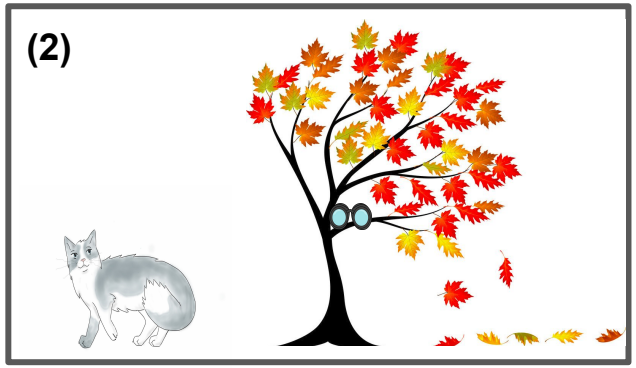

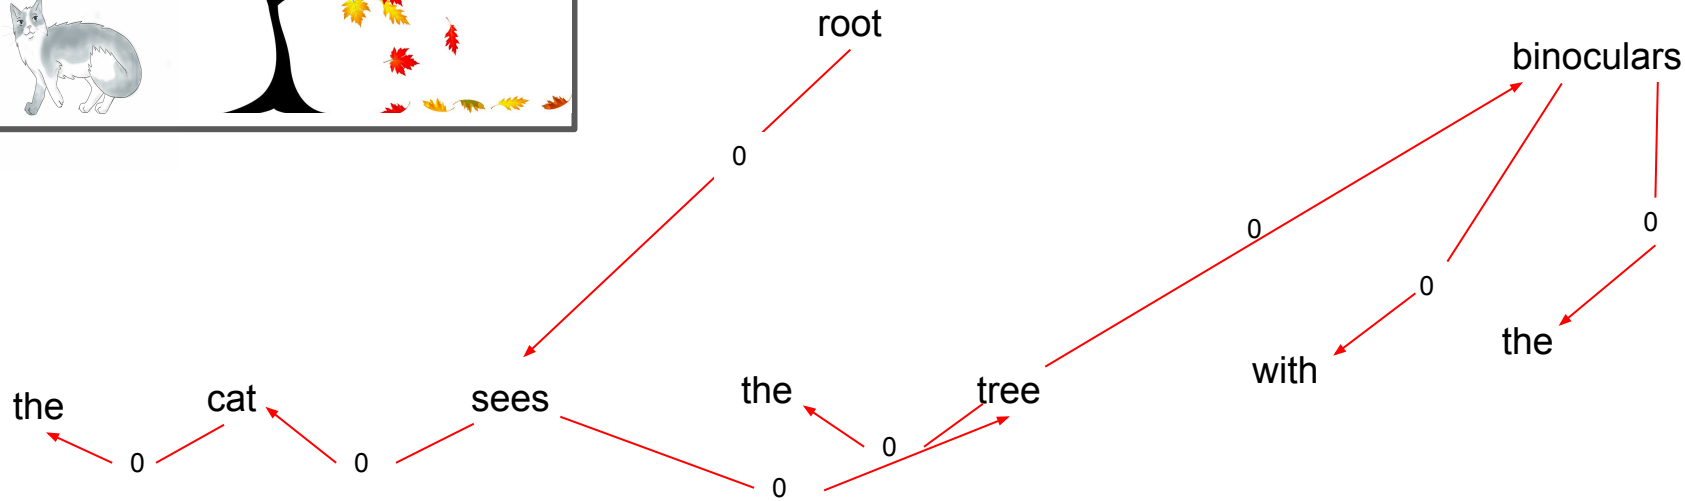

Ex. 2

The cat sees **the tree with the binoculars**.

