NLP machine translation exercises

Miryam de Lhoneux

Q1 Perform beam search with $k = 2$ on the language model search path in fig. 1. What are the two most probable strings?

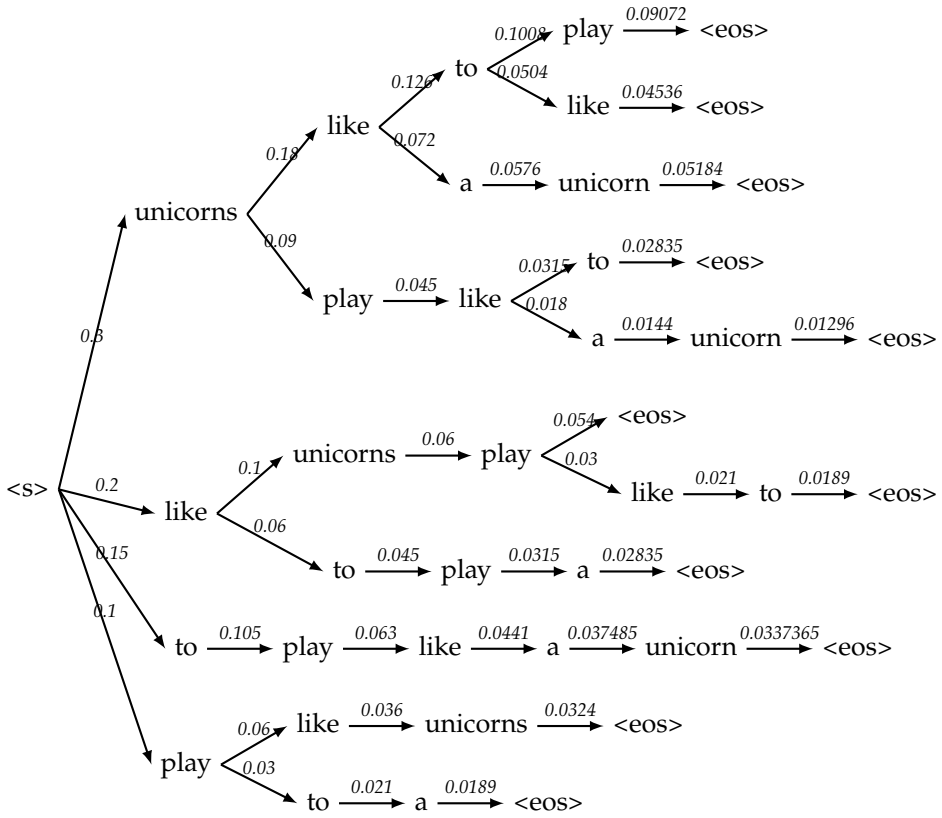

Figure 1: Incomplete search path of an imaginary language model.

Also try with $k = 3$, is the best hypothesis still the same?

Q2 Compute the chrF with $k = \beta = 2$ of the following hypothesis | reference translation pairs:

REFERENCE: `they left together`

HYPOTHESIS: `they went away together`