



Rank Sequence Diagram

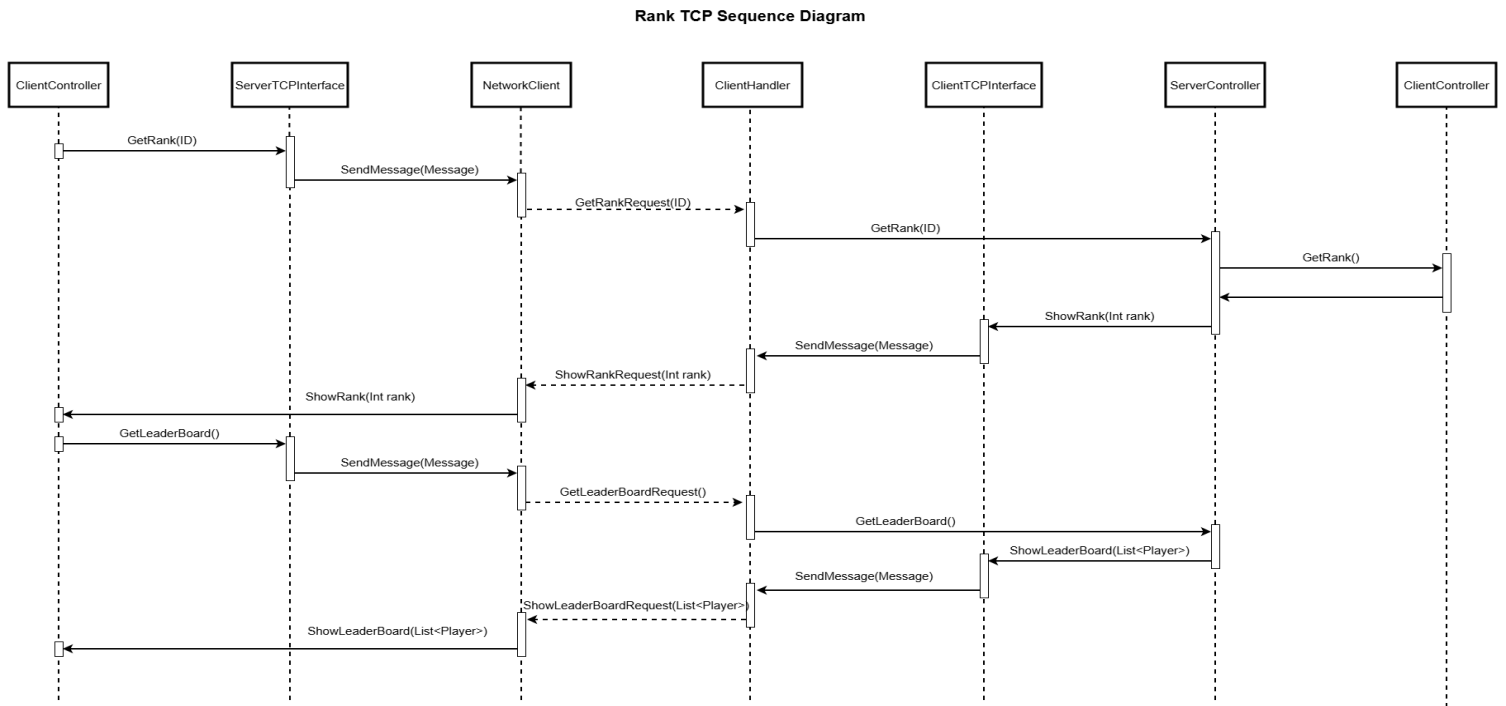

The client requests their rank in a specific lobby (ID). The request is wrapped into a message by ServerTCPInterface, sent by NetworkClient, and handled by ClientHandler before reaching LobbyController.

The other message requests the full leaderboard that, unlike the rank request, retrieves the information from ServerController. The result is a list of players sorted by their ranks.

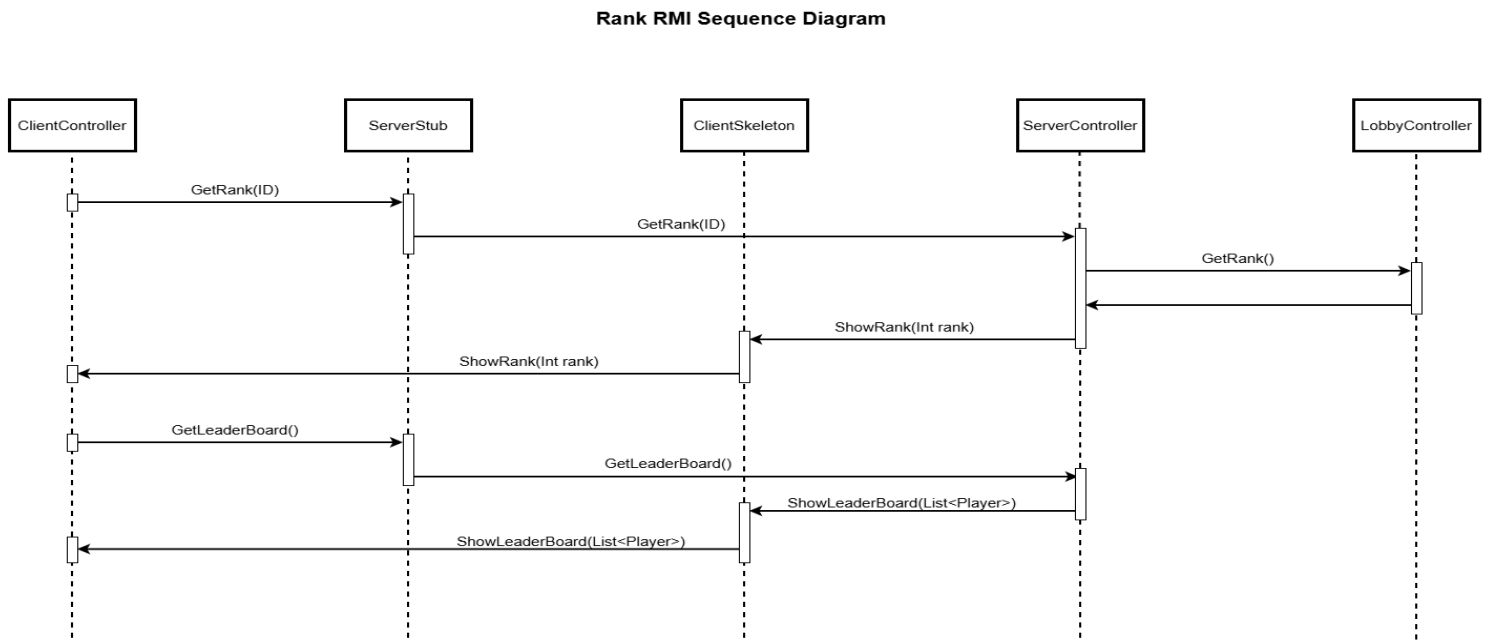

The client requests their rank in a specific lobby (ID). The remote method call goes through the ServerStub to the ServerController, which retrieves the data from LobbyController. The result is returned to the client via ClientSkeleton.

The other call requests the full leaderboard that, unlike the rank request, retrieves the information from ServerController. The result is a list of player sorted by their ranks.