



Card Pick Sequence Diagram

Card Pick RMI sequence diagram

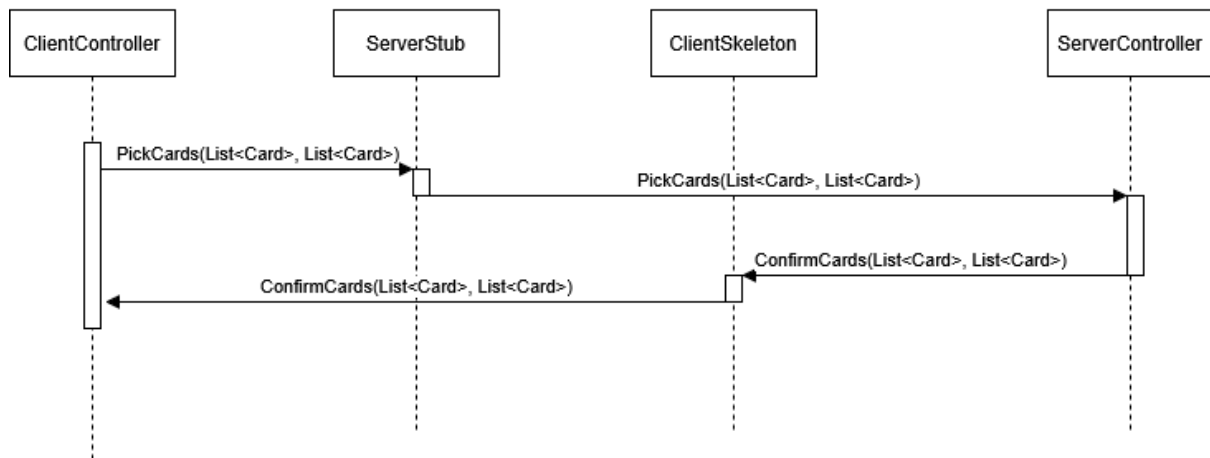

ServerStub is the virtual server, while the ClientSkeleton is the virtual client. The client can pick a card by calling the virtual method via the ServerStub. Pick cards takes two lists as parameters, one for the cards chosen from the top row and the second one for the bottom row. By doing so we omit passing the rows as parameters. Then the server sends back a confirmation message, by returning the cards chosen.

Card Pick TCP sequence diagram

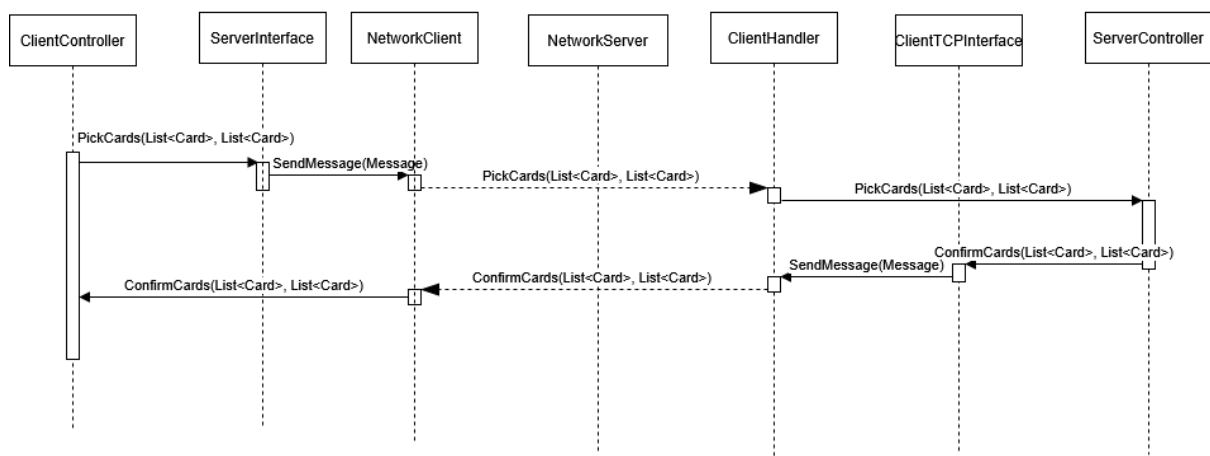

Before sending the picked cards, the client connects to the NetworkServer that will create a ClientTCPInterface with a ClientHandler that will handle all the interactions with the specific user.

The client sends two lists of cards, picked from top and bottom. Then the server will send a confirmation message back.

The check if the chosen card is valid will be done on the client side. So for example if a user tries to buy a building card but he hasn't enough food.

On the client side we will already have a reference to the rows, because it is needed for the visualization. So during the card pick action we don't have a function and message to get the current rows.