


Game Access Sequence Diagram

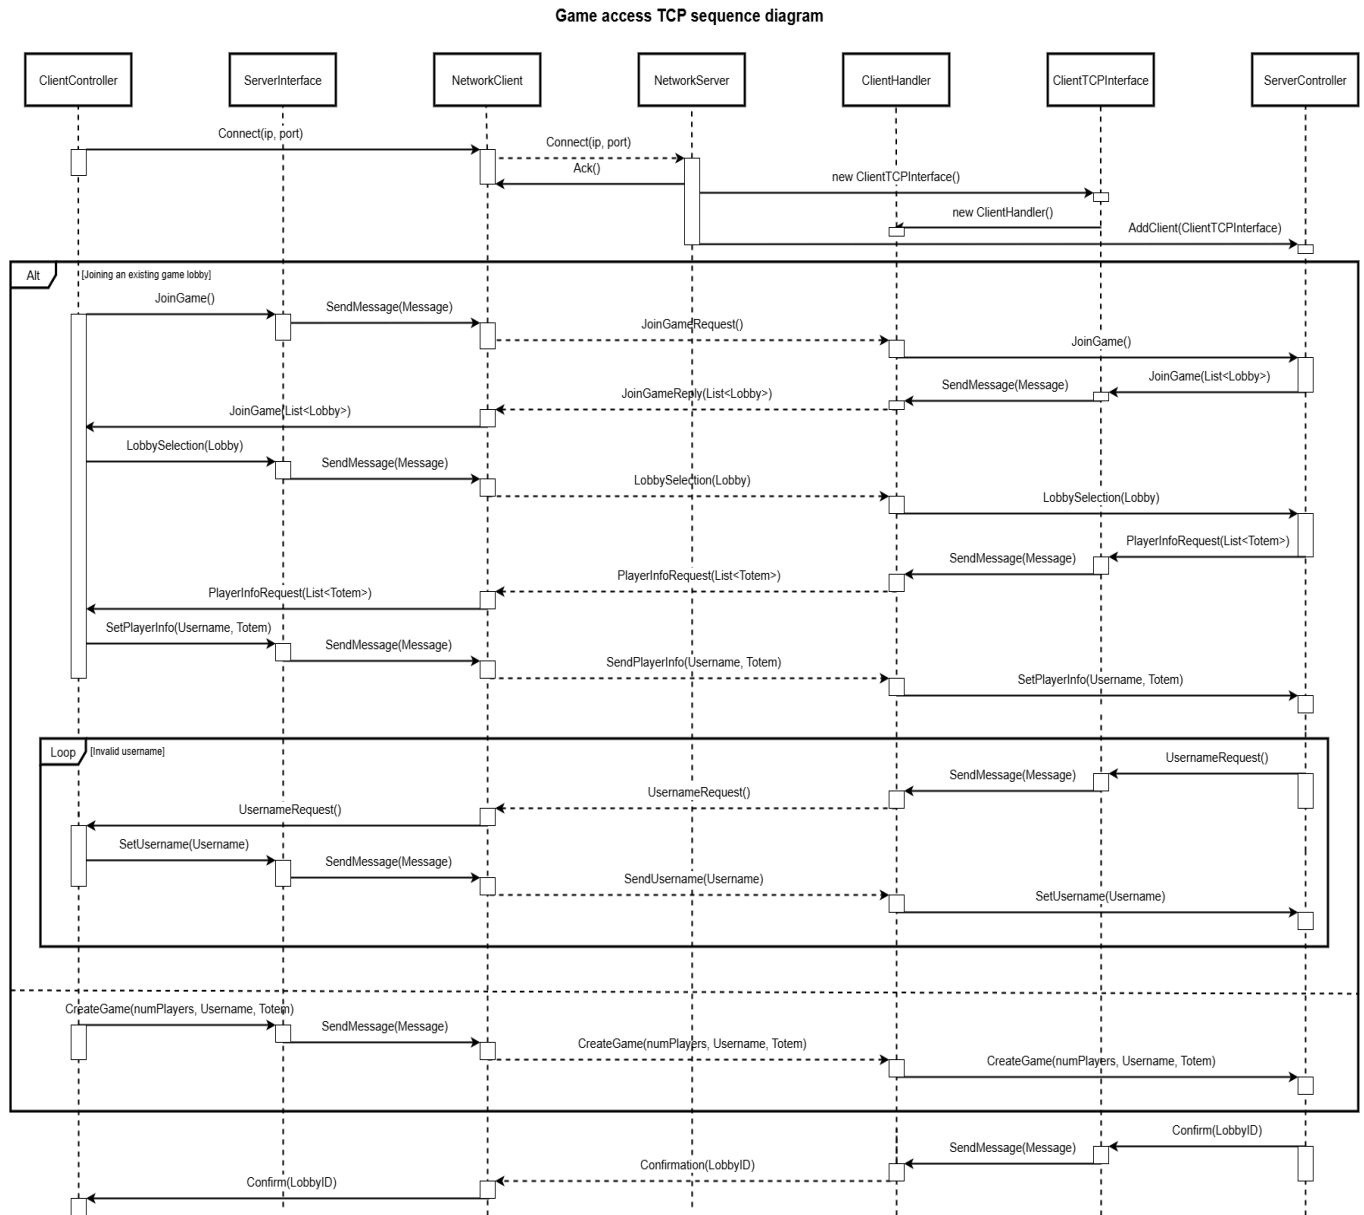

The client connects to the server by sending a connection request message that is handled by the NetworkServer. Upon this request a new ClientTCPInterface is created with a dedicated ClientHandler to take care of the client's interactions.


The client can then choose whether to join an existing lobby or create a new game.

In the first case it receives a list of existing lobbies to choose from, and upon selection a list of the totems that are still available. The client then chooses a totem and username, the latter must be a valid (not duplicate) one.

In the second case the client creates a new game by providing all the needed information.

In the end the server responds with a confirmation with the LobbyID, so that it can be used for all the next interactions.

Game access RMI sequence diagram

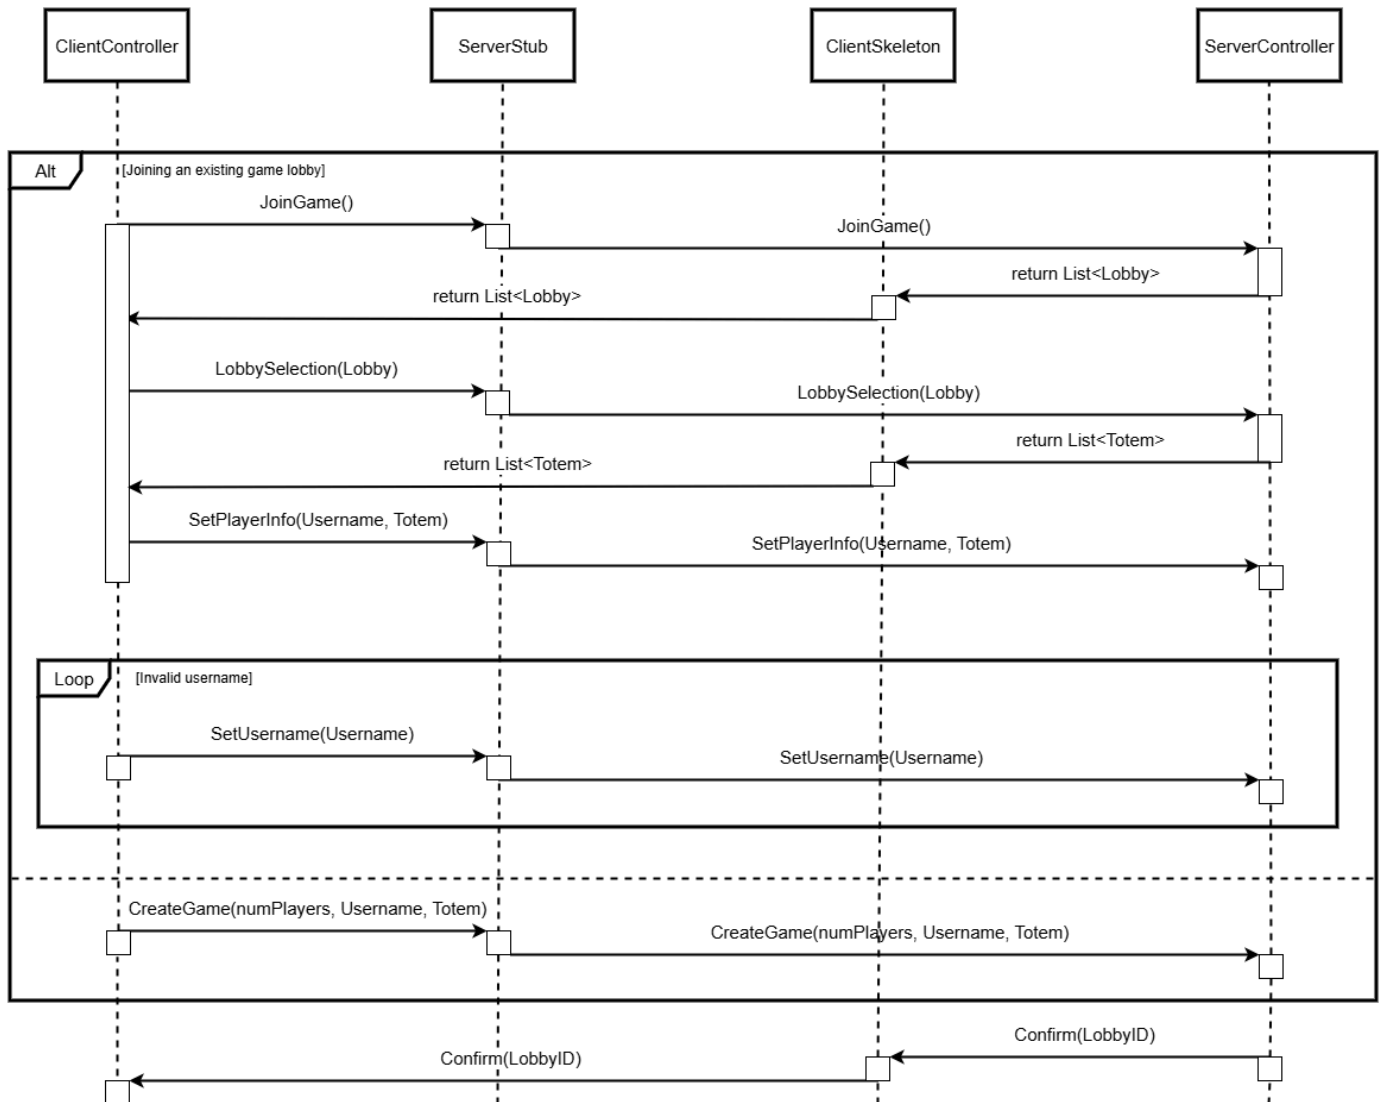

The client can either join an existing game or create a new one by calling a virtual method using the server stub.

In the first case the server returns a list of existing lobbies to choose from. Upon selection it then returns the available totems. The client sets their information, the username must be valid (not duplicate).

In the second case it calls a method to create a game by passing all the required information. The server then confirms by returning the LobbyID to use in further interactions.