


Game Access Sequence Diagram

Game access TCP sequence diagram

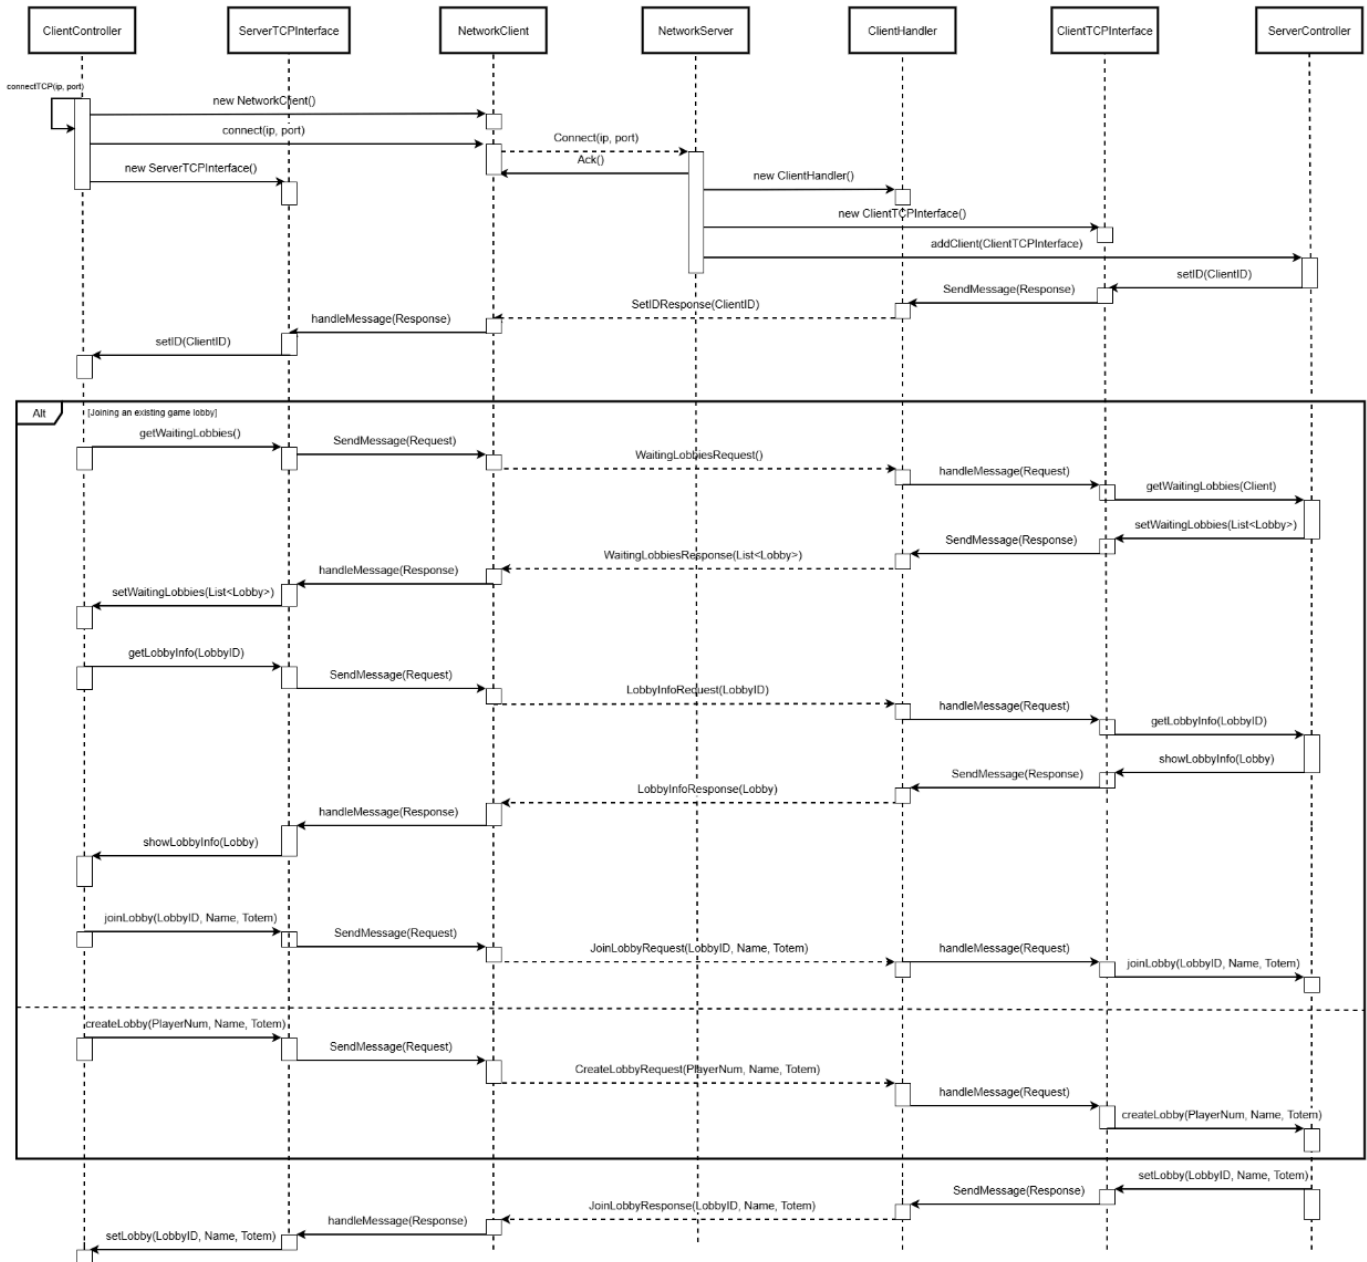


The client connects to the server by sending a connection request message that is handled by the NetworkServer. Upon this request a new ClientTCPInterface and ClientHandler are created and the client gets added to the ServerController.

The client can then choose whether to join an existing lobby or create a new game. In the first case it receives a list of existing lobbies to choose from, and upon selection additional information regarding a lobby. In the second case the client creates a new game by providing all the needed information.

In the end the server responds with a confirmation with the LobbyID, so that it can be used for all the next interactions.

Game access RMI sequence diagram

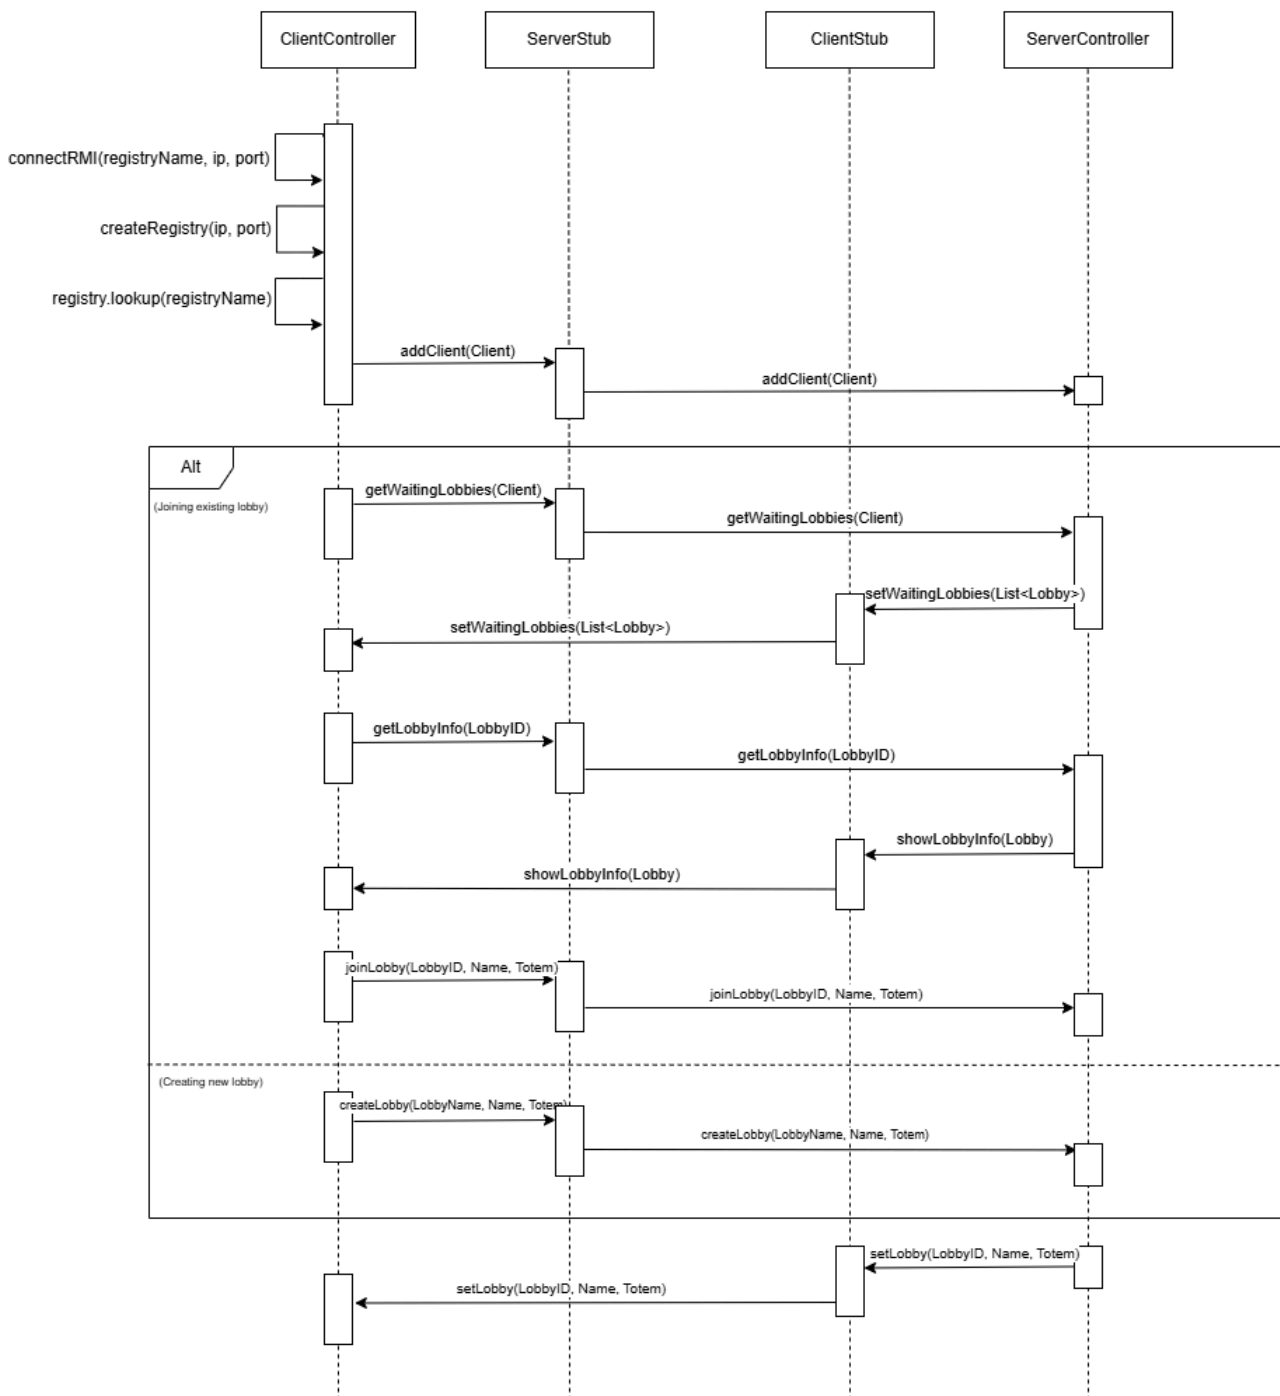

The client can either join an existing game or create a new one by calling a virtual method using the server stub.

In the first case the server responds with the list of available lobbies. Upon selection it then returns additional information regarding the lobby. The client then joins.

In the second case it calls a method to create a game by passing all the required information.

The server then confirms by returning the LobbyID to use in further interactions.