


Rank Sequence Diagram


Rank TCP sequence diagram

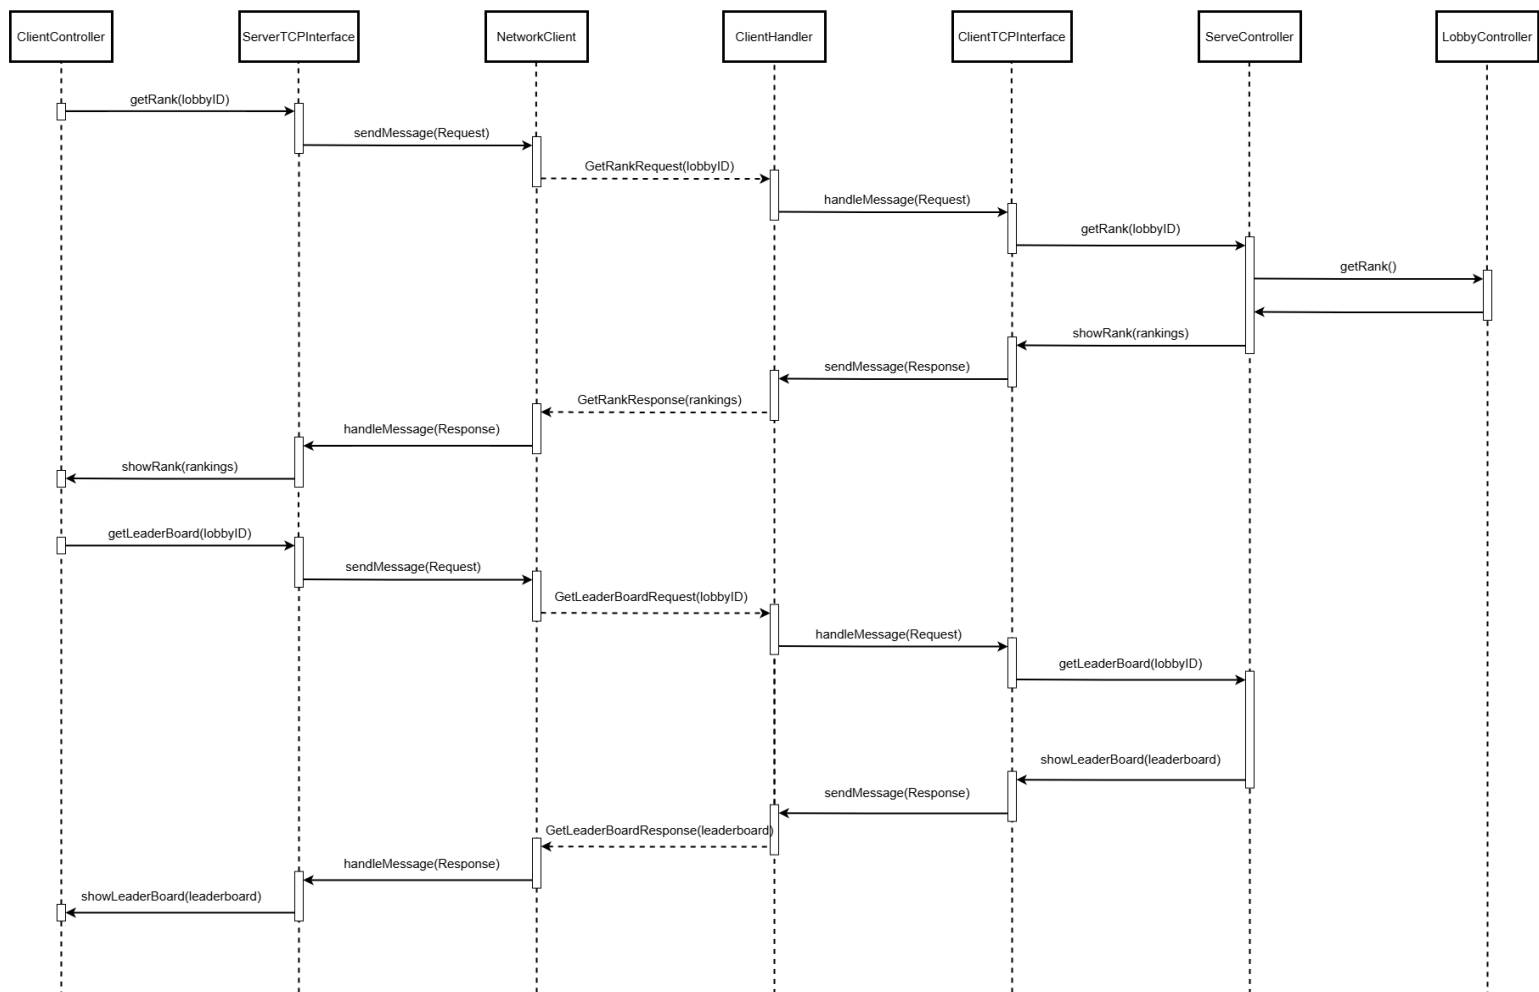

The client requests their rank in a specific lobby (ID). The request is wrapped into a message by ServerTCPInterface, sent by NetworkClient, and handled by ClientHandler before reaching LobbyController.

The other message requests the full leaderboard that, unlike the rank request, retrieves the information from ServerController. The result is a list of players sorted by their ranks.

Rank RMI Sequence Diagram

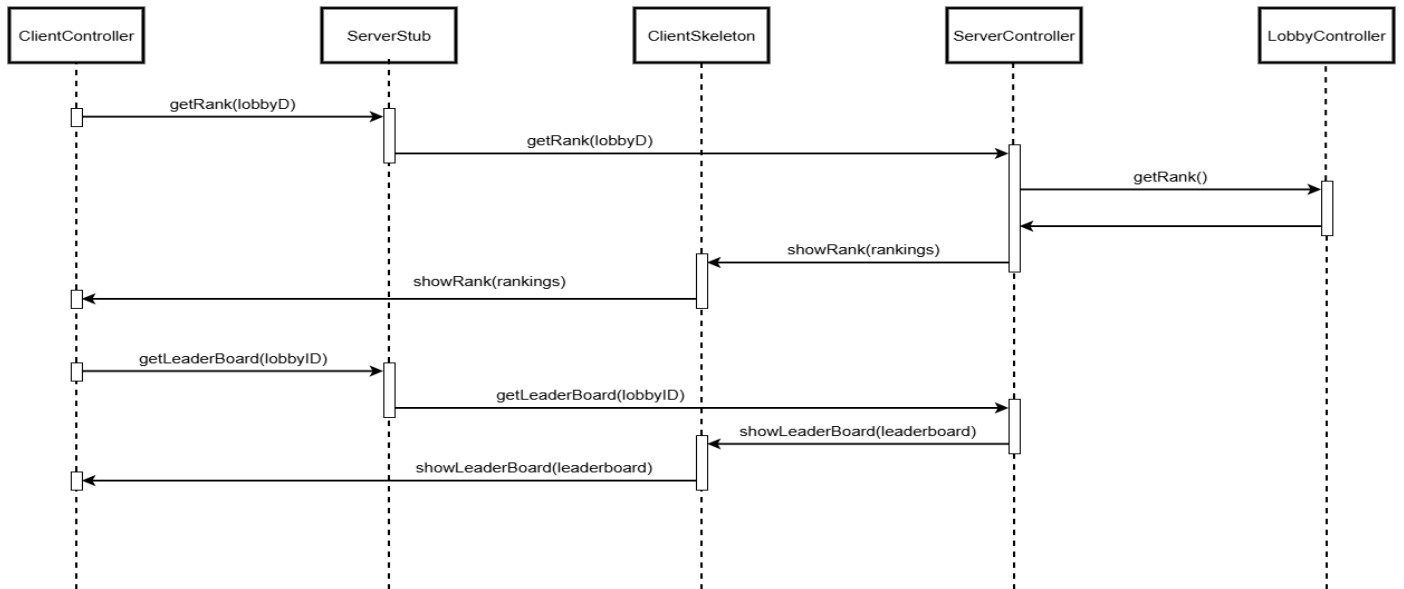

The client requests their rank in a specific lobby (ID). The remote method call goes through the `ServerStub` to the `ServerController`, which retrieves the data from `LobbyController`. The result is returned to the client via `ClientSkeleton`.

The other call requests the full leaderboard that, unlike the rank request, retrieves the information from `ServerController`. The result is a list of player sorted by their ranks.