

CIS620- Project Report install basic security and Configure mutt

Name- Tejaswi Gadde

Csuid-2884829

Installation and Configuration of Mutt Email Terminal Before installing the mutt email software, we need to update the software

1. `wget ftp://ftp.mutt.org/pub/mutt/mutt-2.1.3.tar.gz`
2. `tar xzvf mutt-2.1.3.tar.gz`

```
tejal23@HARINI-CHOWDARY:~$ sudo apt update
Setting up libgtk-3-bin (3.24.41-4ubuntu1.3) ...
Setting up apport-core-dump-handler (2.28.1-0ubuntu3.8) ...
Setting up apport (2.28.1-0ubuntu3.8) ...
apport-autoreport.service is a disabled or a static unit not running, not starting it.
Setting up python3-distupgrader (1:24.04.27) ...
Setting up ubuntu-release-upgrader-core (1:24.04.27) ...
Setting up python3-update-manager (1:24.04.12) ...
Setting up update-manager-core (1:24.04.12) ...
Processing triggers for install-info (7.1-3build2) ...
Processing triggers for hicolor-icon-theme (0.17-2) ...
Processing triggers for libc-bin (2.39-0ubuntu8.6) ...
Processing triggers for systemd (255.4-1ubuntu8.11) ...
Processing triggers for man-db (2.12.0-4build2) ...
Processing triggers for dbus (1.14.10-4ubuntu4.1) ...
tejal23@HARINI-CHOWDARY-TEJASWI-SRIHANTH:~$ wget ftp://ftp.mutt.org/pub/mutt/mutt-2.1.3.tar.gz
--2025-10-30 17:01:59-- ftp://ftp.mutt.org/pub/mutt/mutt-2.1.3.tar.gz
=> 'mutt-2.1.3.tar.gz'
Resolving ftp.mutt.org (ftp.mutt.org)... 140.211.166.134, 64.50.233.100, 64.50.236.52, ...
Connecting to ftp.mutt.org (ftp.mutt.org)|140.211.166.134|:21... connected.
Logging in as anonymous ... Logged in!
==> SYST ... done. ==> PWD ... done.
==> TYPE I ... done. ==> CWD (/pub/mutt) ... done.
==> SIZE mutt-2.1.3.tar.gz ... 5408941
==> PASV ... done. ==> RETR mutt-2.1.3.tar.gz ... done.
Length: 5408941 (5.2M) (unauthoritative)

mutt-2.1.3.tar.gz          100%[=====] 5.16M  2.54MB/s   in 2.0s

2025-10-30 17:02:02 (2.54 MB/s) - 'mutt-2.1.3.tar.gz' saved [5408941]

tejal23@HARINI-CHOWDARY-TEJASWI-SRIHANTH:~$ tar xzvf mutt-2.1.3.tar.gz
mutt-2.1.3/
mutt-2.1.3/main.c
mutt-2.1.3/README.SECURITY
mutt-2.1.3/sendlib.c
mutt-2.1.3/color.h
mutt-2.1.3/signal.c
mutt-2.1.3/OPS.SHIME
mutt-2.1.3/monitor.c
mutt-2.1.3/wcwidth.c
mutt-2.1.3/muttbug
```

```
teja123@HARINI-CHOWDARY x + -  
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~$ tar xzvf mutt-2.1.3.tar.gz  
mutt-2.1.3/  
mutt-2.1.3/main.c  
mutt-2.1.3/README.SECURITY  
mutt-2.1.3/sendlib.c  
mutt-2.1.3/color.h  
mutt-2.1.3/signal.c  
mutt-2.1.3/OPS.SMIME  
mutt-2.1.3/monitor.c  
mutt-2.1.3/wcwidth.c  
mutt-2.1.3/muttbug  
mutt-2.1.3/wcscasecmp.c  
mutt-2.1.3/_mutt_regex.h  
mutt-2.1.3/mkdtemp.c  
mutt-2.1.3/crypt-gpgme.h  
mutt-2.1.3/buffy.c  
mutt-2.1.3/status.c  
mutt-2.1.3/GPL  
mutt-2.1.3/from.c  
mutt-2.1.3/crypt-mod.h  
mutt-2.1.3/gettext.h  
mutt-2.1.3/mh.c  
mutt-2.1.3/md5.h  
mutt-2.1.3/pager.h  
mutt-2.1.3/gen_defs  
mutt-2.1.3/mkreldate.sh  
mutt-2.1.3/mutt_menu.h  
mutt-2.1.3/TODO  
mutt-2.1.3/mutt_ssl.c  
mutt-2.1.3/mime.types  
mutt-2.1.3/mx.h  
mutt-2.1.3/check_sec.sh  
mutt-2.1.3/mkchangelog.sh  
mutt-2.1.3/txt2c.sh  
mutt-2.1.3/pgpkey.c  
mutt-2.1.3/doc/  
mutt-2.1.3/doc/configuration.html  
mutt-2.1.3/doc/tuning.html  
mutt-2.1.3/doc/manual.xml.head  
mutt-2.1.3/doc/mbox.man
```

9°C
Light rain

Search

5:11 PM
10/30/2025

sudo apt-get install libncurses5-dev libncursesw5-dev


```
teja123@HARINI-CHOWDARY:~/mutt-2.1.3$ sudo apt-get install libncurses5-dev libncursesw5-dev
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Note, selecting 'libncurses-dev' instead of 'libncurses5-dev'
Note, selecting 'libncurses-dev' instead of 'libncursesw5-dev'
libncurses-dev is already the newest version (6.4+20240113-1ubuntu2).
The following packages were automatically installed and are no longer required:
  libdrm-nouveau2 libdrm-radeon1 libgll-amber-dri libglapi-mesa libllvm19 libxcb-dri2-0
Use 'sudo apt autoremove' to remove them.
0 upgraded, 0 newly installed, 0 to remove and 1 not upgraded.
teja123@HARINI-CHOWDARY-TEJASWI-SRINANTH:~/mutt-2.1.3$ sudo apt -get install libssl-dev
E: Invalid operation -get
teja123@HARINI-CHOWDARY-TEJASWI-SRINANTH:~/mutt-2.1.3$ sudo apt -get install libssl-dev
E: Command line option 'g' [from -get] is not understood in combination with the other options.
teja123@HARINI-CHOWDARY-TEJASWI-SRINANTH:~/mutt-2.1.3$ sudo apt -get update
E: Command line option 'g' [from -get] is not understood in combination with the other options.
teja123@HARINI-CHOWDARY-TEJASWI-SRINANTH:~/mutt-2.1.3$ sudo apt-get update
Hit:1 http://archive.ubuntu.com/ubuntu noble InRelease
Hit:2 http://security.ubuntu.com/ubuntu noble-security InRelease
Hit:3 http://archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:4 http://archive.ubuntu.com/ubuntu noble-backports InRelease
Reading package lists... Done
teja123@HARINI-CHOWDARY-TEJASWI-SRINANTH:~/mutt-2.1.3$ sudo apt-get install libssl-dev
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libdrm-nouveau2 libdrm-radeon1 libgll-amber-dri libglapi-mesa libllvm19
  libxcb-dri2-0
Use 'sudo apt autoremove' to remove them.
Suggested packages:
  libssl-doc
The following NEW packages will be installed:
  libssl-dev
0 upgraded, 1 newly installed, 0 to remove and 1 not upgraded.
Need to get 2408 kB of archives.
After this operation, 13.3 MB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 libssl-dev amd64 3.0.13-0ubuntu3.6 [2408 kB]
Fetched 2408 kB in 0s (5094 kB/s)
Selecting previously unselected package libssl-dev:amd64.
```

sudo apt --get install libssl-dev

```
teja123@HARINI-CHOWDARY:~$ sudo apt-get install libssl-dev
Hit:3 http://archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:4 http://archive.ubuntu.com/ubuntu noble-backports InRelease
Reading package lists... Done
teja123@HARINI-CHOWDARY-TEJASWI-SRIWANTH:~/mutt-2.1.3$ sudo apt-get install libssl-dev
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libdrm-nouveau2 libdrm-radeon1 libgll-amber-dri libglapi-mesa libllvm19
  libxcb-dri2-0
Use 'sudo apt autoremove' to remove them.
Suggested packages:
  libssl-doc
The following NEW packages will be installed:
  libssl-dev
0 upgraded, 1 newly installed, 0 to remove and 1 not upgraded.
Need to get 2408 kB of archives.
After this operation, 13.3 MB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 libssl-dev amd64 3.0.13-0ubuntu3.6 [2408 kB]
Fetched 2408 kB in 0s (5094 kB/s)
Selecting previously unselected package libssl-dev:amd64.
(Reading database ... 44987 files and directories currently installed.)
Preparing to unpack .../libssl-dev_3.0.13-0ubuntu3.6_amd64.deb ...
Unpacking libssl-dev:amd64 (3.0.13-0ubuntu3.6) ...
Setting up libssl-dev:amd64 (3.0.13-0ubuntu3.6) ...
```

Configure

`./configure --prefix=/usr --sysconfdir=/etc --with-docdir=/usr/share/doc/mutt-2.1.3 --with ssl --enable-external-dotlock --enable-pop --enable-imap --enable-hcache --enable-sidebar && make`

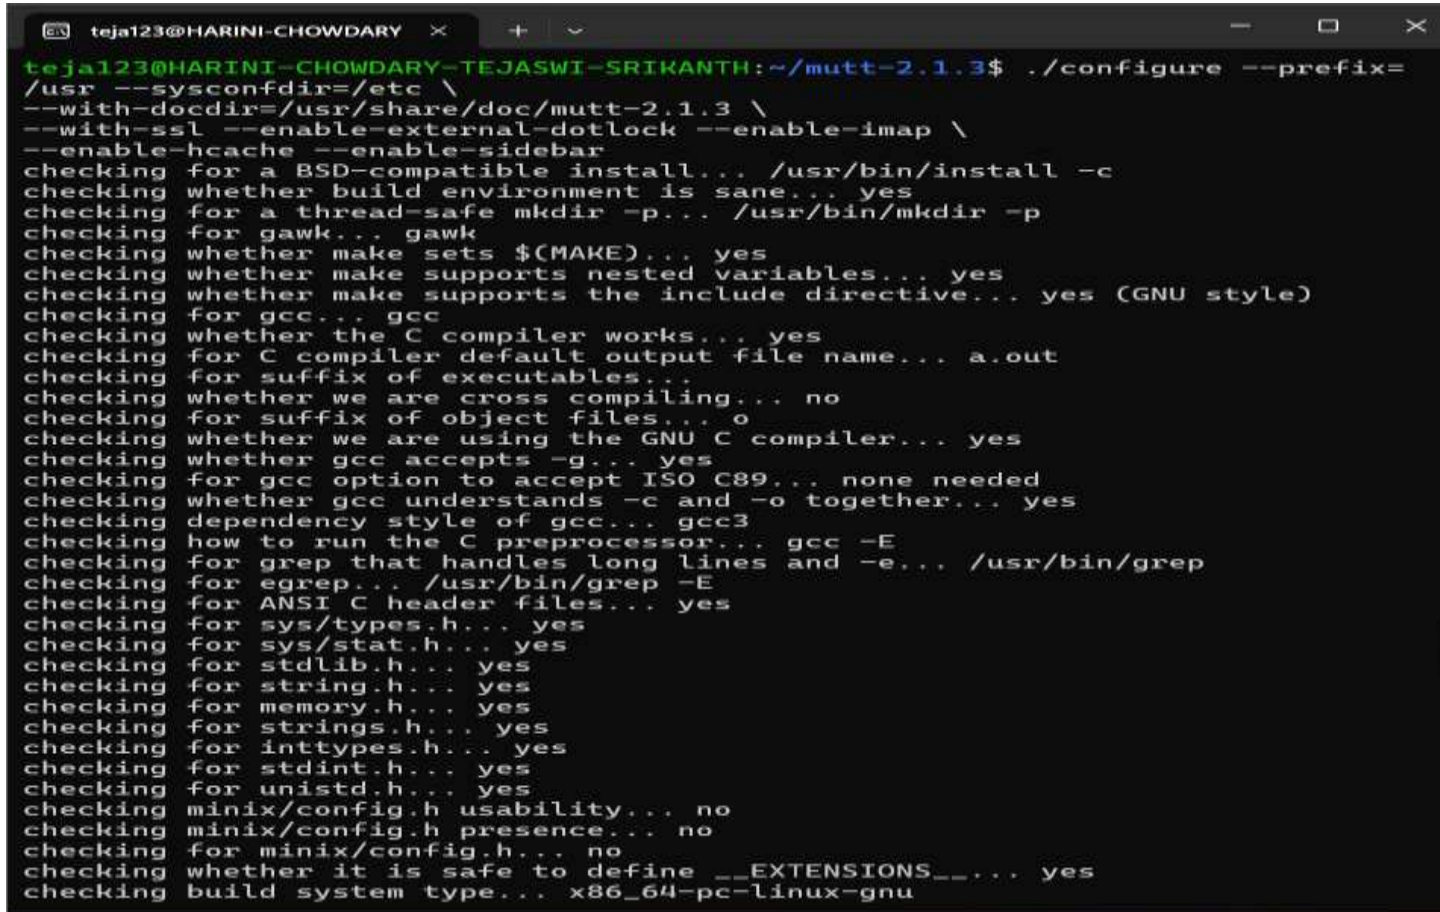A terminal window titled 'teja123@HARINI-CHOWDARY' showing the execution of the './configure' script for 'mutt-2.1.3'. The script is being run with various options: --prefix=/usr, --sysconfdir=/etc, --with-docdir=/usr/share/doc/mutt-2.1.3, --with ssl, --enable-external-dotlock, --enable-imap, --enable-hcache, and --enable-sidebar. The output shows a series of checks for various system features and dependencies, all of which are successfully resolved. The checks include: BSD-compatible install, build environment, thread-safe mkdir, gawk, make, gcc, C compiler, suffix of executables, cross compiling, GNU C compiler, gcc options, dependency style, C preprocessor, grep, egrep, ANSI C header files, sys/types.h, sys/stat.h, stdlib.h, string.h, memory.h, strings.h, inttypes.h, stdint.h, unistd.h, minix/config.h usability and presence, and the build system type (x86_64-pc-linux-gnu).

```
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$ ./configure --prefix=
/usr --sysconfdir=/etc \
--with-docdir=/usr/share/doc/mutt-2.1.3 \
--with-ssl --enable-external-dotlock --enable-imap \
--enable-hcache --enable-sidebar
checking for a BSD-compatible install... /usr/bin/install -c
checking whether build environment is sane... yes
checking for a thread-safe mkdir -p... /usr/bin/mkdir -p
checking for gawk... gawk
checking whether make sets $(MAKE)... yes
checking whether make supports nested variables... yes
checking whether make supports the include directive... yes (GNU style)
checking for gcc... gcc
checking whether the C compiler works... yes
checking for C compiler default output file name... a.out
checking for suffix of executables...
checking whether we are cross compiling... no
checking for suffix of object files... o
checking whether we are using the GNU C compiler... yes
checking whether gcc accepts -g... yes
checking for gcc option to accept ISO C89... none needed
checking whether gcc understands -c and -o together... yes
checking dependency style of gcc... gcc3
checking how to run the C preprocessor... gcc -E
checking for grep that handles long lines and -e... /usr/bin/grep
checking for egrep... /usr/bin/grep -E
checking for ANSI C header files... yes
checking for sys/types.h... yes
checking for sys/stat.h... yes
checking for stdlib.h... yes
checking for string.h... yes
checking for memory.h... yes
checking for strings.h... yes
checking for inttypes.h... yes
checking for stdint.h... yes
checking for unistd.h... yes
checking minix/config.h usability... no
checking minix/config.h presence... no
checking for minix/config.h... no
checking whether it is safe to define __EXTENSIONS__... yes
checking build system type... x86_64-pc-linux-gnu
```


Make

sudo make install

```
tejal23@HARINI-CHOWDARY: ~$ sudo make install
config.status: creating po/POTFILES
config.status: creating po/Makefile
tejal23@HARINI-CHOWDARY-TEJASWI-SRIHANTH:~/mutt-2.1.3$ sudo make install
./gen_defs ./OPS ./OPS.SIDEBAR ./OPS.PGP ./OPS.SMIME ./OPS.CRYPT > keymap_defs.h
./patchlist.sh < ./PATCHES > patchlist.c
echo 'const char *ReleaseDate = "'$(cd . && ./mkreldate.sh)'"';' > reldate.h
gcc -DPKGDATA_DIR=\"/usr/share/mutt\" -DSYSCONFDIR=\"/etc\" -DBINDIR=\"/usr/bin\" -DMUTTLOCALEDIR=\"/usr/share/locale\" -DHAVE_CONFIG_H=1 -I. -I. -I. -I./imap -Wall -pedantic -Wno-long-long -g -O2 -MT txt2c.o -MD -MP -MF .deps/txt2c.Tpo -c -o txt2c.o txt2c.c
mv -f .deps/txt2c.Tpo .deps/txt2c.Po
gcc -Wall -pedantic -Wno-long-long -g -O2 -o txt2c txt2c.o
( \
  (gcc -v >/dev/null 2>&1 && gcc -v) || \
  (gcc --version >/dev/null 2>&1 && gcc --version) || \
  (gcc -V >/dev/null 2>&1 && gcc -V) || \
  echo "unknown compiler"; \
) 2>&1 | ./txt2c.sh cc_version >conststrings.c
echo "-Wall -pedantic -Wno-long-long -g -O2" | ./txt2c.sh cc_flags >>conststrings.c
grep ac_cs_config= config.status | \
cut -d= -f2- | \
sed -e 's/"/"/' -e 's/$$/' | ./txt2c.sh configure_options >>conststrings.c
mv -f conststrings.c conststrings.c
echo '#define MUTT_VERSION "'$(sh ./version.sh)'"' > version.h.tmp
cmp -s version.h version.h.tmp && rm -f version.h.tmp || mv version.h.tmp version.h
( echo '#include "config.h"; echo '#undef ENABLE_NLS'; echo '#include "mutt.h"; ) \
| gcc -E -DPKGDATA_DIR=\"/usr/share/mutt\" -DSYSCONFDIR=\"/etc\" -DBINDIR=\"/usr/bin\" -DMUTTLOCALEDIR=\"/usr/share/locale\" -DHAVE_CONFIG_H=1 -I. -I. -I. -I./imap - | perl ./hcachever.pl > hcachever.h
make install-recursive
make[1]: Entering directory '/home/tejal23/mutt-2.1.3'
Making install in m4
make[2]: Entering directory '/home/tejal23/mutt-2.1.3/m4'
make[3]: Entering directory '/home/tejal23/mutt-2.1.3/m4'
make[3]: Nothing to be done for 'install-exec-am'.
make[3]: Nothing to be done for 'install-data-am'.
make[3]: Leaving directory '/home/tejal23/mutt-2.1.3/m4'
make[2]: Leaving directory '/home/tejal23/mutt-2.1.3/m4'
Making install in po
make[2]: Entering directory '/home/tejal23/mutt-2.1.3/po'
installing bg.gmo as /usr/share/locale/bg/LC_MESSAGES/mutt.mo
installing ca.gmo as /usr/share/locale/ca/LC_MESSAGES/mutt.mo
installing cs.gmo as /usr/share/locale/cs/LC_MESSAGES/mutt.mo
installing da.gmo as /usr/share/locale/da/LC_MESSAGES/mutt.mo
```

After the successful installation of the mutt.

We need to create some directories for storing the cache message headers, bodies and store certificates, by using the following commands.

```
mkdir -p ~/.mutt/cache/headers
```

```
mkdir ~/.mutt/certificates
```

```
mkdir ~/.mutt/cache/bodies
```

```
touch ~/.mutt/certificates
```

All the queries executed successfully.

To create the configuration file.


```
touch ~/.mutt/muttrc
```



```
teja123@HARINI-CHOWDARY x + v
chmod +x smime_keys
make[3]: Entering directory '/home/teja123/mutt-2.1.3'
echo '#define MUTT_VERSION "'sh ". /version.sh"'> version.h.tmp
cmp -s version.h version.h.tmp && rm -f version.h.tmp || mv version.h.tmp version.h
/usr/bin/mkdir -p '/usr/bin'
/usr/bin/install -c mutt mutt_dotlock mutt_pgprng pgpwrap '/usr/bin'
/usr/bin/mkdir -p '/usr/bin'
/usr/bin/install -c muttbug flea smime_keys '/usr/bin'
make install-exec-hook
make[4]: Entering directory '/home/teja123/mutt-2.1.3'
if test -f /usr/bin/mutt_dotlock && test -f /usr/bin/mutt_dotlock ; then \
    rm -f /usr/bin/mutt_dotlock ; \
    ln -sf /usr/bin/mutt_dotlock /usr/bin/mutt_dotlock ; \
fi
if test -f /usr/bin/mutt_dotlock && test xmail != x ; then \
    chgrp mail /usr/bin/mutt_dotlock && \
    chmod 2755 /usr/bin/mutt_dotlock || \
    { echo "Can't fix mutt_dotlock's permissions! This is required to lock mailboxes in the mail spool directory." >&2 ; exit 1 ; } \
fi
make[4]: Leaving directory '/home/teja123/mutt-2.1.3'
/usr/bin/mkdir -p /etc
/usr/bin/install -c -m 644 ./mime.types /etc/mime.types.dist
if [ ! -f /etc/mime.types ]; then \
    /usr/bin/install -c -m 644 ./mime.types /etc; \
fi
make[3]: Leaving directory '/home/teja123/mutt-2.1.3'
make[2]: Leaving directory '/home/teja123/mutt-2.1.3'
make[1]: Leaving directory '/home/teja123/mutt-2.1.3'
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$ mkdir -p ~/.mutt/cache/headers
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$ mkdir ~/.mutt/certificates
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$ mkdir ~/.mutt/cache/bodies
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$ touch ~/.mutt/certificates
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$ touch ~/.mutt/mutttrc
teja123@HARINI-CHOWDARY-TEJASWI-SRIKANTH:~/mutt-2.1.3$
```

Now type the following command

Vim ~/.mutt/muttrc

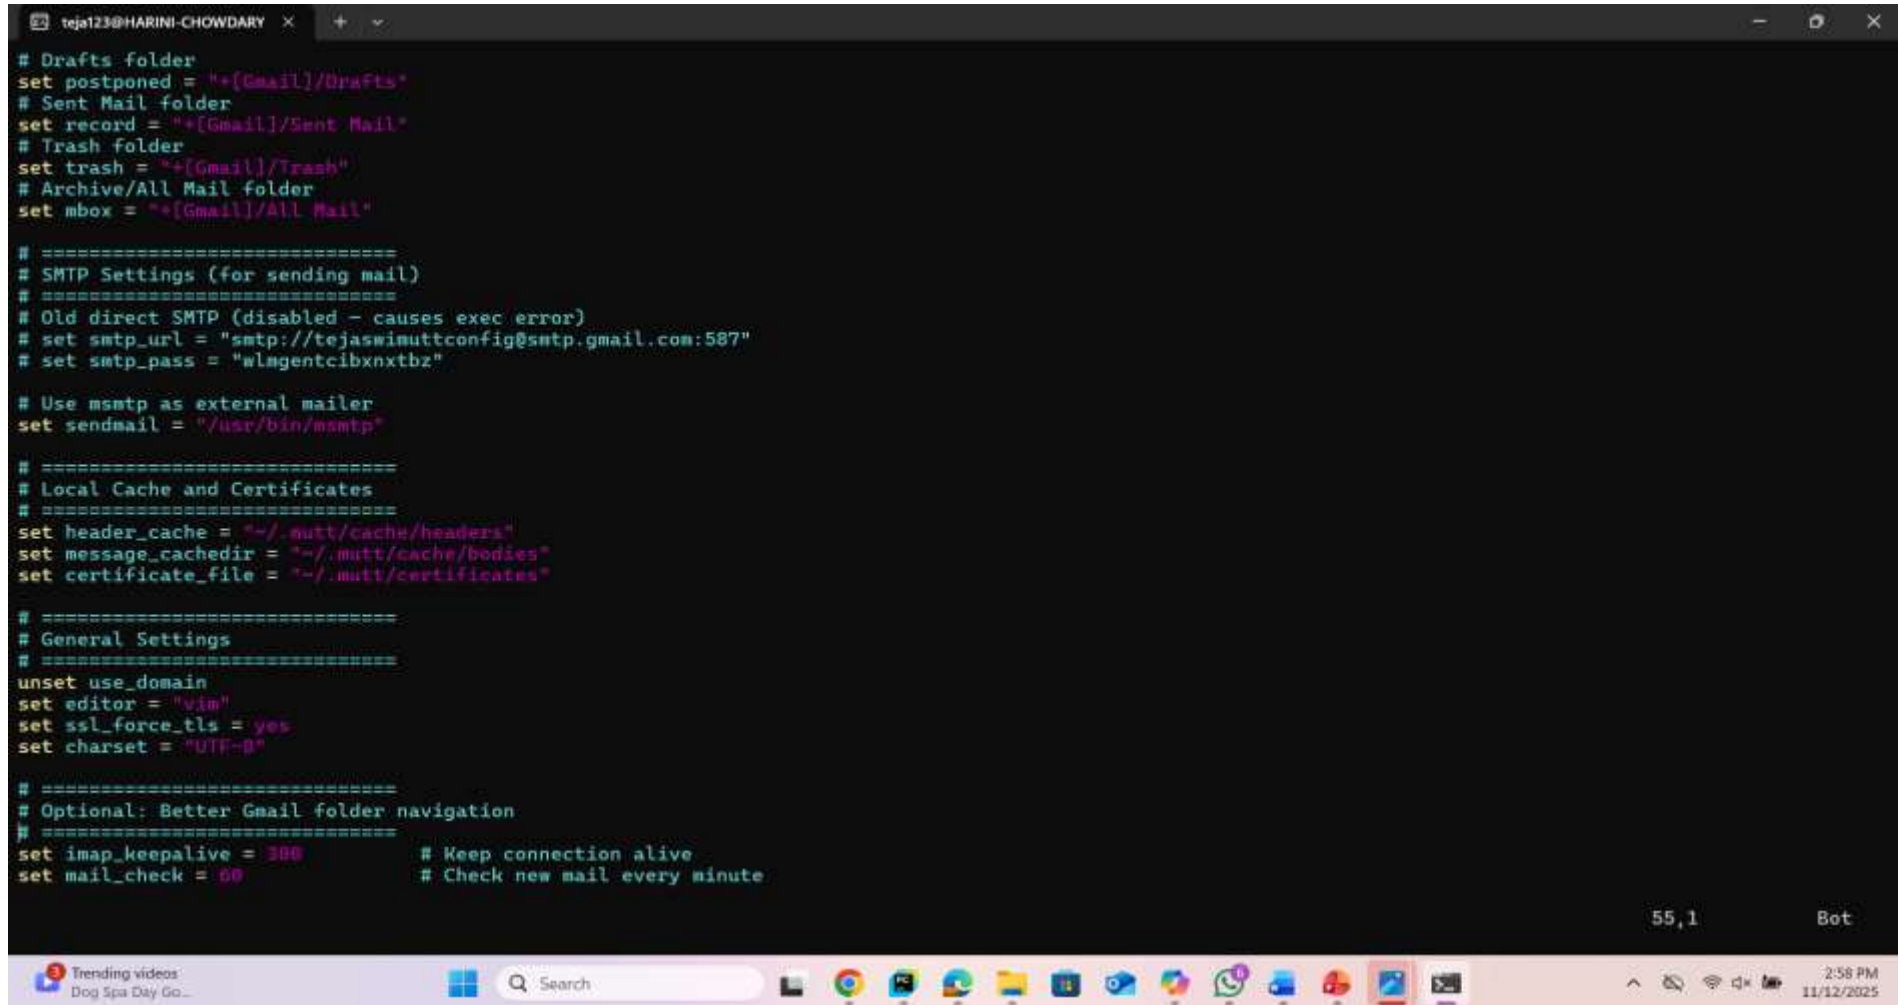

```
# Drafts folder
set postponed = "+[Gmail]/Drafts"
# Sent Mail folder
set record = "+[Gmail]/Sent Mail"
# Trash folder
set trash = "+[Gmail]/Trash"
# Archive/All Mail folder
set mbox = "+[Gmail]/All Mail"

# =====
# SMTP Settings (for sending mail)
# =====
# Old direct SMTP (disabled - causes exec error)
set smtp_url = "smtp://tejaswinutttconfig@gmail.com:587"
set smtp_pass = "wlagenticibxnxtbz"

# Use msmtplib as external mailer
set sendmail = "/usr/bin/msmtplib"


# =====
# Local Cache and Certificates
# =====
set header_cache = "~/.mutt/cache/headers"
set message_cachedir = "~/.mutt/cache/bodies"
set certificate_file = "~/.mutt/certificates"

# =====
# General Settings
# =====
unset use_domain
set editor = "vim"
set ssl_force_tls = yes
set charset = "UTF-8"


# =====
# Optional: Better Gmail folder navigation
# =====
set imap_heartbeat = 300 # Keep connection alive
set mail_check = 60 # Check new mail every minute
```

55,1 Bot

In order to send the mail we have on the less security app on in gmail settings

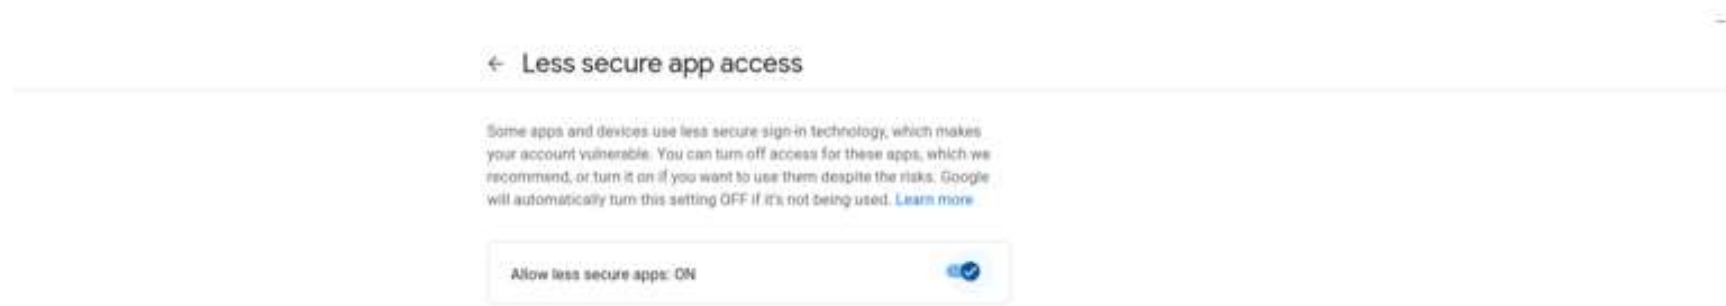


Now type the command
mutt In the terminal
Then it opens the following command

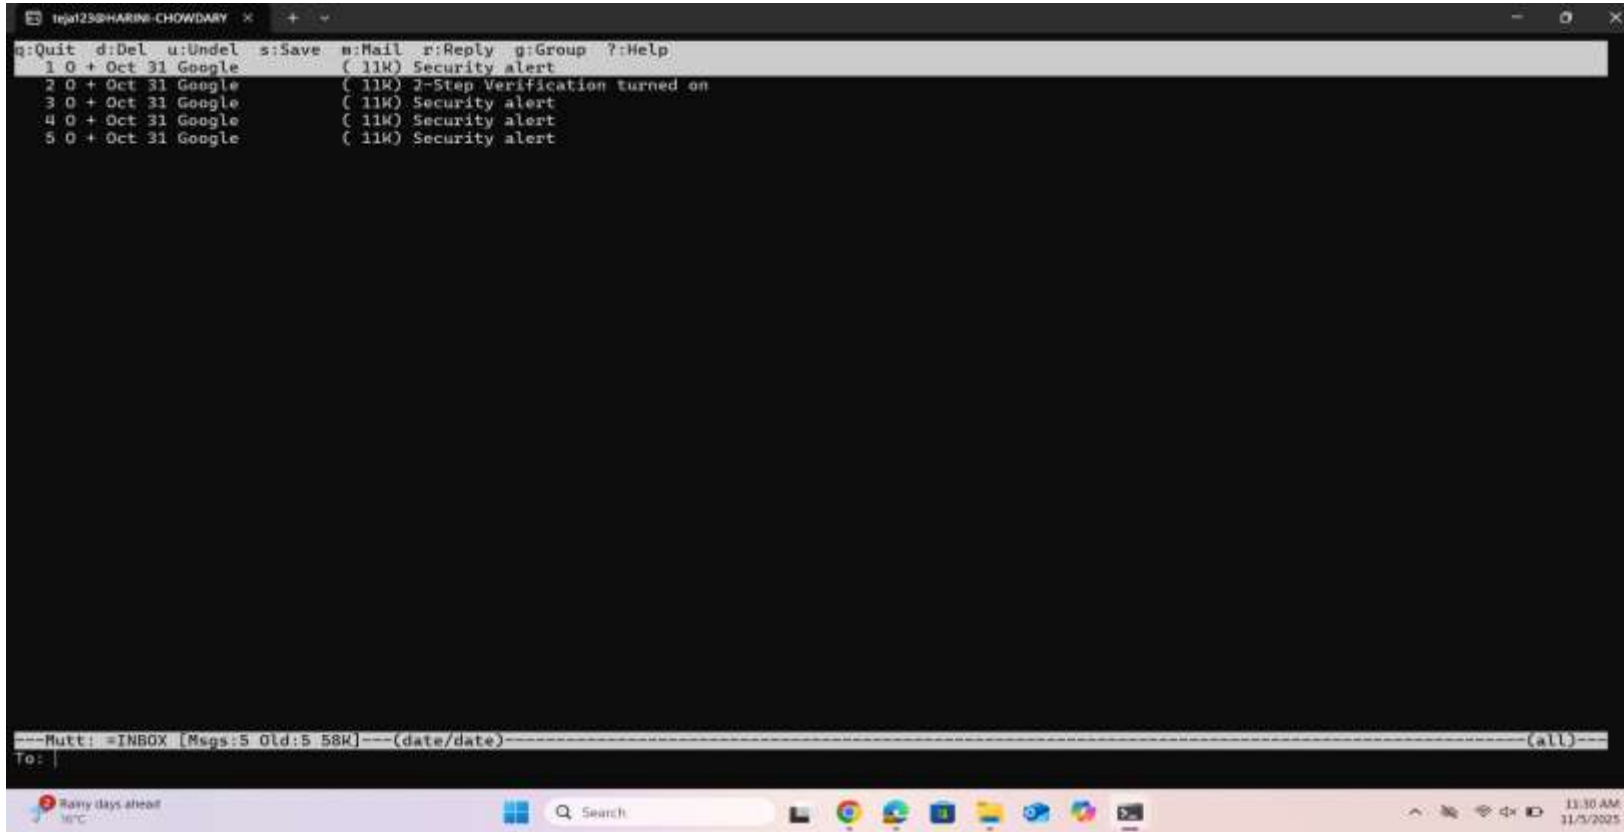

```
teja123@HARINI-CHOWDARY
q:Quit d:Del u:Undel s:Save m:Mail r:Reply g:Group ?:Help
1 0 + Oct 31 Google (11K) Security alert
2 0 + Oct 31 Google (11K) 2-Step Verification turned on
3 0 + Oct 31 Google (11K) Security alert
4 0 + Oct 31 Google (11K) Security alert
5 0 + Oct 31 Google (11K) Security alert

-----Mutt: =INBOX [Msgs:5 Old:5 58K]--(date/date)--(all)-----
To: |
```


Once the terminal is opened by typing the following command we can do All the operations.
Now we will see how to compose the mail using mutt terminal.
To send the mail press option 'm' from the keyboard.

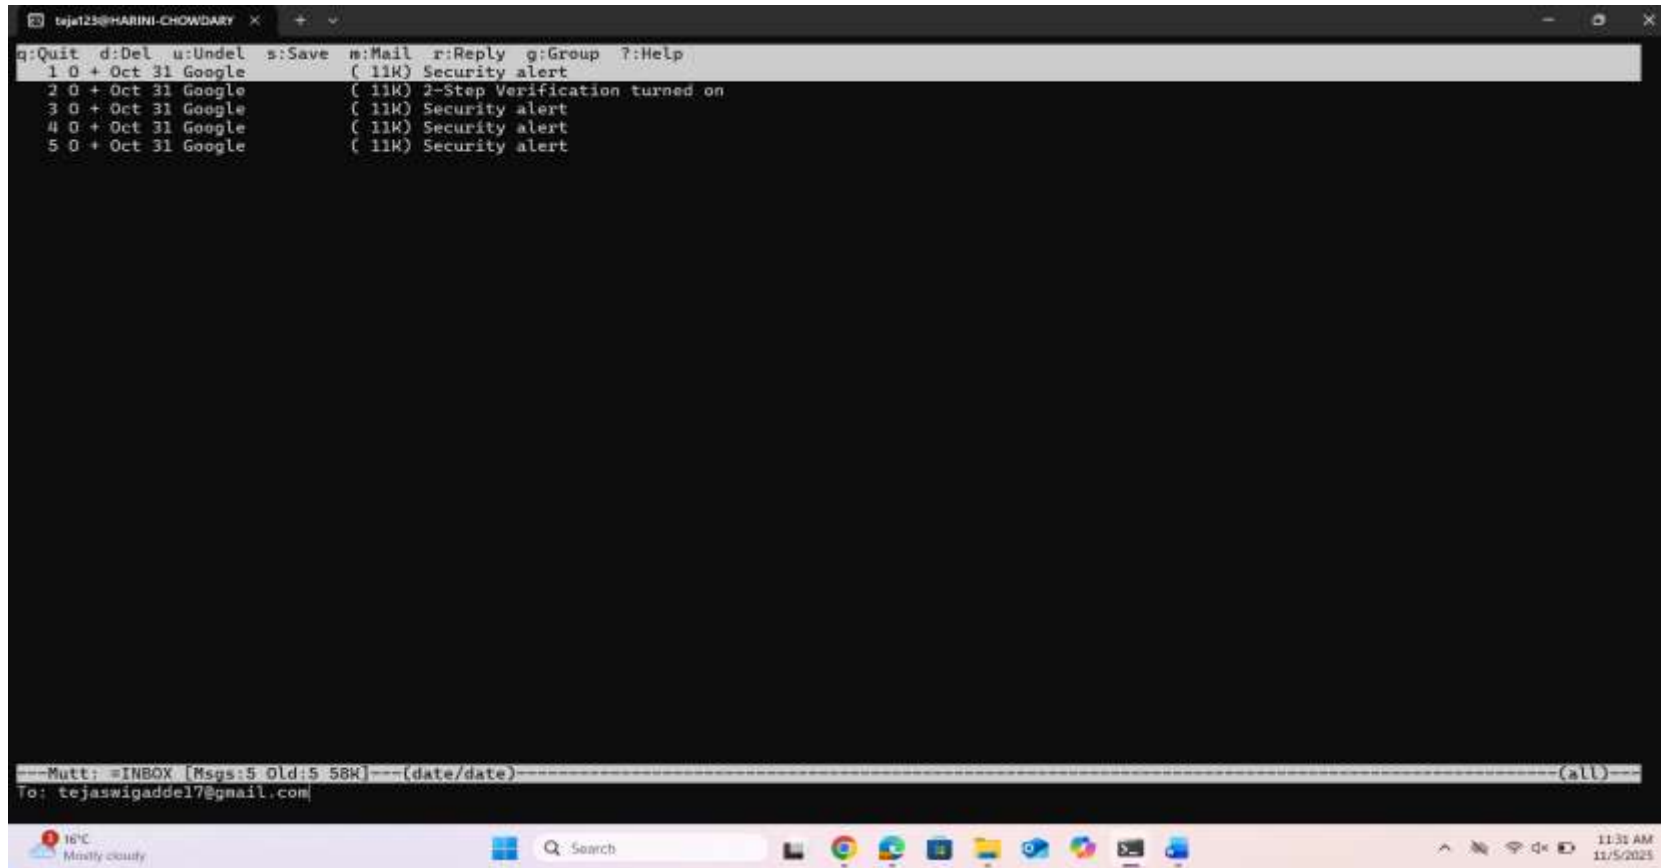

```
teja123@MARINI-CHOWDARY
q:Quit d:Del u:Undel s:Save m:Mail r:Reply g:Group ?:Help
1 0 + Oct 31 Google ( 11K) Security alert
2 0 + Oct 31 Google ( 11K) 2-Step Verification turned on
3 0 + Oct 31 Google ( 11K) Security alert
4 0 + Oct 31 Google ( 11K) Security alert
5 0 + Oct 31 Google ( 11K) Security alert

---Mutt: INBOX [Msgs:5 Old:5 58K]---[date/date]---(all)---
To: tejaswigadde17@gmail.com
```


Like the above screenshot type the to mail address and click on enter
Now it asks to enter the subject.

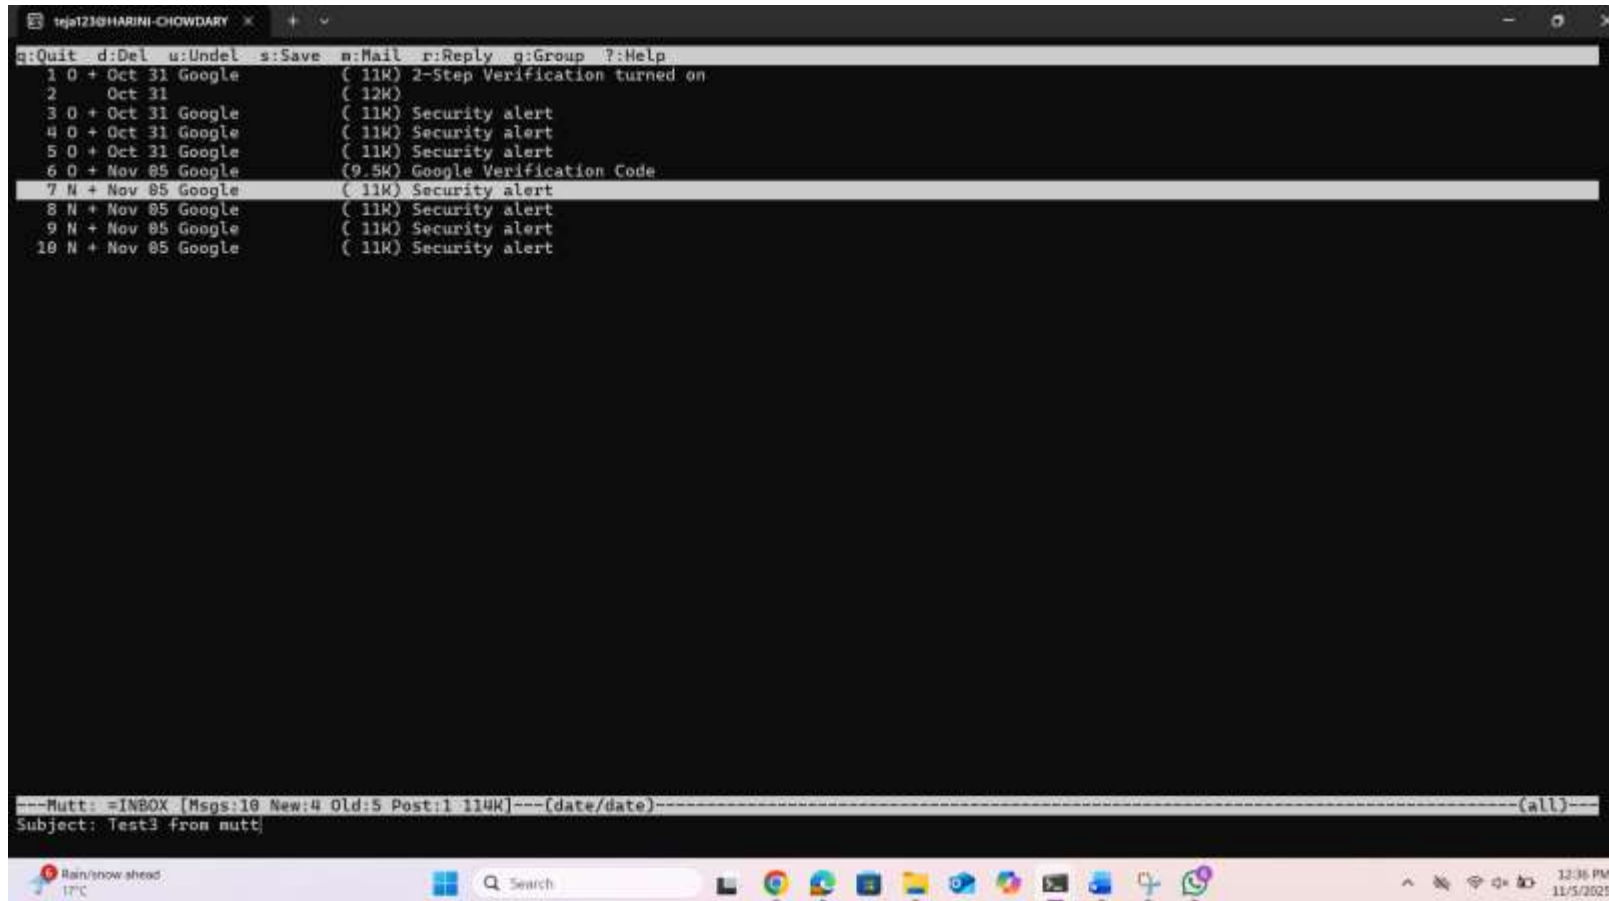

```
teja123@HARINI-CHOWDARY
n:Quit d:Del u:Undel s:Save m:Mail r:Reply g:Group ? :Help
1 0 + Oct 31 Google ( 11K) 2-Step Verification turned on
2      Oct 31      ( 12K)
3 0 + Oct 31 Google ( 11K) Security alert
4 0 + Oct 31 Google ( 11K) Security alert
5 0 + Oct 31 Google ( 11K) Security alert
6 0 + Nov 05 Google (9.5K) Google Verification Code
7 N + Nov 05 Google ( 11K) Security alert
8 N + Nov 05 Google ( 11K) Security alert
9 N + Nov 05 Google ( 11K) Security alert
10 N + Nov 05 Google ( 11K) Security alert

---Mutt: =INBOX [Msgs:10 New:4 Old:5 Post:1 114K]---(date/date)---(all)---
Subject: Test3 from mutt
```


Now type the subject and click on enter

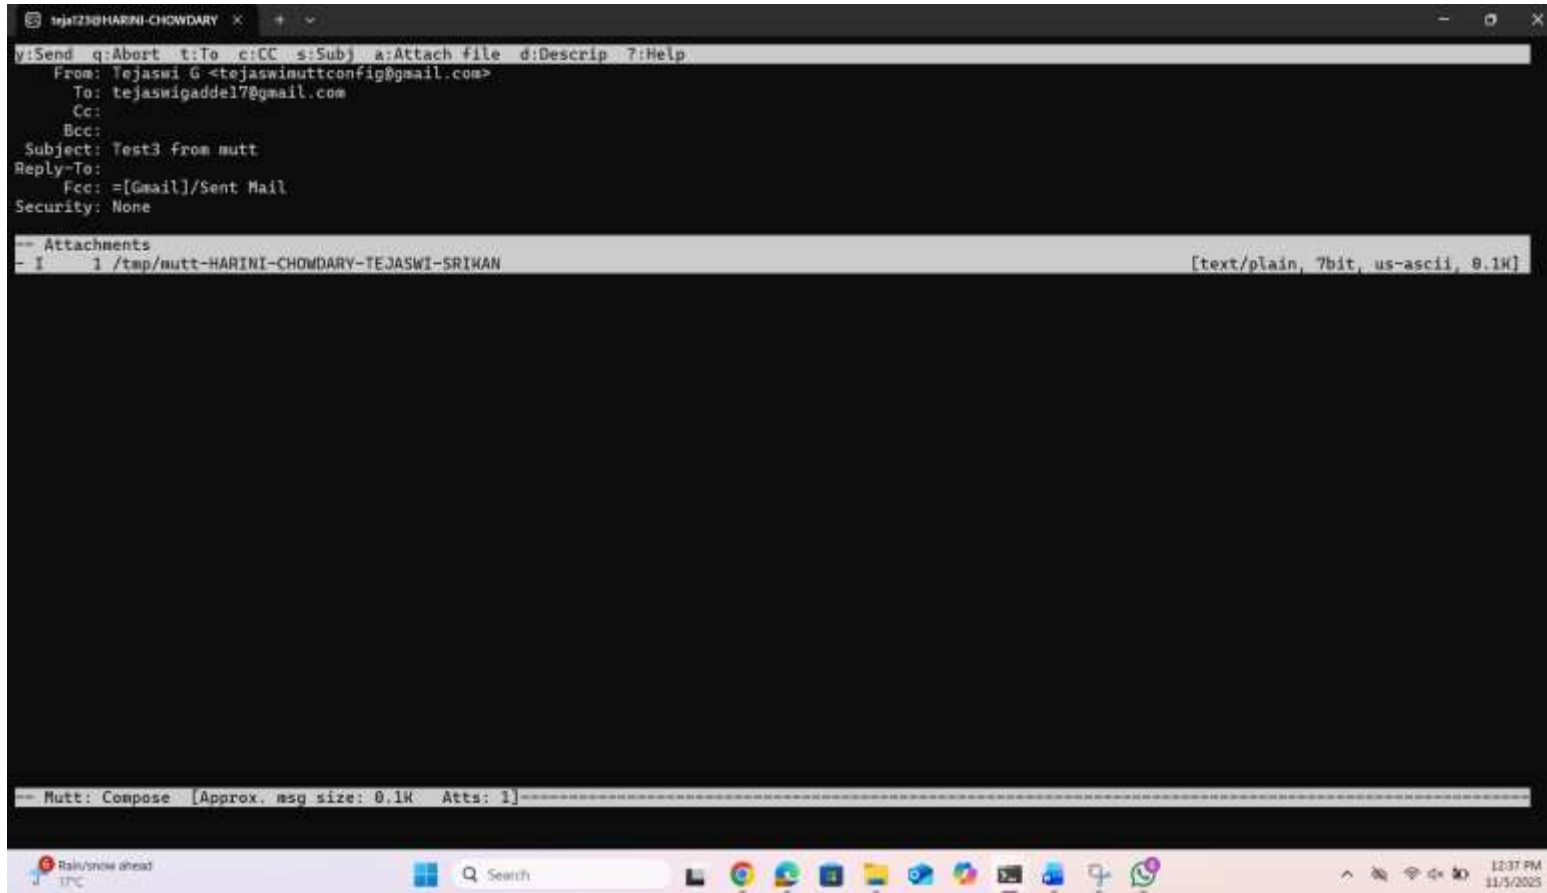

The screenshot shows a terminal window with the Mutt email composer. The window title is 'tejas123@HARINI-CHOWDARY'. The interface includes a menu bar at the top with options: y:Send q:Abort t:To c:CC s:Subj a:Attach file d:Descrip ? :Help. Below this, the email header is displayed: From: Tejaswi G <tejaswinuttconfig@gmail.com>, To: tejaswigaddel17@gmail.com, Cc:, Bcc:, Subject: Test3 from mutt, Reply-To:, Fcc: =[Gmail]/Sent Mail, Security: None. A section for attachments follows, showing one attachment: 1 /tmp/mutt-HARINI-CHOWDARY-TEJASWI-SRIKAN [text/plain, 7bit, us-ascii, 0.1K]. At the bottom of the terminal, a status bar reads: Mutt: Compose [Approx. msg size: 0.1K Atts: 1]. The Windows taskbar is visible at the bottom of the screen, showing the time as 12:37 PM on 11/5/2025.

```
tejas123@HARINI-CHOWDARY
y:Send q:Abort t:To c:CC s:Subj a:Attach file d:Descrip ? :Help
From: Tejaswi G <tejaswinuttconfig@gmail.com>
To: tejaswigaddel17@gmail.com
Cc:
Bcc:
Subject: Test3 from mutt
Reply-To:
Fcc: =[Gmail]/Sent Mail
Security: None

-- Attachments
- 1      1 /tmp/mutt-HARINI-CHOWDARY-TEJASWI-SRIKAN      [text/plain, 7bit, us-ascii, 0.1K]

-- Mutt: Compose [Approx. msg size: 0.1K Atts: 1]
```

Press Y to send the mail

```
teja23@HARINI-CHOWDARY
q:Quit d:Del u:Undel s:Save n:Mail r:Reply g:Group ?:Help
1 0 + Oct 31 Google ( 11K) 2-Step Verification turned on
2 0 + Oct 31 Google ( 12K)
3 0 + Oct 31 Google ( 11K) Security alert
4 0 + Oct 31 Google ( 11K) Security alert
5 0 + Oct 31 Google ( 11K) Security alert
6 0 + Nov 05 Google (0.5K) Google Verification Code
7 N + Nov 05 Google ( 11K) Security alert
8 N + Nov 05 Google ( 11K) Security alert
9 N + Nov 05 Google ( 11K) Security alert
10 N + Nov 05 Google ( 11K) Security alert

---Mutt: =INBOX [Msgs:10 New:4 Old:5 Post:1 114K]---(date/date)---(all)---
Mail sent.
```