
Matrimony Deployment Guide

Oct 23, 2026 · @Teju

Step-by-step commands to take a change from your laptop to the UAT server (`anupamshaadi.in`) for all five apps, plus where every file lives on the server.

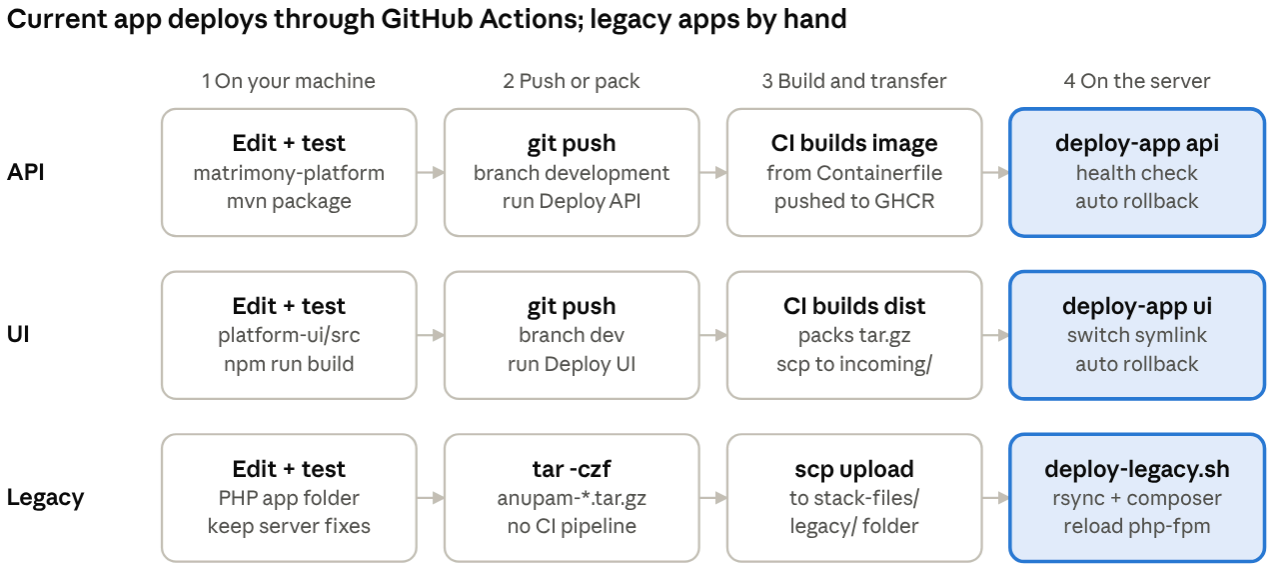

deployment flow · 3 apps, 4 stages

1. Where everything is

Server: `anupamshaadi.in` (AlmaLinux 10). Log in with `ssh root@anupamshaadi.in` . All apps sit behind one Nginx container.

App	URL	Local folder (your PC)	Code on server	Settings / passwords on server	Logs on server
Backend API (Spring Boot)	`https://anupamshaadi.in/api`	`D:\WORK\Weoto\Anupam backend\matrimony-platform`	Container `matrimony-api` (image `ghcr.io/weototechnologies/matrimony-api:<sha>`)	`/etc/apps/matrimony/app.env`	`podman logs -f matrimony-api`
Frontend UI (React)	`https://anupamshaadi.in/`	`D:\WORK\Weoto\Anupam backend\matrimony-platform-ui`	`/opt/apps/matrimony/ui/current` (link to `ui/releases/<tag>/`)	Baked into build from GitHub repo secrets	`podman logs -f nginx`
Legacy Admin (CI3)	`https://admin.anupamshaadi.in/`	`D:\WORK\Weoto\anupam-admin-legacy\anupam-legacy-admin\anupam-admin-main`	`/opt/apps/legacy/anupam-admin/current`	`/etc/apps/legacy/anupam-admin/app.env`	`/opt/apps/legacy/anupam-admin/shared/logs`
Legacy API (CI4)	`https://api.anupamshaadi.in/`	`anupam_api-main` folder	`/opt/apps/legacy/anupam-api/current`	`/etc/apps/legacy/anupam-api/app.env`	`/opt/apps/legacy/anupam-api/shared/writable/logs`

App	URL	Local folder (your PC)	Code on server	Settings / passwords on server	Logs on server
Legacy Portal (CI4)	`https://anupamshaadi.in/anupamshaadi-new-app/`	`anupam_portal-main` folder	`/opt/apps/legacy/anupam-portal/current`	`/etc/apps/legacy/anupam-portal/app.env`	`/opt/apps/legacy/anupam-portal/shared/writable/logs`

Other server locations:

Path	What it is
`/opt/apps/stack/compose.yaml`	Defines containers: `nginx`, `matrimony-api`, `matrimony-valkey`, `matrimony-mysql`
`/opt/apps/stack/nginx/conf.d/`	Nginx site configs (`matrimony.conf`, `anupam-admin.conf`, `anupam-api.conf`, `anupam-portal.inc`)
`/opt/apps/matrimony/incoming/`	UI bundles uploaded by GitHub Actions
`/root/stack-files/`	Deploy scripts + `legacy/` folder where you upload legacy `.tar.gz` files
`/root/stack-files/legacy/env/`	Master copy of legacy `.app.env` files (script copies them to `/etc/apps/legacy/`)
`/opt/apps/legacy/anupam-admin/shared/uploads`	Admin user photos (never overwritten by a deploy)
`/usr/local/sbin/deploy-app`	Script that deploys API/UI (Matrimony only)
`/var/lib/apps/matrimony/mysql`	MySQL data (database `shadi`, used by all apps)
`/var/backups/matrimony/mysql`	Daily MySQL backups, 02:00 UTC, last 7 kept
`/etc/letsencrypt/live/`	SSL certificates

The Legacy API and Portal folders in this repo (`legacy/API`, `legacy/Web`) are old cPanel copies. Do not deploy them as they are (see section 4).

2. Deploy Backend API

No JAR to copy. GitHub Actions builds a Docker/Podman image and the server pulls it. Downtime: under 1 minute.

Step 1 — Local (PowerShell): build and test

```
cd "D:\WORK\Weoto\Anupam backend\matrimony-platform"
mvn clean package -DskipTests
mvn spring-boot:run
```

Step 2 — Local: push code

```
git add .
git commit -m "your change"
git push origin development
```

Step 3 — GitHub: run deploy

1. Open https://github.com/WeotoTechnologies/matrimony-platform/actions
2. Click **Deploy API (UAT)** > **Run workflow** > branch `development` > **Run workflow**.
3. Wait for the green tick (about 5–10 min). Red = open the run and read the error.

The workflow runs `sudo /usr/local/sbin/deploy-app matrimony api <commit-sha>` on the server. If the new API does not start within 2 minutes, it switches back to the old one by itself.

Step 4 — Server: check

```
ssh root@anupamshaadi.in
podman ps
podman logs --tail 100 matrimony-api
curl -fkSs https://127.0.0.1/api/ajax/membership-plan -H 'Host:
anupamshaadi.in' >/dev/null && echo api-ok
```

Added a new DB column or table? Run the SQL on the server **before** Step 3 (Hibernate is set to `validate`, so the API will not start without it):

```
systemctl start matrimony-mysql-backup.service
podman exec -i matrimony-mysql sh -c 'MYSQL_PWD="$MYSQL_ROOT_PASSWORD" mysql
-uroot shadi' < /root/V5__your_change.sql
```

(Copy the `.sql` up first: `scp V5__your_change.sql root@anupamshaadi.in:/root/`.)

3. Deploy Frontend UI

No `dist/` to copy. GitHub Actions builds it, uploads it and switches the site. No downtime. If backend and frontend both changed, deploy the backend first.

Step 1 — Local (PowerShell): build and test

```
cd "D:\WORK\Weoto\Anupam backend\matrimony-platform-ui"
npm ci
npm run lint
npm run build
```

Step 2 — Local: push code

```
git add .
git commit -m "your change"
git push origin dev
```

Step 3 — GitHub: run deploy

1. Open https://github.com/WeotoTechnologies/matrimony-platform-ui/actions
2. Click **Deploy UI (UAT)** > **Run workflow** > branch `dev` > **Run workflow**.
3. Wait for the green tick (about 3–5 min).

The workflow uploads `matrimony-ui-<tag>.tar.gz` to `/opt/apps/matrimony/incoming/`, then `deploy-app` unpacks it to `/opt/apps/matrimony/ui/releases/<tag>/` and points `ui/current` at it.

Step 4 — Server: check

```
ssh root@anupamshaadi.in
ls -l /opt/apps/matrimony/ui/current
ls -1t /opt/apps/matrimony/ui/releases
curl -fkSs https://127.0.0.1/ -H 'Host: anupamshaadi.in' >/dev/null && echo
ui-ok
```

Then open `https://anupamshaadi.in` in the browser and press Ctrl+F5.

4. Deploy Legacy Admin / API / Portal

No GitHub Actions. You make a `.tar.gz`, upload it, and run one script on the server. Do only the app(s) you changed.

Before you start — these lines must be in the code, or the app shows a blank 500 or talks to the live `.com` site:

- API and Portal `public/index.php`: `require FCPATH . '../app/Config/Paths.php';` (not `api_ci` / `web_ci`)
- Portal `app/Config/Constants.php`: `API_URL` and `BASE_URL` read from `$_ENV`
- Admin: `application/config/legacy_env.php` exists and is included by `config.php` and `database.php`

- No real `.env` file inside the folder

Step 1 — Local (PowerShell): make the tar.gz

Admin — run from the folder that contains `anupam-admin-main`:

```
cd "D:\WORK\Weoto\anupam-admin-legacy\anupam-legacy-admin"
tar -czf anupam-admin.tar.gz --exclude='anupam-admin-main/uploads' --
exclude='anupam-admin-main/application/logs' --exclude='anupam-admin-
main/application/cache' --exclude='anupam-admin-main/error_log' --
exclude='anupam-admin-main/info.php' --exclude='anupam-admin-
main/phpinfo.php' --exclude='anupam-admin-main/mail_test.php' anupam-admin-
main
```

API — run from the folder that contains `anupam_api-main`:

```
tar -czf anupam-api.tar.gz --exclude='anupam_api-main/vendor' --
exclude='anupam_api-main/writable' --exclude='anupam_api-main/.env'
anupam_api-main
```

Portal — run from the folder that contains `anupam_portal-main`:

```
tar -czf anupam-portal.tar.gz --exclude='anupam_portal-main/vendor' --
exclude='anupam_portal-main/writable' --exclude='anupam_portal-main/.env'
anupam_portal-main
```

File names must be exactly `anupam-admin.tar.gz`, `anupam-api.tar.gz`, `anupam-portal.tar.gz`.

Step 2 — Local: upload to the server

```
scp anupam-admin.tar.gz root@anupamshaadi.in:/root/stack-files/legacy/
scp anupam-api.tar.gz root@anupamshaadi.in:/root/stack-files/legacy/
scp anupam-portal.tar.gz root@anupamshaadi.in:/root/stack-files/legacy/
```

Step 3 — Server: run the deploy script

```
ssh root@anupamshaadi.in
cd /root/stack-files
bash deploy-legacy.sh
```

It ends with `Done. Verify:`. It copies code into `/opt/apps/legacy/<app>/current`, runs `composer install` for API and Portal, reloads PHP-FPM and Nginx. User uploads, the database and the Matrimony API are not touched. If it stops with an error, nothing after that line ran; fix and run it again.

Step 4 — Server: check

```
curl -fsS -o /dev/null -H 'Host: admin.anupamshaadi.in' https://127.0.0.1/ &&
echo admin-ok
curl -fsS -o /dev/null -H 'Host: api.anupamshaadi.in' https://127.0.0.1/ &&
echo legacy-api-ok
curl -fsS -o /dev/null -H 'Host: anupamshaadi.in'
https://127.0.0.1/anupamshaadi-new-app/ && echo portal-ok
```

Then in the browser: log in to `https://admin.anupamshaadi.in/` and open `https://anupamshaadi.in/anupamshaadi-new-app/`.

There is no automatic rollback for legacy apps. Keep the previous `.tar.gz` on your PC; to undo, upload it again and re-run Step 3.

5. Change settings or passwords

No code deploy needed for these.

App	Edit this	Then run
Backend API	Local `matrimony-platform/.env.uat` (`KEY=value`, no quotes, no `$`)	Git Bash in `matrimony-platform`: `deploy/push-env.sh .env.uat root@anupamshaadi.in` — installs `/etc/apps/matrimony/app.env`, restarts API, restores the old file if the API fails
Frontend UI	GitHub repo secret in `matrimony-platform-ui` > Settings > Secrets and variables > Actions	Run **Deploy UI (UAT)** again
Legacy Admin / API / Portal	On server: `/root/stack-files/legacy/env/anupam-<app>.app.env`	`cd /root/stack-files && bash deploy-legacy.sh`
Nginx	On server: `/opt/apps/stack/nginx/conf.d/<file>`	`podman exec nginx nginx -t && podman exec nginx nginx -s reload`

Never commit `.env`, `.env.uat` or any `app.env` file to git.

6. Useful server commands

Run as root after `ssh root@anupamshaadi.in`.

To do	Command
See running containers	`podman ps`
Backend API logs	`podman logs -f matrimony-api`
Nginx logs	`podman logs -f nginx`
PHP (legacy) logs	`journalctl -u php-fpm -f`
Restart backend API	`cd /opt/apps/stack && podman-compose up -d --force-recreate matrimony-api`
Restart Nginx	`podman exec nginx nginx -s reload`
Restart PHP (legacy)	`systemctl reload php-fpm`
List backend versions kept	`podman images ghcr.io/weototechnologies/matrimony-api`
Roll back backend	`deploy-app matrimony api <older-sha>`
List UI versions kept	`ls -1t /opt/apps/matrimony/ui/releases`
Roll back UI	`deploy-app matrimony ui <older-tag>`
Backup database now	`systemctl start matrimony-mysql-backup.service`
Open MySQL shell	`podman exec -it matrimony-mysql sh -c 'MYSQL_PWD="$MYSQL_ROOT_PASSWORD" mysql -uroot shadi'`
Disk space	`df -h`
Memory per container	`podman stats --no-stream`

The last 5 backend images and last 5 UI releases are kept, so rollback works only for those.