


HireOS Interview — architecture and Zoom data flow

All connections to Zoom and OpenAI are HTTPS/TLS. PostgreSQL and the internal services are reachable only inside the private Docker network.

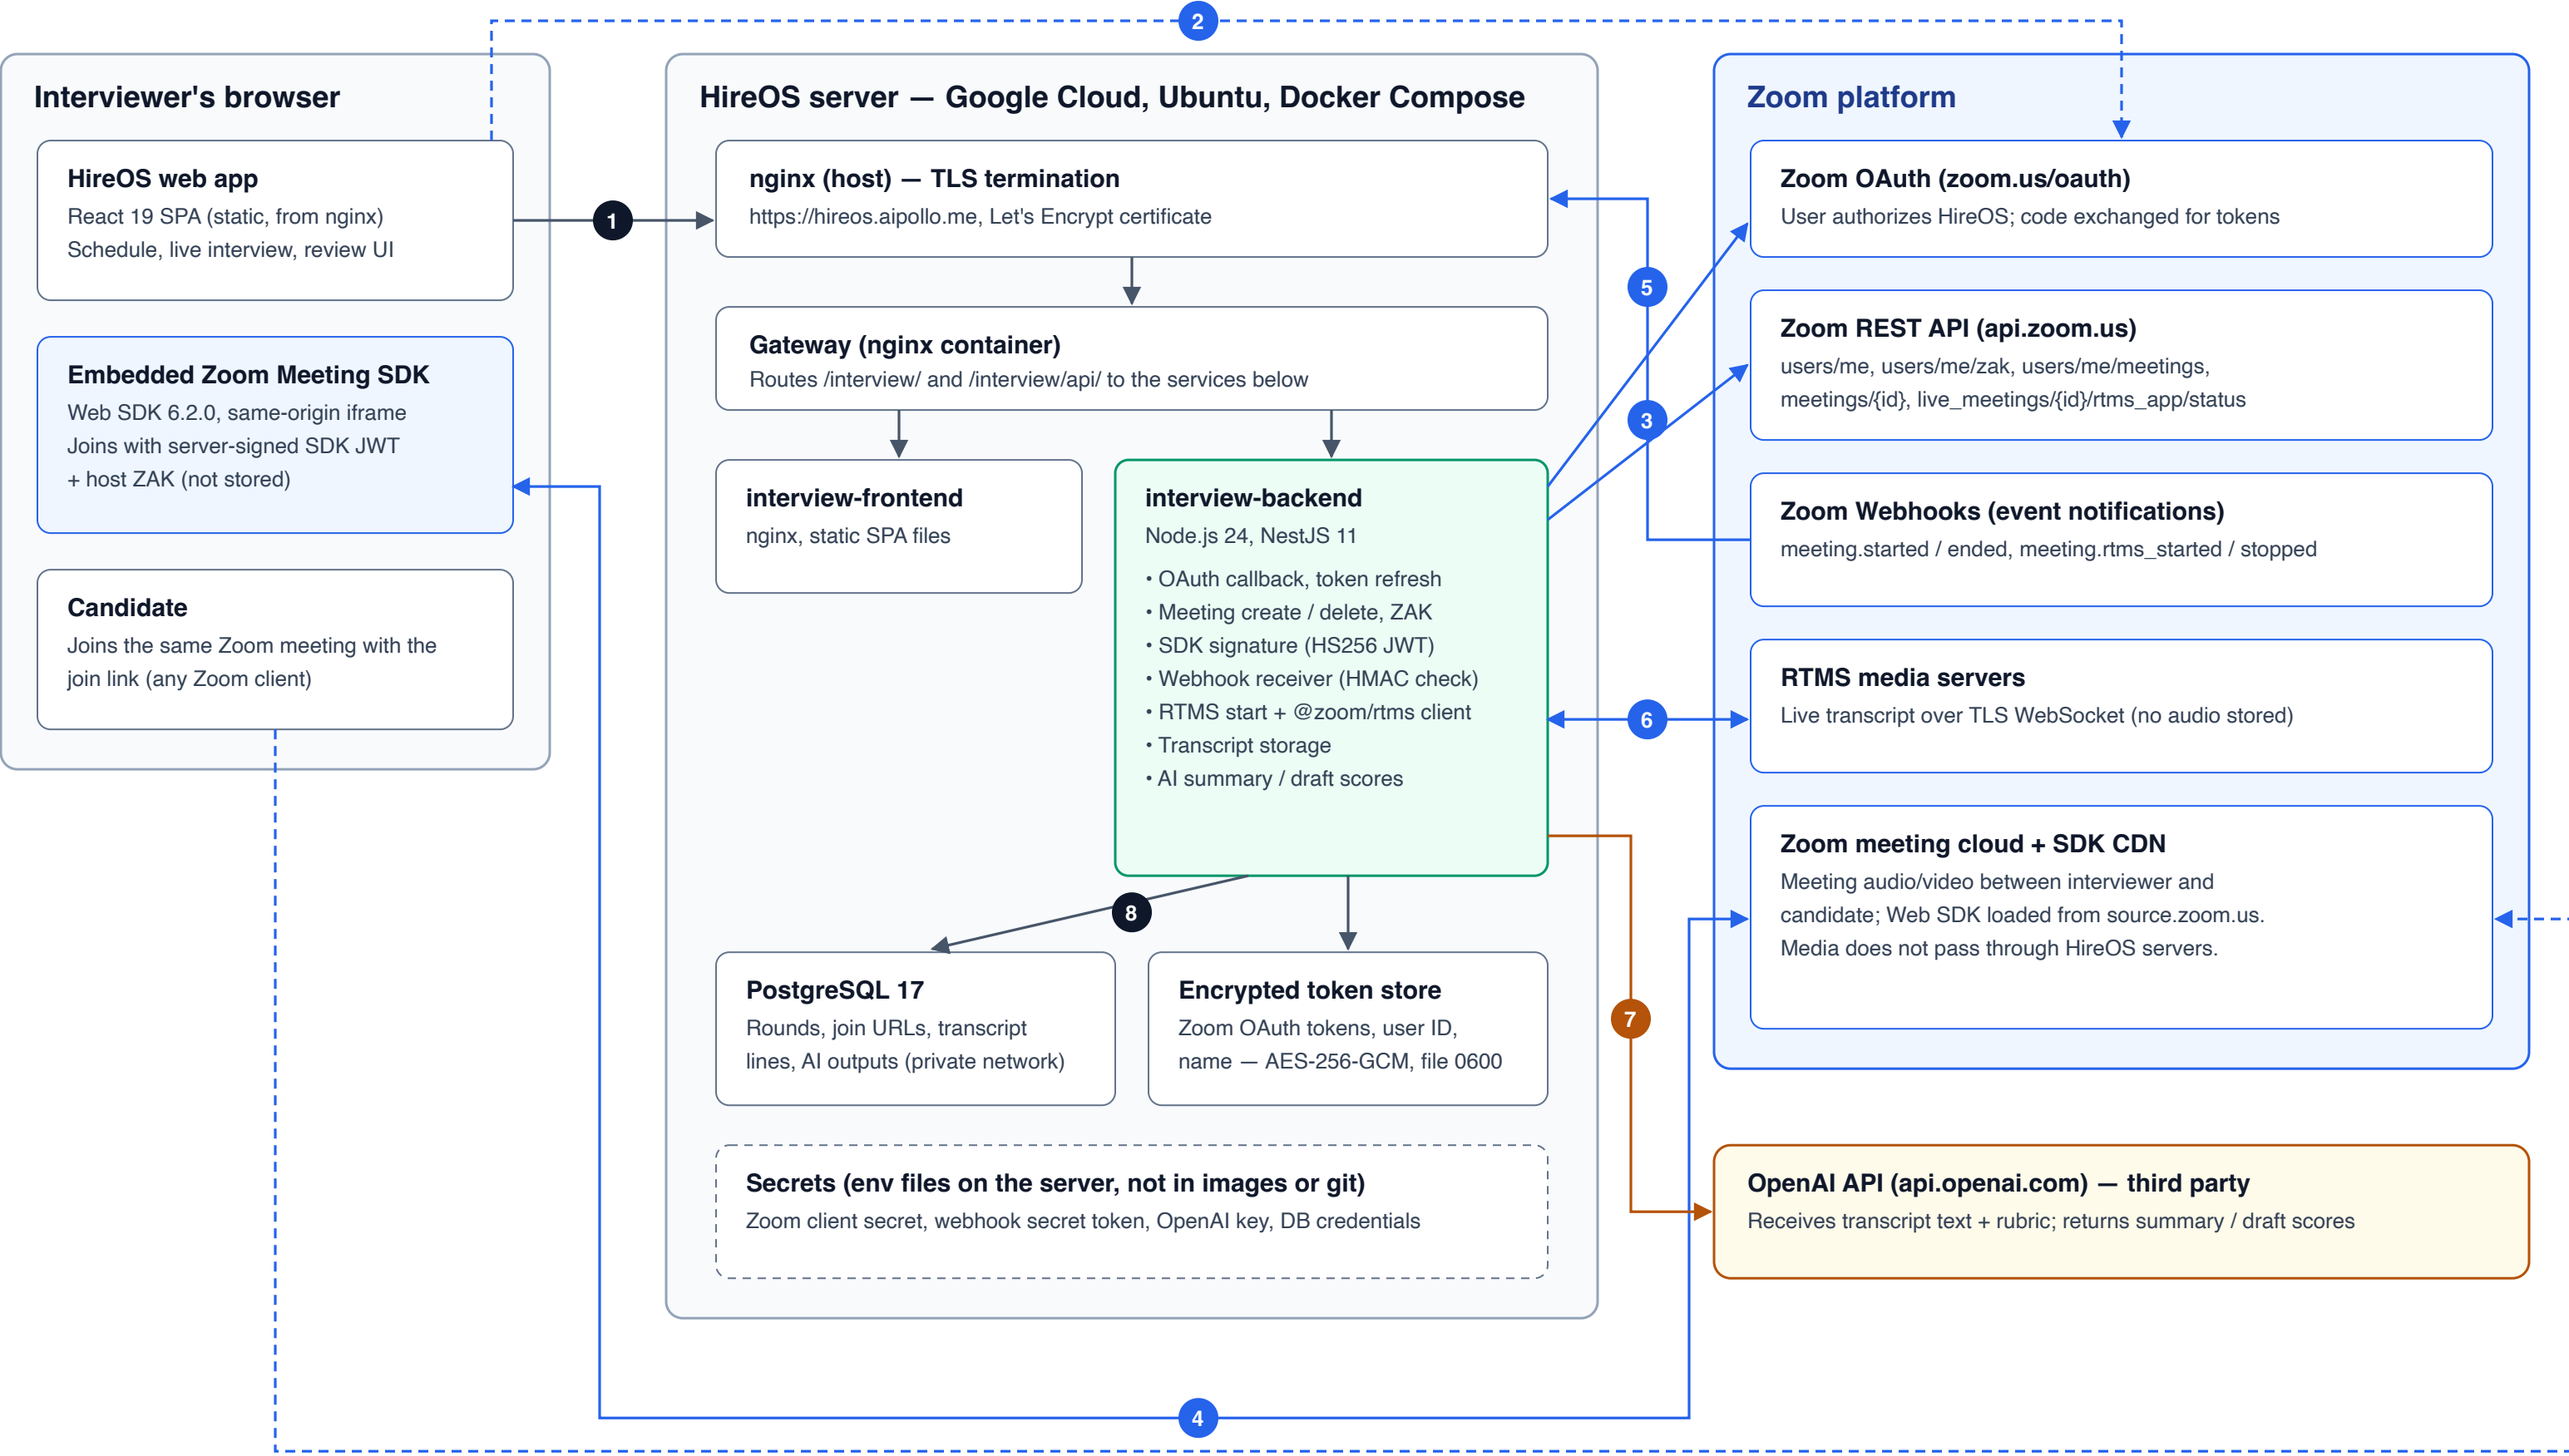

Flow

1 Interviewer uses HireOS over HTTPS. 2 Interviewer authorizes HireOS on Zoom OAuth; Zoom redirects back to https://hireos.aipollo.me/hireos/interview/api/integrations/zoom/callback and the backend exchanges the code for tokens. 3 Backend calls the Zoom REST API to create the meeting, get the host ZAK and start RTMS. 4 The embedded Meeting SDK joins the meeting directly with Zoom. 5 Zoom webhooks reach https://hireos.aipollo.me/hireos/interview/api/meetings/webhooks/zoom (HMAC-verified). 6 Backend receives the live transcript over RTMS. 7 Transcript text and the rubric are sent to the OpenAI API to draft a summary and scores for human review. 8 Transcripts and join URLs are stored in PostgreSQL; OAuth tokens are stored encrypted (AES-256-GCM).