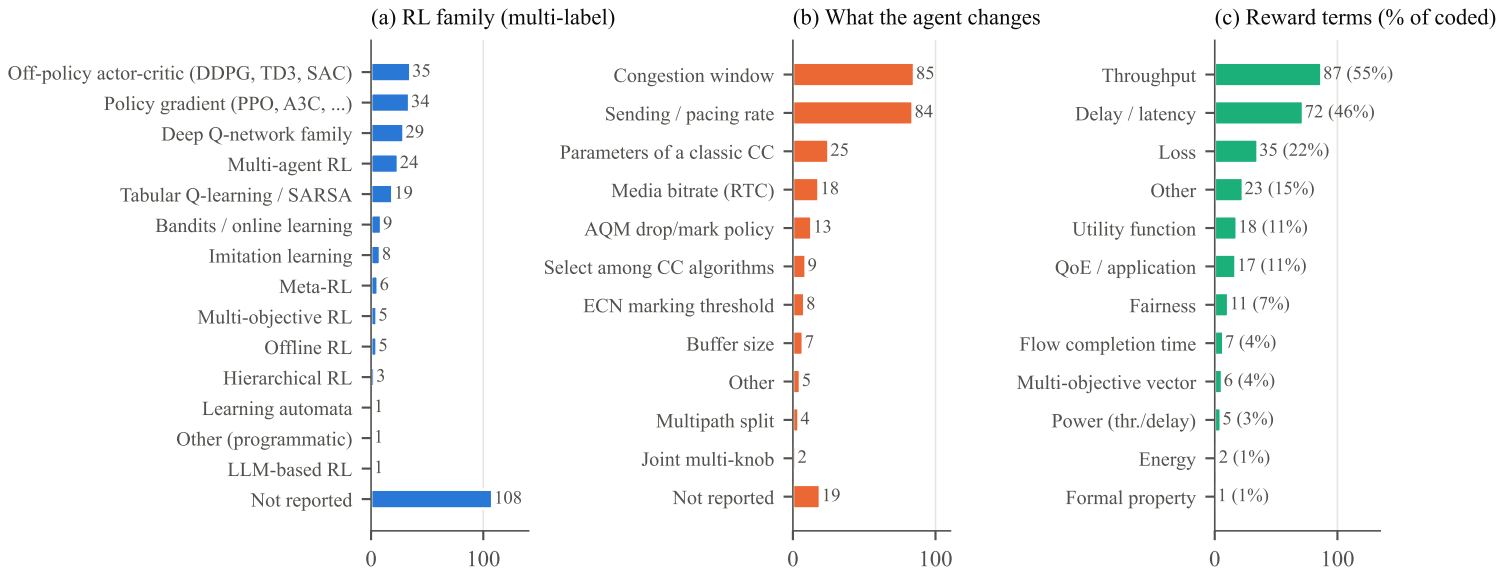
(a) RL family (multi-label)
Off-policy actor-critic (DDPG, TD3, SAC)
35
Policy gradient (PPO, A3C, ...)
34
Deep Q-network family
29
Multi-agent RL
24
Tabular Q-learning / SARSA
19
Bandits / online learning
9
Imitation learning
8
Meta-RL
6
Multi-objective RL
5
Offline RL
5
Hierarchical RL
3
Learning automata
1
Other (programmatic)
1
LLM-based RL
1
Not reported
108
0
100
(b) What the agent changes
Congestion window
85
Sending / pacing rate
84
Parameters of a classic CC
25
Media bitrate (RTC)
18
AQM drop/mark policy
13
Select among CC algorithms
9
ECN marking threshold
8
Buffer size
7
Other
5
Multipath split
4
Joint multi-knob
2
Not reported
19
0
100
(c) Reward terms (% of coded)
Throughput
87 (55%)
Delay / latency
72 (46%)
Loss
35 (22%)
Other
23 (15%)
Utility function
18 (11%)
QoE / application
17 (11%)
Fairness
11 (7%)
Flow completion time
7 (4%)
Multi-objective vector
6 (4%)
Power (thr./delay)
5 (3%)
Energy
2 (1%)
Formal property
1 (1%)
0
100