

NodeJs y Jenkins

Plugins necesarios

Nodejs

Ir a “tolos” y configurar el plugin

instalaciones de NodeJS

Añadir NodeJS

NodeJS

Nombre

nodejs1

☒ Instalar automáticamente ?

Install from nodejs.org

Versión

NodeJS 24.4.1

For the underlying architecture, if available, force the installation of the 32bit package. Otherwise the build will fail

☐ Force 32bit architecture

Global npm packages to install

Specify list of packages to install globally -- see npm install -g. Note that you can fix the packages version by using the syntax "packageName@version"

Global npm packages refresh hours

Duration, in hours, before 2 npm cache update. Note that 0 will always update npm cache

72

Añadir un instalador ▾

Añadir NodeJS

Save Apply

Creamos el job para el nodejs

Building in workspace /var/jenkins_home/workspace/NodeJsApp indica donde está el repo en el server

Repositorio del código fuente

Configurar el origen del código fuente

Connect and manage your code repository to automatically pull the latest code for your builds.

☐ Ninguno

☒ Git ?

Repositories ?

Repository URL ?

https://github.com/TeodoroAnelloasix2/nodejsapp.git

Credentials ?

- none -

+ Add

Avanzado ▾

Add Repository

Configuramos el step con comando Shell y el entorno de nodejs

Environment ?

Configure settings and variables that define the context in which your build runs, like credentials, paths, and global parameters.

☐ Delete workspace before build starts

☐ Use secret text(s) or file(s) ?

☐ Provide Configuration files ?

☐ Abortar la ejecución si se ataca

☐ Add timestamps to the Console Output

☐ Inspect build log for published build scans

☒ Provide Node & npm bin/ folder to PATH ?

NodeJS Installation

Specify needed nodejs installation where npm installed packages will be provided to the PATH

nodejs1

npmrc file

- use system default -

Cache location

Default (-/npm or %APP_DATA%/npm-cache)

☐ With Art ?

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Ejecutar línea de comandos (shell) ?

Comando

Visualizar la lista de variables de entorno disponibles

```
#!/bin/bash
npm install
```


Avanzado ▾

Dockerizar aplicación

Plugin

CloudBees Docker Build and PublishVersion

Crear un repositorio para subir la imagen en dockerhub

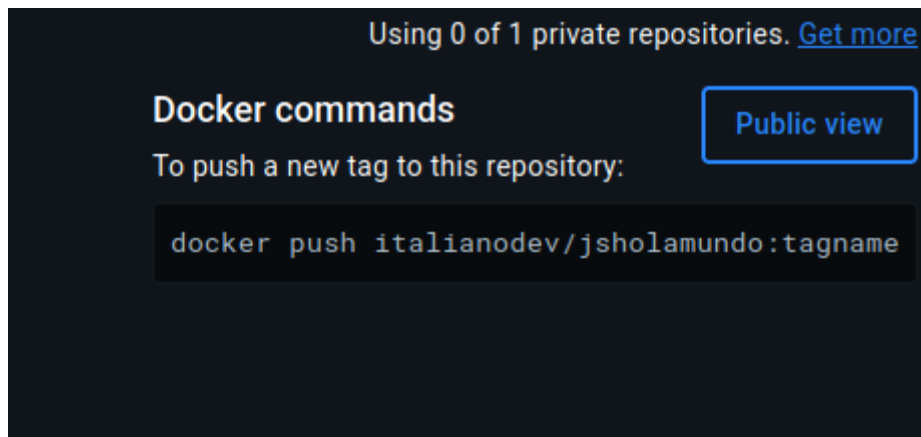

Vamos a configurar el job

Agregamos un paso de Docker build and publish

A screenshot of the "Docker Build and Publish" configuration form. The form has several sections, each with a red circle containing a number indicating a step in the configuration process. 1. The "Docker Build and Publish" header has a red circle with the number 1. 2. The "Repository Name" field contains "italianodev/jsholamundo" and has a red circle with the number 2. 3. The "Tag" field contains "v1.0" and has a red circle with the number 3. 4. The "Docker Host URI" field is empty and has a red circle with the number 4. 5. The "Server credentials" section has a dropdown menu showing "- none -" and a "+ Add" button. 6. The "Docker registry URL" field is empty and has a red circle with the number 5. 7. The "Registry credentials" section has a dropdown menu showing "- none -" and a "+ Add" button. 8. Below the "+ Add" button for "Registry credentials", there is a dropdown menu showing "Jenkins" and a red circle with the number 6.

Configuramos las credenciales para el login en docker

Hacer Docker login para tener activa la sesión antes de ejecutar el job

Lanzamos el job

Started by user [jenkins](#)

Running as SYSTEM

Building in workspace /var/jenkins_home/workspace/NodeJsApp

The recommended git tool is: NONE

No credentials specified

```
> git rev-parse --resolve-git-dir /var/jenkins_home/workspace/NodeJsApp/.git #  
timeout=10
```

Fetching changes from the remote Git repository

```
> git config remote.origin.url https://github.com/TeodoroAnelloasix2/nodejsapp.git  
# timeout=10
```

Fetching upstream changes from

<https://github.com/TeodoroAnelloasix2/nodejsapp.git>

```
> git --version # timeout=10
```

```
> git --version # 'git version 2.39.5'
```

```
> git fetch --tags --force --progress --
```

```
https://github.com/TeodoroAnelloasix2/nodejsapp.git
```

```
+refs/heads/*:refs/remotes/origin/* # timeout=10
```

```
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
```

```
Checking out Revision 5afd24494724d1185e3c802dc4306a0a08589a21  
(refs/remotes/origin/main)
```

```
> git config core.sparsecheckout # timeout=10
```

```
> git checkout -f 5afd24494724d1185e3c802dc4306a0a08589a21 # timeout=10
```

```
Commit message: "test"
```

```
> git rev-list --no-walk 5afd24494724d1185e3c802dc4306a0a08589a21 #  
timeout=10
```

```
[NodeJsApp] $ /bin/bash /tmp/jenkins281628448689606854.sh
```

```
npm warn old lockfile
```

```
npm warn old lockfile The package-lock.json file was created with an old version of  
npm,
```

```
npm warn old lockfile so supplemental metadata must be fetched from the  
registry.
```

```
npm warn old lockfile
```

```
npm warn old lockfile This is a one-time fix-up, please be patient...
```

```
npm warn old lockfile
```

```
npm warn EBADENGINE Unsupported engine {
```

```
npm warn EBADENGINE   package: 'hola-mundo-nodeJS@1.0.0',
```

```
npm warn EBADENGINE   required: { node: '^14.8.0' },
```

```
npm warn EBADENGINE   current: { node: 'v24.4.1', npm: '11.4.2' }
```

```
npm warn EBADENGINE }
```

```
up to date, audited 60 packages in 2s
```

```
7 vulnerabilities (3 low, 4 high)
```

To address all issues, run:

```
npm audit fix
```

Run `npm audit` for details.

```
[NodeJsApp] $ docker build -t italianodev/jsholamundo:v1.0 --pull=true  
/var/jenkins_home/workspace/NodeJsApp
```

```
#1 [internal] load build definition from Dockerfile
```

```
#1
```

```
sha256:4382d2ca50f7d143c50d55c3a8ac6306f79dd7fe743b782df7a8d77ab9a65  
a78
```

```
#1 transferring dockerfile: 128B done
```

```
#1 DONE 0.0s
```

```
#2 [internal] load metadata for docker.io/library/node:12
```

```
#2
```

```
sha256:1db49b057e220e27430a586be14b29799ddfb076afbceee4a2163b02b450  
4fb7
```

```
#2 ...
```

```
#3 [auth] library/node:pull token for registry-1.docker.io
```

```
#3
```

```
sha256:b624a3f3264c78c6fc0a9bd1d28fac417cf848bc0605b73cb1f703143b182  
9c2
```

```
#3 DONE 0.0s
```

```
#2 [internal] load metadata for docker.io/library/node:12
```

```
#2
```

```
sha256:1db49b057e220e27430a586be14b29799ddfb076afbceee4a2163b02b450  
4fb7
```

```
#2 DONE 0.9s
```

#4 [internal] load .dockerignore

#4

sha256:ae96abaa8f357f065ae9090d7d94871902107ff5460b4d62b2ef4a35a9d018c7

#4 transferring context: 2B done

#4 DONE 0.0s

#9 [1/4] FROM

docker.io/library/node:12@sha256:01627afeb110b3054ba4a1405541ca095c8bfc
a1cb6f2be9479c767a2711879e

#9

sha256:bbbb053c2a8aeca77bcc5d57f6e0d1b8ffa95b7f4d7d60bd4cc9b445bdf46fb

#9 DONE 0.0s

#7 [internal] load build context

#7

sha256:cd2e42193961a5af5f85797619da57059acf9ba5f520bfe210ed1c0b1cb16a9e

#7 transferring context: 83.30kB 0.0s done

#7 DONE 0.1s

#8 [2/4] WORKDIR /appnodejs

#8

sha256:d87480b705f37be8a8fa9c77f60440bc16a46abea61f59539c1bce61f35f2099

#8 CACHED

#6 [3/4] ADD . /appnodejs

#6

sha256:4fda3f01fb02320fa63f712a4921cebebc5fe6b3d42dbc5d64ec2ada82ce5b98

#6 DONE 0.2s

#5 [4/4] RUN npm install

#5

sha256:256022bc0dac4c687c86ba6525749777de2a064410cf8cdb8a1ff2c5f0fc1
aba

#5 0.866 npm WARN read-shrinkwrap This version of npm is compatible with
lockfileVersion@1, but package-lock.json was generated for lockfileVersion@3. I'll
try to do my best with it!

#5 4.474 updated 59 packages and audited 59 packages in 3.806s

#5 4.512 found 11 vulnerabilities (5 low, 1 moderate, 5 high)

#5 4.512 run `npm audit fix` to fix them, or `npm audit` for details

#5 DONE 4.6s

#10 exporting to image

#10

sha256:7dde97f3b959da07abd012be3411a0b8308b1217f9cd7588bb6caf1267b3
a3ca

#10 exporting layers

#10 exporting layers 0.2s done

#10 writing image

sha256:ec41959c8a1d65527940109387ac70c7b6604ea73491cba44161545cdcdf
4e93 done

#10 naming to docker.io/italianodev/jsholamundo:v1.0 done

#10 DONE 0.2s

[NodeJsApp] \$ docker build -t italianodev/jsholamundo:latest --pull=true
/var/jenkins_home/workspace/NodeJsApp

#1 [internal] load build definition from Dockerfile

#1

sha256:d6dad8080e74d2cb1ad55112777dba598f91a9c37b40bf353f07309fbabc6
eb6

#1 transferring dockerfile: 128B done

#1 DONE 0.0s

#2 [internal] load metadata for docker.io/library/node:12

#2

sha256:1db49b057e220e27430a586be14b29799ddfb076afbceee4a2163b02b4504fb7

#2 DONE 0.2s

#3 [internal] load .dockerignore

#3

sha256:e8fdad715ed4ec914594775ce383618e616fe5c955399cda2a5c94d1f2dd5fc7

#3 transferring context: 2B done

#3 DONE 0.0s

#8 [1/4] FROM

docker.io/library/node:12@sha256:01627afeb110b3054ba4a1405541ca095c8bfc
a1cb6f2be9479c767a2711879e

#8

sha256:bbbb053c2a8aecaa77bcc5d57f6e0d1b8ffa95b7f4d7d60bd4cc9b445bdf46fb

#8 DONE 0.0s

#6 [internal] load build context

#6

sha256:8f8571b8744d1d8a59e56a09aeda3022274d1930f36de481e35abae012a18589

#6 transferring context: 42.45kB 0.0s done

#6 DONE 0.0s

#7 [2/4] WORKDIR /appnodejs

#7

sha256:d87480b705f37be8a8fa9c77f60440bc16a46abea61f59539c1bce61f35f2099

#7 CACHED

#5 [3/4] ADD . /appnodejs

#5

sha256:cee620b127b016138264892399246befb790039660acac33f2b8e9fc11da5cb8

#5 CACHED

#4 [4/4] RUN npm install

#4

sha256:5f93569b6321e9832e11fa2c7d898b0e8cbddb5846bd62071419eeae8e8f943

#4 CACHED

#9 exporting to image

#9

sha256:7b28339e2676ba58c71a6ba4d9a364b46adb9b79326efbebc18366dc28fec68

#9 exporting layers done

#9 writing image

sha256:ec41959c8a1d65527940109387ac70c7b6604ea73491cba44161545cdcdf4e93 done

#9 naming to docker.io/italianodev/jsholamundo:latest done

#9 DONE 0.0s

[NodeJsApp] \$ docker push italianodev/jsholamundo:v1.0

The push refers to repository [docker.io/italianodev/jsholamundo]

9b6104ed5d96: Preparing

4b4c460fba48: Preparing
130a490b0d20: Preparing
586c0b414da7: Preparing
0bfd290f2c17: Preparing
6d75cd01c26c: Preparing
95904c181913: Preparing
df69bfa94785: Preparing
f35deb8d96fc: Preparing
f6c2459e2059: Preparing
f8323fb3a55c: Preparing
2f4dc9775f33: Preparing
6d75cd01c26c: Waiting
95904c181913: Waiting
df69bfa94785: Waiting
f35deb8d96fc: Waiting
f6c2459e2059: Waiting
f8323fb3a55c: Waiting
2f4dc9775f33: Waiting
0bfd290f2c17: Mounted from library/node
586c0b414da7: Mounted from library/node
130a490b0d20: Pushed
6d75cd01c26c: Mounted from library/node
4b4c460fba48: Pushed
95904c181913: Mounted from library/node
9b6104ed5d96: Pushed
df69bfa94785: Mounted from library/node
f6c2459e2059: Mounted from library/node
f35deb8d96fc: Mounted from library/node

f8323fb3a55c: Mounted from library/node

2f4dc9775f33: Mounted from library/node

v1.0: digest:

sha256:31b00355db2b6c5ad83ceb150f0eeda003b26f3dd8123db9a6557a877039

4605 size: 2842

[NodeJsApp] \$ docker push italianodev/jsholamundo:latest

The push refers to repository [docker.io/italianodev/jsholamundo]

9b6104ed5d96: Preparing

4b4c460fba48: Preparing

130a490b0d20: Preparing

586c0b414da7: Preparing

0bfd290f2c17: Preparing

6d75cd01c26c: Preparing

95904c181913: Preparing

df69bfa94785: Preparing

f35deb8d96fc: Preparing

f6c2459e2059: Preparing

f8323fb3a55c: Preparing

2f4dc9775f33: Preparing

df69bfa94785: Waiting

f35deb8d96fc: Waiting

f6c2459e2059: Waiting

f8323fb3a55c: Waiting

2f4dc9775f33: Waiting

6d75cd01c26c: Waiting

95904c181913: Waiting

586c0b414da7: Layer already exists

0bfd290f2c17: Layer already exists

130a490b0d20: Layer already exists

9b6104ed5d96: Layer already exists

4b4c460fba48: Layer already exists

95904c181913: Layer already exists

6d75cd01c26c: Layer already exists

f35deb8d96fc: Layer already exists

f6c2459e2059: Layer already exists

df69bfa94785: Layer already exists

f8323fb3a55c: Layer already exists

2f4dc9775f33: Layer already exists

latest: digest:

sha256:31b00355db2b6c5ad83ceb150f0eeda003b26f3dd8123db9a6557a877039

4605 size: 2842

Finished: SUCCESS

Test imagen

docker run --name app1js -d -p 3000:3000 italianodev/jsholamundo:v1.0

05f4684b329e1e9839a04b74a1faad923868f7efd519a68ae421d0981239c108

docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS
PORTS			NAMES	
05f4684b329e	italianodev/jsholamundo:v1.0	"docker-entrypoint.s..."	3 seconds ago	Up 2 seconds
	0.0.0.0:3000->3000/tcp, [::]:3000->3000/tcp			app1js
1e9a14ad65a4	jenkins/jknsdocker:v1	"/usr/bin/tini -- /u..."	2 hours ago	Up
	About an hour	0.0.0.0:5000->5000/tcp, [::]:5000->5000/tcp, 0.0.0.0:8080->8080/tcp, [::]:8080->8080/tcp, 50000/tcp		jenkins-cnt2

```
curl localhost:3000;echo
```

Hello World! Hola Mundo!