



Pipes / FIFOs / Message Queues — data is copied through the kernel

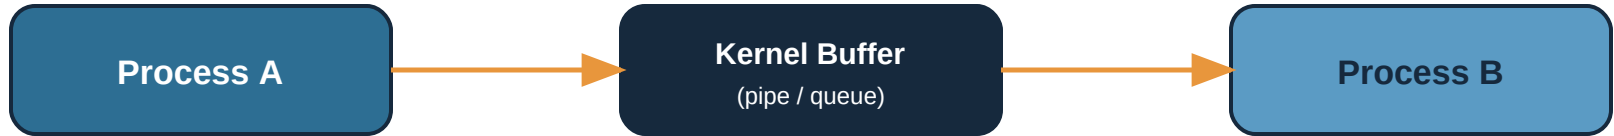

2 copies per message: user → kernel (write), kernel → user (read)

Shared Memory — both processes access the same physical memory directly

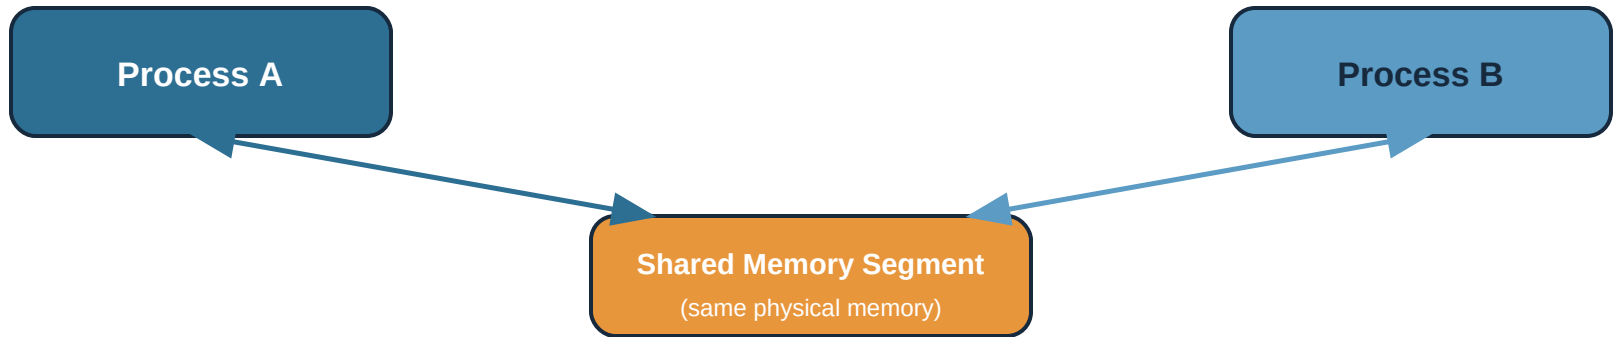

0 copies — fastest IPC method, but needs explicit synchronization (mutex/semaphore).