



# Dynamic Limit Adjustment Using UltraEdge and AMP

Reference : RA 447

## Description

This demo demonstrates how a test program can interact with an **UltraEdge (UE)** system by uploading a **Docker container**.

The container includes:

- An **AMP DAS (Data Acquisition System)**
- A mechanism to compute a **new low limit** for a specific test

Once computed, this limit is transmitted via a **FIFO (First-In-First-Out)** queue to the test program, allowing it to update the test limit dynamically in real time.

For demonstration purposes, the new test limit is calculated as the **average of all previous test results**. As the test program continues, the limit is automatically updated, showcasing the system's adaptive behavior.

The primary objective of this demo is to highlight the **ecosystem synergy between AMP and UltraEdge**. By combining AMP's analytics with UE's execution capability, the test program becomes smarter and evolves based on collected data.


---

## Key Highlights

- **UltraEdge and AMP Integration**  
Demonstrates interaction between AMP and UE to enable smarter test behavior.
- **Dynamic Test Limits**  
Real-time limit updates based on live results.
- **Adaptive Test Program**  
Test conditions evolve based on previous outcomes.

---

## Visual Summary

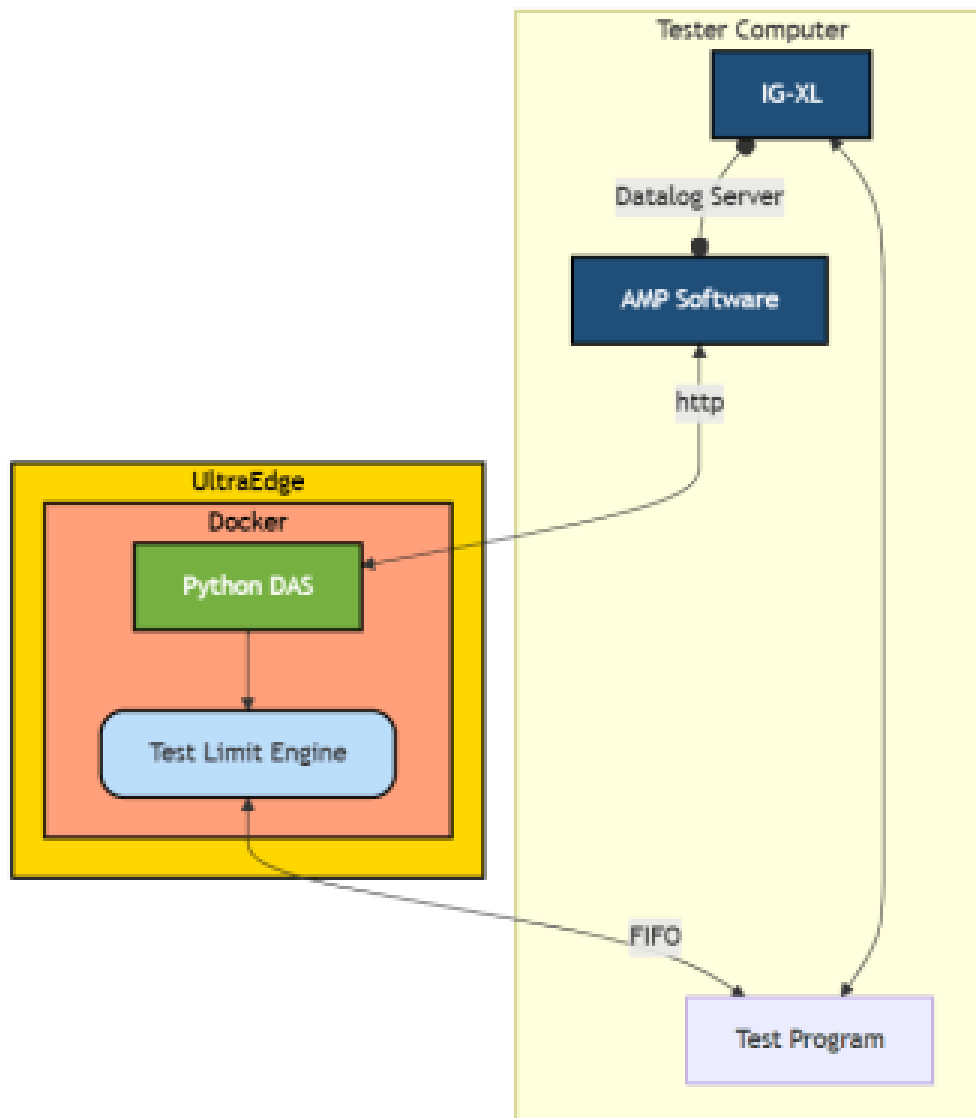

## Source Code

### NOTE

The source code will be available in a future release via a dedicated Git repository.

## General Information

- **Language:** Python
- **Platform:** IG-XL 10.50.00
- **System:** UltraEdge with AMP



# Advanced Details - RA 0450

## Understanding the Dockerfile

In this section, we dive into the core components of the Docker container used in RA 0450. The container hosts a Python-based DAS (Data Acquisition System) service running on an UltraEdge system. Below, we analyze key instructions in the `Dockerfile`.

### TIP

The full `Dockerfile` can be found here: [source/Docker/Dockerfile](https://github.com/ra0450/source/Docker/Dockerfile)

## Key Dockerfile Commands Explained

### `RUN pip install flask`

This line installs **Flask**, a lightweight web framework for Python. Flask is widely used to build RESTful APIs, which makes it a natural fit for serving communication endpoints in a microservice environment like this DAS.

In this use case, Flask enables the DAS inside the Docker container to:

- Act as a **local web server** on the UltraEdge
- Respond to incoming HTTP requests from the tester
- Serve dynamically computed data such as updated test limits

Flask's simplicity and minimal footprint make it ideal for containerized microservices.

### `EXPOSE 5001`

This command declares **port 5001** as the port on which the container will listen. It is essential to enable communication between the:

- **Tester Host** (running IGXL or MST)
- **Docker Container** (running on the UltraEdge)

By convention in this setup, port `5001` is used to:

- Receive incoming requests from the test program
- Respond with computed data from the DAS (e.g., updated test limits)

### NOTE

While **EXPOSE** does not publish the port to the host by itself, it **documents the intention** and allows tools like Docker Compose or manual publishing (`-p 5001:5001`) to expose it.

In summary, these two lines are essential for enabling the Python DAS application to:

- Be reachable from outside the container (via port 5001)
- Serve test results or configuration updates using a lightweight Flask server

The combination of Flask + port exposure establishes the communication bridge between your test program and the DAS logic running in an isolated UltraEdge container.

## Understanding the Python DAS (**pydas.py**)

The Python DAS is a Flask-based web service that:

- Receives AMP messages via HTTP POST requests
- Extracts test data from incoming JSON payloads
- Computes the new **low limit** as the average of recent results
- Sends this value back to the test program via a FIFO file descriptor

## Architecture Overview

- **Communication with Tester:** The tester sends AMP messages (like **TEST\_DATA**, **TEST\_END**, etc.) to the DAS.
- **Threading:** Test data is managed in parallel threads to avoid blocking.
- **Data Storage:** Test values are stored in a list of **TestData** instances.
- **Computation:** On **TEST\_END**, the average of the **RESULT** values is computed.
- **Result Reporting:** The final result is sent through a FIFO to the tester program.

## Key Components Explained

- **TestData** class: Used to encapsulate one test's data (test number, site, result, and limits).
- Flask routes: Handle various AMP message types:
  - **/SUBLOT\_START**: Initializes the process
  - **/TEST\_START**: Clears the previous data
  - **/TEST\_DATA**: Parses and stores new data
  - **/TEST\_END**: Triggers computation and sends results

- `/SUBLOT_END`: Final clean-up

## Inter-Process Communication

The line:

```
fifo_output = "/app/exec/fifo_to_TP"  
output_stream = open(fifo_output, 'w')
```


is critical for communication between the Docker-based DAS and the IGXL tester. It uses a **named FIFO pipe** to push results back into the tester host.

Example result message sent:

```
CODE:0.87|report:[S:0,TN:1234,R:0.5,LLM:-1,HLM:1],...
```

---

## Message Flow Diagram

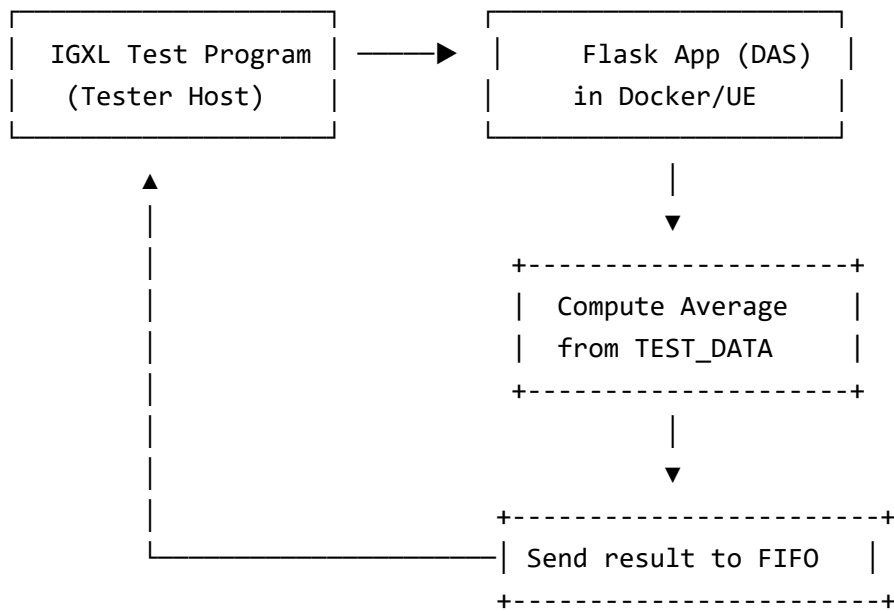

This illustrates how the test program interacts with the DAS inside UltraEdge:

1. Test program sends messages (e.g., `TEST_DATA`, `TEST_END`) to Flask routes.
2. Flask handles and processes data.
3. Result is computed.
4. Result is sent back to the tester using FIFO.

# Test Program & Tester Host Communication

On the tester host, the IGXL test program drives interaction with the UltraEdge system. It performs the following steps:

## Step 1: Connect to UltraEdge

In the `OnProgramLoaded` event:

```
UE.Connect "10.100.100.1", 2023
```

This establishes a TCP connection with the UltraEdge server (port 2023).

## Step 2: Start Session and Launch Docker

In the `OnProgramValidated` event:

```
UE.SecureSession.Start ""  
UEToolsDocker.SetupCommunicationPath("pydas")  
UEToolsDocker.UE_InstallandStartDockerApp
```

This:

- Starts a secure session
- Creates FIFO for tester-to-UE communication
- Installs and runs the Dockerized DAS

## Supporting Module: `UEToolsDocker`

This module includes utilities to:

- Transfer the `pydas.tar.gz` archive to UltraEdge
- Load the Docker image
- Start the container mapped on port 5001
- Send/receive data via FIFO

### Key method:

```
UE.Application("pydas").RunDockerContainer("pydas", "/app/pydas.py", "pydas", "5001:5001")
```

This runs the Flask app inside Docker and exposes it to tester.

## Reading the Results

```
UE.ReadString ApplicationName & FROMUE_FIFO, data
```

This reads the output from the FIFO and extracts:

- `CODE:<limit>`: the new test limit
- `report:<raw>`: a report string of test results

## Test Function

```
Call TheExec.Flow.TestLimit(measure, lowlimit, 10, , , , unitVolt, , , , , , , , 123)
```

The test program uses the updated low limit received from the DAS to dynamically adjust pass/fail criteria.

---

Next section: How the AMP JSON messages are structured and parsed in Python.