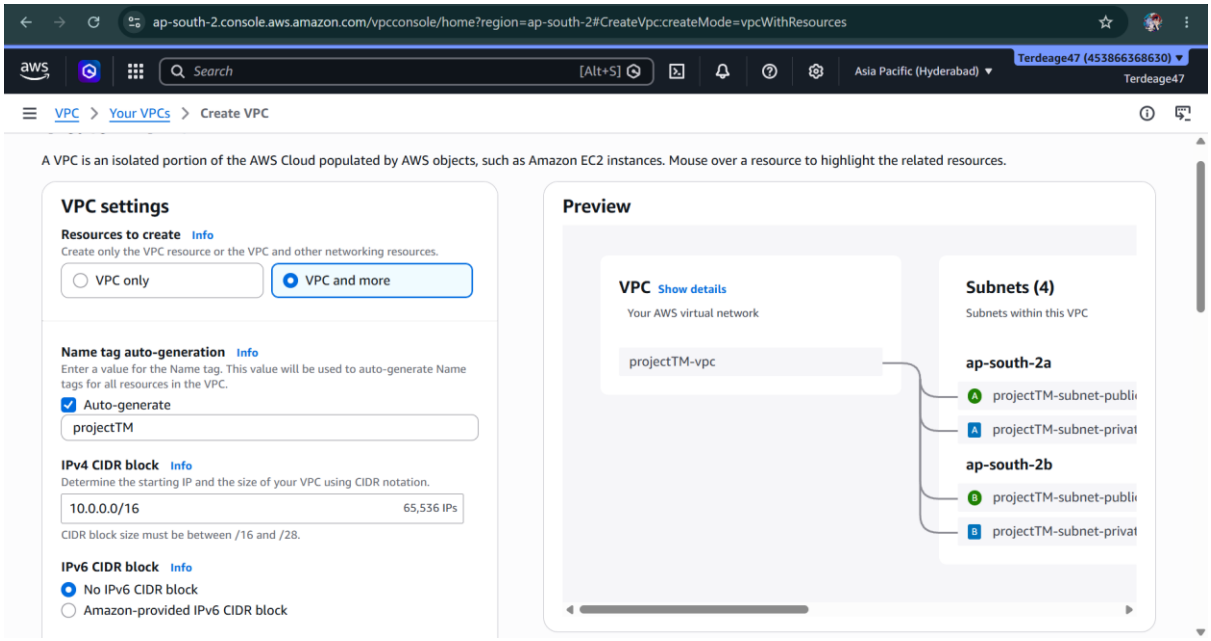
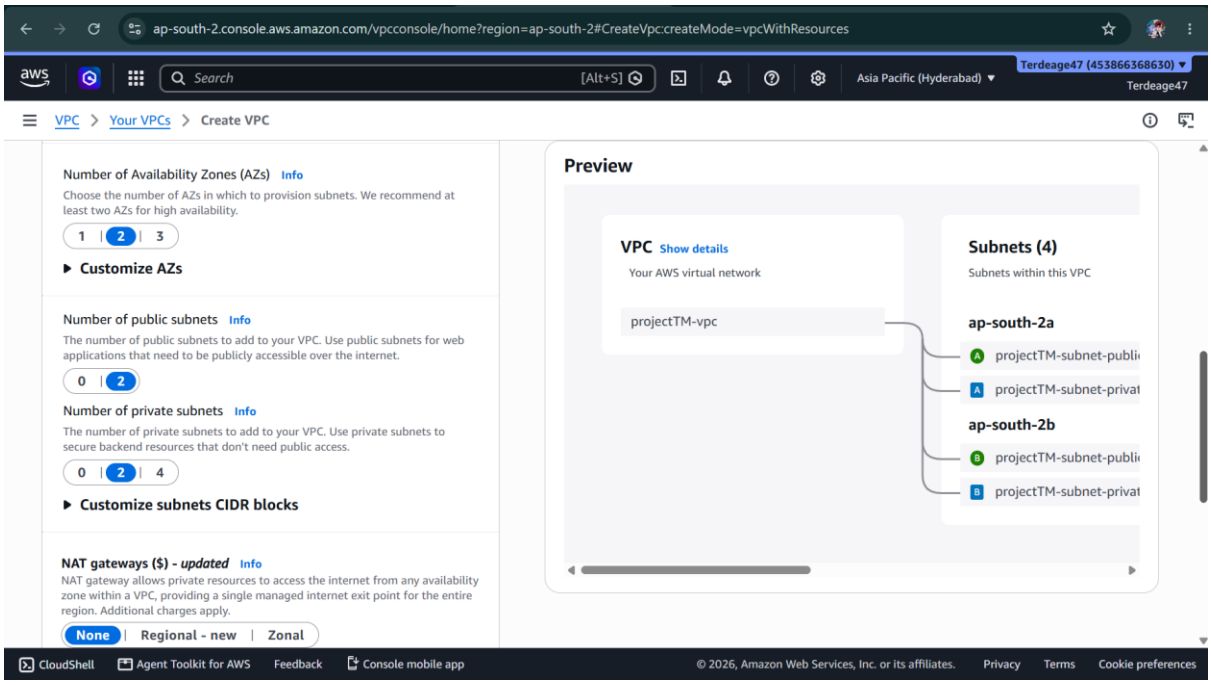
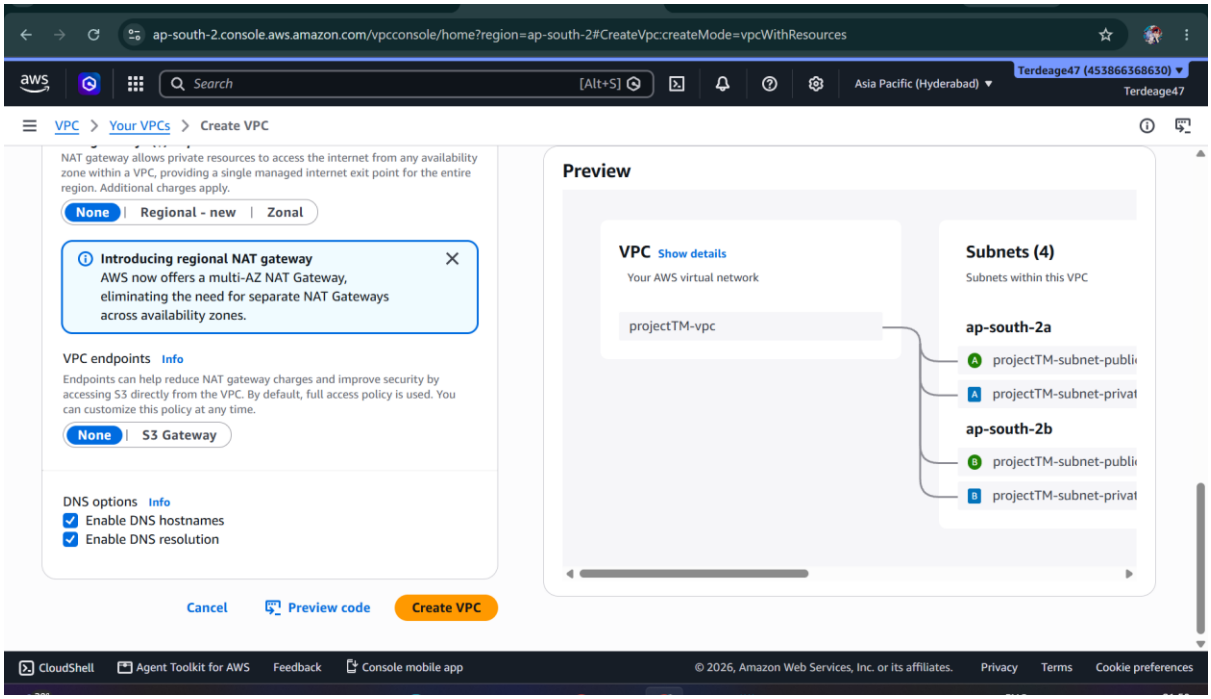
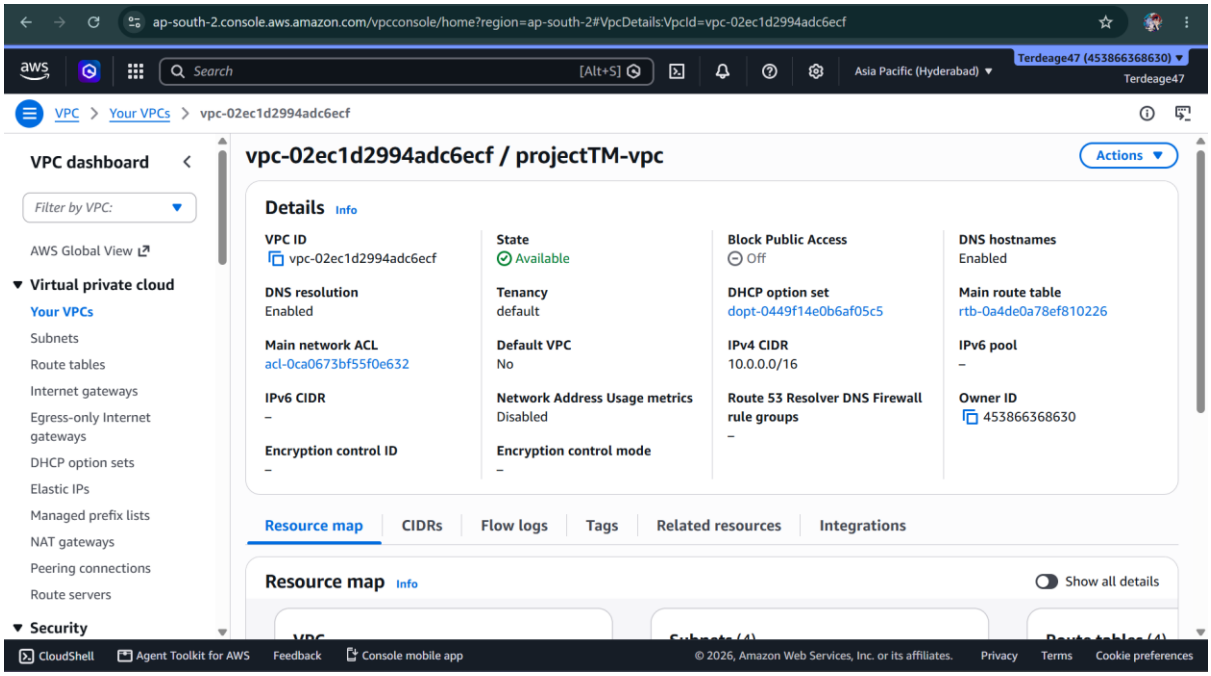
AWS Assignment

TASK 1- Create a VPC

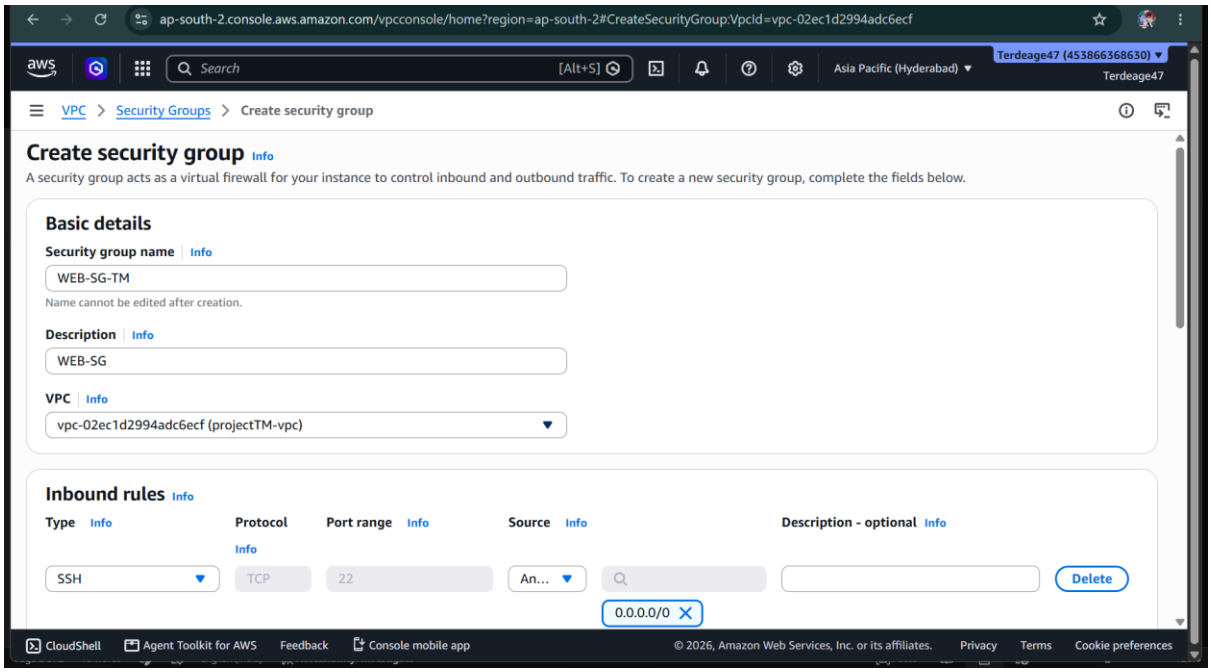


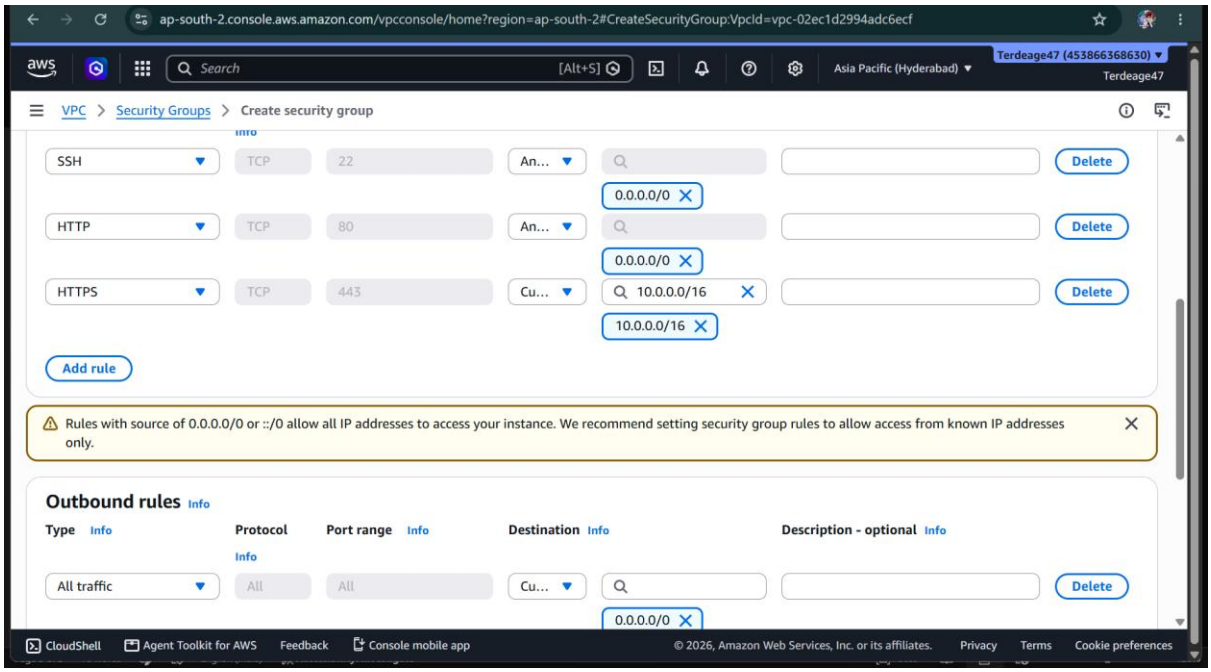


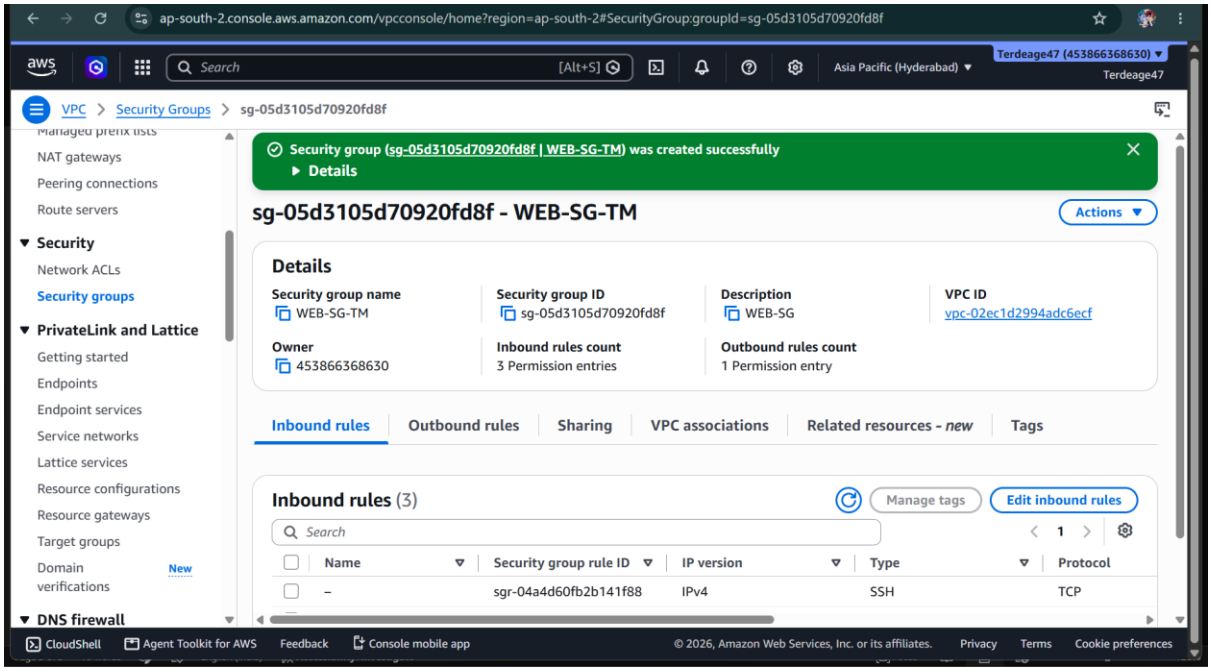

ap-south-2.console.aws.amazon.com/vpcconsole/home?region=ap-south-2#CreateVpc:createMode=vpcWithResources
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Your VPCs > Create VPC
NAT gateway allows private resources to access the internet from any availability zone within a VPC, providing a single managed internet exit point for the entire region. Additional charges apply.
None | Regional - new | Zonal
Introducing regional NAT gateway
AWS now offers a multi-AZ NAT Gateway, eliminating the need for separate NAT Gateways across availability zones.
VPC endpoints Info
Endpoints can help reduce NAT gateway charges and improve security by accessing S3 directly from the VPC. By default, full access policy is used. You can customize this policy at any time.
None | S3 Gateway
DNS options Info
Enable DNS hostnames
Enable DNS resolution
Cancel
Preview code
Create VPC
Preview
VPC Show details
Your AWS virtual network
projectTM-vpc
Subnets (4)
Subnets within this VPC
ap-south-2a
projectTM-subnet-publi
projectTM-subnet-privat
ap-south-2b
projectTM-subnet-publi
projectTM-subnet-privat
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

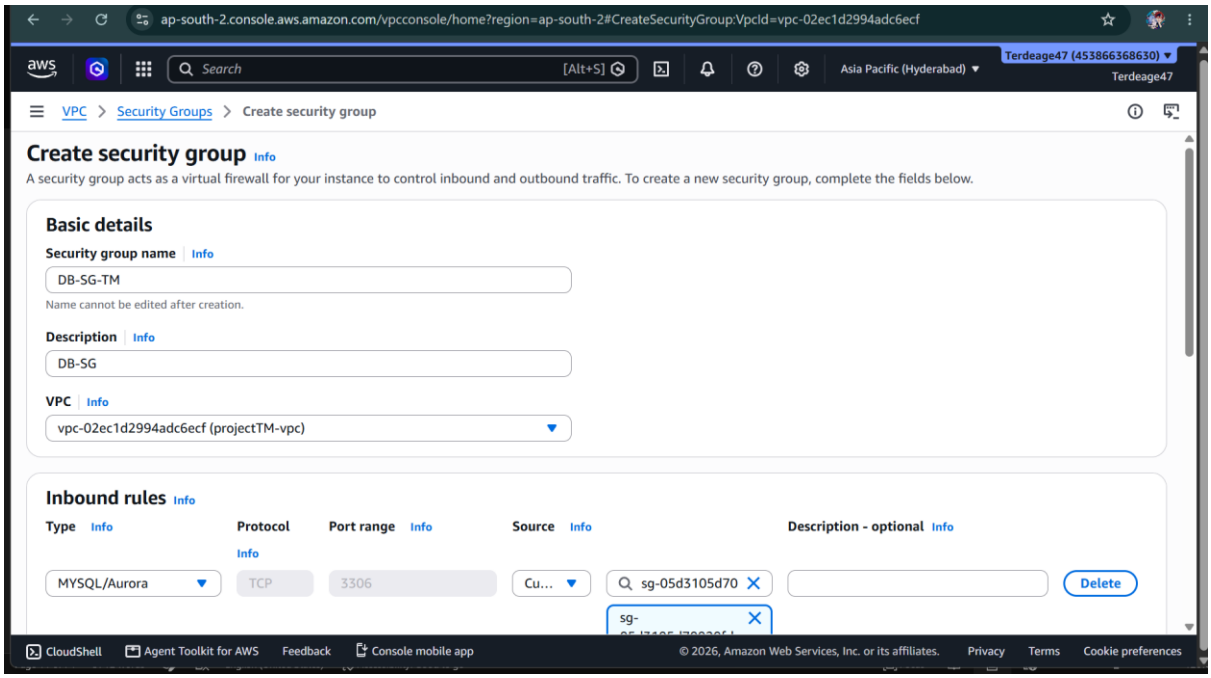

ap-south-2.console.aws.amazon.com/vpcconsole/home?region=ap-south-2#VpcDetails:VpcId=vpc-02ec1d2994adc6ecf
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Your VPCs > vpc-02ec1d2994adc6ecf
VPC dashboard
Filter by VPC:
AWS Global View
Virtual private cloud
Your VPCs
Subnets
Route tables
Internet gateways
Egress-only Internet gateways
DHCP option sets
Elastic IPs
Managed prefix lists
NAT gateways
Peering connections
Route servers
Security
vpc-02ec1d2994adc6ecf / projectTM-vpc
Actions
Details Info
VPC ID
vpc-02ec1d2994adc6ecf
State
Available
Block Public Access
Off
DNS hostnames
Enabled
DNS resolution
Enabled
Tenancy
default
DHCP option set
dopt-0449f14e0b6af05c5
Main route table
rtb-0a4de0a78ef810226
Main network ACL
acl-0ca0673bf55f0e632
Default VPC
No
IPv4 CIDR
10.0.0.0/16
IPv6 pool
–
IPv6 CIDR
–
Network Address Usage metrics
Disabled
Route 53 Resolver DNS Firewall rule groups
–
Owner ID
453866368630
Encryption control ID
–
Encryption control mode
–
Resource map
CIDRs
Flow logs
Tags
Related resources
Integrations
Resource map Info
Show all details
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

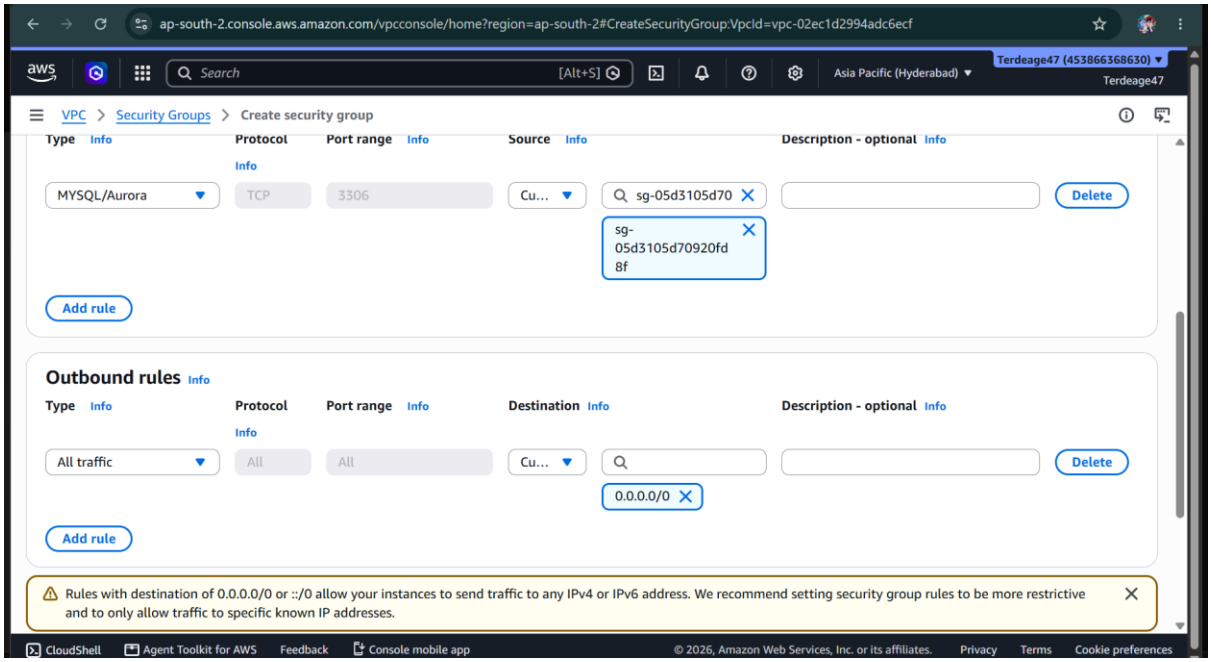
TASK 2-Create 2 Security Groups

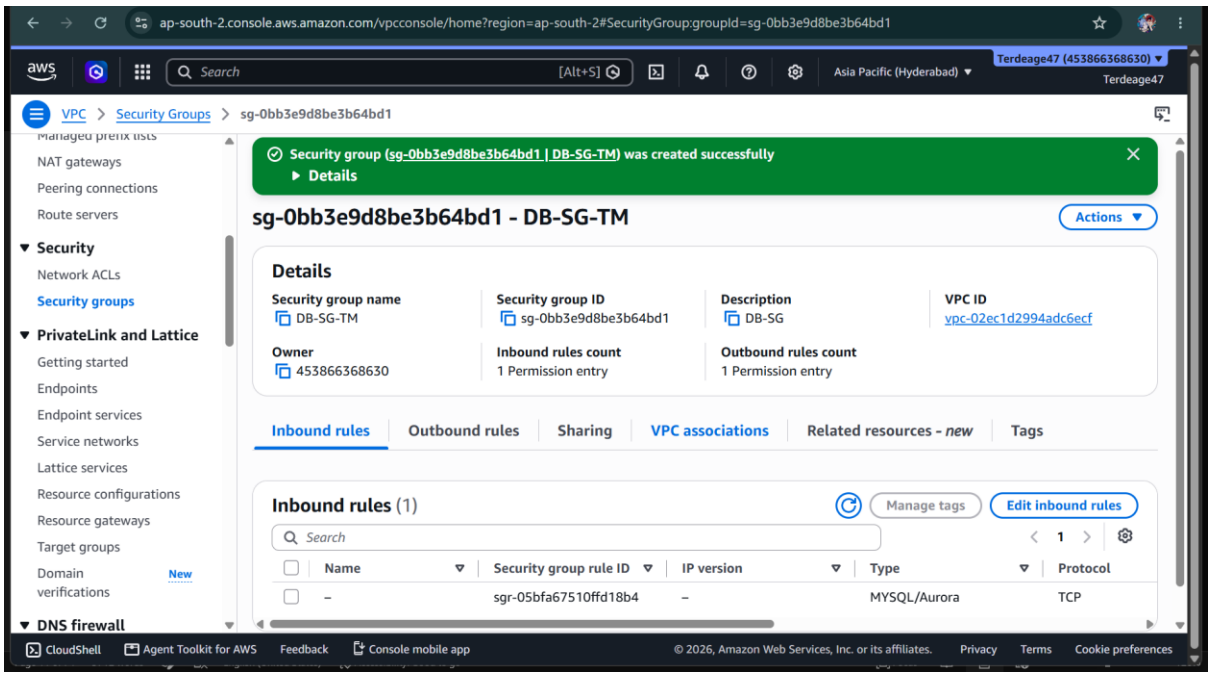




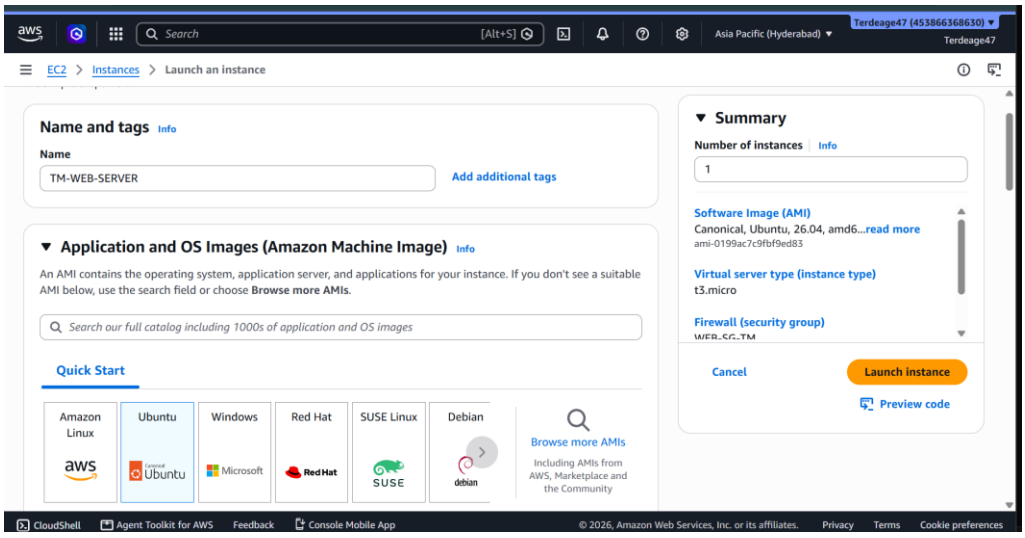

ap-south-2.console.aws.amazon.com/vpcconsole/home?region=ap-south-2#SecurityGroup:groupId=sg-05d3105d70920fd8f
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Security Groups > sg-05d3105d70920fd8f
NAT gateways
Peering connections
Route servers
Security
Network ACLs
Security groups
PrivateLink and Lattice
Getting started
Endpoints
Endpoint services
Service networks
Lattice services
Resource configurations
Resource gateways
Target groups
Domain verifications
New
DNS firewall
Security group (sg-05d3105d70920fd8f | WEB-SG-TM) was created successfully
Details
sg-05d3105d70920fd8f - WEB-SG-TM
Actions
Details
Security group name
WEB-SG-TM
Security group ID
sg-05d3105d70920fd8f
Description
WEB-SG
VPC ID
vpc-02ec1d2994adc6ecf
Owner
453866368630
Inbound rules count
3 Permission entries
Outbound rules count
1 Permission entry
Inbound rules
Outbound rules
Sharing
VPC associations
Related resources - new
Tags
Inbound rules (3)
Manage tags
Edit inbound rules
Search
1
Name
Security group rule ID
IP version
Type
Protocol
–
sgr-04a4d60fb2b141f88
IPv4
SSH
TCP
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

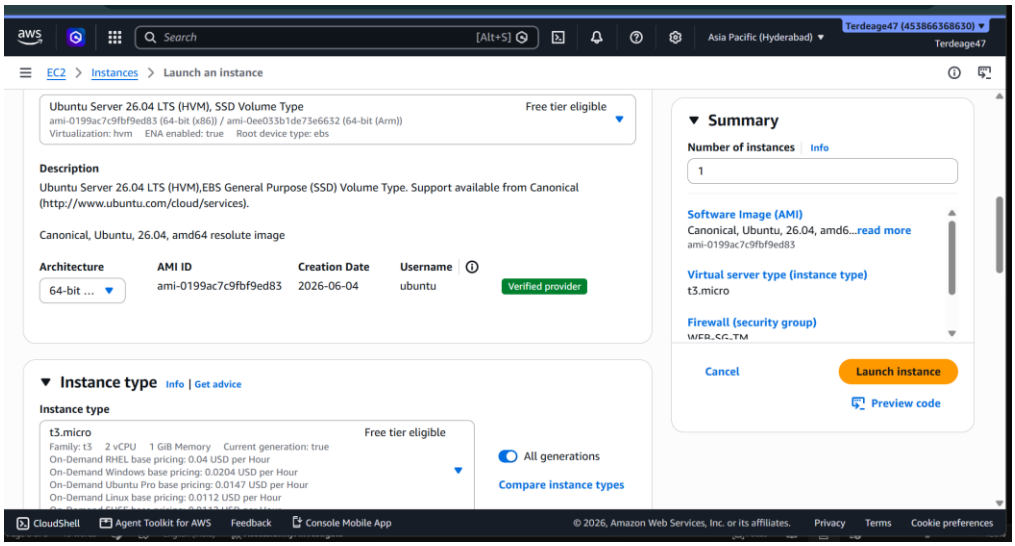

ap-south-2.console.aws.amazon.com/vpcconsole/home?region=ap-south-2#CreateSecurityGroup:VpcId=vpc-02ec1d2994adc6ecf
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Security Groups > Create security group
Create security group Info
A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.
Basic details
Security group name Info
DB-SG-TM
Name cannot be edited after creation.
Description Info
DB-SG
VPC Info
vpc-02ec1d2994adc6ecf (projectTM-vpc)
Inbound rules Info
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
MYSQL/Aurora
TCP
3306
Cu...
sg-05d3105d70
Delete
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

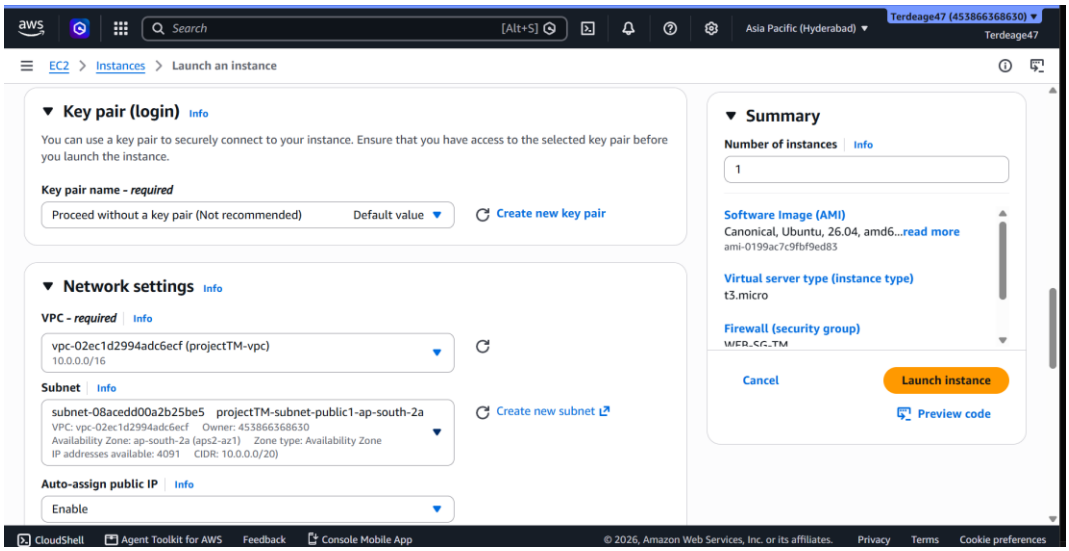

ap-south-2.console.aws.amazon.com/vpcconsole/home?region=ap-south-2#CreateSecurityGroup:VpcId=vpc-02ec1d2994adc6ecf
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Security Groups > Create security group
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
MYSQL/Aurora
TCP
3306
Cu...
sg-05d3105d70
sg-05d3105d70920fd8f
Delete
Add rule
Outbound rules Info
Type Info
Protocol Info
Port range Info
Destination Info
Description - optional Info
All traffic
All
All
Cu...
0.0.0.0/0
Delete
Add rule
Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

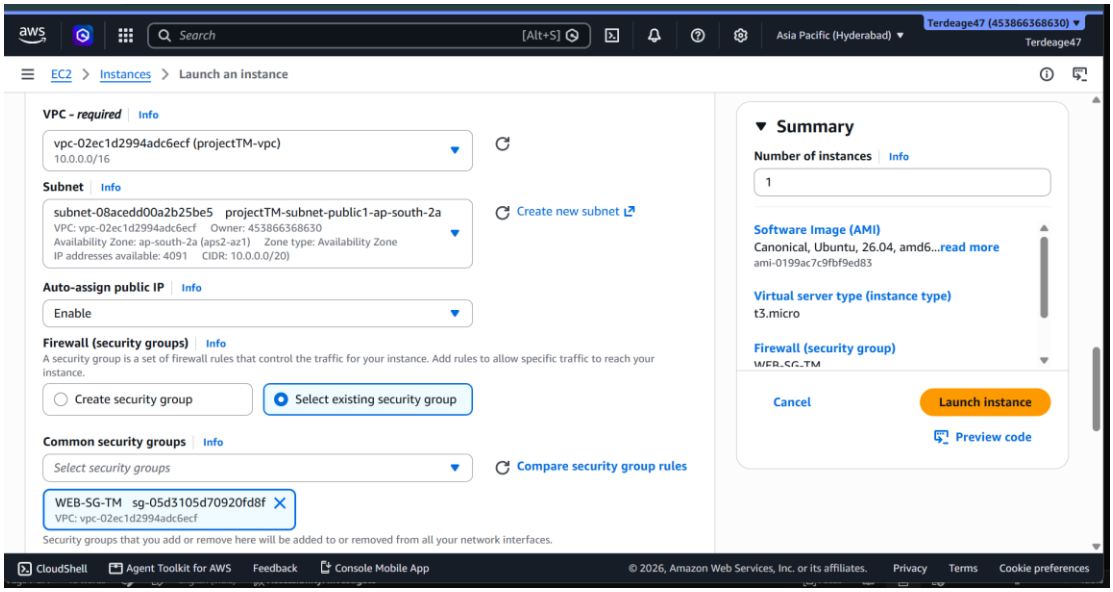

ap-south-2.console.aws.amazon.com/vpcconsole/home?region=ap-south-2#SecurityGroup:groupId=sg-0bb3e9d8be3b64bd1
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Security Groups > sg-0bb3e9d8be3b64bd1
NAT gateways
Peering connections
Route servers
Security
Network ACLs
Security groups
PrivateLink and Lattice
Getting started
Endpoints
Endpoint services
Service networks
Lattice services
Resource configurations
Resource gateways
Target groups
Domain verifications
New
DNS firewall
Security group (sg-0bb3e9d8be3b64bd1 | DB-SG-TM) was created successfully
Details
sg-0bb3e9d8be3b64bd1 - DB-SG-TM
Actions
Details
Security group name
DB-SG-TM
Security group ID
sg-0bb3e9d8be3b64bd1
Description
DB-SG
VPC ID
vpc-02ec1d2994adc6ecf
Owner
453866368630
Inbound rules count
1 Permission entry
Outbound rules count
1 Permission entry
Inbound rules
Outbound rules
Sharing
VPC associations
Related resources - new
Tags
Inbound rules (1)
Manage tags
Edit inbound rules
Search
Name
Security group rule ID
IP version
Type
Protocol
–
sgr-05bfa67510ffd18b4
–
MYSQL/Aurora
TCP
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

TASK 3- Create Instance

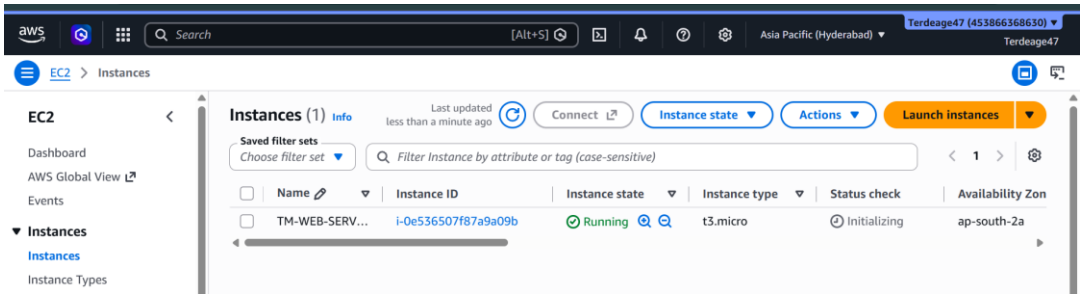




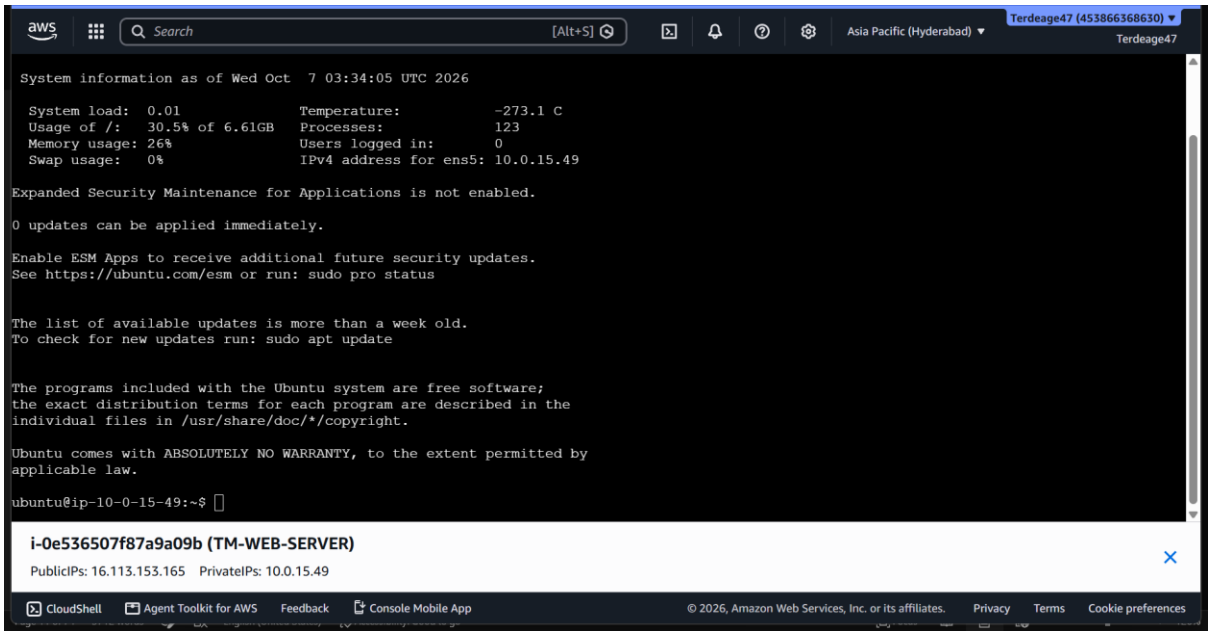


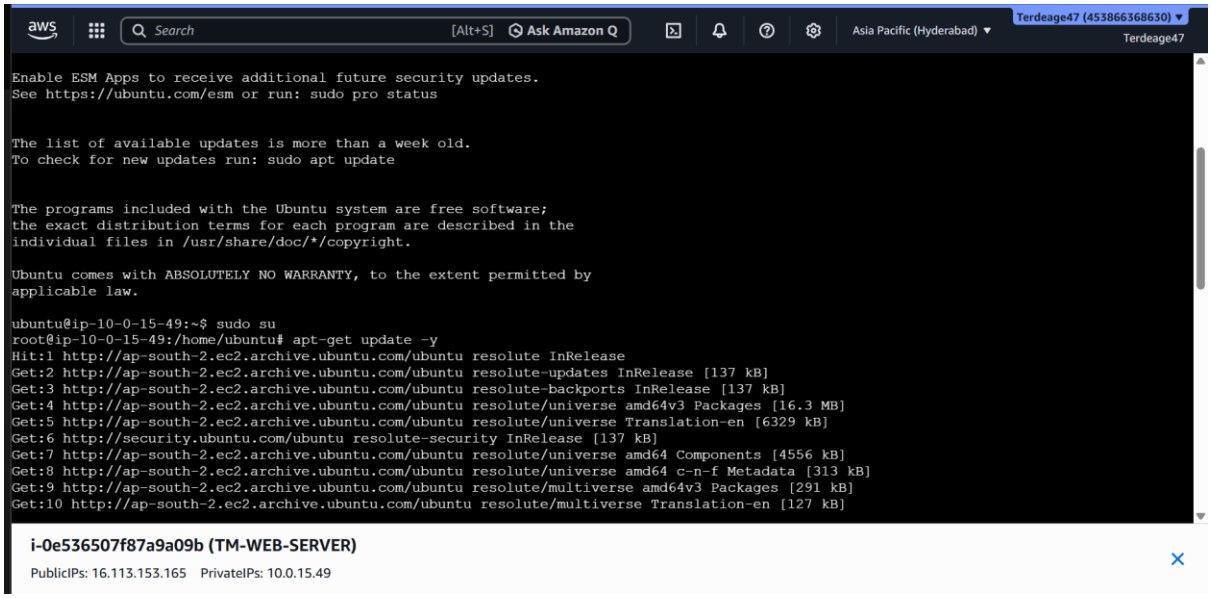


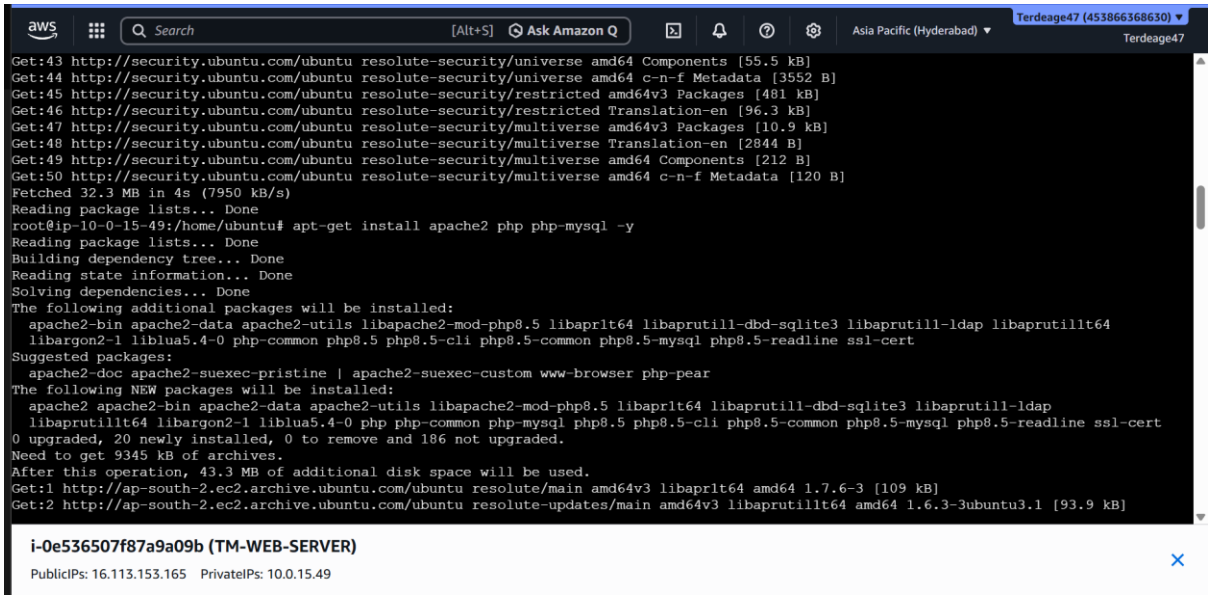


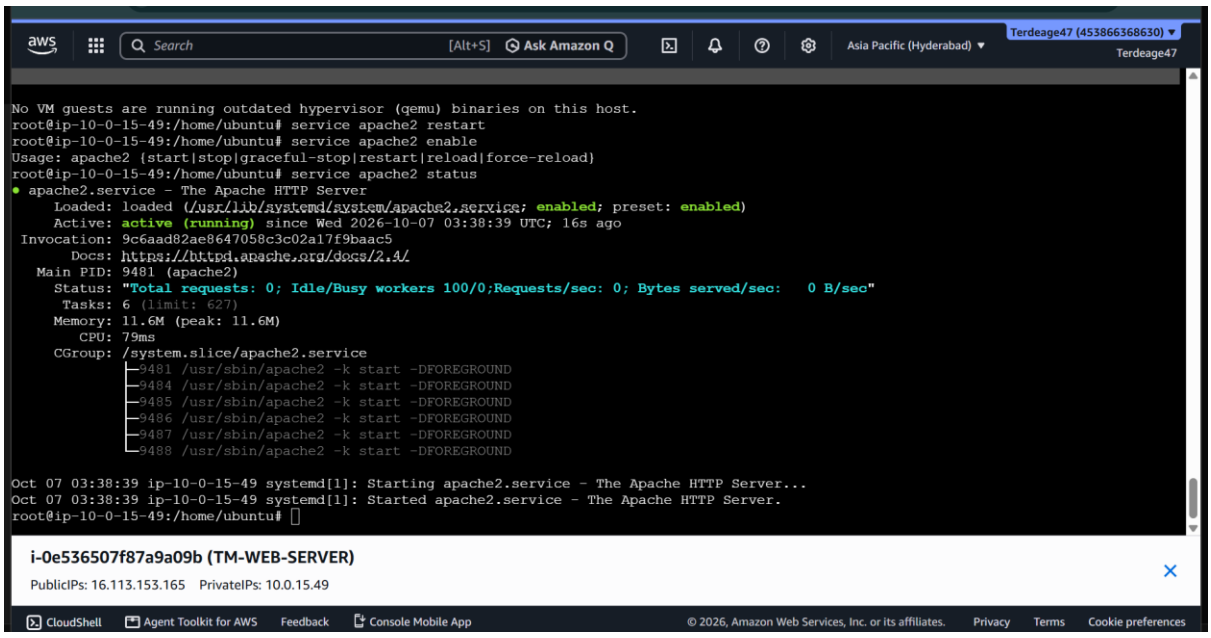


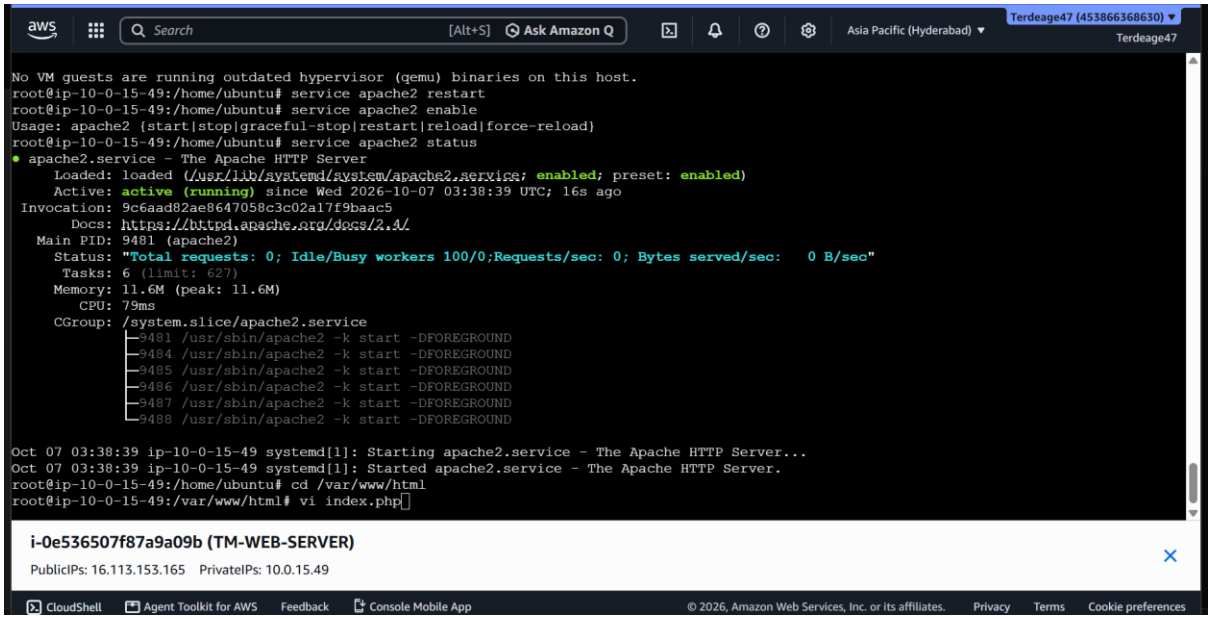
Connect to the instance




aws
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status
The list of available updates is more than a week old.
To check for new updates run: sudo apt update
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.
ubuntu@ip-10-0-15-49:~$ sudo su
root@ip-10-0-15-49:/home/ubuntu# apt-get update -y
Hit:1 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute InRelease
Get:2 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute-updates InRelease [137 kB]
Get:3 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute-backports InRelease [137 kB]
Get:4 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 Packages [16.3 MB]
Get:5 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/universe Translation-en [6329 kB]
Get:6 http://security.ubuntu.com/ubuntu resolute-security InRelease [137 kB]
Get:7 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64 Components [4556 kB]
Get:8 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64 c-n-f Metadata [313 kB]
Get:9 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/multiverse amd64v3 Packages [291 kB]
Get:10 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/multiverse Translation-en [127 kB]
i-0e536507f87a9a09b (TM-WEB-SERVER)
PublicIPs: 16.113.153.165 PrivateIPs: 10.0.15.49

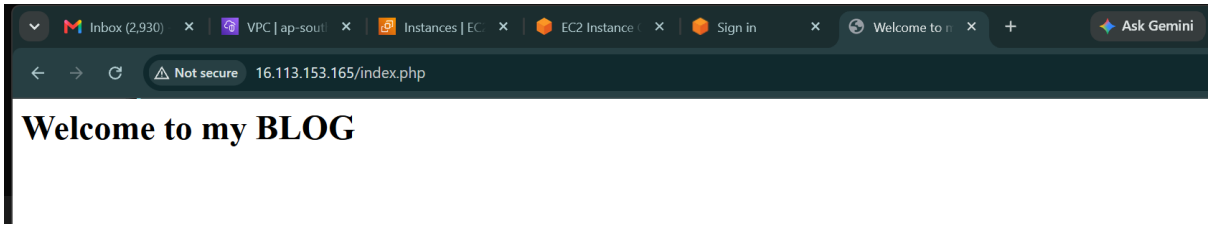

aws
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Get:43 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 Components [55.5 kB]
Get:44 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 c-n-f Metadata [3552 B]
Get:45 http://security.ubuntu.com/ubuntu resolute-security/restricted amd64v3 Packages [481 kB]
Get:46 http://security.ubuntu.com/ubuntu resolute-security/restricted Translation-en [96.3 kB]
Get:47 http://security.ubuntu.com/ubuntu resolute-security/multiverse amd64v3 Packages [10.9 kB]
Get:48 http://security.ubuntu.com/ubuntu resolute-security/multiverse Translation-en [2844 B]
Get:49 http://security.ubuntu.com/ubuntu resolute-security/multiverse amd64 Components [212 B]
Get:50 http://security.ubuntu.com/ubuntu resolute-security/multiverse amd64 c-n-f Metadata [120 B]
Fetched 32.3 MB in 4s (7950 kB/s)
Reading package lists... Done
root@ip-10-0-15-49:/home/ubuntu# apt-get install apache2 php php-mysql -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Solving dependencies... Done
The following additional packages will be installed:
apache2-bin apache2-data apache2-utils libapache2-mod-php8.5 libapr1t64 libaprutil1-dbd-sqlite3 libaprutil1-ldap libaprutil1t64
libargon2-1 liblua5.4-0 php-common php8.5 php8.5-cli php8.5-common php8.5-mysql php8.5-readline ssl-cert
Suggested packages:
apache2-doc apache2-suexec-pristine | apache2-suexec-custom www-browser php-pear
The following NEW packages will be installed:
apache2 apache2-bin apache2-data apache2-utils libapache2-mod-php8.5 libapr1t64 libaprutil1-dbd-sqlite3 libaprutil1-ldap
libaprutil1t64 libargon2-1 liblua5.4-0 php php-common php-mysql php8.5 php8.5-cli php8.5-common php8.5-mysql php8.5-readline ssl-cert
0 upgraded, 20 newly installed, 0 to remove and 186 not upgraded.
Need to get 9345 kB of archives.
After this operation, 43.3 MB of additional disk space will be used.
Get:1 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libapr1t64 amd64 1.7.6-3 [109 kB]
Get:2 http://ap-south-2.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 libaprutil1t64 amd64 1.6.3-3ubuntu3.1 [93.9 kB]
i-0e536507f87a9a09b (TM-WEB-SERVER)
PublicIPs: 16.113.153.165 PrivateIPs: 10.0.15.49


aws
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
No VM guests are running outdated hypervisor (qemu) binaries on this host.
root@ip-10-0-15-49:/home/ubuntu# service apache2 restart
root@ip-10-0-15-49:/home/ubuntu# service apache2 enable
Usage: apache2 {start|stop|graceful-stop|restart|reload|force-reload}
root@ip-10-0-15-49:/home/ubuntu# service apache2 status
apache2.service - The Apache HTTP Server
Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
Active: active (running) since Wed 2026-10-07 03:38:39 UTC; 16s ago
Invocation: 9c6aad82ae8647058c3c02a17f9baac5
Docs: https://httpd.apache.org/docs/2.4/
Main PID: 9481 (apache2)
Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec: 0 B/sec"
Tasks: 6 (limit: 627)
Memory: 11.6M (peak: 11.6M)
CPU: 79ms
CGroup: /system.slice/apache2.service
9481 /usr/sbin/apache2 -k start -DFOREGROUND
9484 /usr/sbin/apache2 -k start -DFOREGROUND
9485 /usr/sbin/apache2 -k start -DFOREGROUND
9486 /usr/sbin/apache2 -k start -DFOREGROUND
9487 /usr/sbin/apache2 -k start -DFOREGROUND
9488 /usr/sbin/apache2 -k start -DFOREGROUND
Oct 07 03:38:39 ip-10-0-15-49 systemd[1]: Starting apache2.service - The Apache HTTP Server...
Oct 07 03:38:39 ip-10-0-15-49 systemd[1]: Started apache2.service - The Apache HTTP Server.
root@ip-10-0-15-49:/home/ubuntu#
i-0e536507f87a9a09b (TM-WEB-SERVER)
PublicIPs: 16.113.153.165 PrivateIPs: 10.0.15.49
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

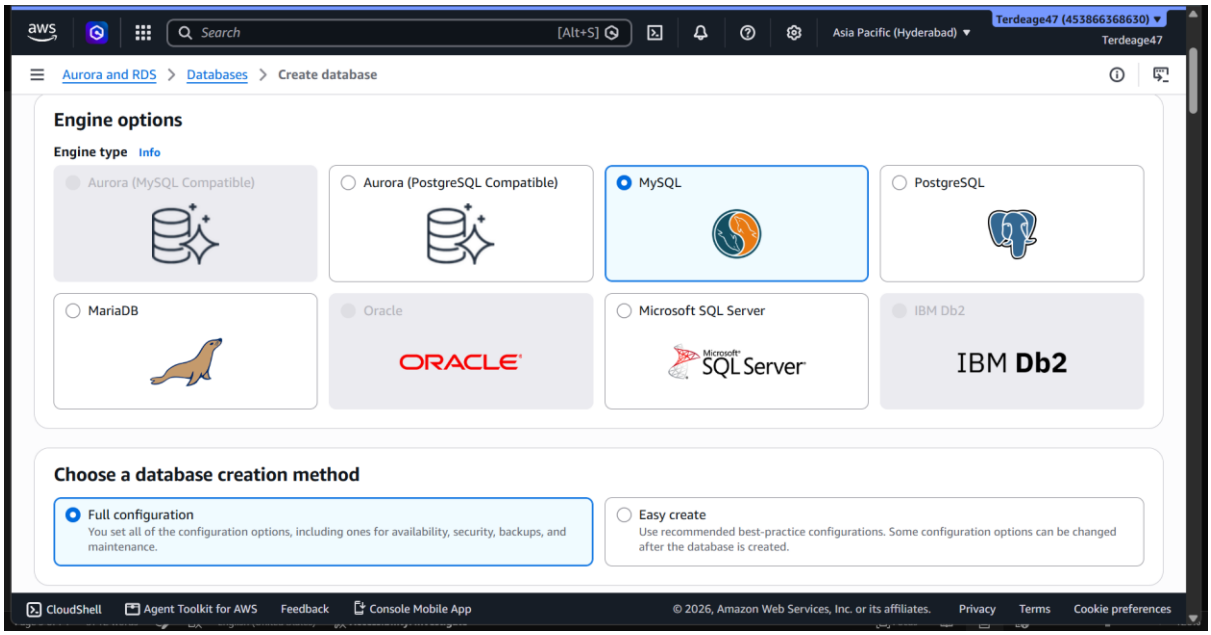


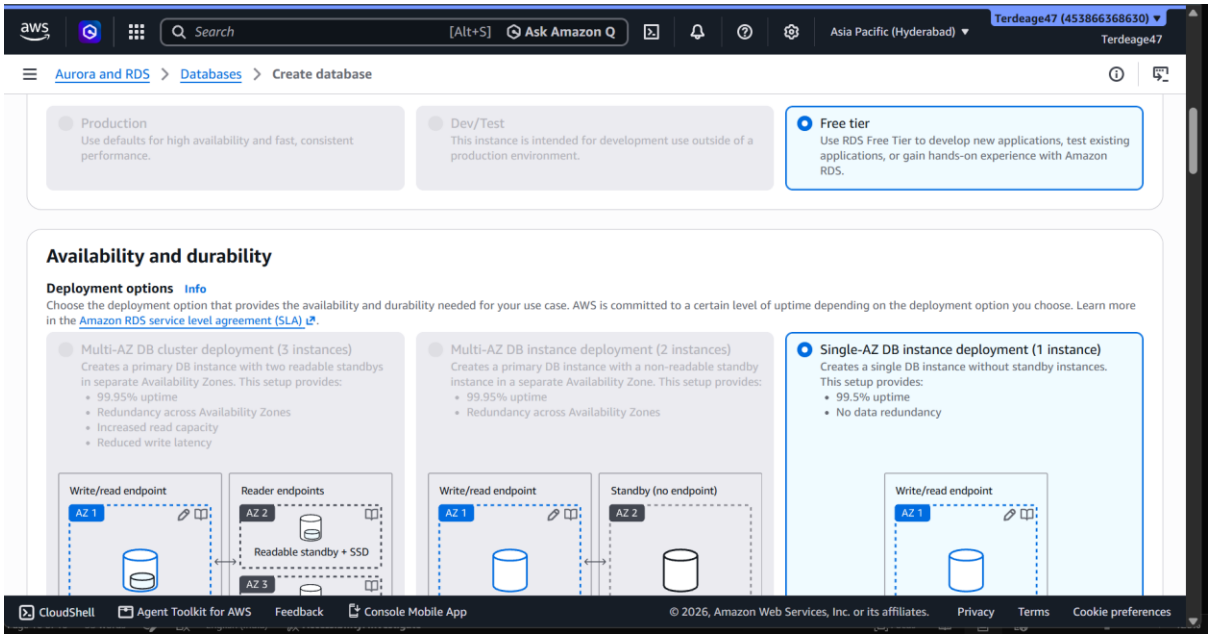


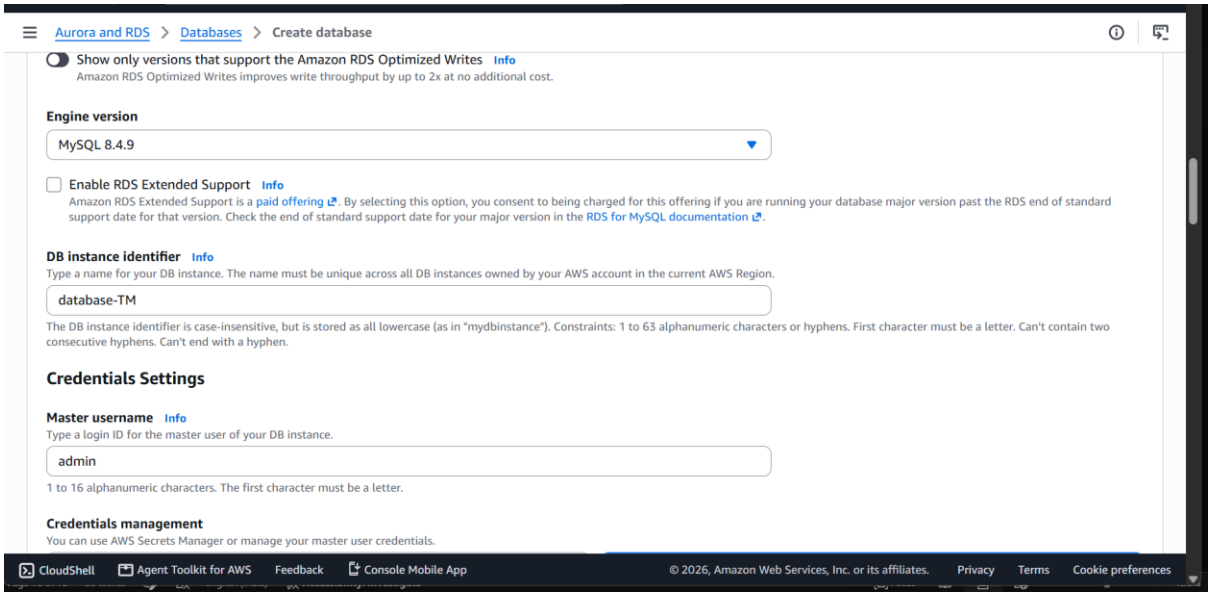
In a new tab, paste the public IP, http:// 16.113.153.165/index.php

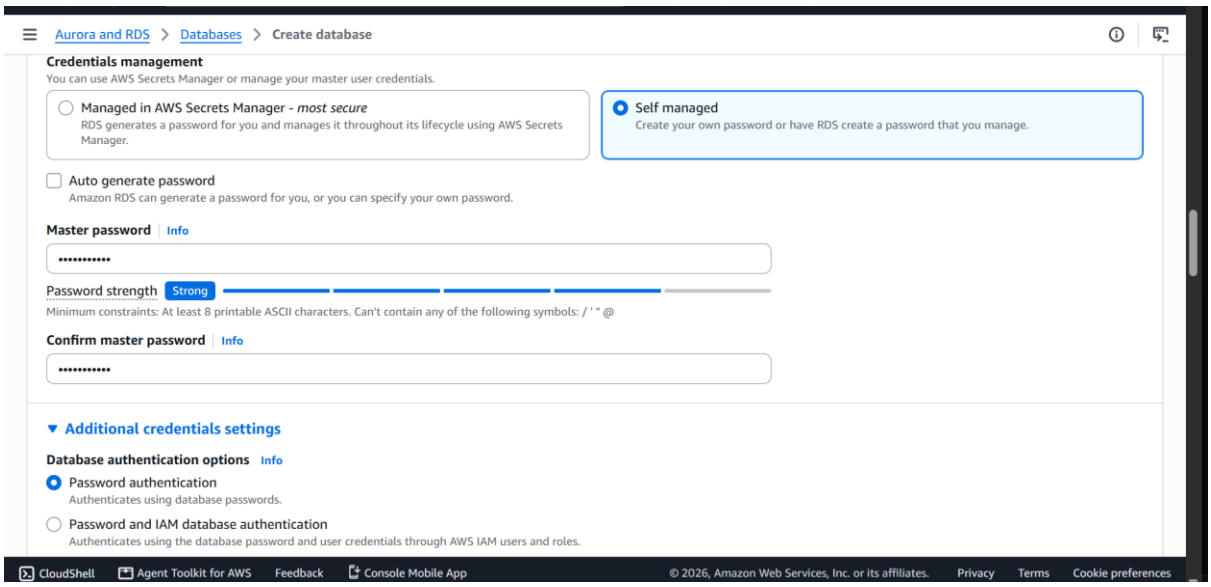


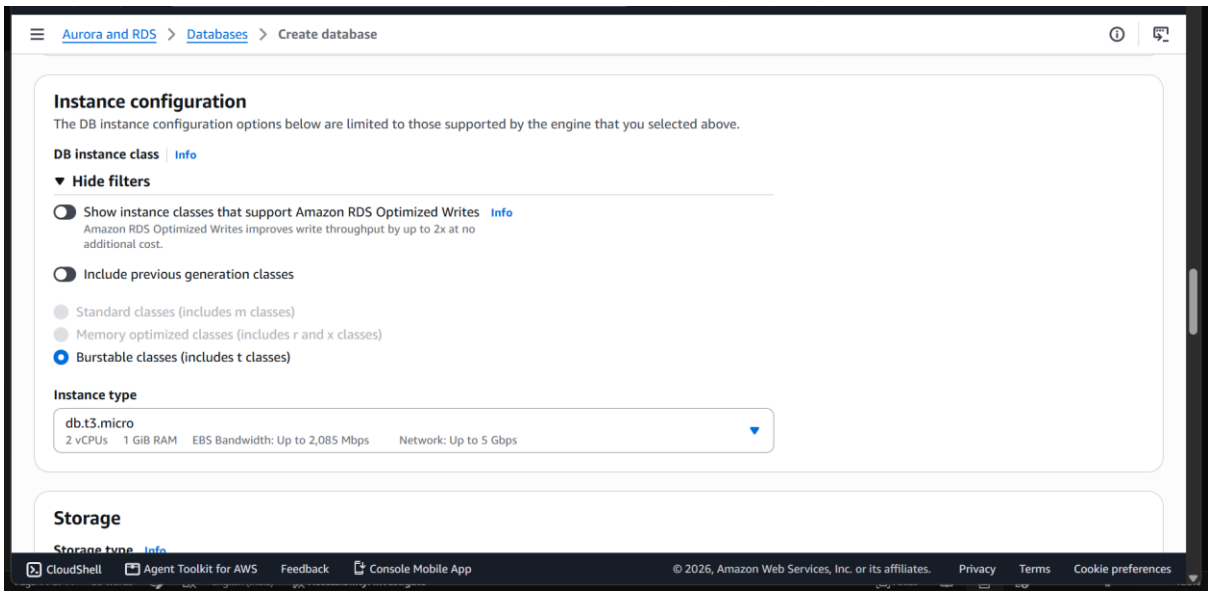
TASK 4: Create RDS, MySQL database

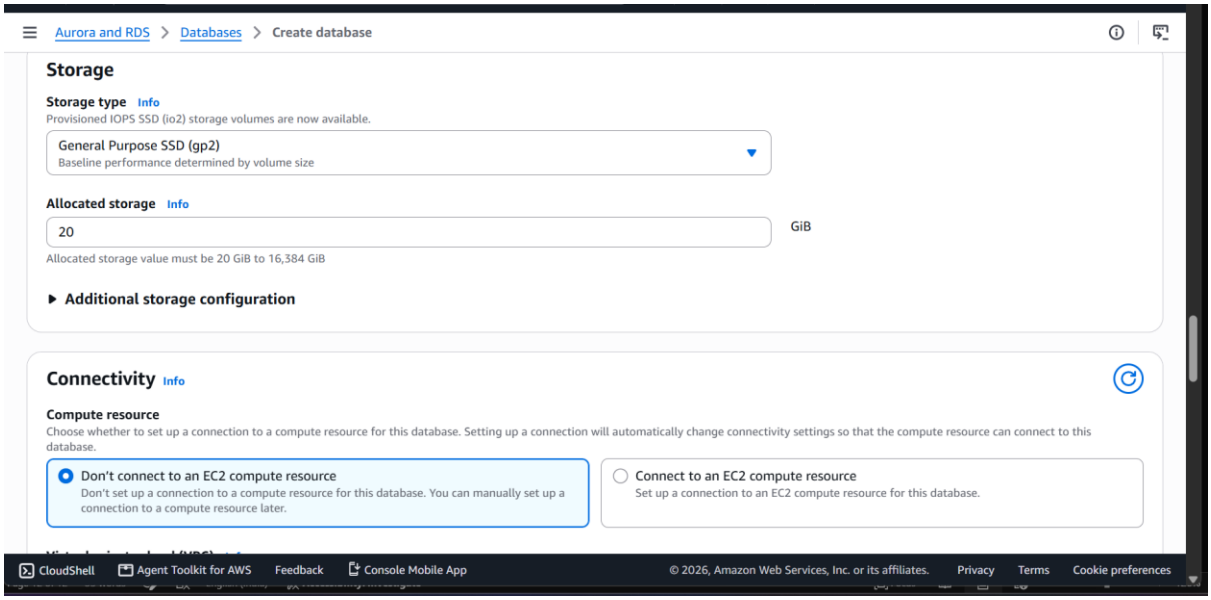


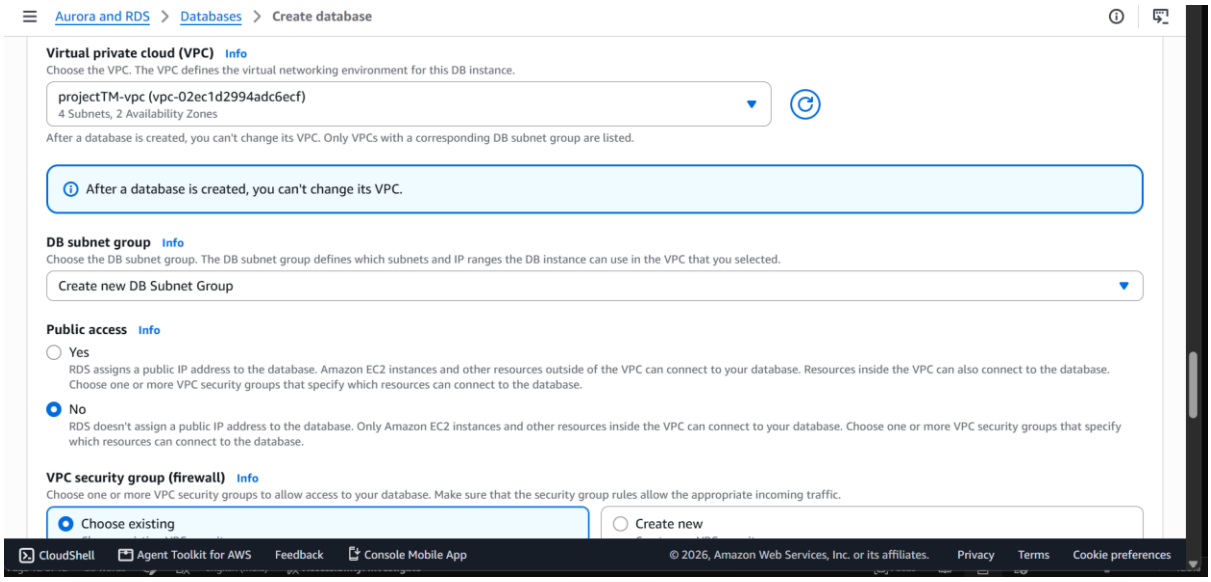


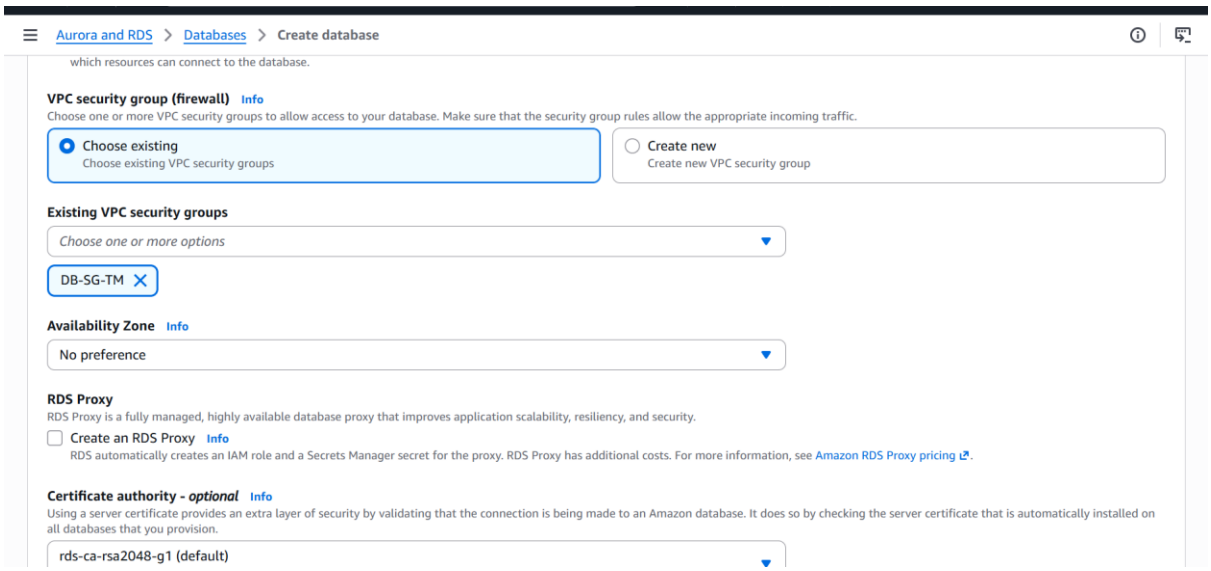

Aurora and RDS > Databases > Create database
Show only versions that support the Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Engine version
MySQL 8.4.9
Enable RDS Extended Support Info
Amazon RDS Extended Support is a paid offering. By selecting this option, you consent to being charged for this offering if you are running your database major version past the RDS end of standard support date for that version. Check the end of standard support date for your major version in the RDS for MySQL documentation.
DB instance identifier Info
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.
database-TM
The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.
Credentials Settings
Master username Info
Type a login ID for the master user of your DB instance.
admin
1 to 16 alphanumeric characters. The first character must be a letter.
Credentials management
You can use AWS Secrets Manager or manage your master user credentials.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

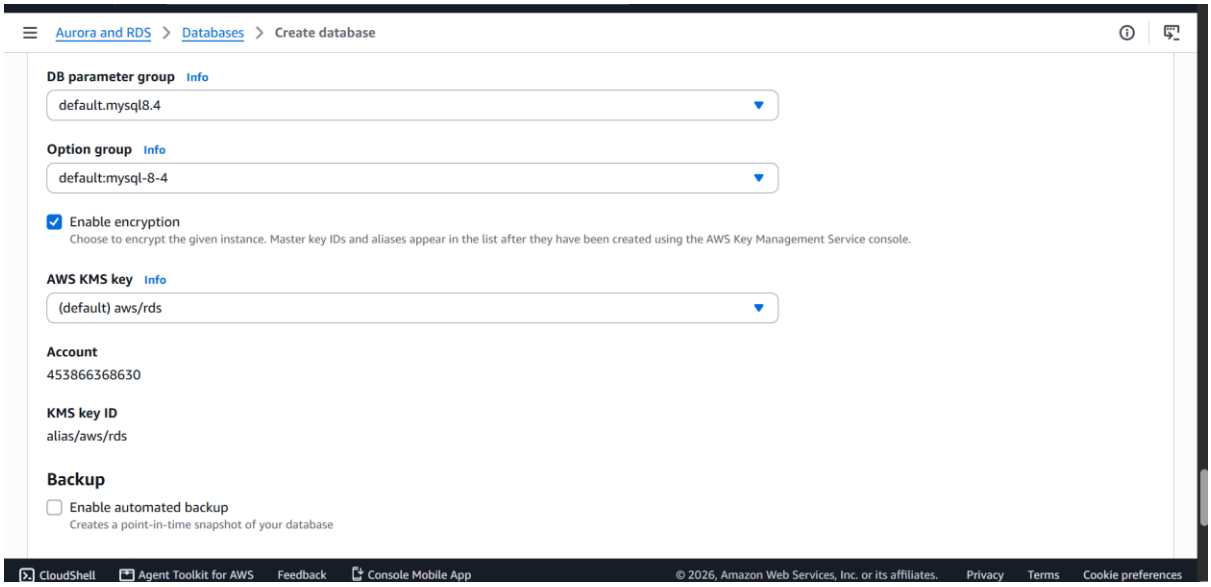

Aurora and RDS > Databases > Create database
Credentials management
You can use AWS Secrets Manager or manage your master user credentials.
Managed in AWS Secrets Manager - most secure
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
Self managed
Create your own password or have RDS create a password that you manage.
Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.
Master password Info
Password strength Strong
Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @
Confirm master password Info
Additional credentials settings
Database authentication options Info
Password authentication
Authenticates using database passwords.
Password and IAM database authentication
Authenticates using the database password and user credentials through AWS IAM users and roles.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

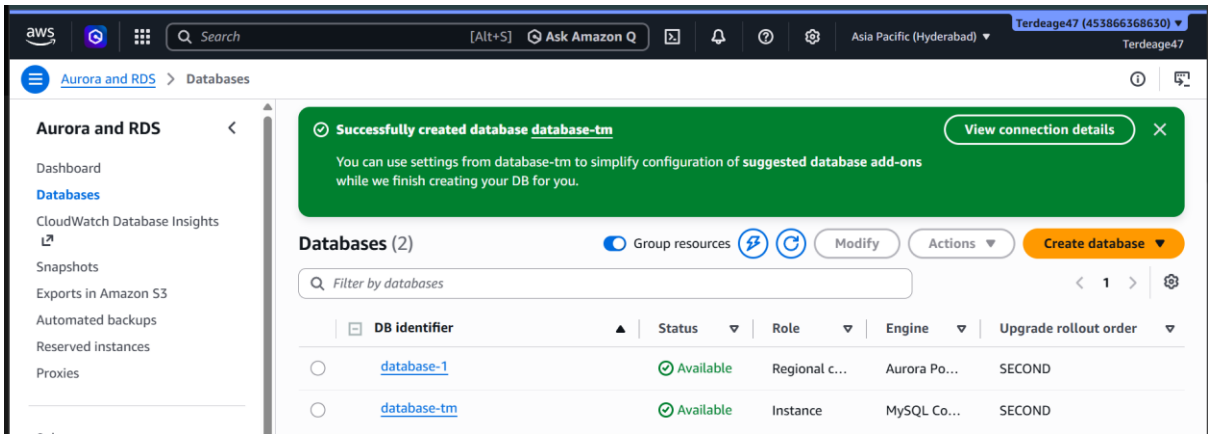

Aurora and RDS > Databases > Create database
Instance configuration
The DB instance configuration options below are limited to those supported by the engine that you selected above.
DB instance class Info
Hide filters
Show instance classes that support Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Include previous generation classes
Standard classes (includes m classes)
Memory optimized classes (includes r and x classes)
Burstable classes (includes t classes)
Instance type
db.t3.micro
2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2,085 Mbps Network: Up to 5 Gbps
Storage
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Aurora and RDS > Databases > Create database
Storage
Storage type Info
Provisioned IOPS SSD (io2) storage volumes are now available.
General Purpose SSD (gp2)
Baseline performance determined by volume size
Allocated storage Info
20
GiB
Allocated storage value must be 20 GiB to 16,384 GiB
Additional storage configuration
Connectivity Info
Compute resource
Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.
Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.
Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Aurora and RDS > Databases > Create database
Virtual private cloud (VPC) Info
Choose the VPC. The VPC defines the virtual networking environment for this DB instance.
projectTM-vpc (vpc-02ec1d2994adc6ecf)
4 Subnets, 2 Availability Zones
After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.
After a database is created, you can't change its VPC.
DB subnet group Info
Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.
Create new DB Subnet Group
Public access Info
Yes
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
No
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.
VPC security group (firewall) Info
Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.
Choose existing
Create new
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

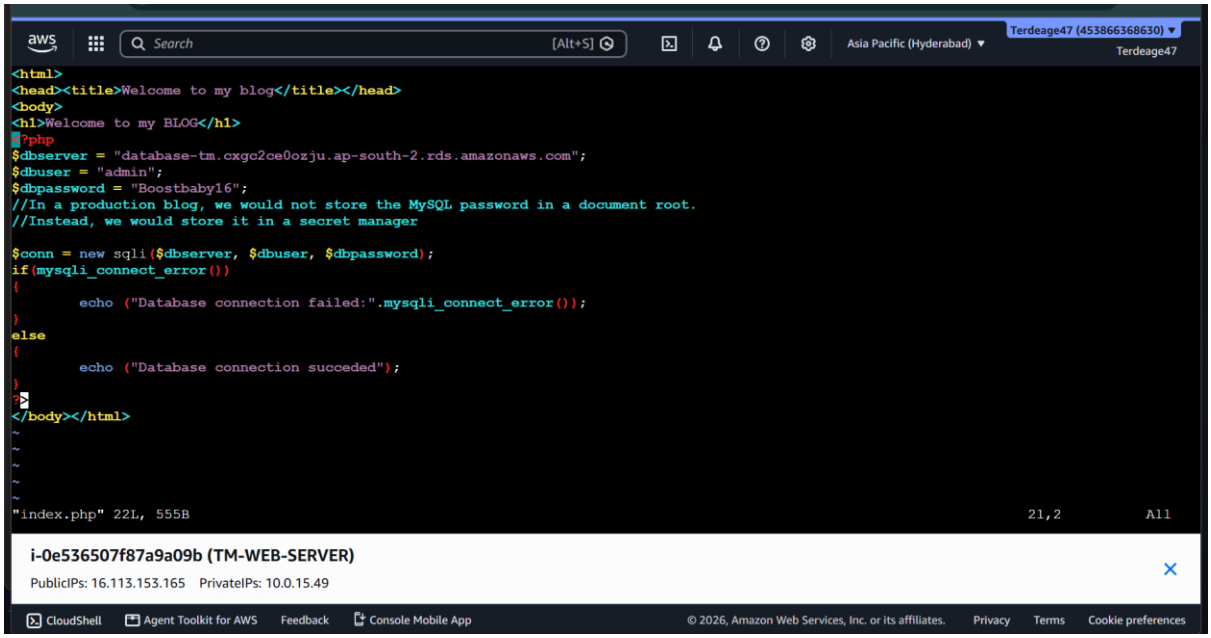

Aurora and RDS > Databases > Create database
which resources can connect to the database.
VPC security group (firewall) Info
Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.
Choose existing
Choose existing VPC security groups
Create new
Create new VPC security group
Existing VPC security groups
Choose one or more options
DB-SG-TM
Availability Zone Info
No preference
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Create an RDS Proxy Info
RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see Amazon RDS Proxy pricing.
Certificate authority - optional Info
Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.
rds-ca-rsa2048-g1 (default)


Aurora and RDS > Databases > Create database
DB parameter group Info
default.mysql8.4
Option group Info
default:mysql-8-4
Enable encryption
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console.
AWS KMS key Info
(default) aws/rds
Account
453866368630
KMS key ID
alias/aws/rds
Backup
Enable automated backup
Creates a point-in-time snapshot of your database
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

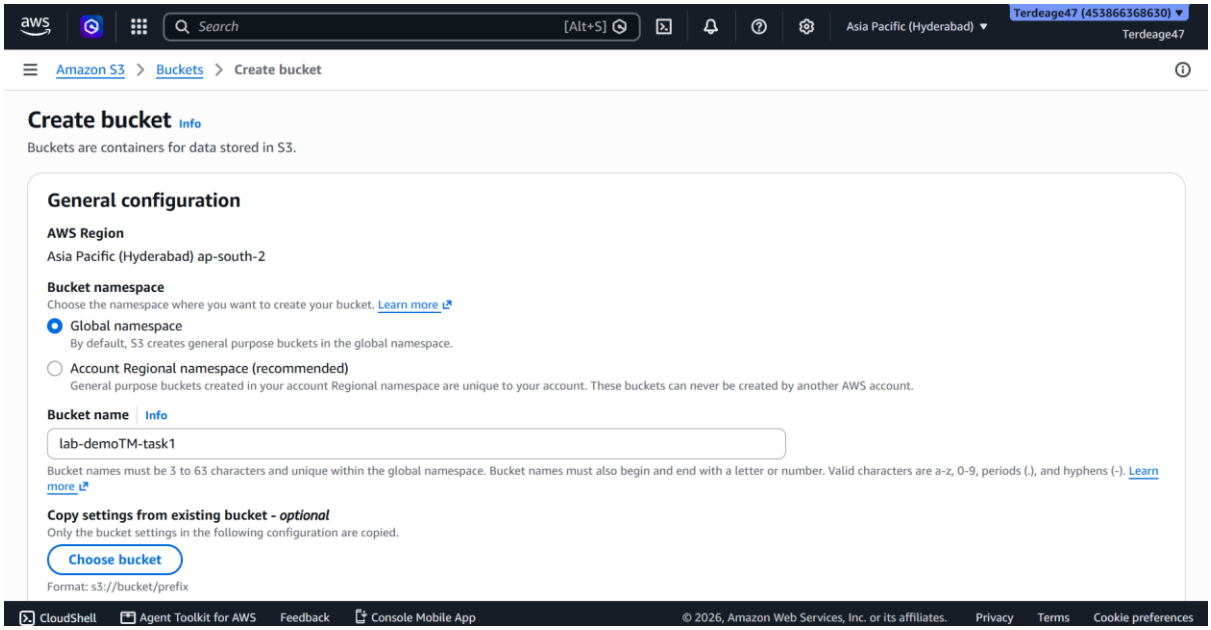

Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Aurora and RDS > Databases
Aurora and RDS
Dashboard
Databases
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Proxies
Successfully created database database-tm
View connection details
You can use settings from database-tm to simplify configuration of suggested database add-ons while we finish creating your DB for you.
Databases (2)
Group resources
Modify
Actions
Create database
Filter by databases
DB identifier
Status
Role
Engine
Upgrade rollout order
database-1
Available
Regional c...
Aurora Po...
SECOND
database-tm
Available
Instance
MySQL Co...
SECOND

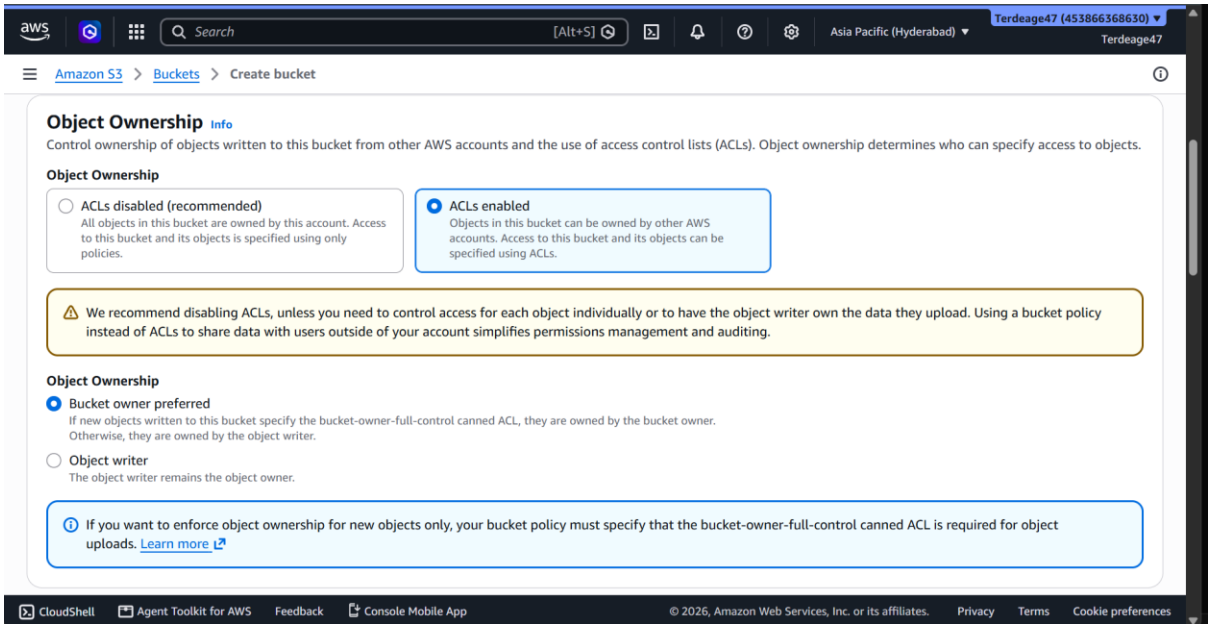
TASK 5: Configure instance to MySQL database

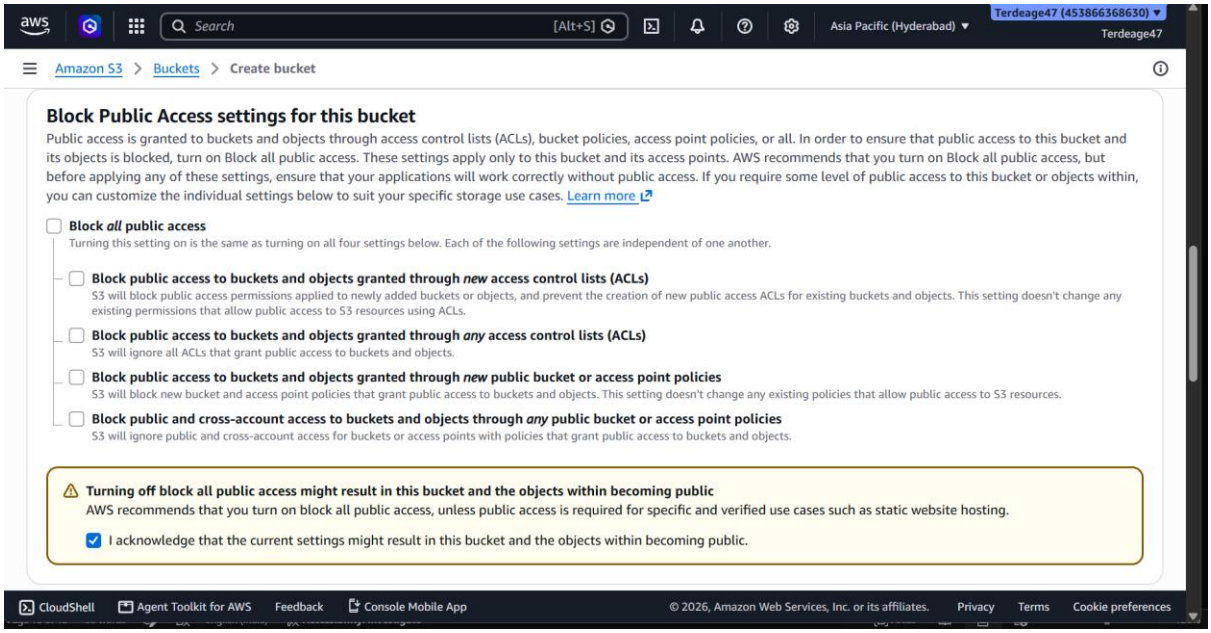
Replace the values for dbserver, dbuser and dbpassword with the RDS we created at Task 4

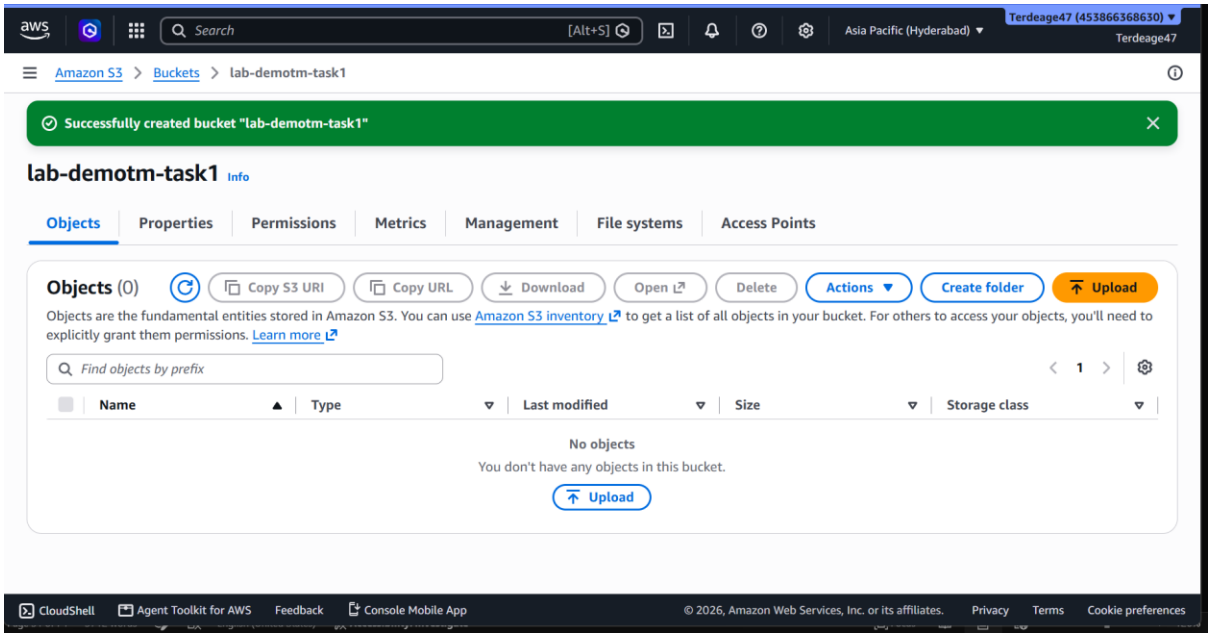


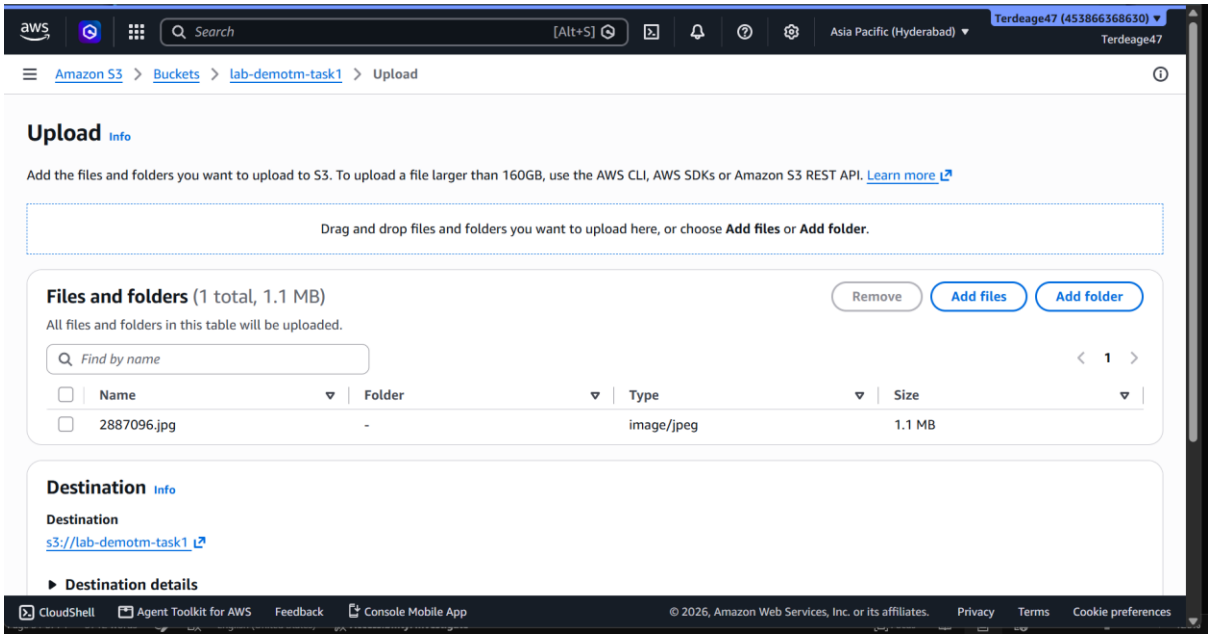
TASK 6: Configure instance to get images from Amazon S3 on website

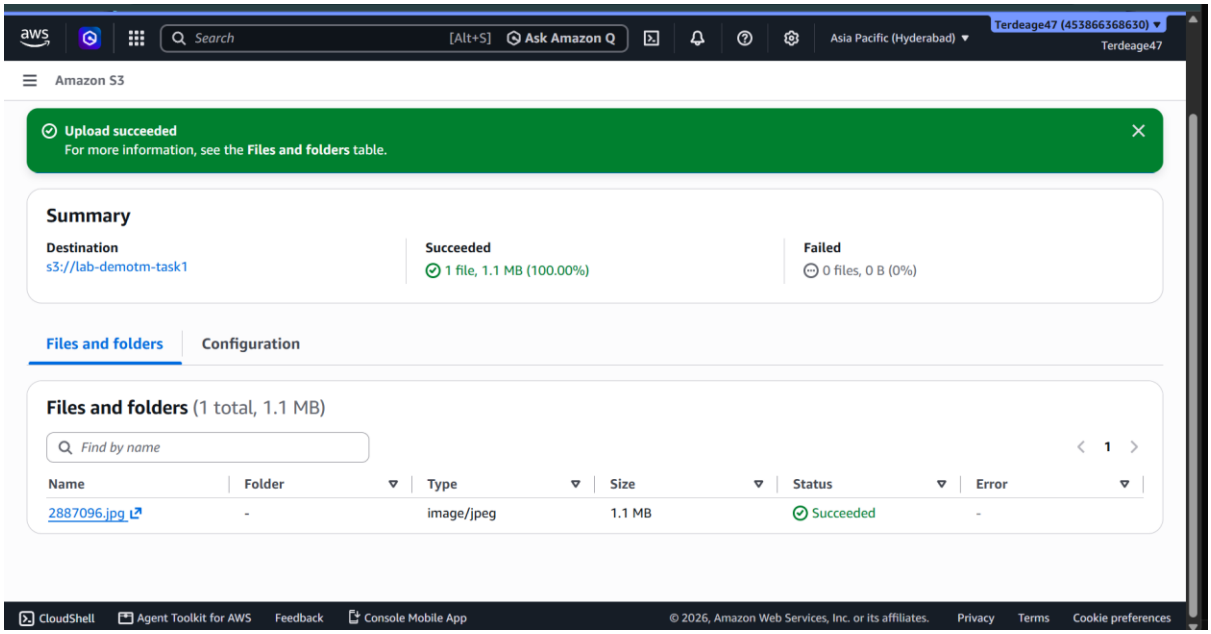


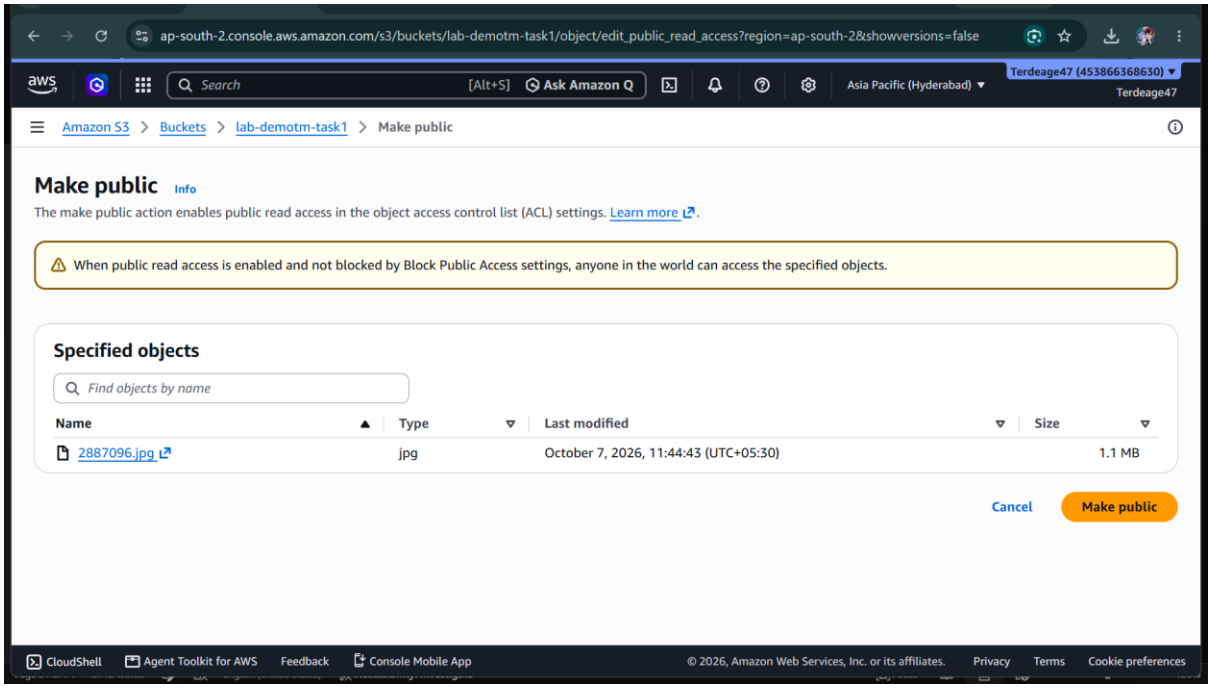

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3 > Buckets > Create bucket
Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.
We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.
Object Ownership
Bucket owner preferred
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
Object writer
The object writer remains the object owner.
If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

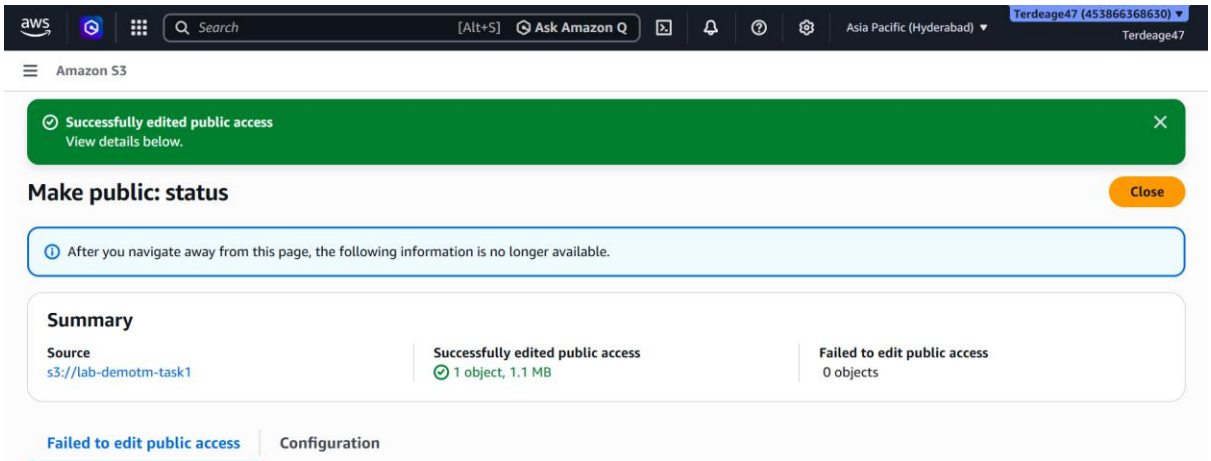

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3 > Buckets > Create bucket
Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.
Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.
I acknowledge that the current settings might result in this bucket and the objects within becoming public.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

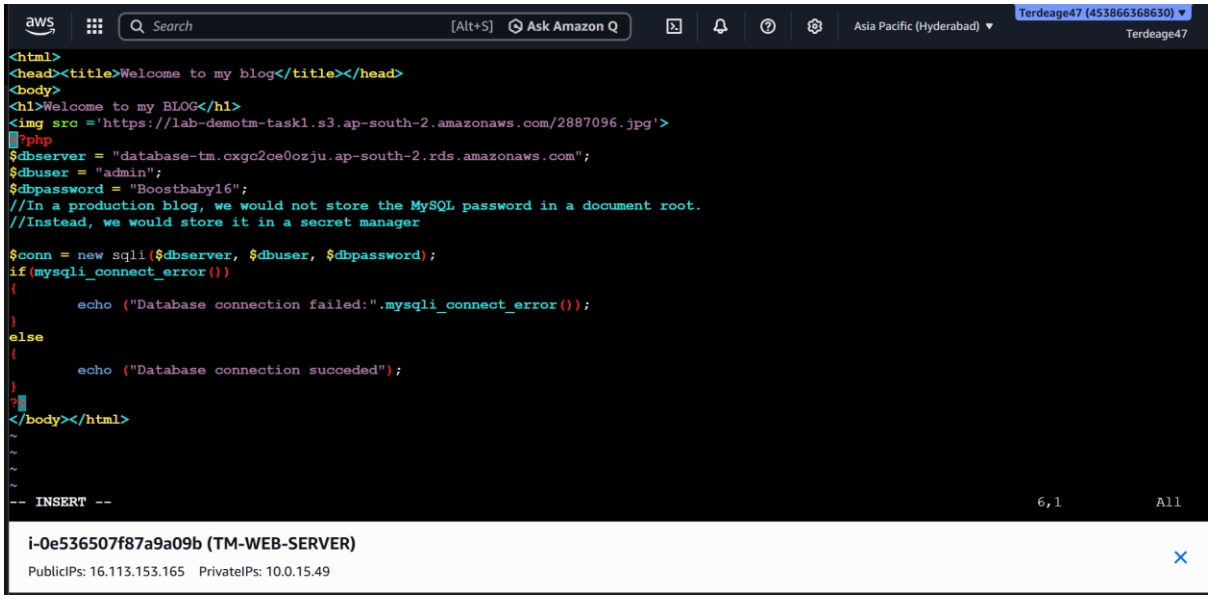

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3 > Buckets > lab-demotm-task1
Successfully created bucket "lab-demotm-task1"
lab-demotm-task1 Info
Objects
Properties
Permissions
Metrics
Management
File systems
Access Points
Objects (0)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Name
Type
Last modified
Size
Storage class
No objects
You don't have any objects in this bucket.
Upload
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3 > Buckets > lab-demotm-task1 > Upload
Upload Info
Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. Learn more
Drag and drop files and folders you want to upload here, or choose Add files or Add folder.
Files and folders (1 total, 1.1 MB)
Remove
Add files
Add folder
All files and folders in this table will be uploaded.
Find by name
Name
Folder
Type
Size
2887096.jpg
-
image/jpeg
1.1 MB
Destination Info
Destination
s3://lab-demotm-task1
Destination details
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3
Upload succeeded
For more information, see the Files and folders table.
Summary
Destination
s3://lab-demotm-task1
Succeeded
1 file, 1.1 MB (100.00%)
Failed
0 files, 0 B (0%)
Files and folders
Configuration
Files and folders (1 total, 1.1 MB)
Find by name
Name
Folder
Type
Size
Status
Error
2887096.jpg
-
image/jpeg
1.1 MB
Succeeded
-
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

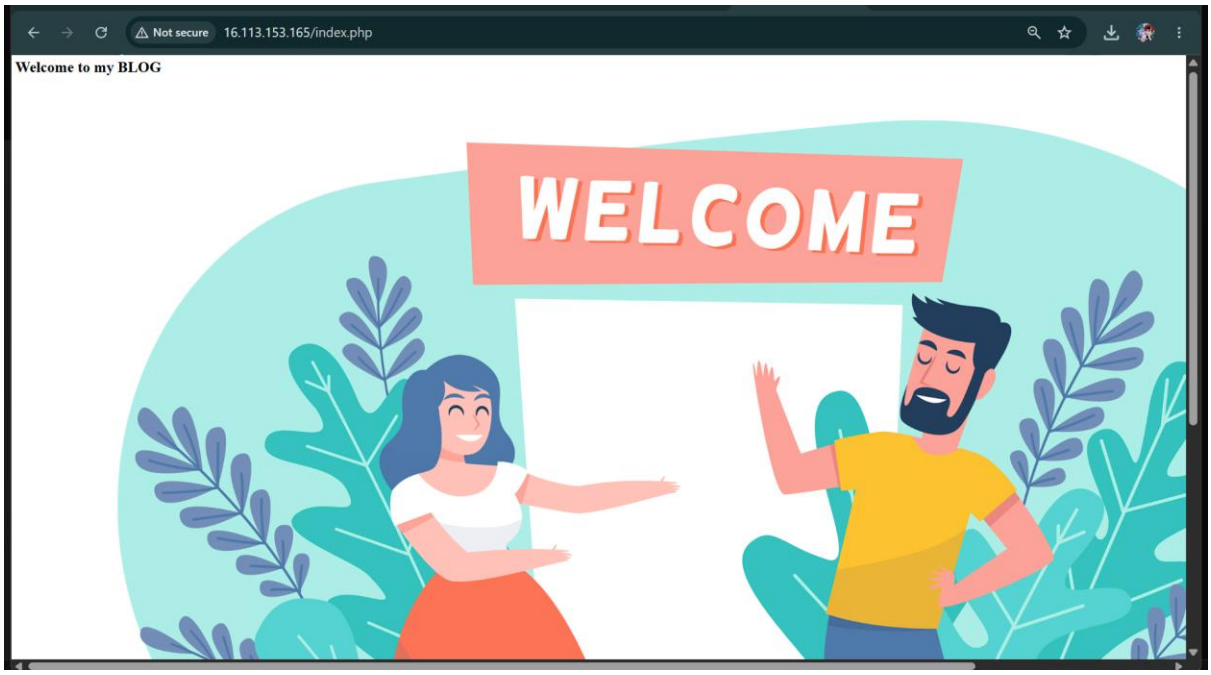

ap-south-2.console.aws.amazon.com/s3/buckets/lab-demotm-task1/object/edit_public_read_access?region=ap-south-2&showversions=false
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3 > Buckets > lab-demotm-task1 > Make public
Make public
Info
The make public action enables public read access in the object access control list (ACL) settings. Learn more.
When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.
Specified objects
Find objects by name
Name
Type
Last modified
Size
2887096.jpg
jpg
October 7, 2026, 11:44:43 (UTC+05:30)
1.1 MB
Cancel
Make public
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
Amazon S3
Successfully edited public access
View details below.
Make public: status
Close
After you navigate away from this page, the following information is no longer available.
Summary
Source
s3://lab-demotm-task1
Successfully edited public access
1 object, 1.1 MB
Failed to edit public access
0 objects
Failed to edit public access
Configuration

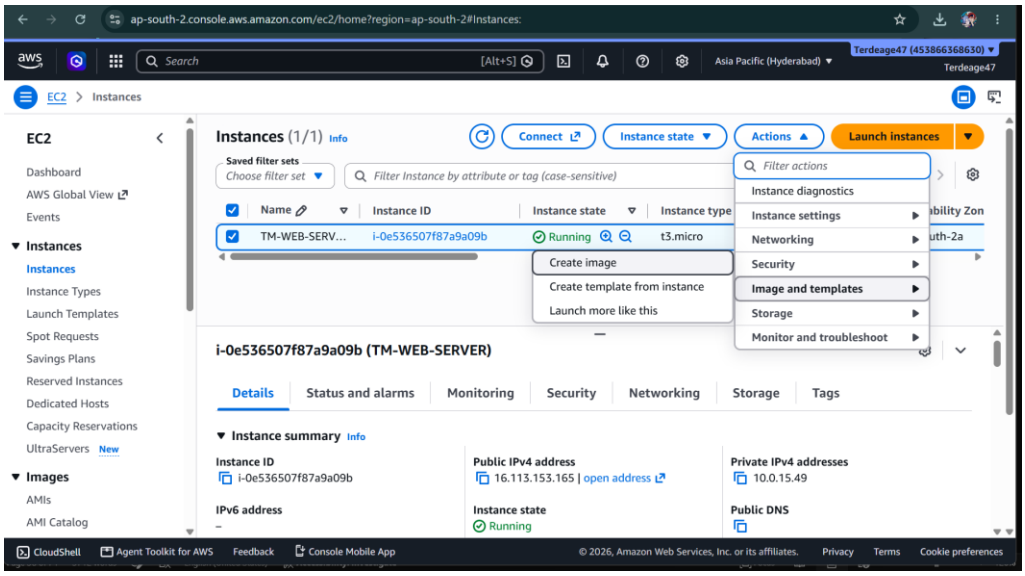


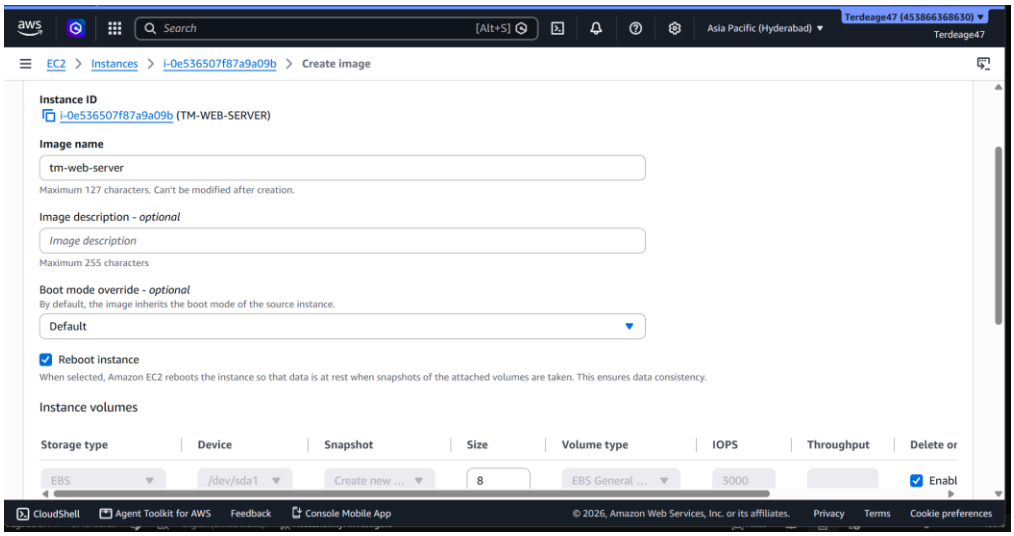
After <h1>, insert an img tag with source url as the url we got from the image we uploaded in S3 bucket.

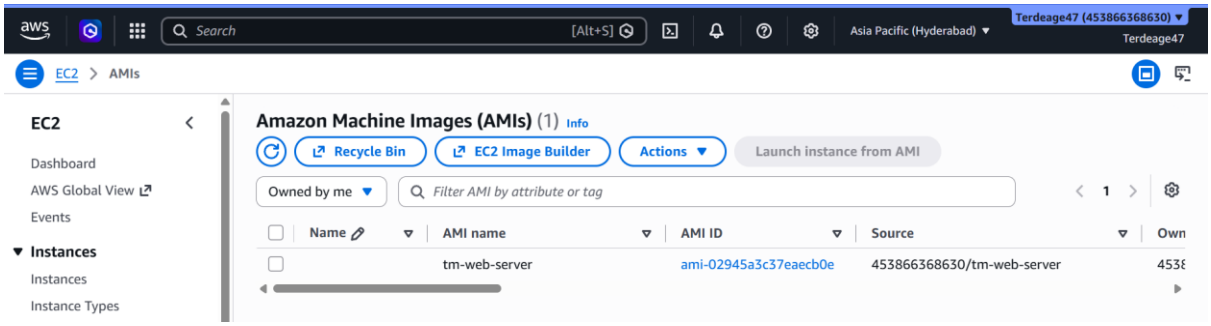
<img src ='https://lab-demotm-task1.s3.ap-south-2.amazonaws.com/2887096.jpg'>



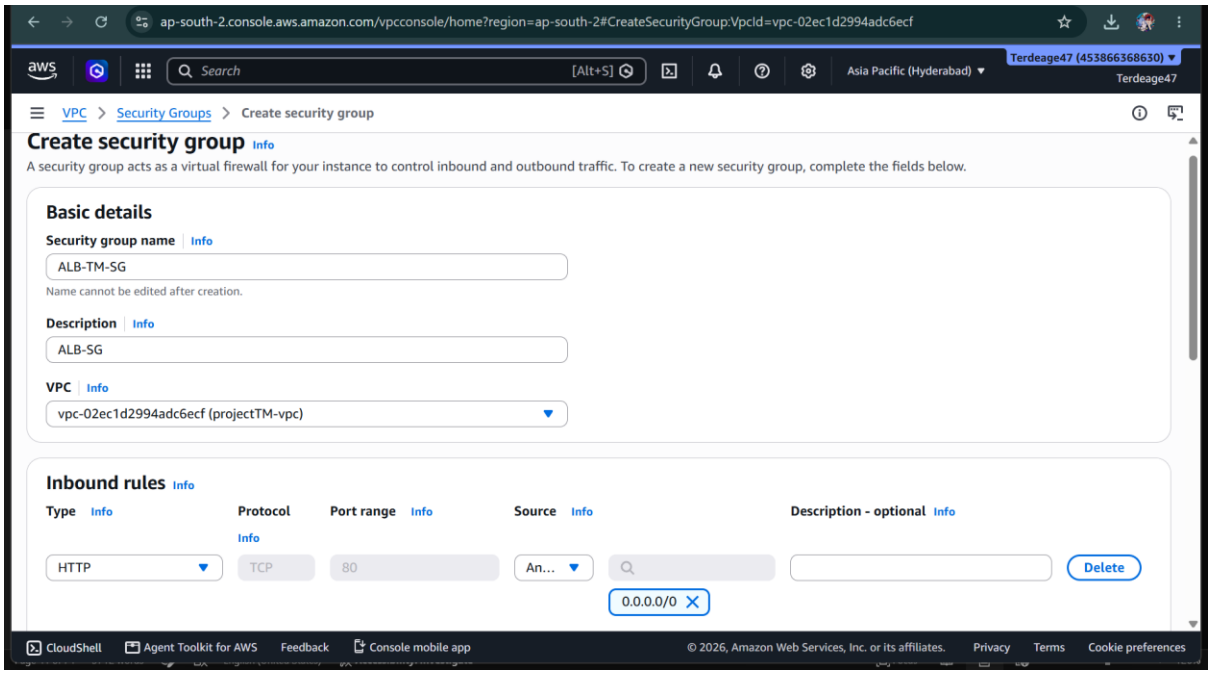
TASK 7: Create AMI image of instance

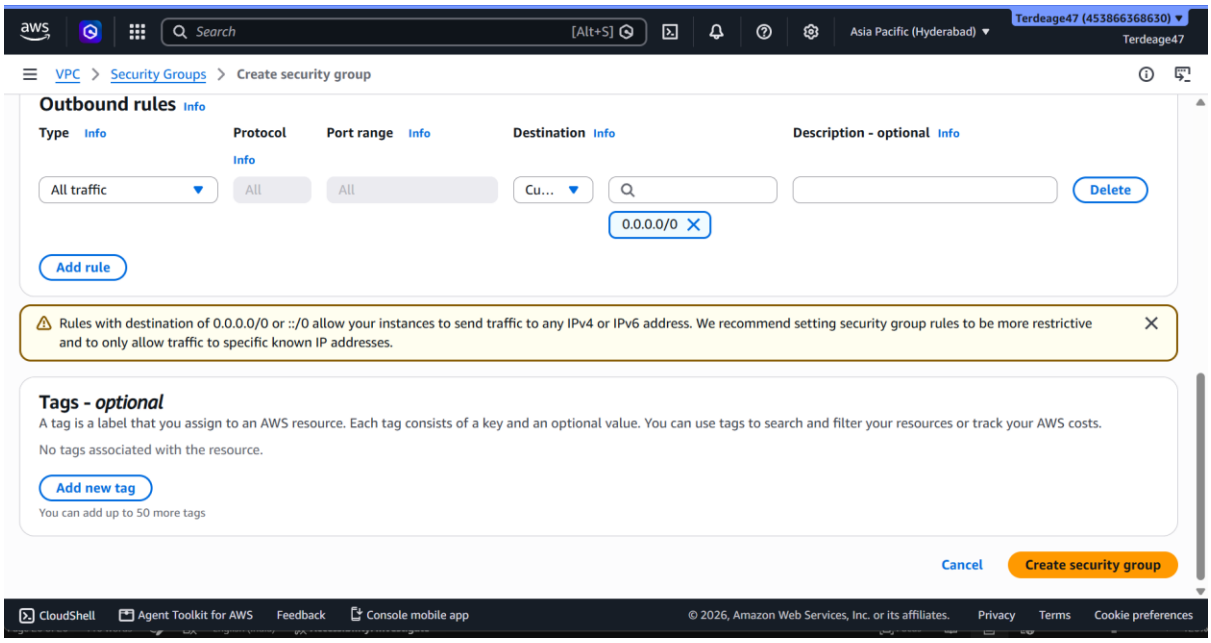


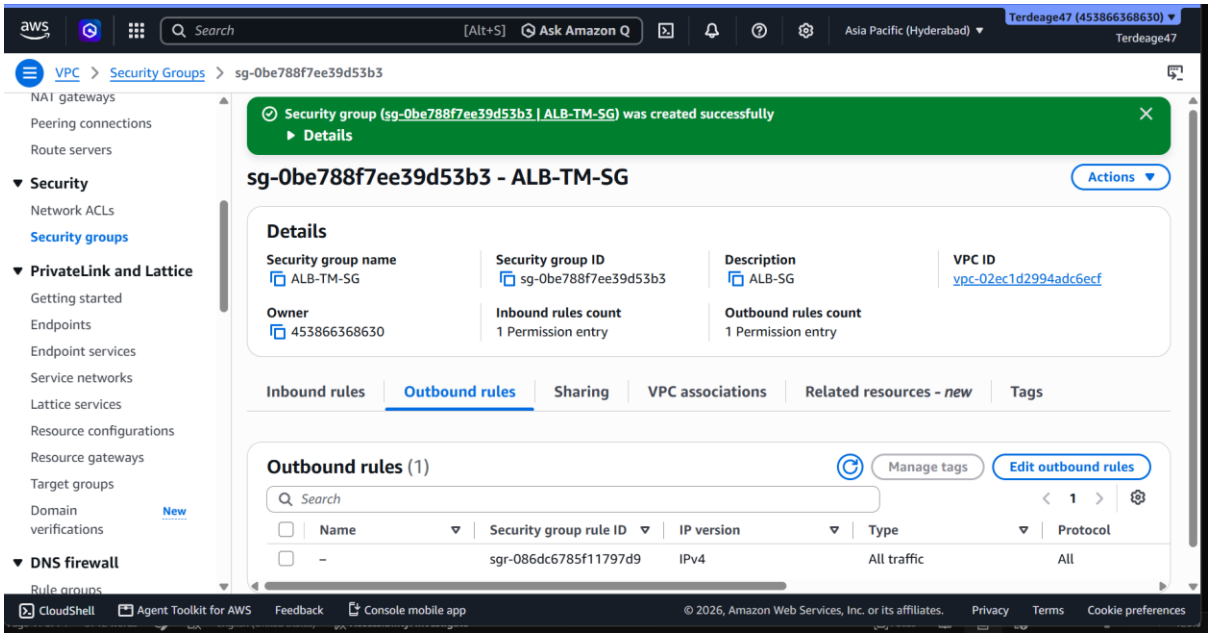




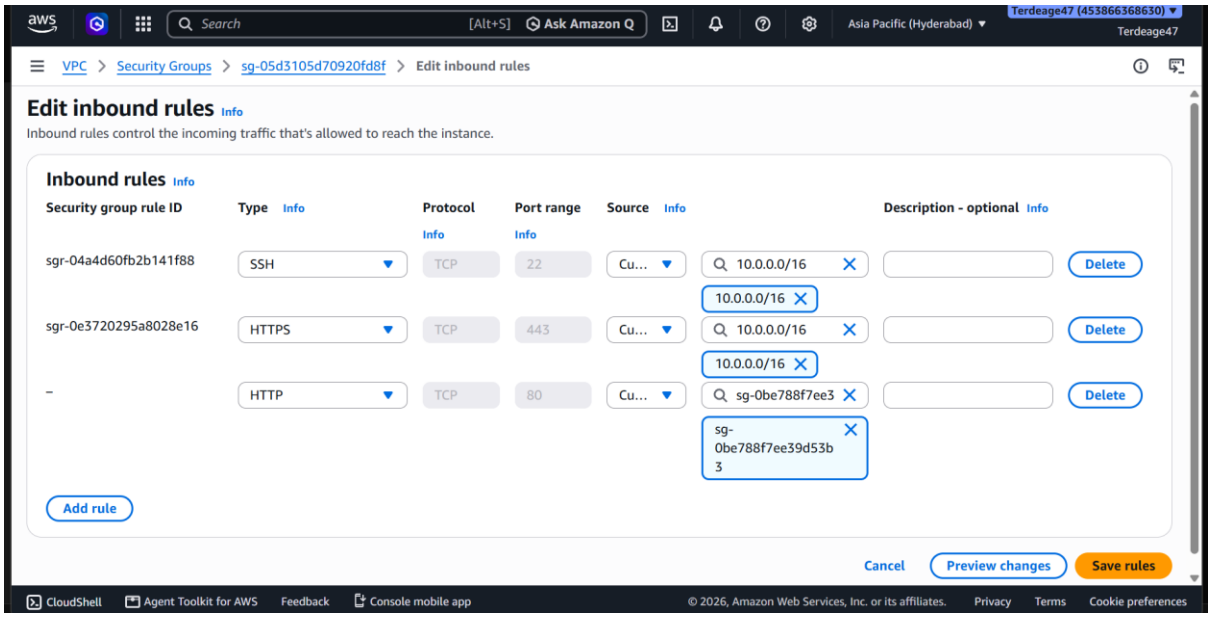
TASK 8 : Create SG for ALB and modify security group of instance

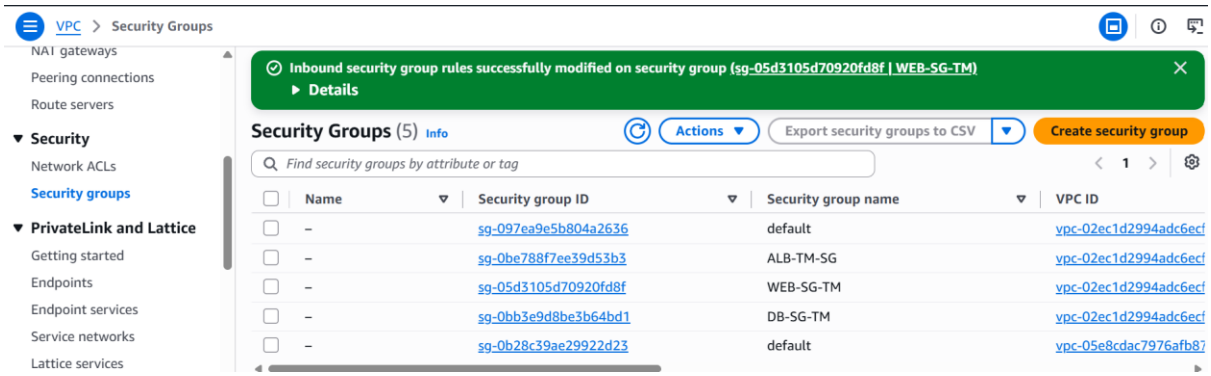




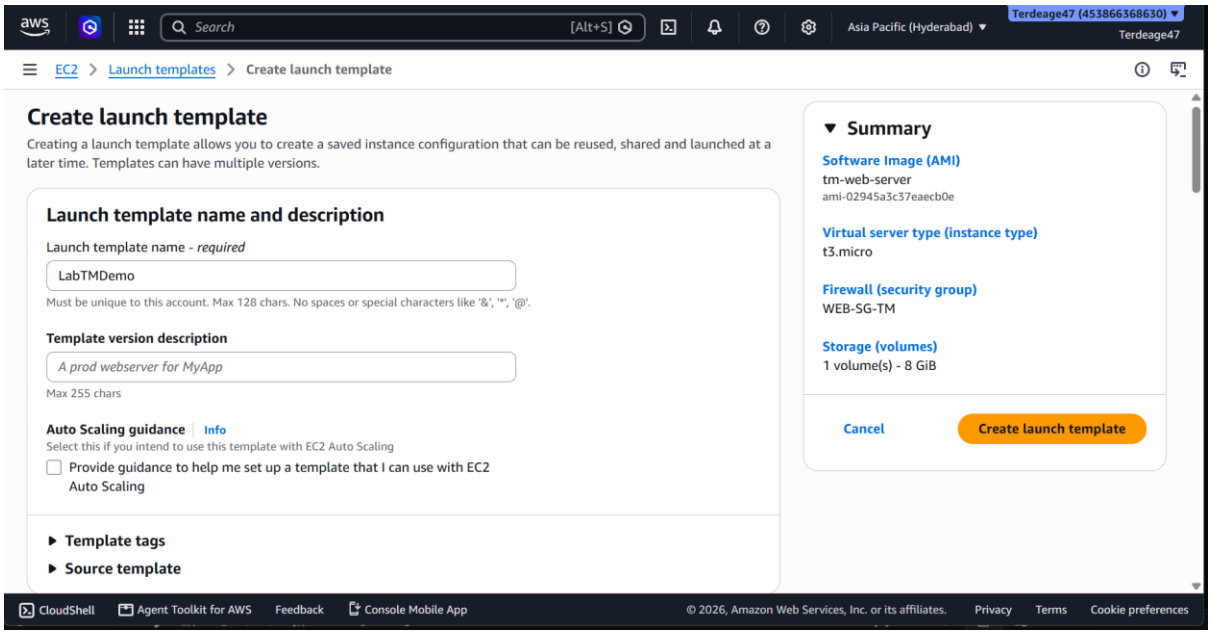


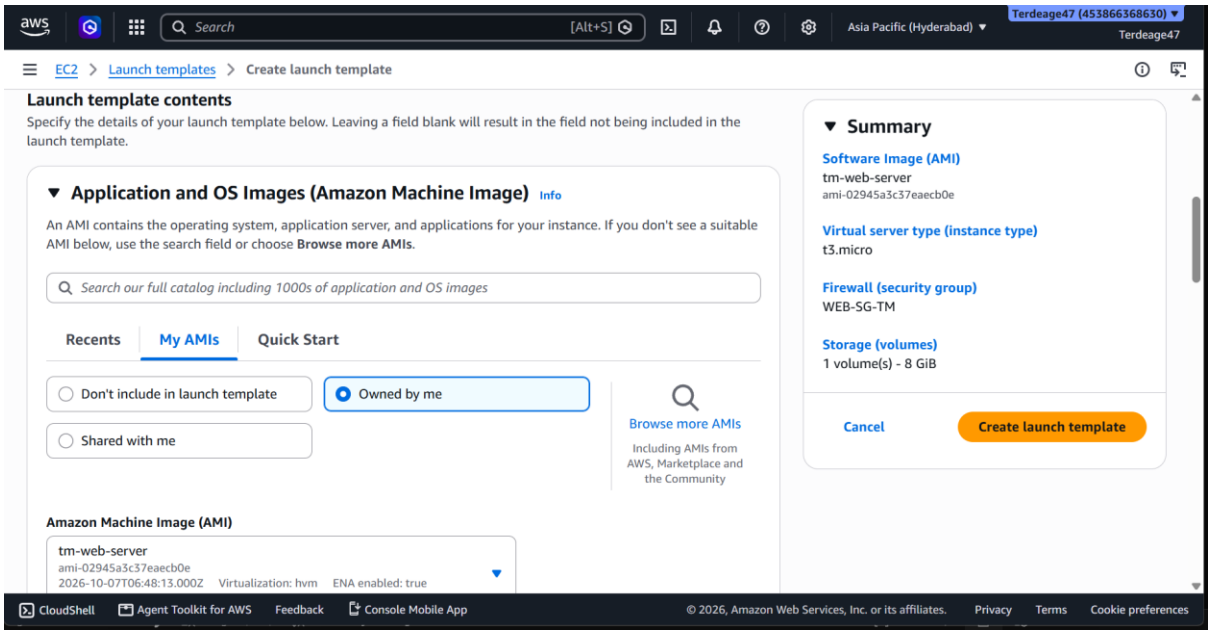
Edit inbound rules for WEB-SG

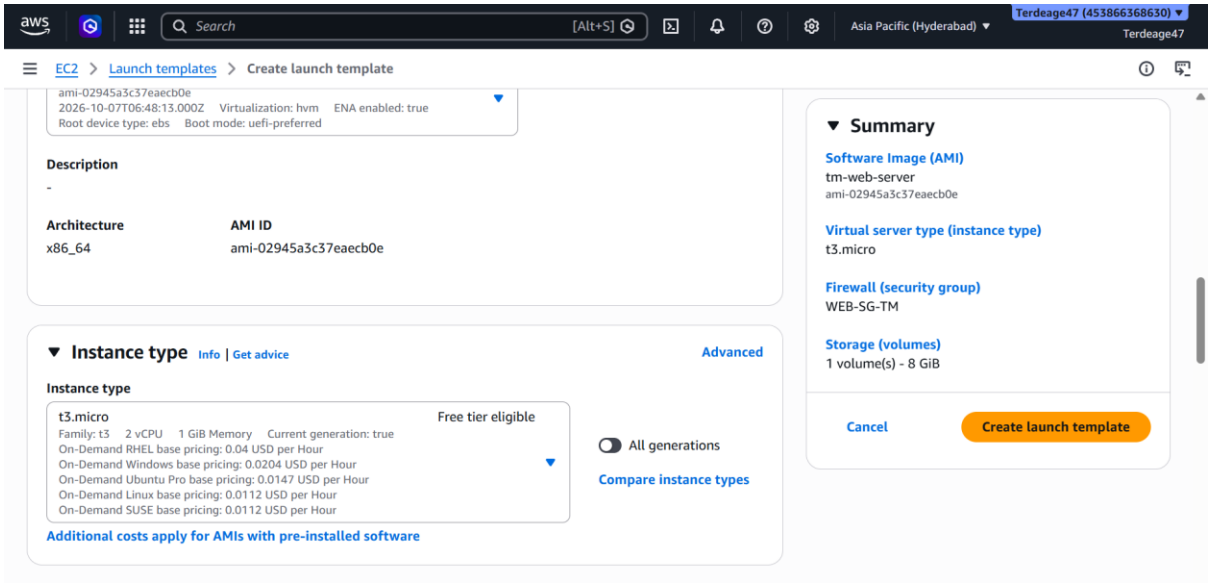


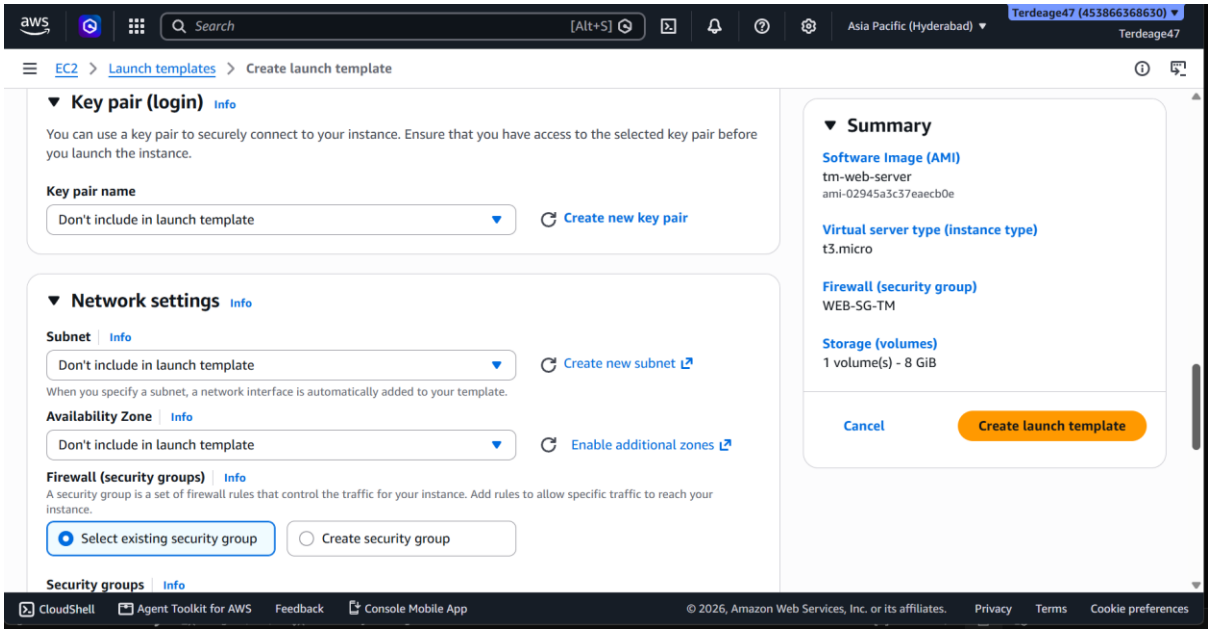


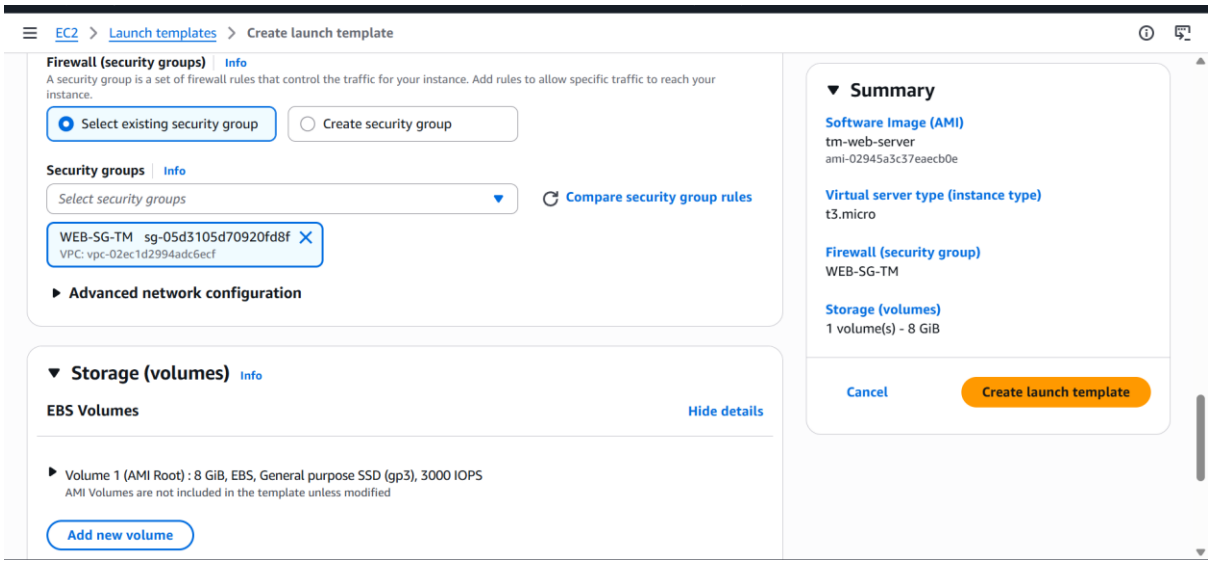
TASK 9: Implement high availability and scalability to the application

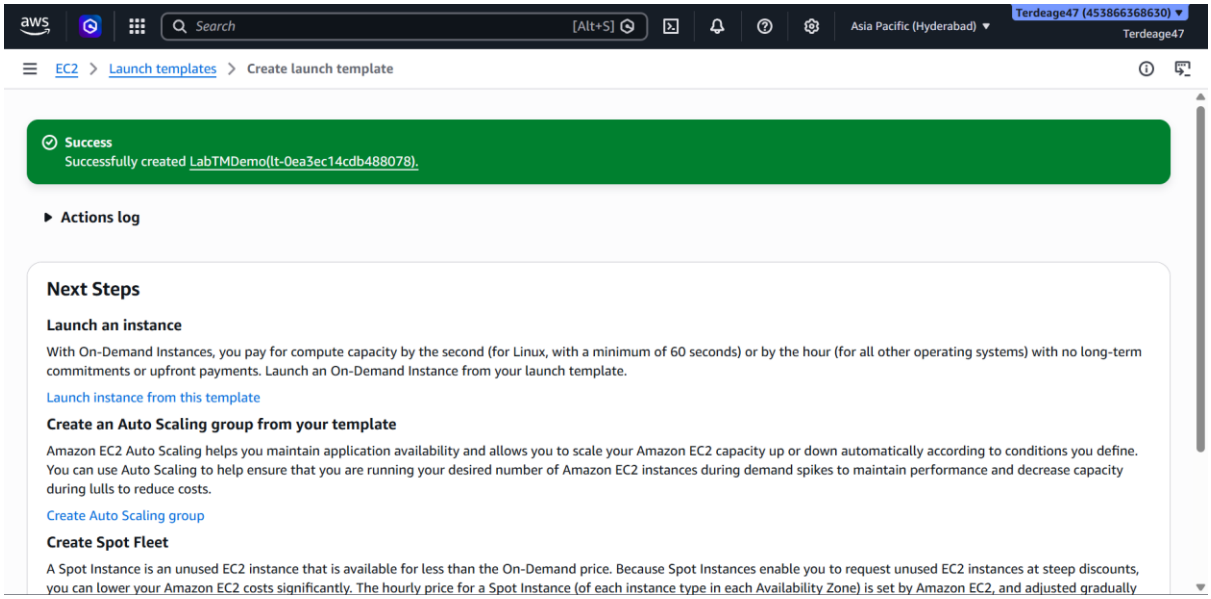


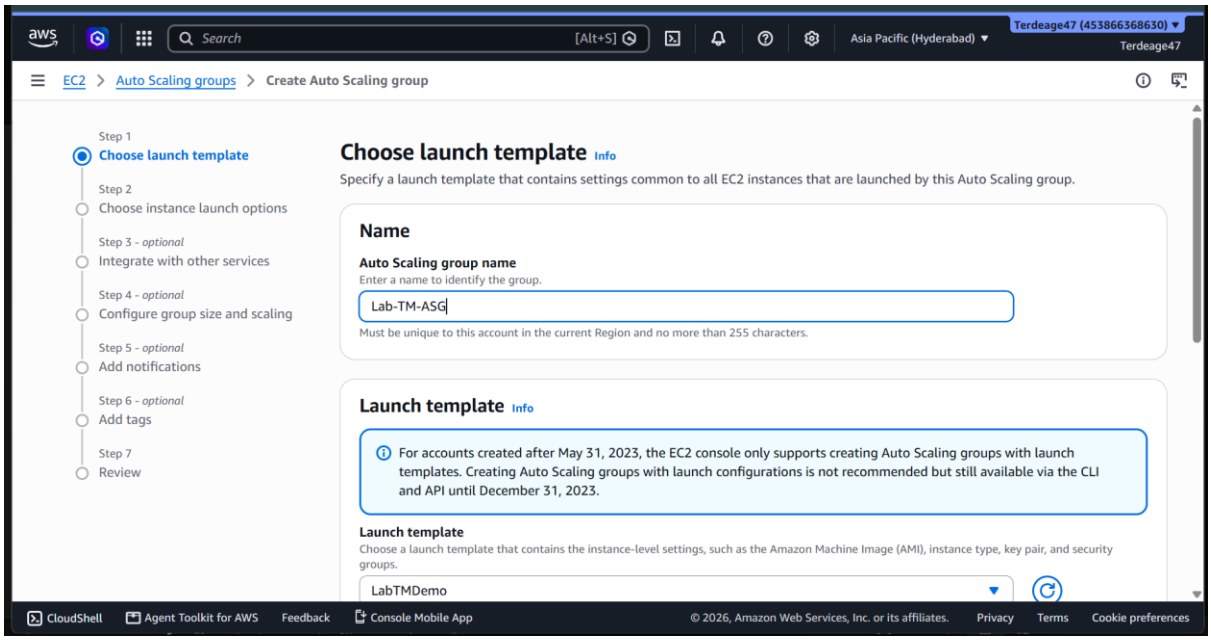


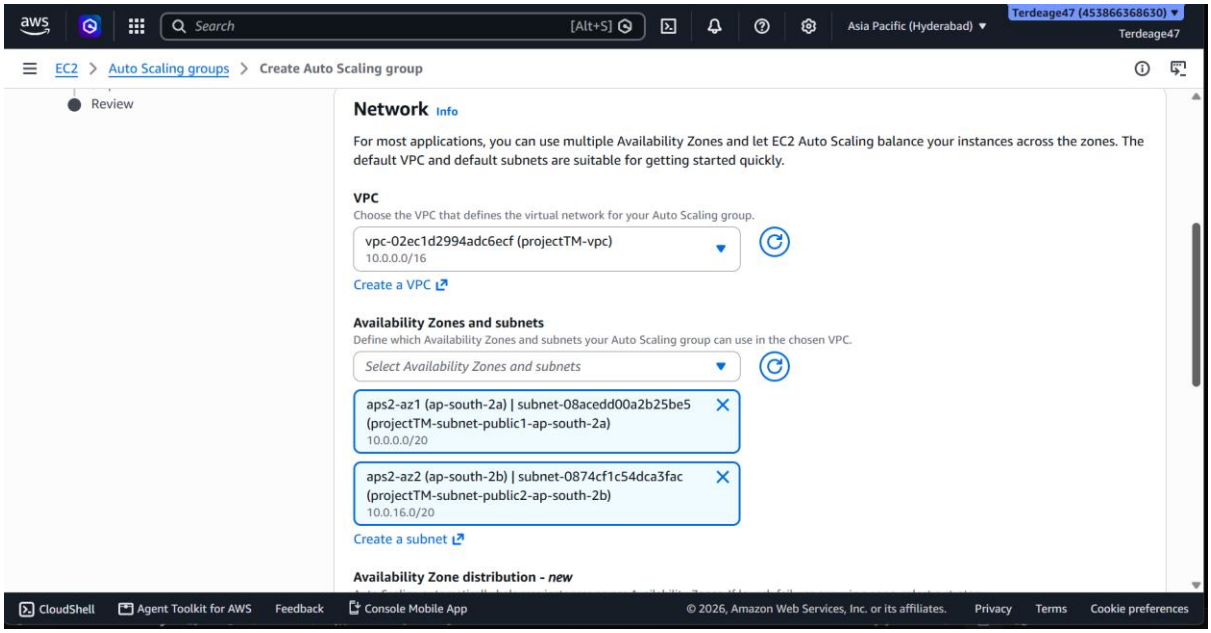

aws
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Launch templates > Create launch template
ami-02945a3c37eaecb0e
2026-10-07T06:48:13.000Z Virtualization: hvm ENA enabled: true
Root device type: ebs Boot mode: uefi-preferred
Description
-
Architecture
x86_64
AMI ID
ami-02945a3c37eaecb0e
Instance type Info | Get advice
Advanced
Instance type
t3.micro
Free tier eligible
Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand RHEL base pricing: 0.04 USD per Hour
On-Demand Windows base pricing: 0.0204 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0147 USD per Hour
On-Demand Linux base pricing: 0.0112 USD per Hour
On-Demand SUSE base pricing: 0.0112 USD per Hour
All generations
Compare instance types
Additional costs apply for AMIs with pre-installed software
Summary
Software Image (AMI)
tm-web-server
ami-02945a3c37eaecb0e
Virtual server type (instance type)
t3.micro
Firewall (security group)
WEB-SG-TM
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Create launch template

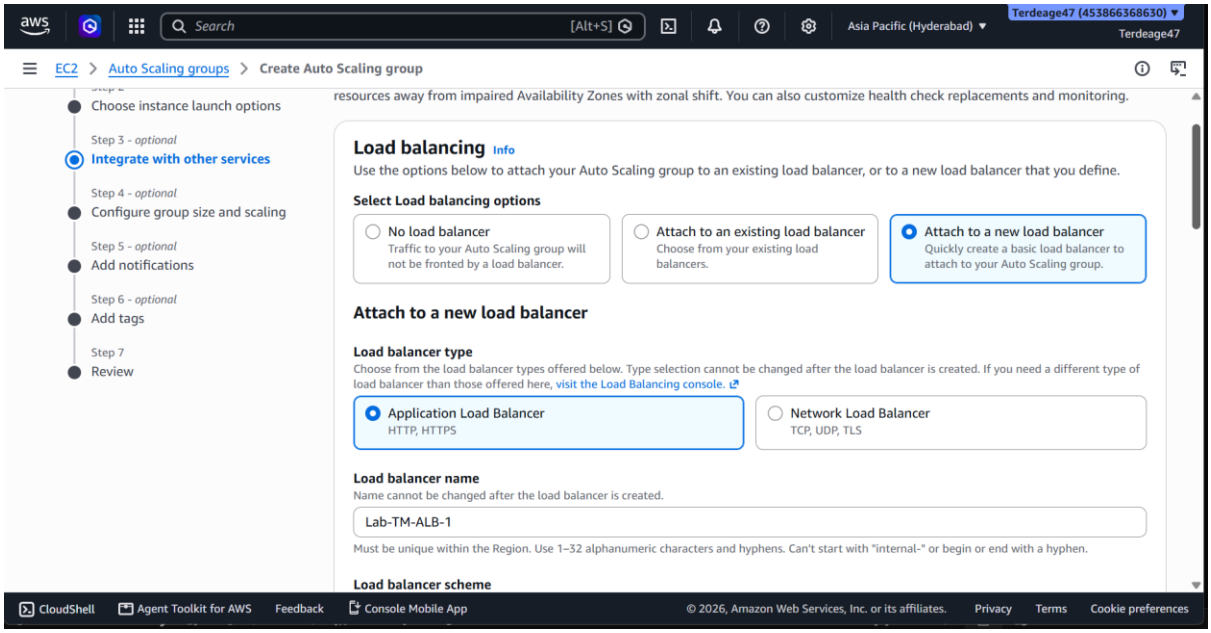

aws
Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Launch templates > Create launch template
Key pair (login) Info
You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.
Key pair name
Don't include in launch template
Create new key pair
Network settings Info
Subnet Info
Don't include in launch template
Create new subnet
When you specify a subnet, a network interface is automatically added to your template.
Availability Zone Info
Don't include in launch template
Enable additional zones
Firewall (security groups) Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
Select existing security group
Create security group
Security groups Info
Summary
Software Image (AMI)
tm-web-server
ami-02945a3c37eaecb0e
Virtual server type (instance type)
t3.micro
Firewall (security group)
WEB-SG-TM
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Create launch template
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

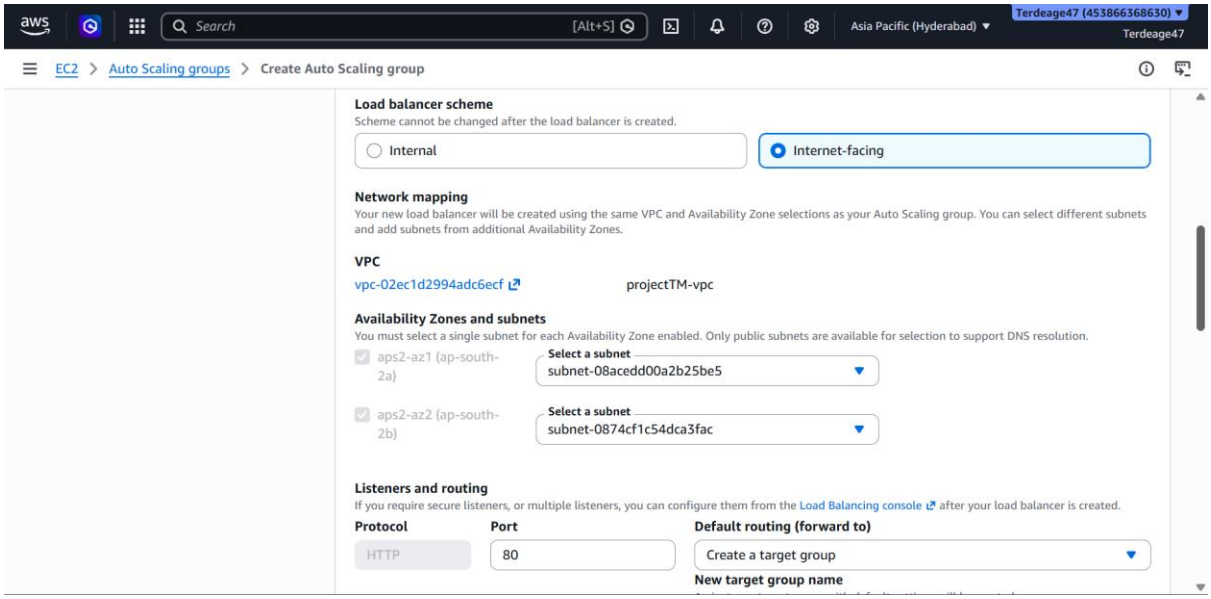

EC2 > Launch templates > Create launch template
Firewall (security groups) Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
Select existing security group
Create security group
Security groups Info
Select security groups
Compare security group rules
WEB-SG-TM sg-05d3105d70920fd8f
VPC: vpc-02ec1d2994adc6ecf
Advanced network configuration
Storage (volumes) Info
EBS Volumes
Hide details
Volume 1 (AMI Root) : 8 GiB, EBS, General purpose SSD (gp3), 3000 IOPS
AMI Volumes are not included in the template unless modified
Add new volume
Summary
Software Image (AMI)
tm-web-server
ami-02945a3c37eaecb0e
Virtual server type (instance type)
t3.micro
Firewall (security group)
WEB-SG-TM
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Create launch template

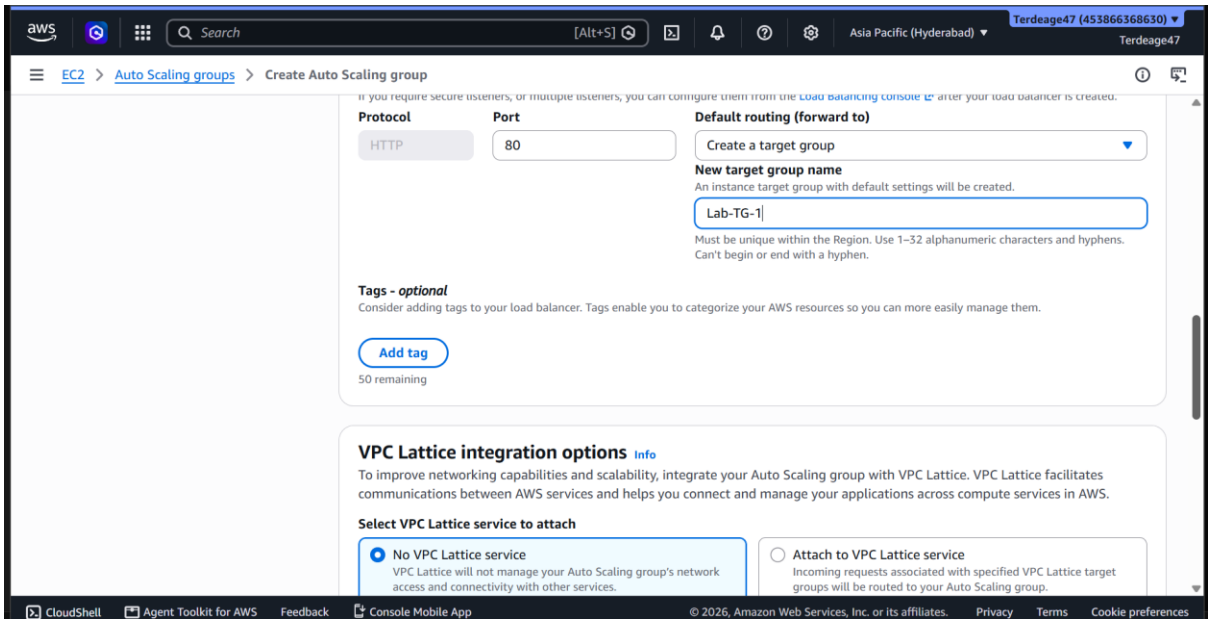

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Launch templates > Create launch template
Success
Successfully created LabTMDemo(lt-0ea3ec14cdb488078).
Actions log
Next Steps
Launch an instance
With On-Demand Instances, you pay for compute capacity by the second (for Linux, with a minimum of 60 seconds) or by the hour (for all other operating systems) with no long-term commitments or upfront payments. Launch an On-Demand Instance from your launch template.
Launch instance from this template
Create an Auto Scaling group from your template
Amazon EC2 Auto Scaling helps you maintain application availability and allows you to scale your Amazon EC2 capacity up or down automatically according to conditions you define. You can use Auto Scaling to help ensure that you are running your desired number of Amazon EC2 instances during demand spikes to maintain performance and decrease capacity during lulls to reduce costs.
Create Auto Scaling group
Create Spot Fleet
A Spot Instance is an unused EC2 instance that is available for less than the On-Demand price. Because Spot Instances enable you to request unused EC2 instances at steep discounts, you can lower your Amazon EC2 costs significantly. The hourly price for a Spot Instance (of each instance type in each Availability Zone) is set by Amazon EC2, and adjusted gradually

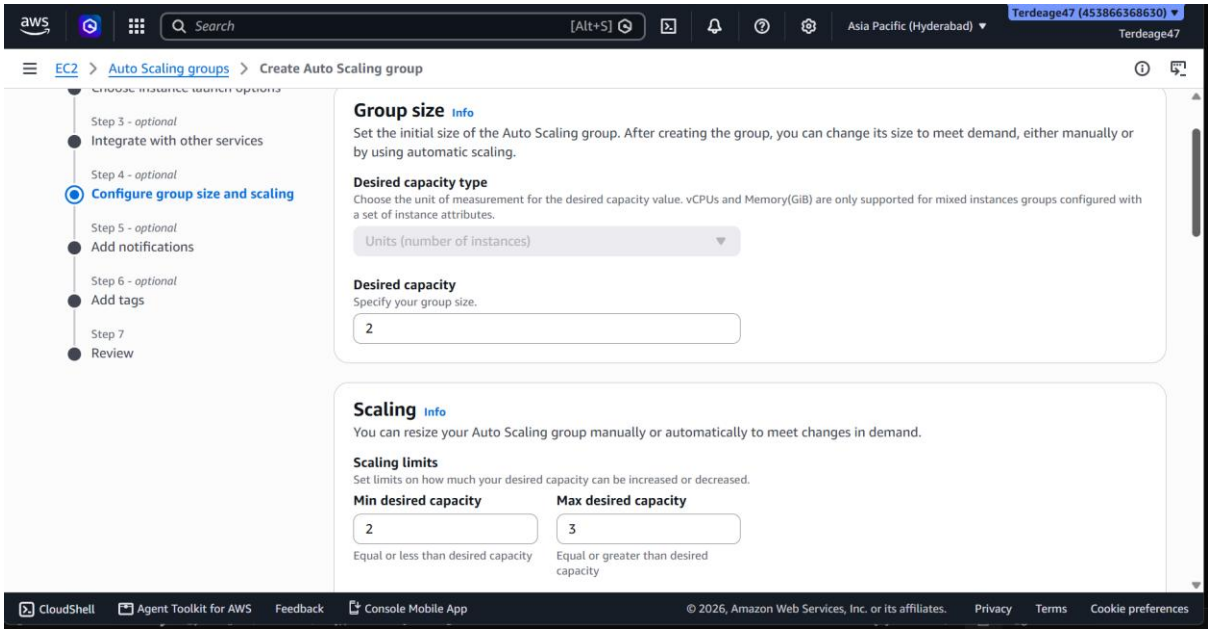

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 1
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Choose launch template Info
Specify a launch template that contains settings common to all EC2 instances that are launched by this Auto Scaling group.
Name
Auto Scaling group name
Enter a name to identify the group.
Lab-TM-ASG
Must be unique to this account in the current Region and no more than 255 characters.
Launch template Info
For accounts created after May 31, 2023, the EC2 console only supports creating Auto Scaling groups with launch templates. Creating Auto Scaling groups with launch configurations is not recommended but still available via the CLI and API until December 31, 2023.
Launch template
Choose a launch template that contains the instance-level settings, such as the Amazon Machine Image (AMI), instance type, key pair, and security groups.
LabTMDemo
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

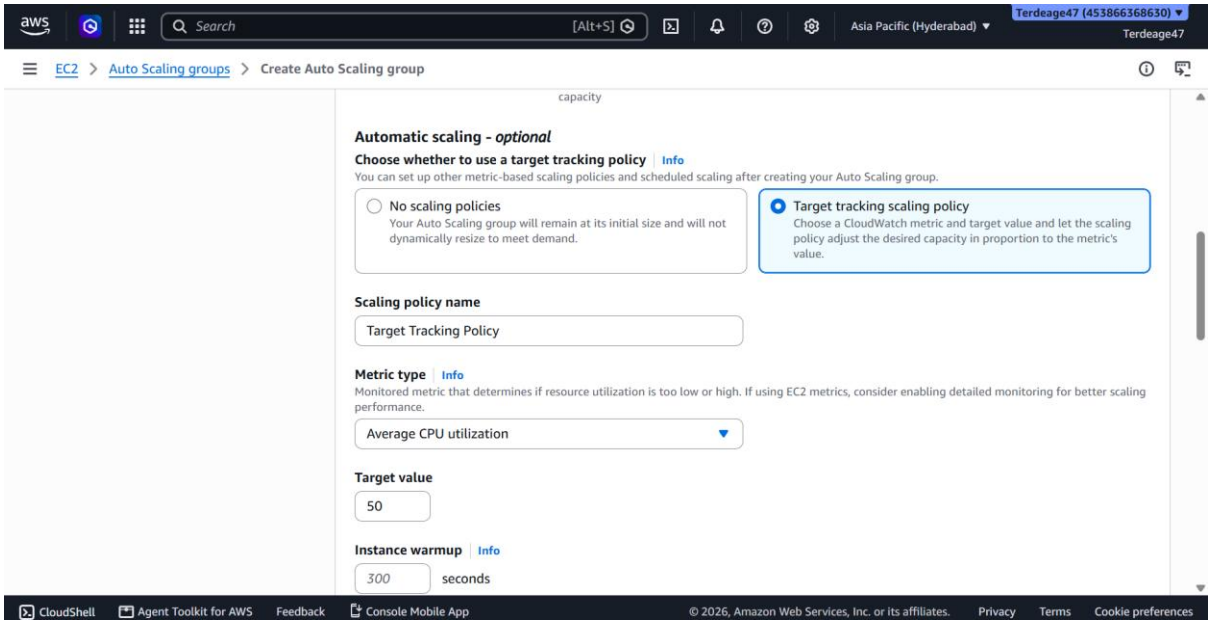

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Review
Network Info
For most applications, you can use multiple Availability Zones and let EC2 Auto Scaling balance your instances across the zones. The default VPC and default subnets are suitable for getting started quickly.
VPC
Choose the VPC that defines the virtual network for your Auto Scaling group.
vpc-02ec1d2994adc6ecf (projectTM-vpc)
10.0.0.0/16
Create a VPC
Availability Zones and subnets
Define which Availability Zones and subnets your Auto Scaling group can use in the chosen VPC.
Select Availability Zones and subnets
aps2-az1 (ap-south-2a) | subnet-08acedd00a2b25be5 (projectTM-subnet-public1-ap-south-2a)
10.0.0.0/20
aps2-az2 (ap-south-2b) | subnet-0874cf1c54dca3fac (projectTM-subnet-public2-ap-south-2b)
10.0.16.0/20
Create a subnet
Availability Zone distribution - new
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

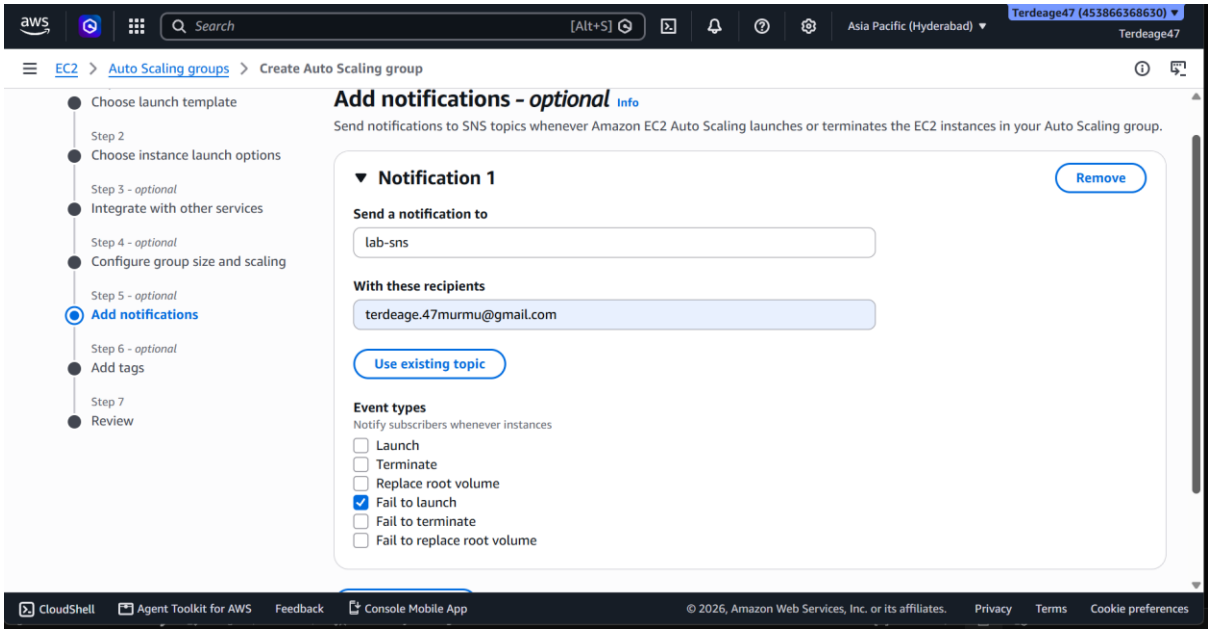

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
resources away from impaired Availability Zones with zonal shift. You can also customize health check replacements and monitoring.
Load balancing Info
Use the options below to attach your Auto Scaling group to an existing load balancer, or to a new load balancer that you define.
Select Load balancing options
No load balancer
Traffic to your Auto Scaling group will not be fronted by a load balancer.
Attach to an existing load balancer
Choose from your existing load balancers.
Attach to a new load balancer
Quickly create a basic load balancer to attach to your Auto Scaling group.
Attach to a new load balancer
Load balancer type
Choose from the load balancer types offered below. Type selection cannot be changed after the load balancer is created. If you need a different type of load balancer than those offered here, visit the Load Balancing console.
Application Load Balancer
HTTP, HTTPS
Network Load Balancer
TCP, UDP, TLS
Load balancer name
Name cannot be changed after the load balancer is created.
Lab-TM-ALB-1
Must be unique within the Region. Use 1–32 alphanumeric characters and hyphens. Can't start with "internal-" or begin or end with a hyphen.
Load balancer scheme
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

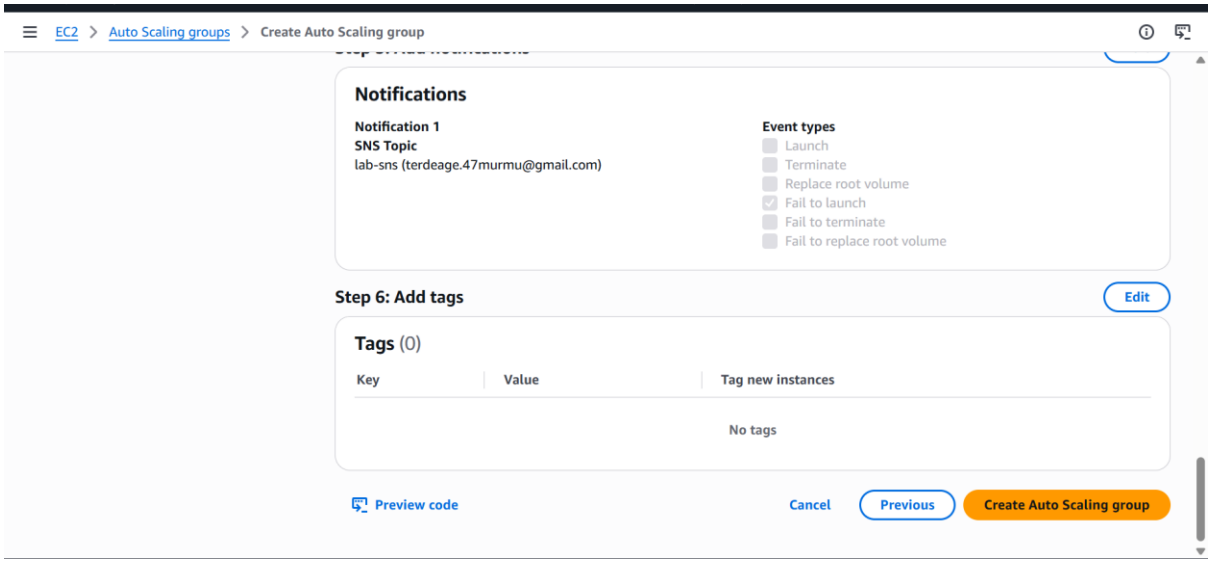

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Load balancer scheme
Scheme cannot be changed after the load balancer is created.
Internal
Internet-facing
Network mapping
Your new load balancer will be created using the same VPC and Availability Zone selections as your Auto Scaling group. You can select different subnets and add subnets from additional Availability Zones.
VPC
vpc-02ec1d2994adc6ecf
projectTM-vpc
Availability Zones and subnets
You must select a single subnet for each Availability Zone enabled. Only public subnets are available for selection to support DNS resolution.
aps2-az1 (ap-south-2a)
Select a subnet
subnet-08acedd00a2b25be5
aps2-az2 (ap-south-2b)
Select a subnet
subnet-0874cf1c54dca3fac
Listeners and routing
If you require secure listeners, or multiple listeners, you can configure them from the Load Balancing console after your load balancer is created.
Protocol
Port
Default routing (forward to)
HTTP
80
Create a target group
New target group name

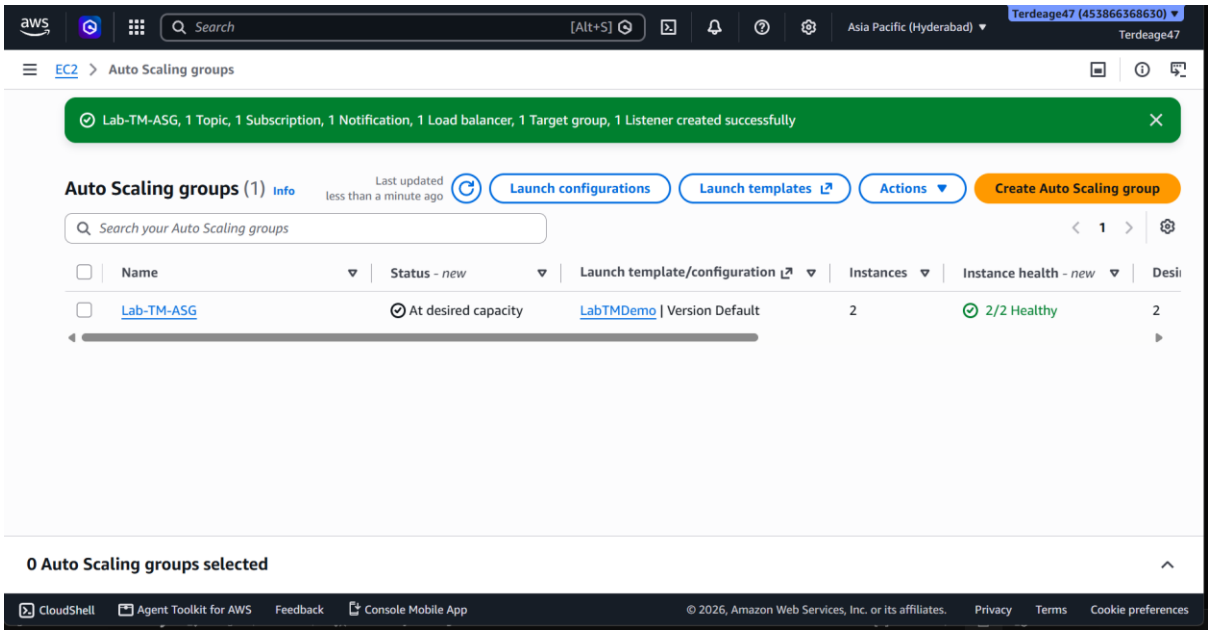

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Protocol
Port
Default routing (forward to)
HTTP
80
Create a target group
New target group name
An instance target group with default settings will be created.
Lab-TG-1
Must be unique within the Region. Use 1–32 alphanumeric characters and hyphens. Can't begin or end with a hyphen.
Tags - optional
Consider adding tags to your load balancer. Tags enable you to categorize your AWS resources so you can more easily manage them.
Add tag
50 remaining
VPC Lattice integration options Info
To improve networking capabilities and scalability, integrate your Auto Scaling group with VPC Lattice. VPC Lattice facilitates communications between AWS services and helps you connect and manage your applications across compute services in AWS.
Select VPC Lattice service to attach
No VPC Lattice service
VPC Lattice will not manage your Auto Scaling group's network access and connectivity with other services.
Attach to VPC Lattice service
Incoming requests associated with specified VPC Lattice target groups will be routed to your Auto Scaling group.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Group size Info
Set the initial size of the Auto Scaling group. After creating the group, you can change its size to meet demand, either manually or by using automatic scaling.
Desired capacity type
Choose the unit of measurement for the desired capacity value. vCPUs and Memory(GiB) are only supported for mixed instances groups configured with a set of instance attributes.
Units (number of instances)
Desired capacity
Specify your group size.
2
Scaling Info
You can resize your Auto Scaling group manually or automatically to meet changes in demand.
Scaling limits
Set limits on how much your desired capacity can be increased or decreased.
Min desired capacity
2
Equal or less than desired capacity
Max desired capacity
3
Equal or greater than desired capacity
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

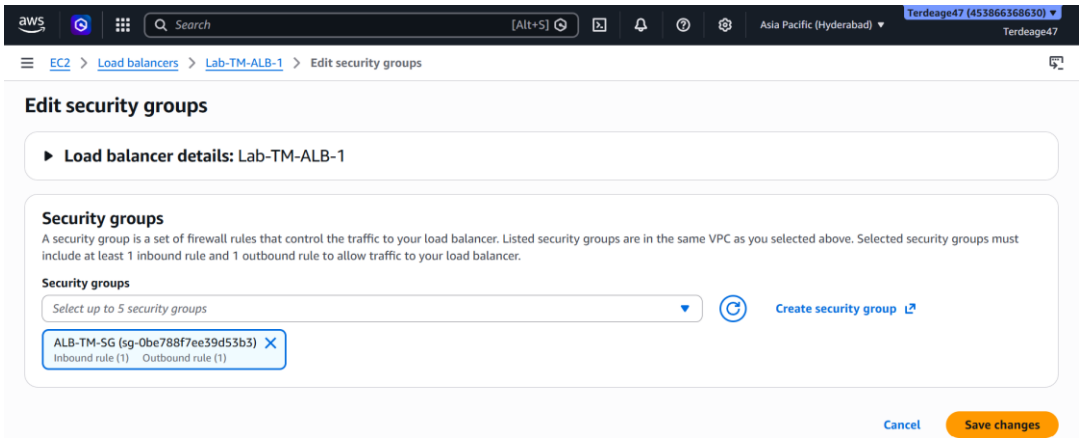

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
capacity
Automatic scaling - optional
Choose whether to use a target tracking policy Info
You can set up other metric-based scaling policies and scheduled scaling after creating your Auto Scaling group.
No scaling policies
Your Auto Scaling group will remain at its initial size and will not dynamically resize to meet demand.
Target tracking scaling policy
Choose a CloudWatch metric and target value and let the scaling policy adjust the desired capacity in proportion to the metric's value.
Scaling policy name
Target Tracking Policy
Metric type Info
Monitored metric that determines if resource utilization is too low or high. If using EC2 metrics, consider enabling detailed monitoring for better scaling performance.
Average CPU utilization
Target value
50
Instance warmup Info
300
seconds
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

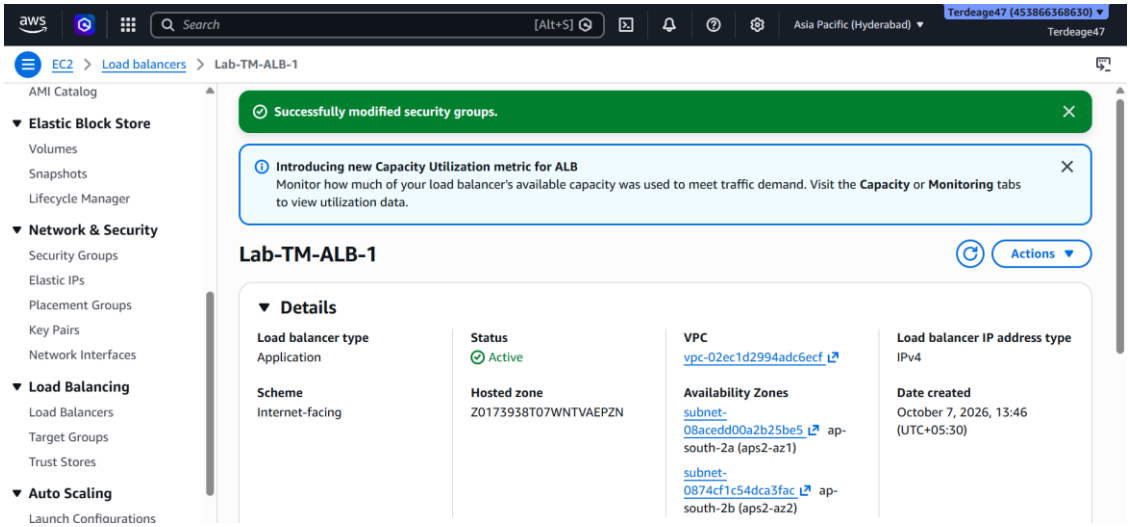

Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups > Create Auto Scaling group
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Add notifications - optional Info
Send notifications to SNS topics whenever Amazon EC2 Auto Scaling launches or terminates the EC2 instances in your Auto Scaling group.
Notification 1
Remove
Send a notification to
lab-sns
With these recipients
terdeage.47murmu@gmail.com
Use existing topic
Event types
Notify subscribers whenever instances
Launch
Terminate
Replace root volume
Fail to launch
Fail to terminate
Fail to replace root volume
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

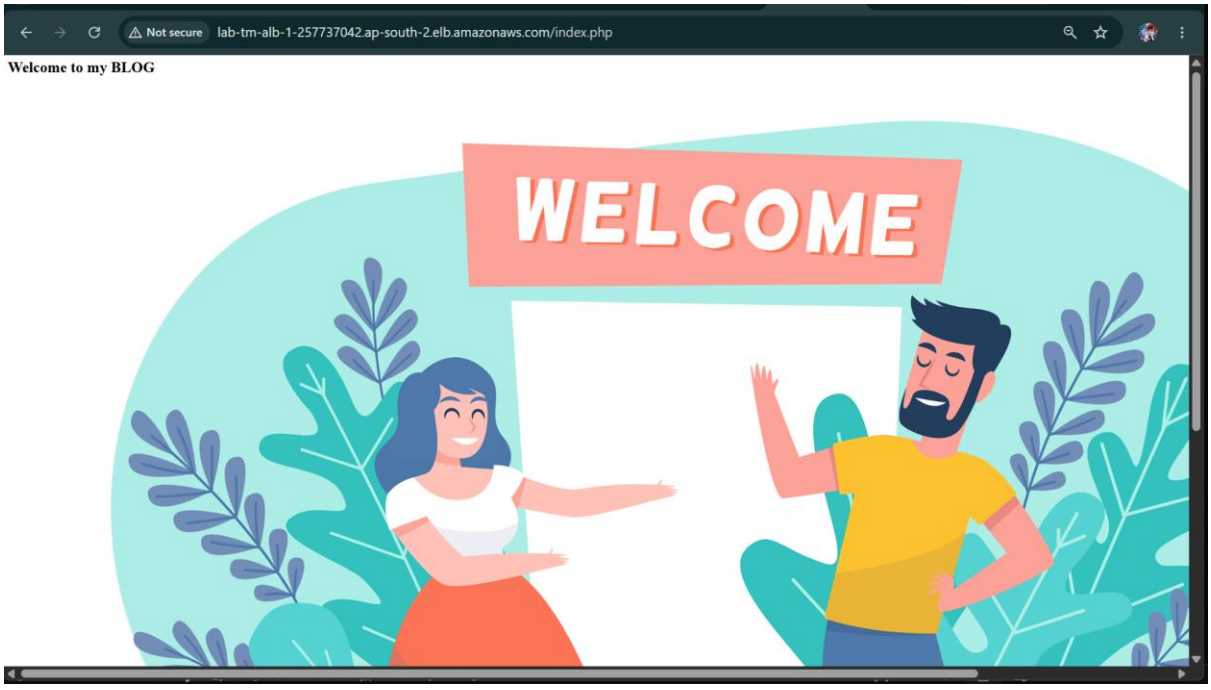

EC2 > Auto Scaling groups > Create Auto Scaling group
Notifications
Notification 1
SNS Topic
lab-sns (terdeage.47murmu@gmail.com)
Event types
Launch
Terminate
Replace root volume
Fail to launch
Fail to terminate
Fail to replace root volume
Step 6: Add tags
Edit
Tags (0)
Key
Value
Tag new instances
No tags
Preview code
Cancel
Previous
Create Auto Scaling group


Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
EC2 > Auto Scaling groups
Lab-TM-ASG, 1 Topic, 1 Subscription, 1 Notification, 1 Load balancer, 1 Target group, 1 Listener created successfully
Auto Scaling groups (1) Info
Last updated less than a minute ago
Launch configurations
Launch templates
Actions
Create Auto Scaling group
Search your Auto Scaling groups
Name
Status - new
Launch template/configuration
Instances
Instance health - new
Lab-TM-ASG
At desired capacity
LabTMDemo | Version Default
2
2/2 Healthy
0 Auto Scaling groups selected
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

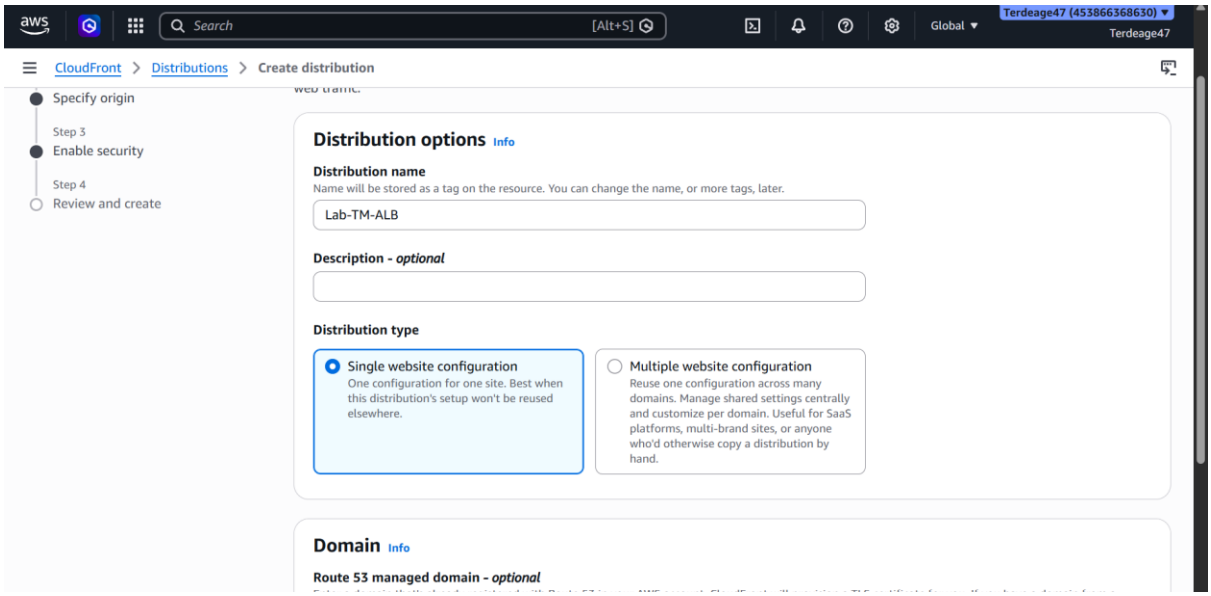
Go to load balancers in EC2, edit the security groups, disable WEB-SG and enable ALB-SG and save changes.

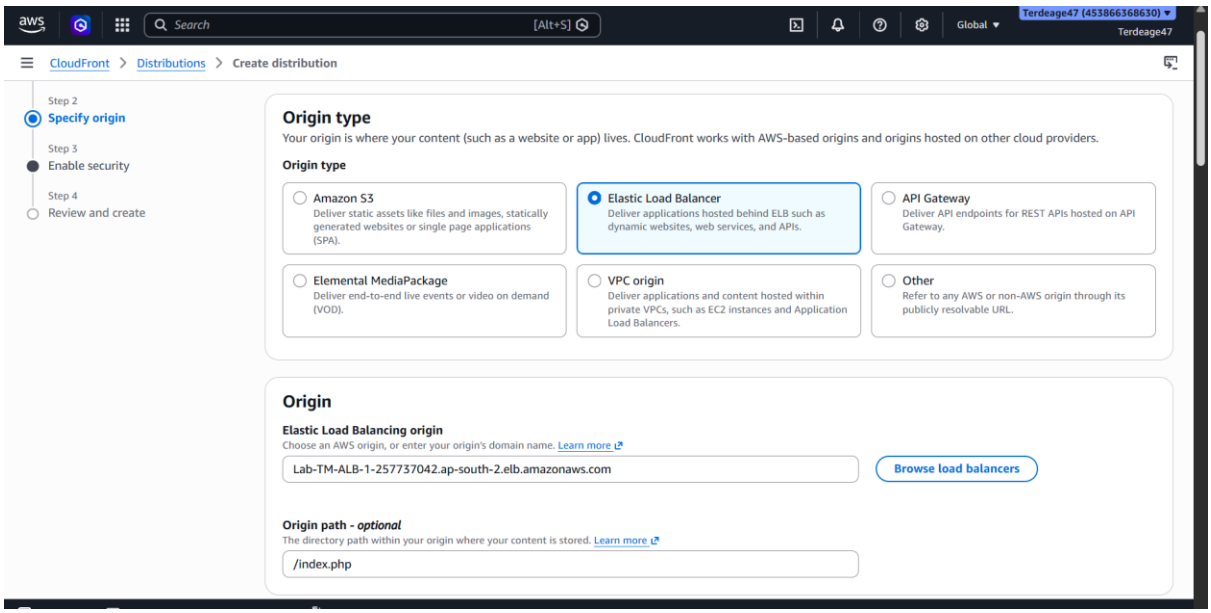


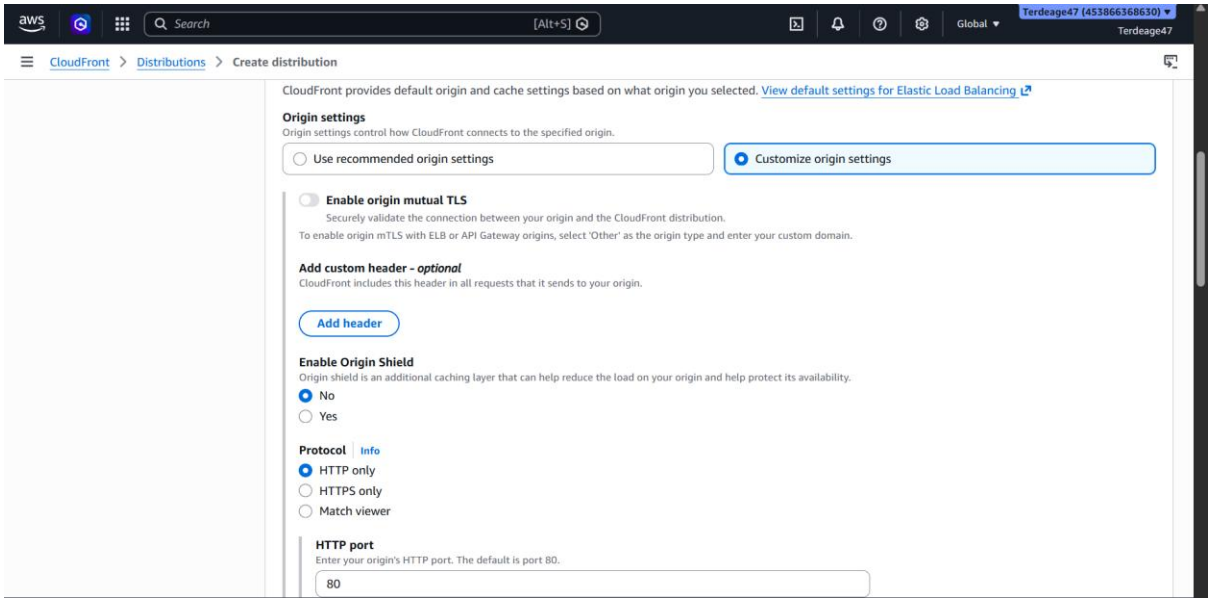


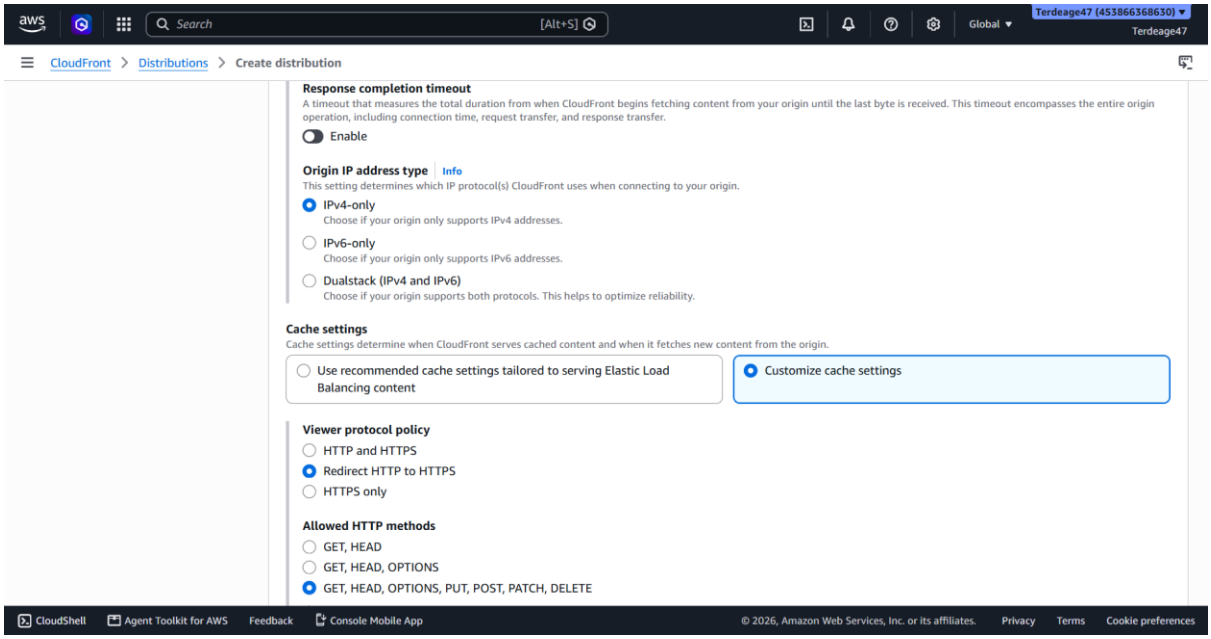


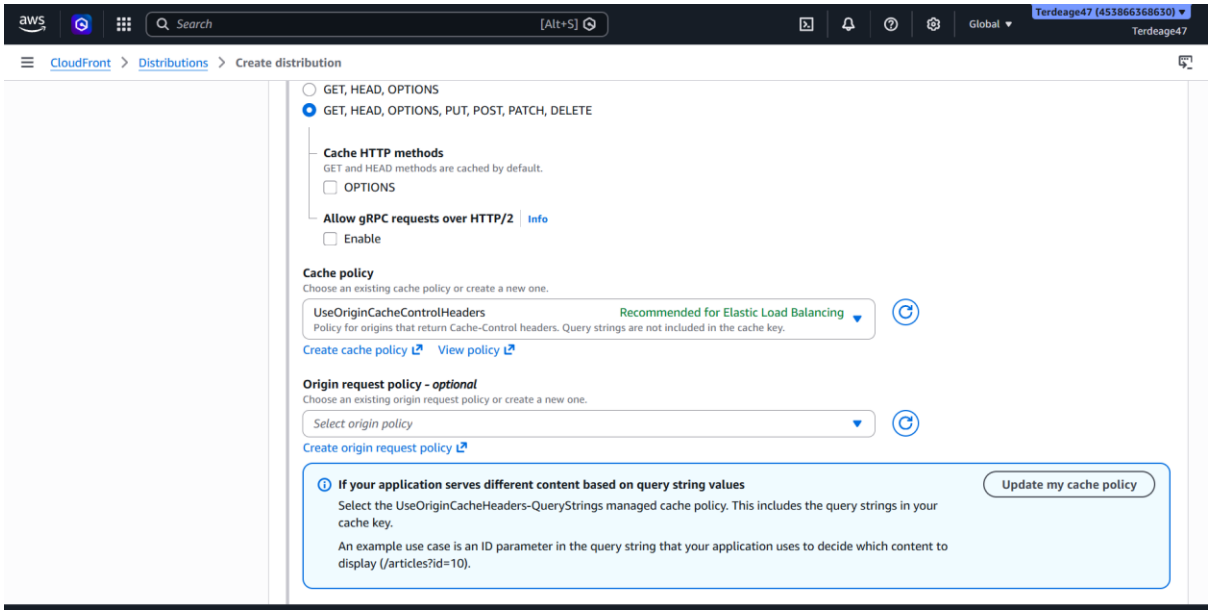
TASK 10 – Implement low latency and security from DDoS attack to application

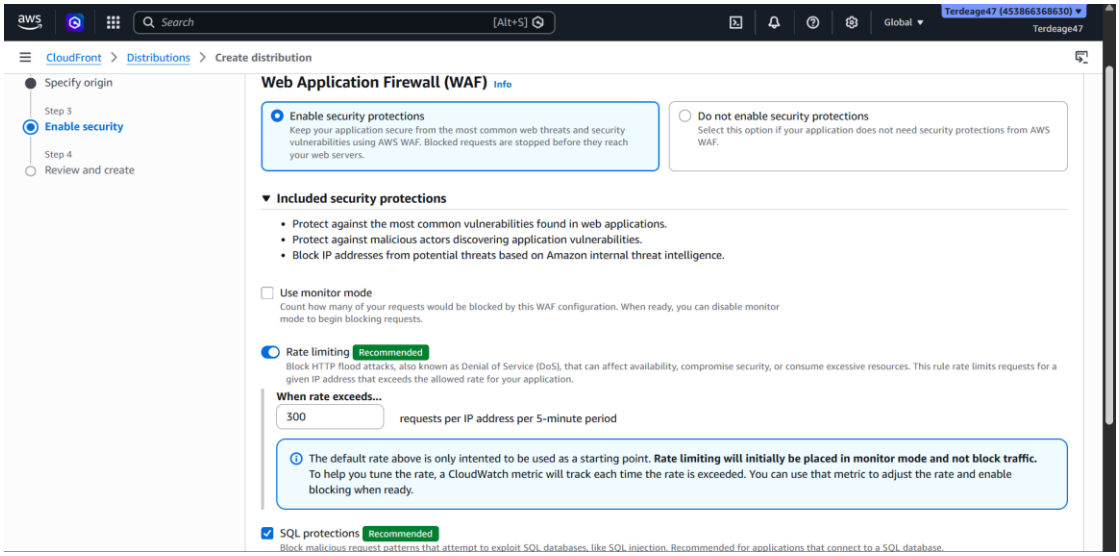


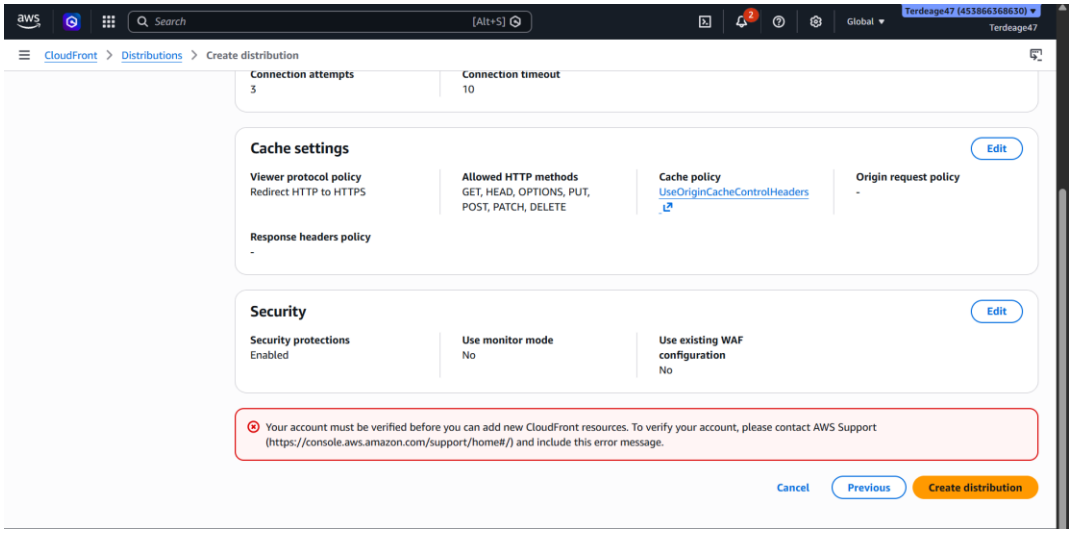



Search
[Alt+S]
Global
Terdeage47 (453866368630)
Terdeage47
CloudFront > Distributions > Create distribution
CloudFront provides default origin and cache settings based on what origin you selected. View default settings for Elastic Load Balancing
Origin settings
Origin settings control how CloudFront connects to the specified origin.
Use recommended origin settings
Customize origin settings
Enable origin mutual TLS
Securely validate the connection between your origin and the CloudFront distribution.
To enable origin mTLS with ELB or API Gateway origins, select 'Other' as the origin type and enter your custom domain.
Add custom header - optional
CloudFront includes this header in all requests that it sends to your origin.
Add header
Enable Origin Shield
Origin shield is an additional caching layer that can help reduce the load on your origin and help protect its availability.
No
Yes
Protocol Info
HTTP only
HTTPS only
Match viewer
HTTP port
Enter your origin's HTTP port. The default is port 80.
80


Search
[Alt+S]
Global
Terdeage47 (453866368630)
Terdeage47
CloudFront > Distributions > Create distribution
Response completion timeout
A timeout that measures the total duration from when CloudFront begins fetching content from your origin until the last byte is received. This timeout encompasses the entire origin operation, including connection time, request transfer, and response transfer.
Enable
Origin IP address type Info
This setting determines which IP protocol(s) CloudFront uses when connecting to your origin.
IPv4-only
Choose if your origin only supports IPv4 addresses.
IPv6-only
Choose if your origin only supports IPv6 addresses.
Dualstack (IPv4 and IPv6)
Choose if your origin supports both protocols. This helps to optimize reliability.
Cache settings
Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.
Use recommended cache settings tailored to serving Elastic Load Balancing content
Customize cache settings
Viewer protocol policy
HTTP and HTTPS
Redirect HTTP to HTTPS
HTTPS only
Allowed HTTP methods
GET, HEAD
GET, HEAD, OPTIONS
GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

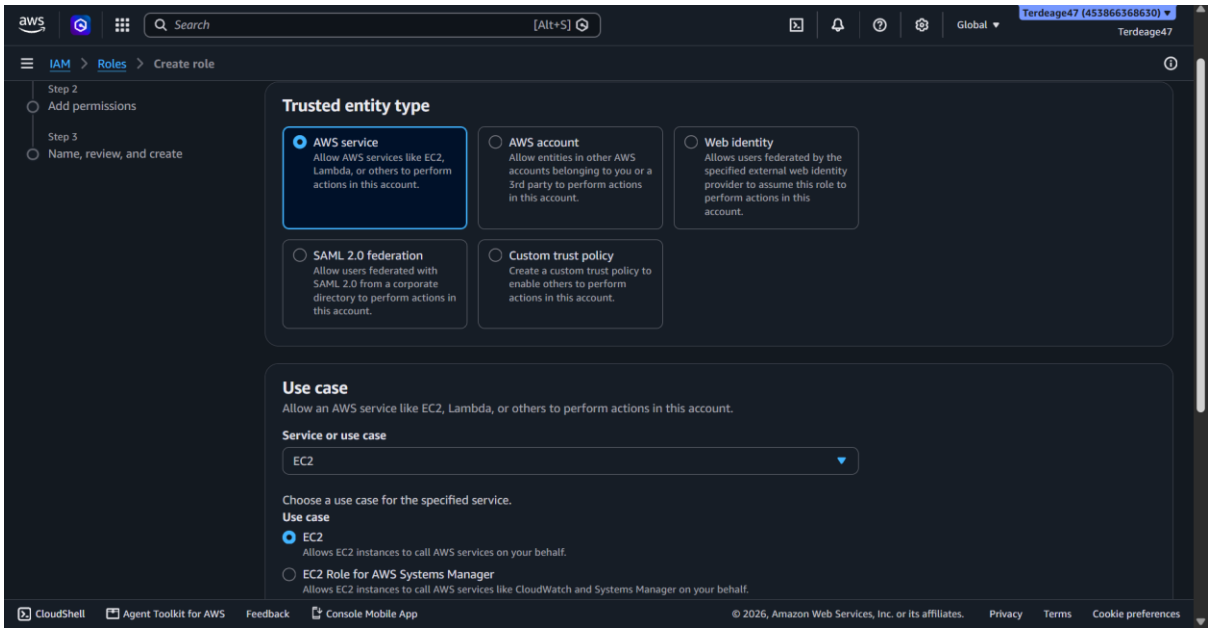


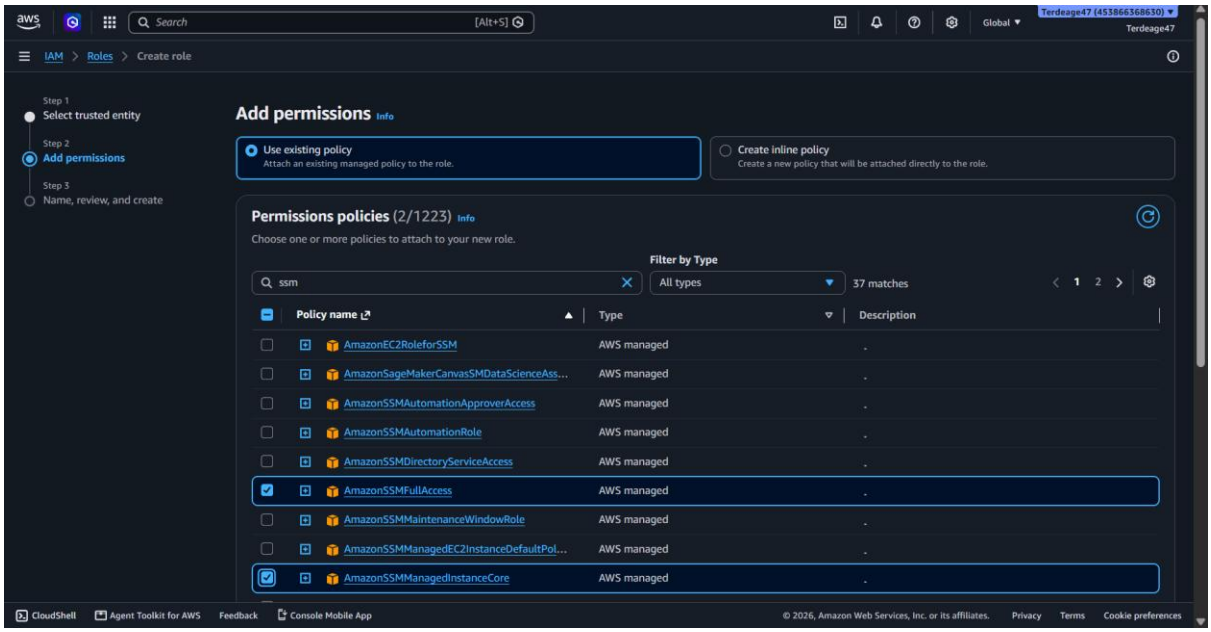


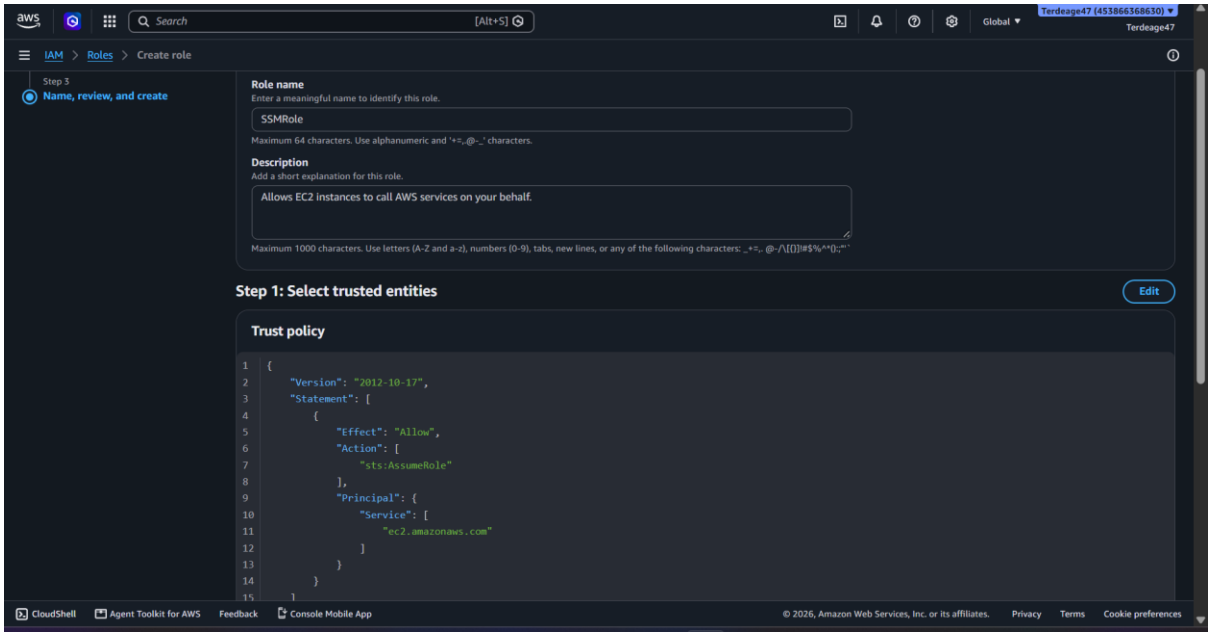


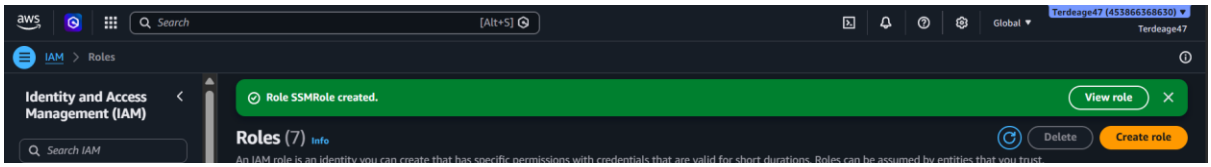
Cloudfront creation is blocked in account, so not able to create.

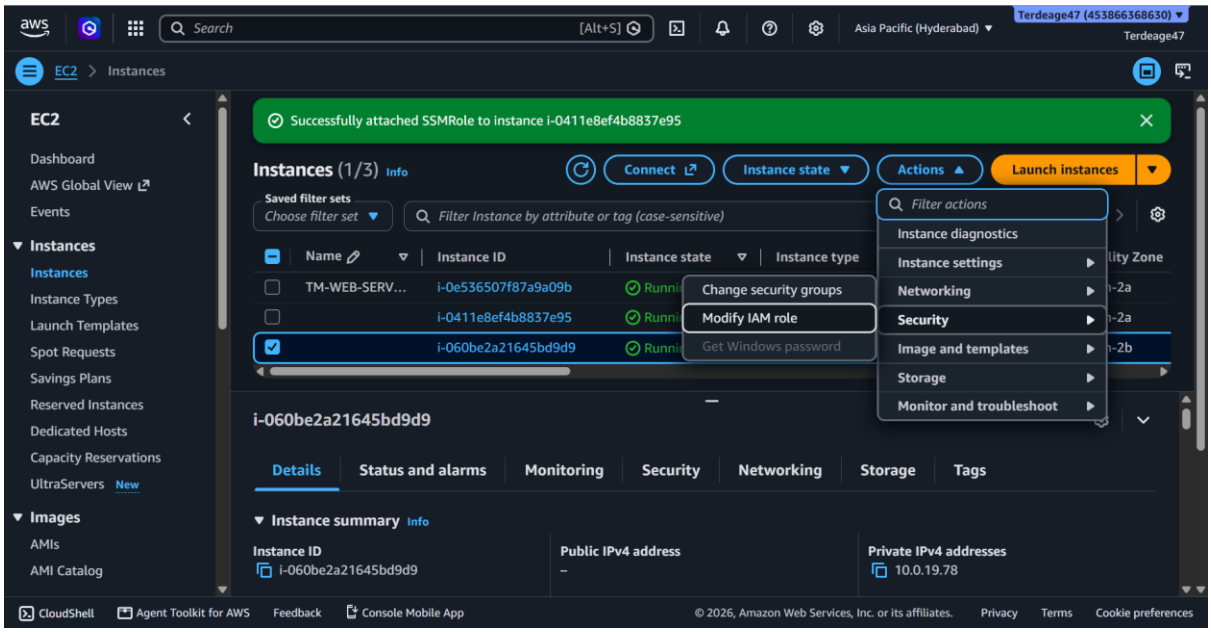
TASK 11 : Implement secure patching for EC2 instance

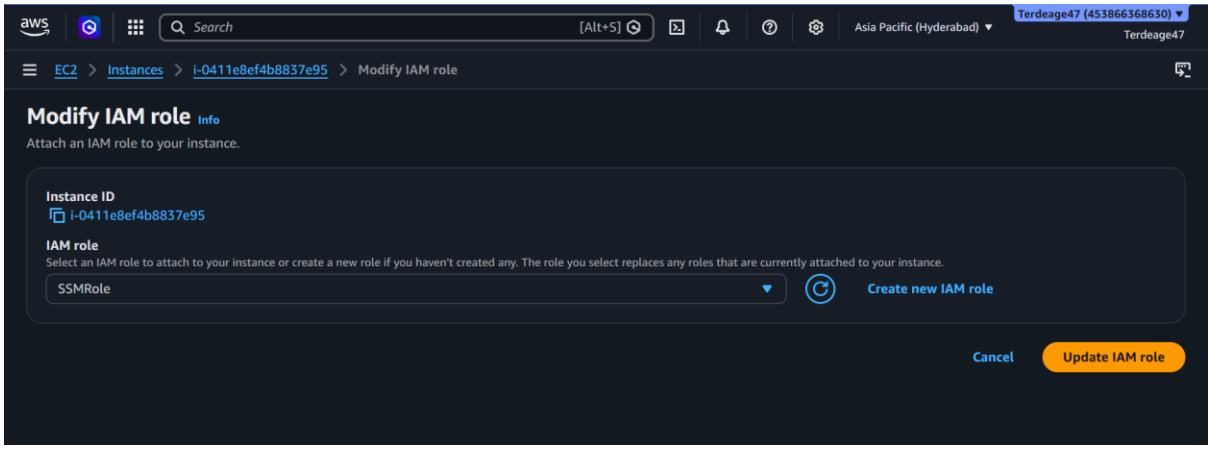


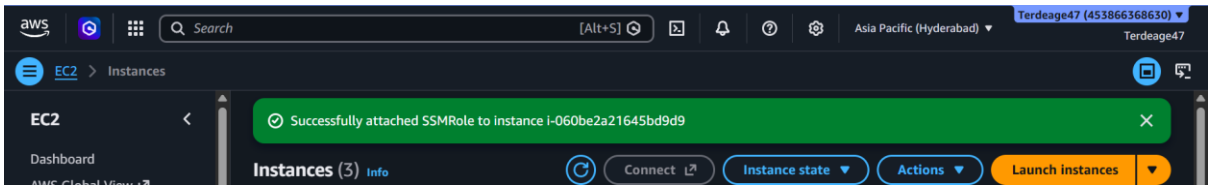



IAM > Roles > Create role
Step 3
Name, review, and create
Role name
Enter a meaningful name to identify this role.
SSMRole
Maximum 64 characters. Use alphanumeric and '+=,.@-_' characters.
Description
Add a short explanation for this role.
Allows EC2 instances to call AWS services on your behalf.
Maximum 1000 characters. Use letters (A-Z and a-z), numbers (0-9), tabs, new lines, or any of the following characters: _+=,. @-/\[{}]!#$%^*();:"'
Step 1: Select trusted entities
Edit
Trust policy
{
"Version": "2012-10-17",
"Statement": [
{
"Effect": "Allow",
"Action": [
"sts:AssumeRole"
],
"Principal": {
"Service": [
"ec2.amazonaws.com"
]
}
}
]
}
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

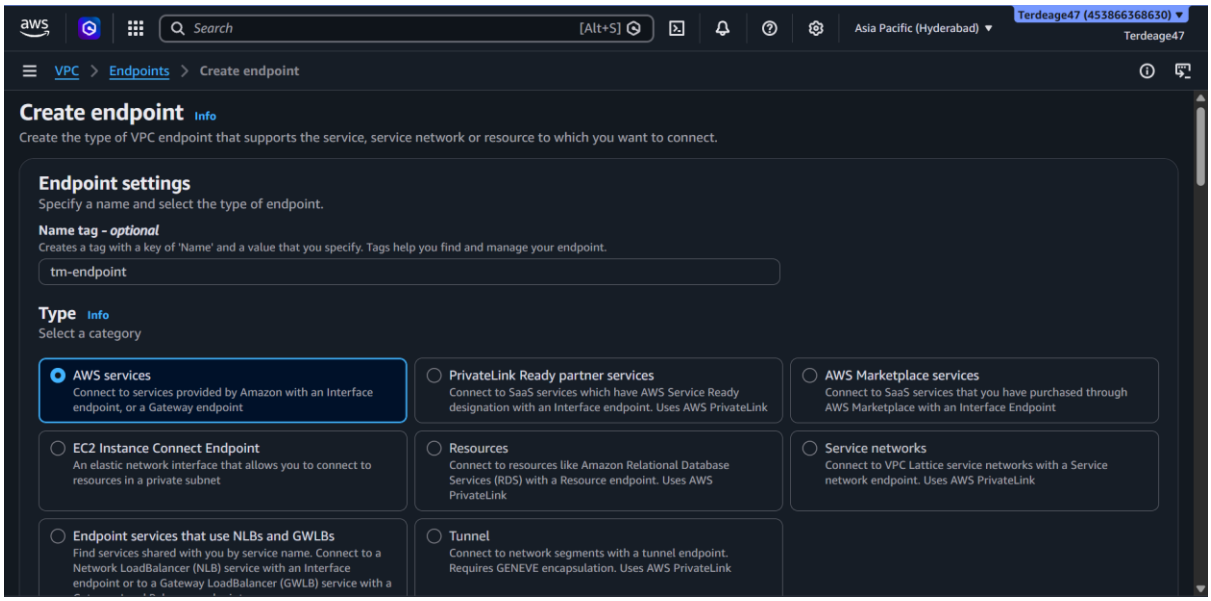

IAM > Roles
Identity and Access Management (IAM)
Search IAM
Role SSMRole created.
View role
Roles (7) Info
Delete
Create role

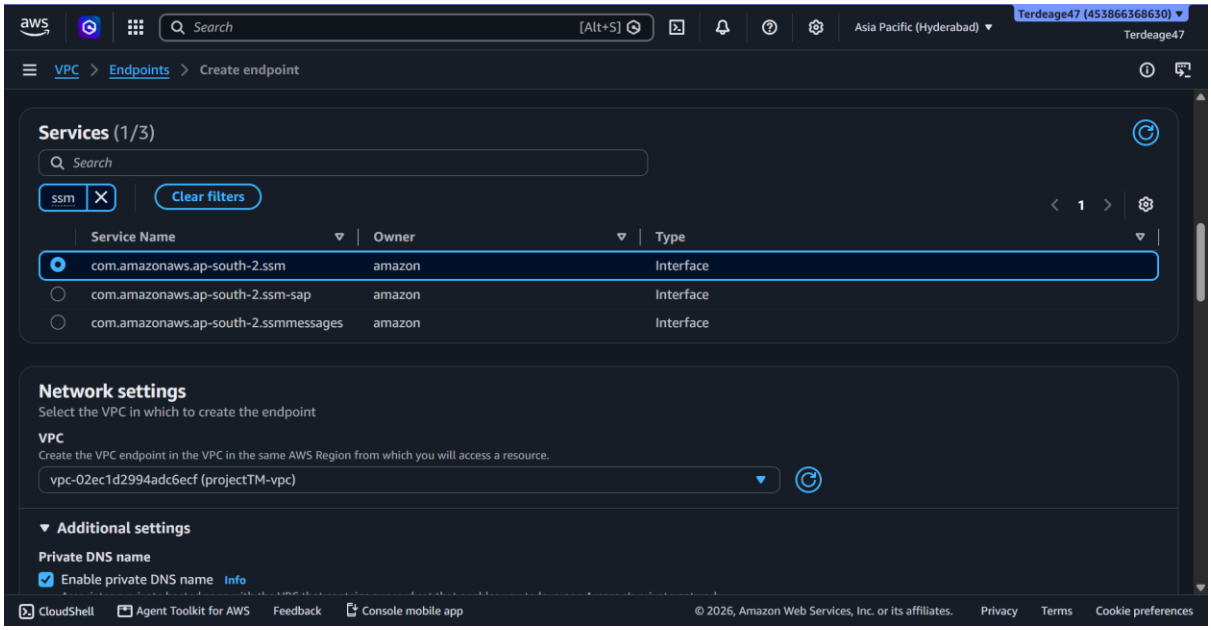

EC2 > Instances
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
UltraServers New
Images
AMIs
AMI Catalog
Successfully attached SSMRole to instance i-0411e8ef4b8837e95
Instances (1/3) Info
Connect
Instance state
Actions
Launch instances
Saved filter sets
Choose filter set
Filter Instance by attribute or tag (case-sensitive)
Name
Instance ID
Instance state
Instance type
TM-WEB-SERV...
i-0e536507f87a9a09b
i-0411e8ef4b8837e95
i-060be2a21645bd9d9
Change security groups
Modify IAM role
Get Windows password
Filter actions
Instance diagnostics
Instance settings
Networking
Security
Image and templates
Storage
Monitor and troubleshoot
i-060be2a21645bd9d9
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Instance ID
i-060be2a21645bd9d9
Public IPv4 address
–
Private IPv4 addresses
10.0.19.78
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

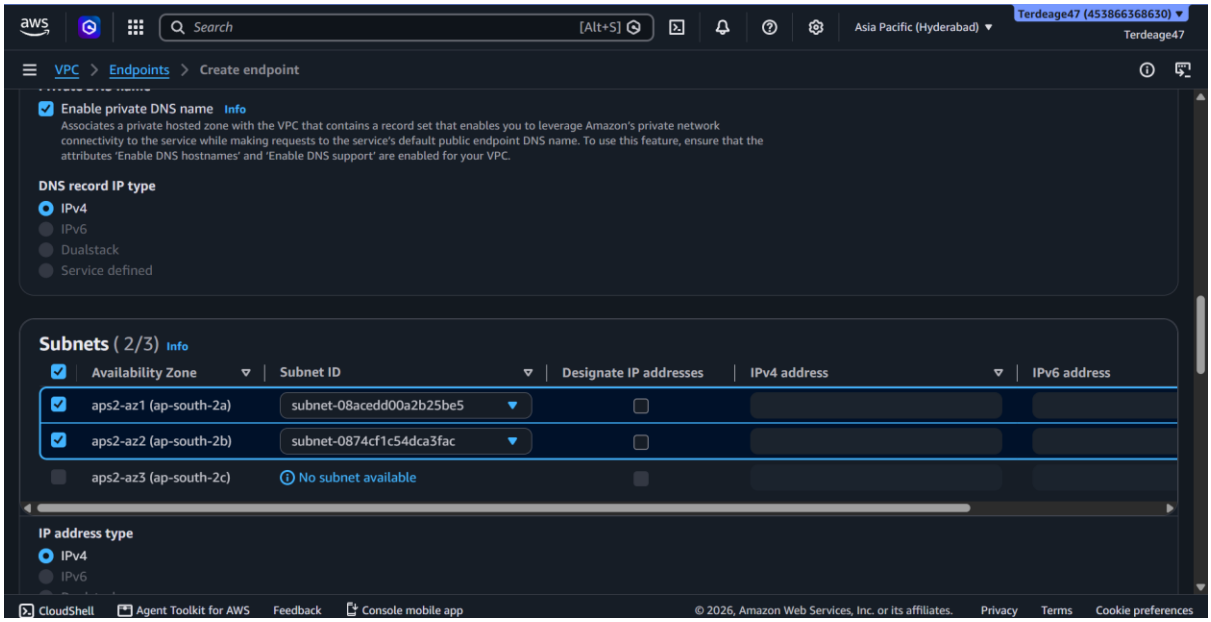


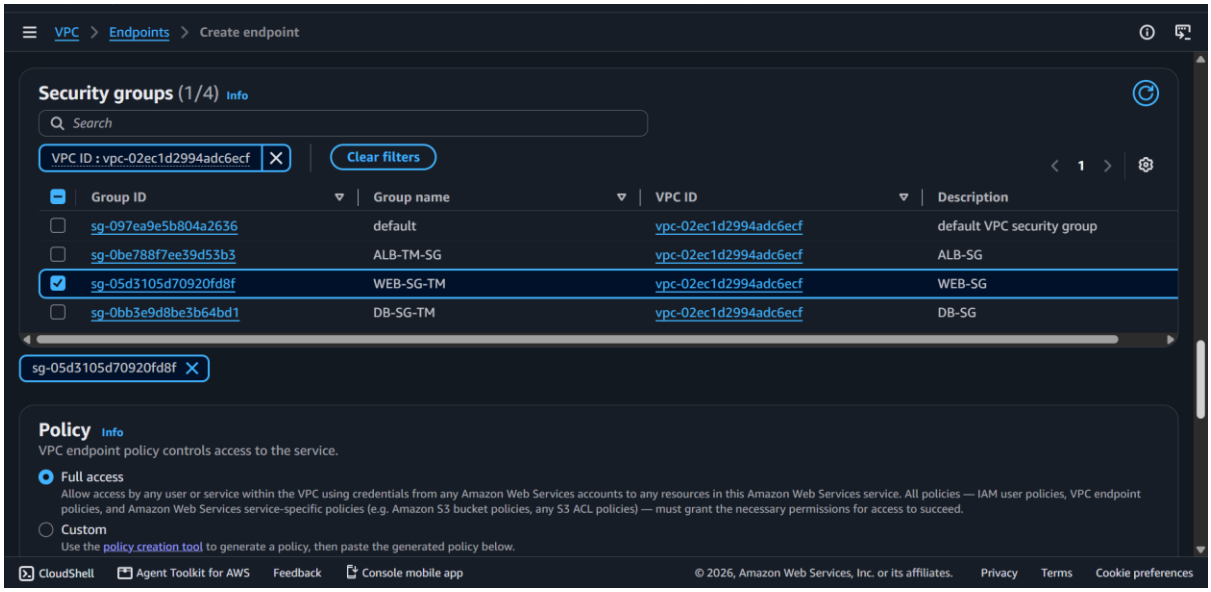


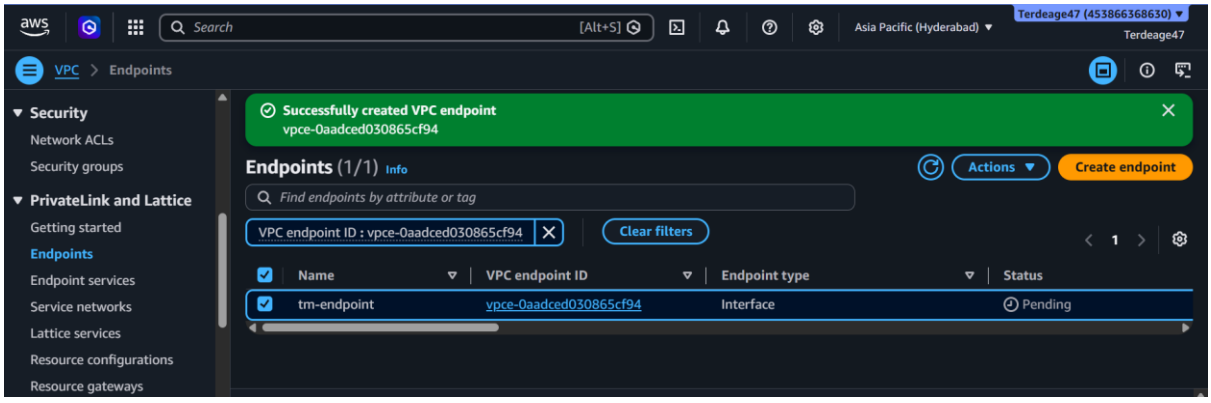
Create 2 endpoints

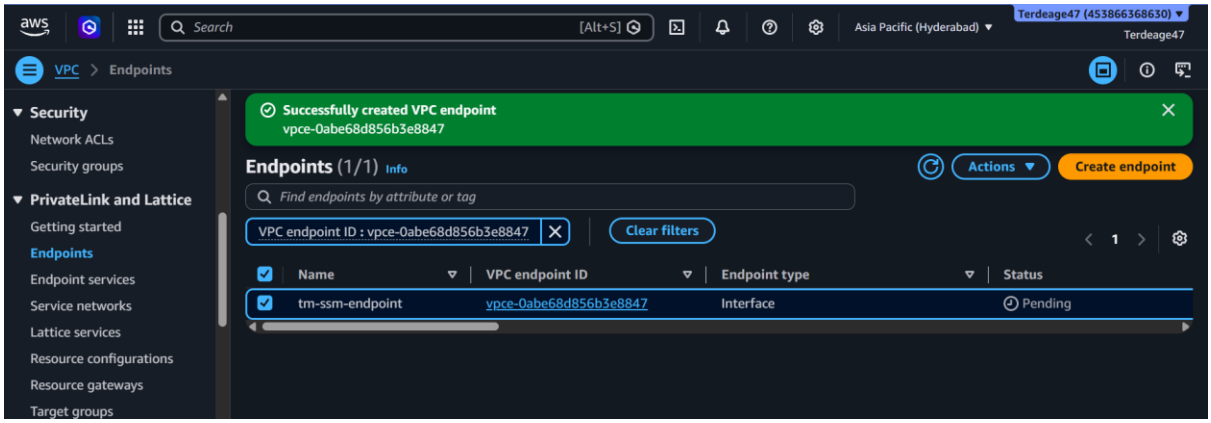


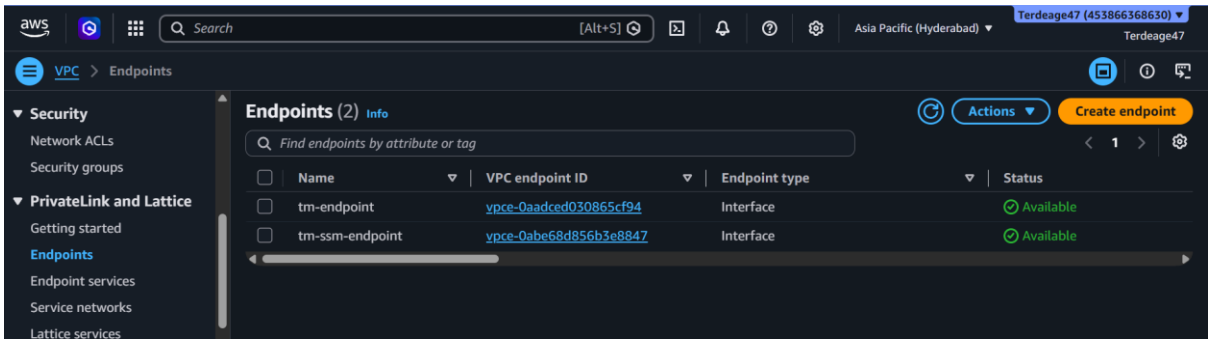

Search [Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Endpoints > Create endpoint
Services (1/3)
Search
ssm
Clear filters
1
Service Name
Owner
Type
com.amazonaws.ap-south-2.ssm
amazon
Interface
com.amazonaws.ap-south-2.ssm-sap
amazon
Interface
com.amazonaws.ap-south-2.ssmmessages
amazon
Interface
Network settings
Select the VPC in which to create the endpoint
VPC
Create the VPC endpoint in the VPC in the same AWS Region from which you will access a resource.
vpc-02ec1d2994adc6ecf (projectTM-vpc)
Additional settings
Private DNS name
Enable private DNS name Info
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search [Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Endpoints > Create endpoint
Enable private DNS name Info
Associates a private hosted zone with the VPC that contains a record set that enables you to leverage Amazon's private network connectivity to the service while making requests to the service's default public endpoint DNS name. To use this feature, ensure that the attributes 'Enable DNS hostnames' and 'Enable DNS support' are enabled for your VPC.
DNS record IP type
IPv4
IPv6
Dualstack
Service defined
Subnets (2/3) Info
Availability Zone
Subnet ID
Designate IP addresses
IPv4 address
IPv6 address
aps2-az1 (ap-south-2a)
subnet-08acedd00a2b25be5
aps2-az2 (ap-south-2b)
subnet-0874cf1c54dca3fac
aps2-az3 (ap-south-2c)
No subnet available
IP address type
IPv4
IPv6
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


VPC > Endpoints > Create endpoint
Security groups (1/4) Info
Search
VPC ID : vpc-02ec1d2994adc6ecf
Clear filters
Group ID | Group name | VPC ID | Description
sg-097ea9e5b804a2636 | default | vpc-02ec1d2994adc6ecf | default VPC security group
sg-0be788f7ee39d53b3 | ALB-TM-SG | vpc-02ec1d2994adc6ecf | ALB-SG
sg-05d3105d70920fd8f | WEB-SG-TM | vpc-02ec1d2994adc6ecf | WEB-SG
sg-0bb3e9d8be3b64bd1 | DB-SG-TM | vpc-02ec1d2994adc6ecf | DB-SG
sg-05d3105d70920fd8f
Policy Info
VPC endpoint policy controls access to the service.
Full access
Allow access by any user or service within the VPC using credentials from any Amazon Web Services accounts to any resources in this Amazon Web Services service. All policies — IAM user policies, VPC endpoint policies, and Amazon Web Services service-specific policies (e.g. Amazon S3 bucket policies, any S3 ACL policies) — must grant the necessary permissions for access to succeed.
Custom
Use the policy creation tool to generate a policy, then paste the generated policy below.
CloudShell
Agent Toolkit for AWS
Feedback
Console mobile app
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Endpoints
Security
Network ACLs
Security groups
PrivateLink and Lattice
Getting started
Endpoints
Endpoint services
Service networks
Lattice services
Resource configurations
Resource gateways
Successfully created VPC endpoint
vpce-0aadced030865cf94
Endpoints (1/1) Info
Actions
Create endpoint
Find endpoints by attribute or tag
VPC endpoint ID : vpce-0aadced030865cf94
Clear filters
Name | VPC endpoint ID | Endpoint type | Status
tm-endpoint | vpce-0aadced030865cf94 | Interface | Pending


Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Endpoints
Security
Network ACLs
Security groups
PrivateLink and Lattice
Getting started
Endpoints
Endpoint services
Service networks
Lattice services
Resource configurations
Resource gateways
Target groups
Successfully created VPC endpoint
vpce-0abe68d856b3e8847
Endpoints (1/1) Info
Actions
Create endpoint
Find endpoints by attribute or tag
VPC endpoint ID : vpce-0abe68d856b3e8847
Clear filters
Name | VPC endpoint ID | Endpoint type | Status
tm-ssm-endpoint | vpce-0abe68d856b3e8847 | Interface | Pending


Search
[Alt+S]
Asia Pacific (Hyderabad)
Terdeage47 (453866368630)
Terdeage47
VPC > Endpoints
Security
Network ACLs
Security groups
PrivateLink and Lattice
Getting started
Endpoints
Endpoint services
Service networks
Lattice services
Endpoints (2) Info
Actions
Create endpoint
Find endpoints by attribute or tag
Name | VPC endpoint ID | Endpoint type | Status
tm-endpoint | vpce-0aadced030865cf94 | Interface | Available
tm-ssm-endpoint | vpce-0abe68d856b3e8847 | Interface | Available