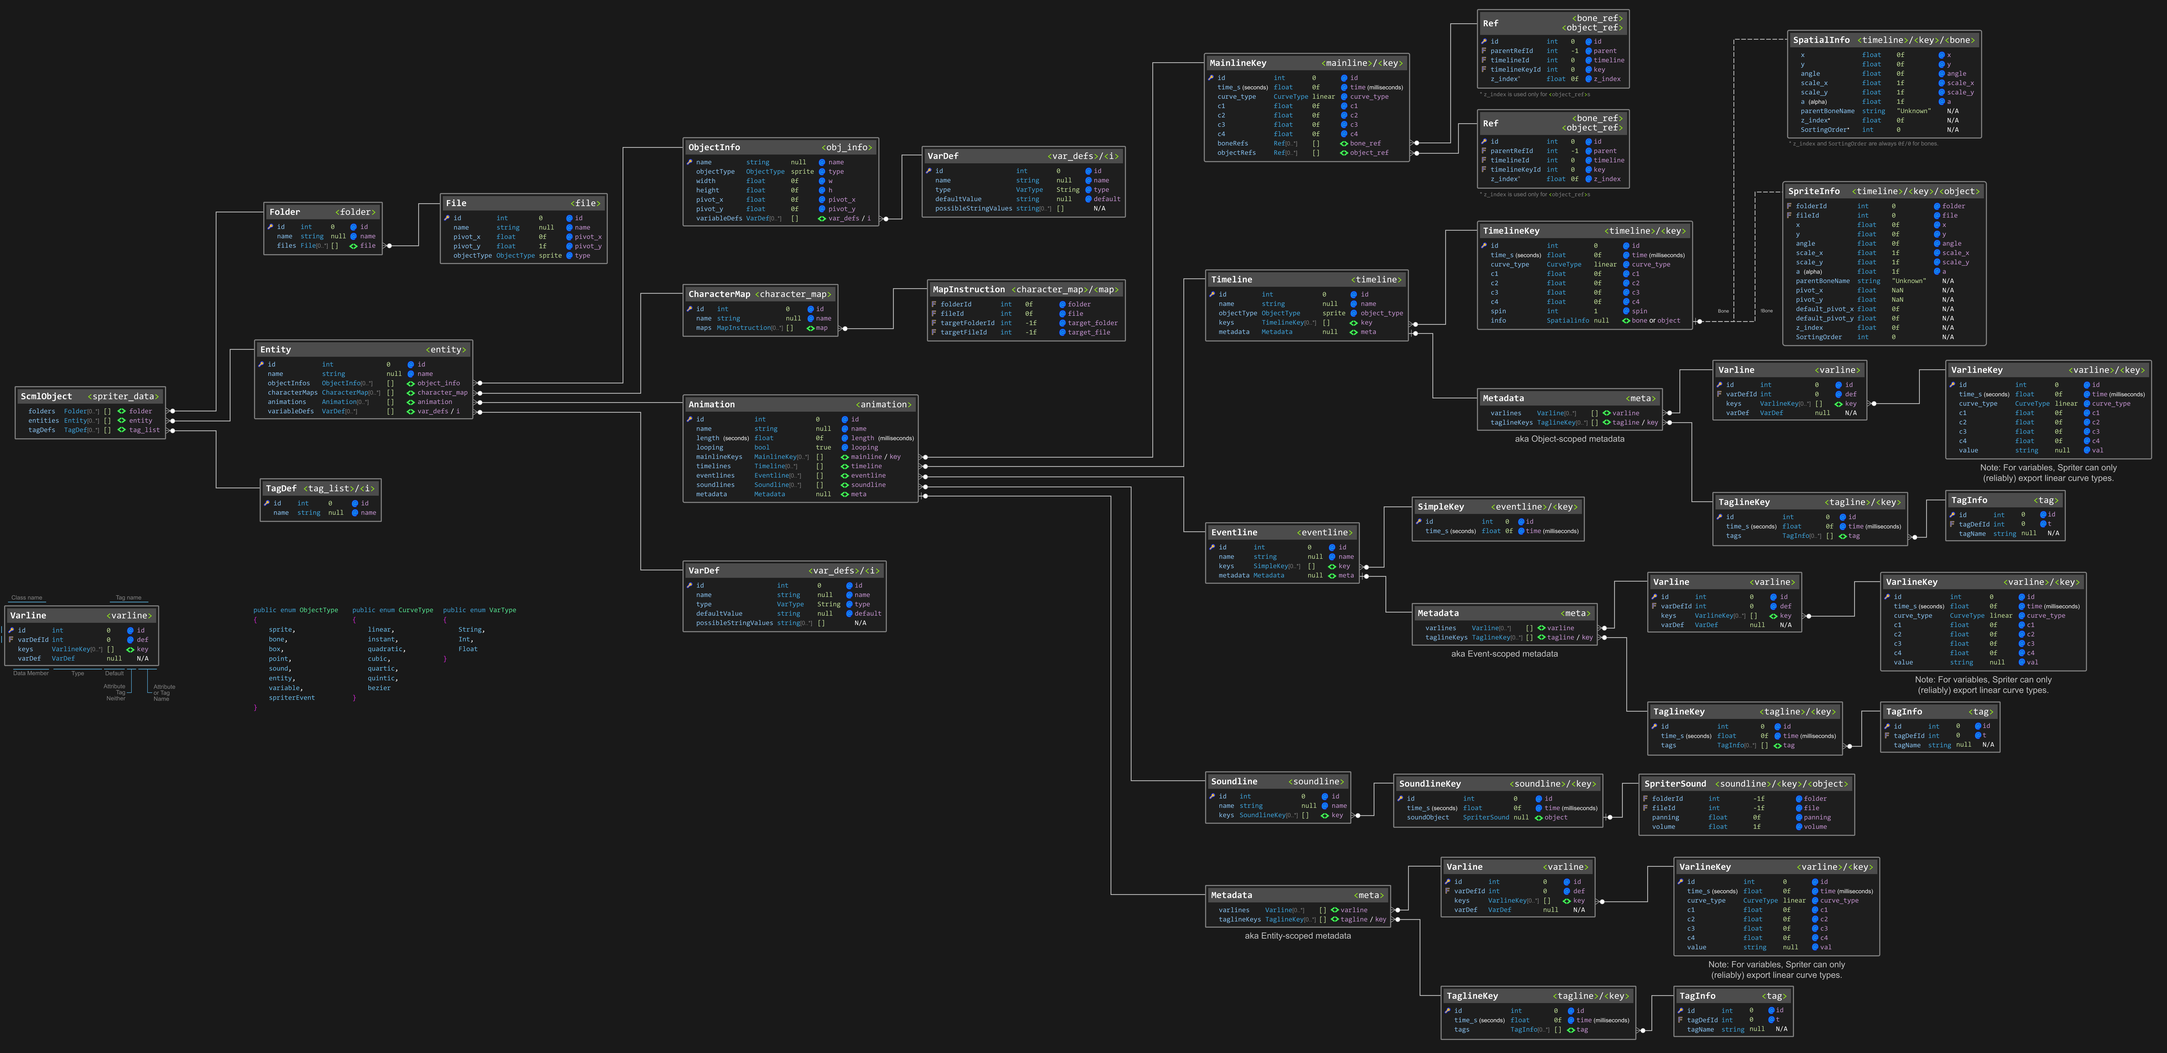
ScmlObject <spriter_data>
folders Folder[0..*] [] folder
entities Entity[0..*] [] entity
tagDefs TagDef[0..*] [] tag_list
Folder <folder>
id int 0 id
name string null name
files File[0..*] [] file
File <file>
id int 0 id
name string null name
pivot_x float 0f pivot_x
pivot_y float 1f pivot_y
objectType ObjectType sprite type
Entity <entity>
id int 0 id
name string null name
objectInfos ObjectInfo[0..*] [] object_info
characterMaps CharacterMap[0..*] [] character_map
animations Animation[0..*] [] animation
variableDefs VarDef[0..*] [] var_defs / i
TagDef <tag_list>/<i>
id int 0 id
name string null name
ObjectInfo <obj_info>
name string null name
objectType ObjectType sprite type
width float 0f w
height float 0f h
pivot_x float 0f pivot_x
pivot_y float 0f pivot_y
variableDefs VarDef[0..*] [] var_defs / i
VarDef <var_defs>/<i>
id int 0 id
name string null name
type VarType String type
defaultValue string null default
possibleStringValues string[0..*] [] N/A
CharacterMap <character_map>
id int 0 id
name string null name
maps MapInstruction[0..*] [] map
MapInstruction <character_map>/<map>
folderId int 0f folder
fileId int 0f file
targetFolderId int -1f target_folder
targetFileId int -1f target_file
Animation <animation>
id int 0 id
name string null name
length (seconds) float 0f length (milliseconds)
looping bool true looping
mainlineKeys MainlineKey[0..*] [] mainline / key
timelines Timeline[0..*] [] timeline
eventlines Eventline[0..*] [] eventline
soundlines Soundline[0..*] [] soundline
metadata Metadata null meta
VarDef <var_defs>/<i>
id int 0 id
name string null name
type VarType String type
defaultValue string null default
possibleStringValues string[0..*] [] N/A
Class name
Tag name
Varline <varline>
Primary Key
Foreign Key
id int 0 id
varDefId int 0 def
keys VarlineKey[0..*] [] key
varDef VarDef null N/A
Data Member
Type
Default
Attribute Tag Neither
Attribute or Tag Name
public enum ObjectType {
sprite,
bone,
box,
point,
sound,
entity,
variable,
spriterEvent
}
public enum CurveType {
linear,
instant,
quadratic,
cubic,
quartic,
quintic,
bezier
}
public enum VarType {
String,
Int,
Float
}
MainlineKey <mainline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
curve_type CurveType linear curve_type
c1 float 0f c1
c2 float 0f c2
c3 float 0f c3
c4 float 0f c4
boneRefs Ref[0..*] [] bone_ref
objectRefs Ref[0..*] [] object_ref
Ref <bone_ref> <object_ref>
id int 0 id
parentRefId int -1 parent
timelineId int 0 timeline
timelineKeyId int 0 key
z_index* float 0f z_index
* z_index is used only for <object_ref>s
Ref <bone_ref> <object_ref>
id int 0 id
parentRefId int -1 parent
timelineId int 0 timeline
timelineKeyId int 0 key
z_index* float 0f z_index
* z_index is used only for <object_ref>s
SpatialInfo <timeline>/<key>/<bone>
x float 0f x
y float 0f y
angle float 0f angle
scale_x float 1f scale_x
scale_y float 1f scale_y
a (alpha) float 1f a
parentBoneName string "Unknown" N/A
z_index* float 0f N/A
SortingOrder* int 0 N/A
* z_index and SortingOrder are always 0f / 0 for bones.
SpriteInfo <timeline>/<key>/<object>
folderId int 0 folder
fileId int 0 file
x float 0f x
y float 0f y
angle float 0f angle
scale_x float 1f scale_x
scale_y float 1f scale_y
a (alpha) float 1f a
parentBoneName string "Unknown" N/A
pivot_x float NaN N/A
pivot_y float NaN N/A
default_pivot_x float 0f N/A
default_pivot_y float 0f N/A
z_index float 0f N/A
SortingOrder int 0 N/A
Bone
Sprite
Timeline <timeline>
id int 0 id
name string null name
objectType ObjectType sprite object_type
keys TimelineKey[0..*] [] key
metadata Metadata null meta
TimelineKey <timeline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
curve_type CurveType linear curve_type
c1 float 0f c1
c2 float 0f c2
c3 float 0f c3
c4 float 0f c4
spin int 1 spin
info SpatialInfo null bone or object
Metadata <meta>
varlines Varline[0..*] [] varline
taglineKeys TaglineKey[0..*] [] tagline / key
aka Object-scoped metadata
Varline <varline>
id int 0 id
varDefId int 0 def
keys VarlineKey[0..*] [] key
varDef VarDef null N/A
VarlineKey <varline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
curve_type CurveType linear curve_type
c1 float 0f c1
c2 float 0f c2
c3 float 0f c3
c4 float 0f c4
value string null val
Note: For variables, Spriter can only (reliably) export linear curve types.
TaglineKey <tagline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
tags TagInfo[0..*] [] tag
TagInfo <tag>
id int 0 id
tagDefId int 0 t
tagName string null N/A
Eventline <eventline>
id int 0 id
name string null name
metadata Metadata null meta
SimpleKey <eventline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
Metadata <meta>
varlines Varline[0..*] [] varline
taglineKeys TaglineKey[0..*] [] tagline / key
aka Event-scoped metadata
Varline <varline>
id int 0 id
varDefId int 0 def
keys VarlineKey[0..*] [] key
varDef VarDef null N/A
VarlineKey <varline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
curve_type CurveType linear curve_type
c1 float 0f c1
c2 float 0f c2
c3 float 0f c3
c4 float 0f c4
value string null val
Note: For variables, Spriter can only (reliably) export linear curve types.
TaglineKey <tagline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
tags TagInfo[0..*] [] tag
TagInfo <tag>
id int 0 id
tagDefId int 0 t
tagName string null N/A
Soundline <soundline>
id int 0 id
name string null name
keys SoundlineKey[0..*] [] key
SoundlineKey <soundline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
soundObject SpriterSound null object
SpriterSound <soundline>/<key>/<object>
folderId int -1f folder
fileId int -1f file
panning float 0f panning
volume float 1f volume
Metadata <meta>
varlines Varline[0..*] [] varline
taglineKeys TaglineKey[0..*] [] tagline / key
aka Entity-scoped metadata
Varline <varline>
id int 0 id
varDefId int 0 def
keys VarlineKey[0..*] [] key
varDef VarDef null N/A
VarlineKey <varline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
curve_type CurveType linear curve_type
c1 float 0f c1
c2 float 0f c2
c3 float 0f c3
c4 float 0f c4
value string null val
Note: For variables, Spriter can only (reliably) export linear curve types.
TaglineKey <tagline>/<key>
id int 0 id
time_s (seconds) float 0f time (milliseconds)
tags TagInfo[0..*] [] tag
TagInfo <tag>
id int 0 id
tagDefId int 0 t
tagName string null N/A