

Commands + Code + Text ▶ Run all RAM Disk

[]

```
from google.colab import files
uploaded = files.upload()
```

Choose Files rides_dataset.csv

rides_dataset.csv(text/csv) - 79807 bytes, last modified: 10/18/2025 - 100% done

Saving rides_dataset.csv to rides_dataset.csv

[]

▶

```
import pandas as pd
df = pd.read_csv('/content/rides_dataset.csv')
df.head()
```

↗

	ride_id	driver_id	user_id	city	ride_date	distance_km	fare_amount	ride_status	driver_rating	payment_mode
0	R10000	D282	U011	Pune	2025-08-17	19.14	362.01	Completed	4.6	UPI
1	R10001	D116	U518	Chennai	2025-07-17	6.47	518.71	Completed	3.5	UPI
2	R10002	D004	U149	Bengaluru	2025-09-09	17.39	646.31	Completed	4.5	UPI
3	R10003	D236	U166	Kochi	2025-09-27	18.69	415.33	Completed	3.3	UPI
4	R10004	D098	U123	Bengaluru	2025-07-31	7.54	669.14	Completed	4.9	Card

📊

📈

Next steps: [Generate code with df](#) [New interactive sheet](#)

[]

```
df.shape      # number of rows & columns
df.columns    # list all columns
df.info()     # data types & null counts
df.describe() # summary stats (mean, std, etc.)
```

How can I install Python libraries? Load data from Google Drive Show an example of training

What can I help you build?

⊕ ▶

```
[ ] from google.colab import files
    uploaded = files.upload()
```

 Choose Files rides_dataset.csv
rides_dataset.csv(text/csv) - 79807 bytes, last modified: 10/18/2025 - 100% done
Saving rides_dataset.csv to rides_dataset.csv

```
[ ] import pandas as pd
    df = pd.read_csv('/content/rides_dataset.csv')
    df.head()
```

	ride_id	driver_id	user_id	city	ride_date	distance_km	fare_amount	ride_status	driver_rating	payment_mode
0	R10000	D282	U011	Pune	2025-08-17	19.14	362.01	Completed	4.6	UPI
1	R10001	D116	U518	Chennai	2025-07-17	6.47	518.71	Completed	3.5	UPI
2	R10002	D004	U149	Bengaluru	2025-09-09	17.39	646.31	Completed	4.5	UPI
3	R10003	D236	U166	Kochi	2025-09-27	18.69	415.33	Completed	3.3	UPI
4	R10004	D098	U123	Bengaluru	2025-07-31	7.54	669.14	Completed	4.9	Card

Next steps: [Generate code with df](#) [New interactive sheet](#)

```
[ ] df.shape      # number of rows & columns
    df.columns    # list all columns
    df.info()     # data types & null counts
    df.describe() # summary stats (mean, std, etc.)
```

 <class 'pandas.core.frame.DataFrame'>
RangeIndex: 1200 entries, 0 to 1199
Data columns (total 10 columns):
Column Non-Null Count Dtype
--- ---
0 ride_id 1200 non-null object
1 driver_id 1200 non-null object
2 user_id 1200 non-null object
3 city 1200 non-null object
4 ride_date 1200 non-null object
5 distance_km 1200 non-null float64
6 fare_amount 1200 non-null float64
7 ride_status 1200 non-null object
8 driver_rating 1200 non-null float64
9 payment_mode 1200 non-null object
dtypes: float64(3), object(7)
memory usage: 93.9+ KB

	distance_km	fare_amount	driver_rating
count	1200.000000	1200.000000	1200.000000
mean	10.701967	425.099367	4.002750
std	5.476024	216.813965	0.592813
min	1.010000	50.800000	3.000000
25%	5.987500	238.992500	3.500000
50%	10.610000	435.825000	4.000000
75%	15.582500	604.580000	4.500000
max	19.990000	799.740000	5.000000



```
df['ride_date'] = pd.to_datetime(df['ride_date'])
df.dtypes
```

```
ride_id      object
driver_id    object
user_id      object
city         object
ride_date    datetime64[ns]
distance_km   float64
fare_amount   float64
ride_status   object
driver_rating float64
payment_mode  object
```

dtype: object


```
df.isnull().sum()    # shows missing values per column
df.duplicated().sum() # count duplicates
```

```
np.int64(0)
```


[+ Code](#)[+ Text](#)

```
import matplotlib.pyplot as plt
import seaborn as sns

plt.figure(figsize=(8,4))
sns.countplot(x='city', data=df)
plt.title('Total Rides per City')
plt.xlabel('City')
plt.ylabel('Number of Rides')
plt.show()
```

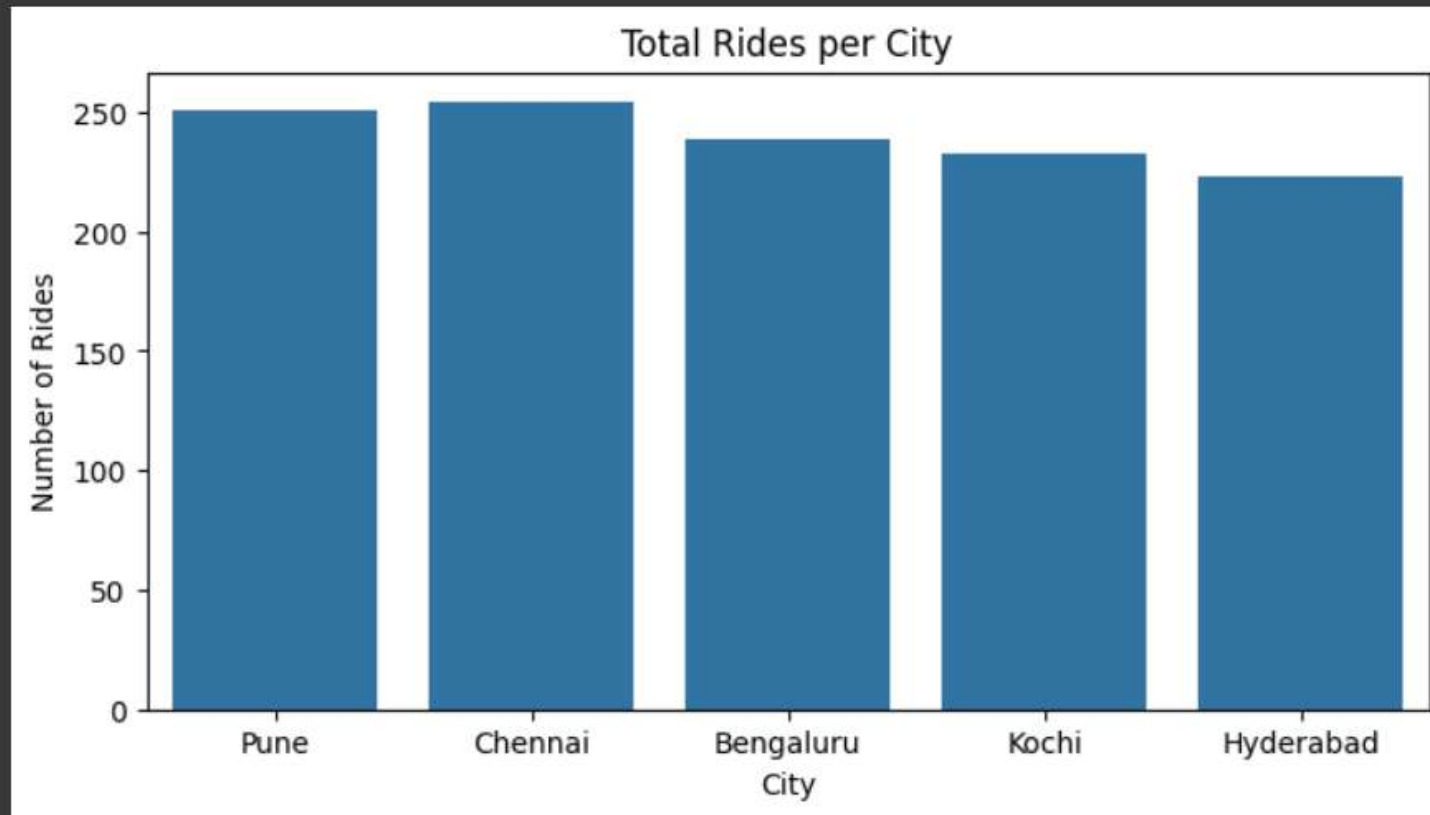


```
city_fares = df.groupby('city')['fare_amount'].mean().sort_values(ascending=False)
plt.figure(figsize=(8,4))
sns.barplot(x=city_fares.index, y=city_fares.values)
plt.title('Average Fare by City')
plt.ylabel('Average Fare (₹)')
plt.show()
```

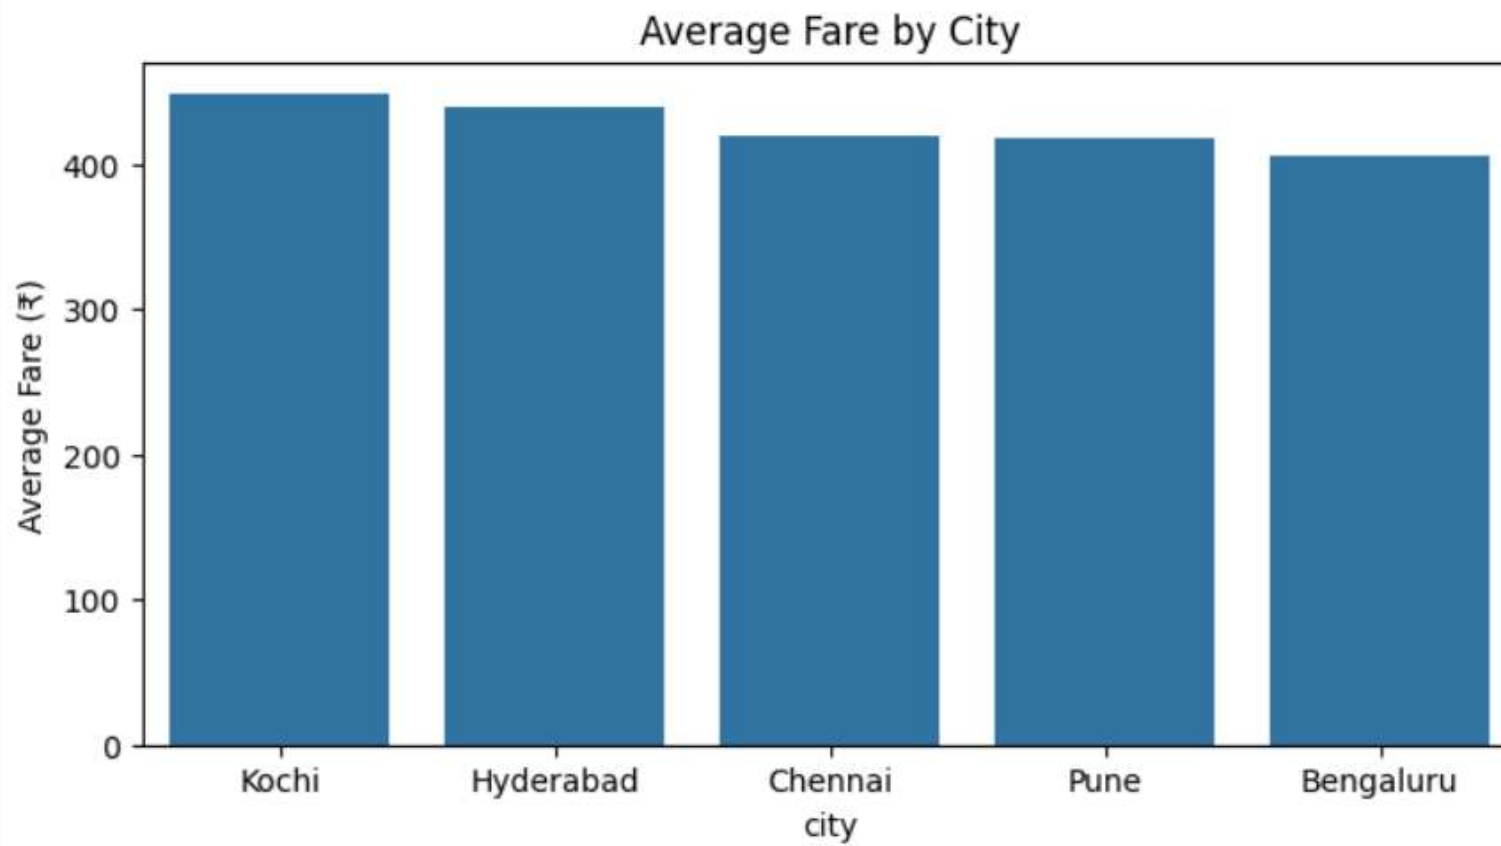


```
cancel_rate = df.groupby('city')['ride_status'].apply(lambda x: (x=='Cancelled').mean()*100)
cancel_rate = cancel_rate.sort_values(ascending=False)

plt.figure(figsize=(8,4))
sns.barplot(x=cancel_rate.index, y=cancel_rate.values)
plt.title('Cancellation Rate (%) by City')
plt.ylabel('Cancellation Rate (%)')
plt.show()
```

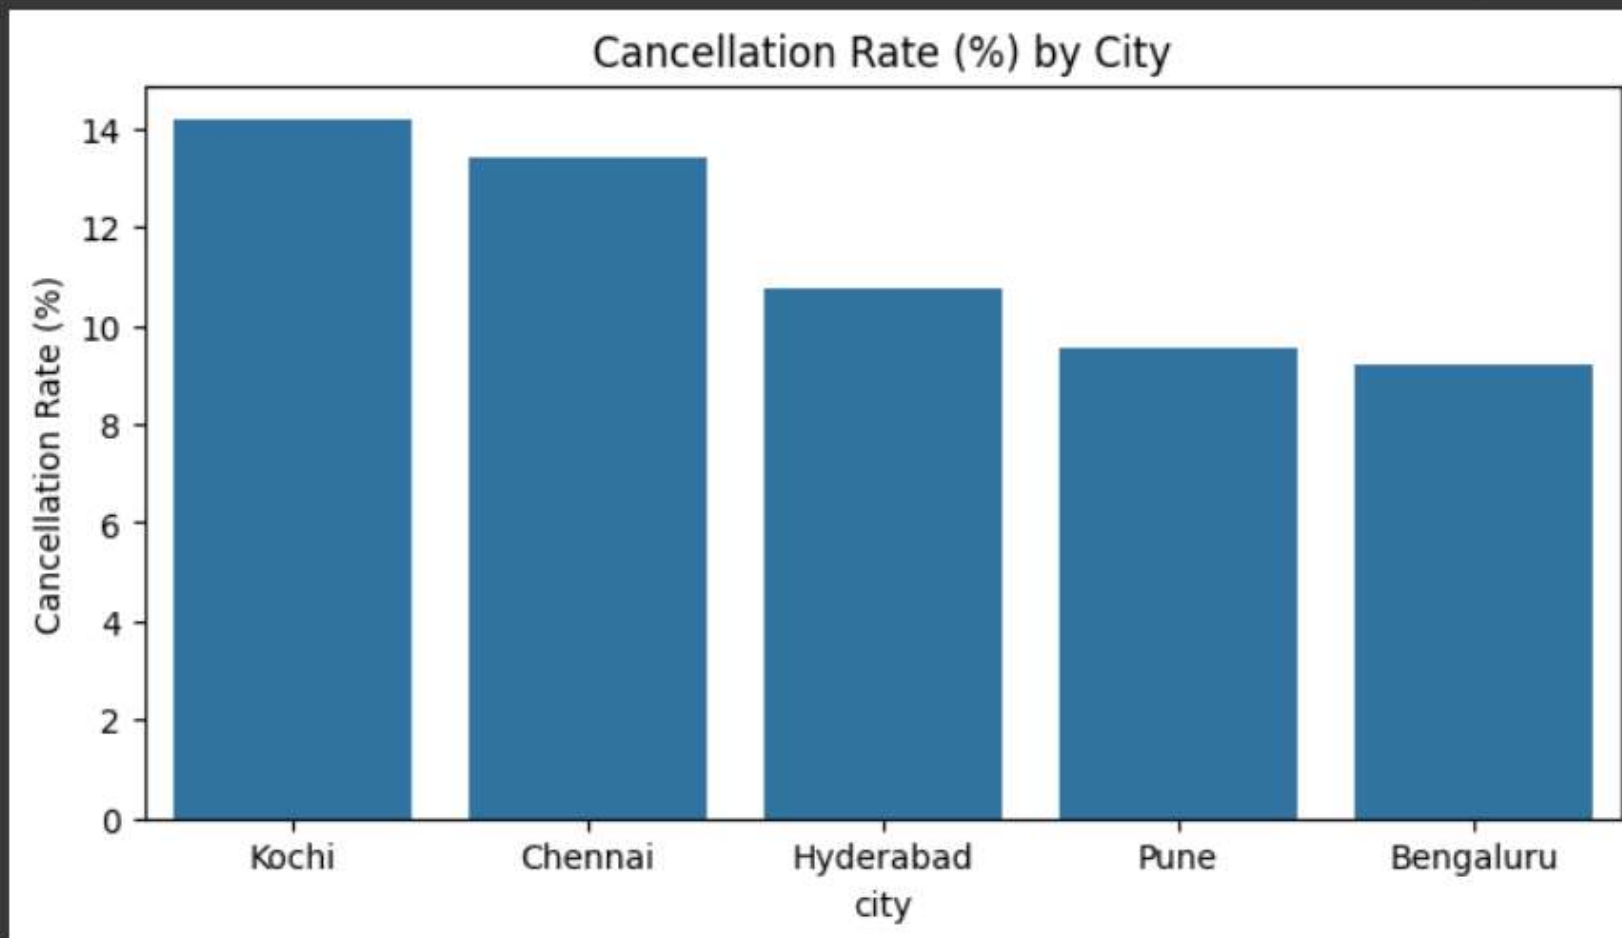

```
plt.figure(figsize=(8,4))
sns.histplot(df['driver_rating'], bins=20, color='orange')
plt.title('Distribution of Driver Ratings')
plt.xlabel('Rating')
plt.ylabel('Frequency')
plt.show()


avg_rating_city = df.groupby('city')['driver_rating'].mean().sort_values(ascending=False)
avg_rating_city
```

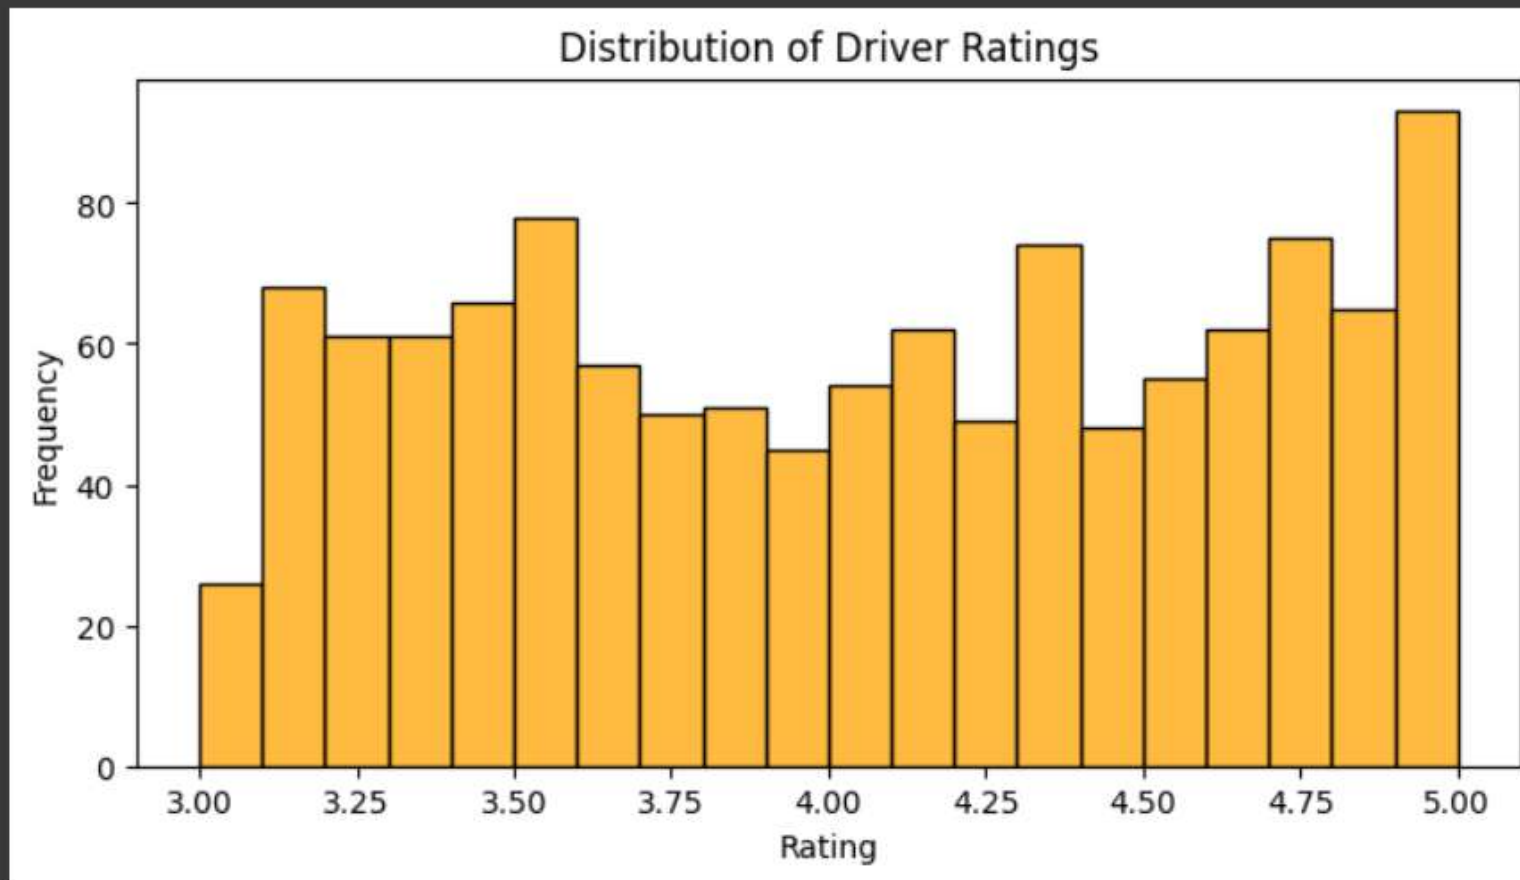

driver rating



```
df['fare_per_km'] = df['fare_amount'] / df['distance_km']
```

```
sns.boxplot(x='city', y='fare_per_km', data=df)  
plt.title('Fare per km by City')  
plt.show()
```

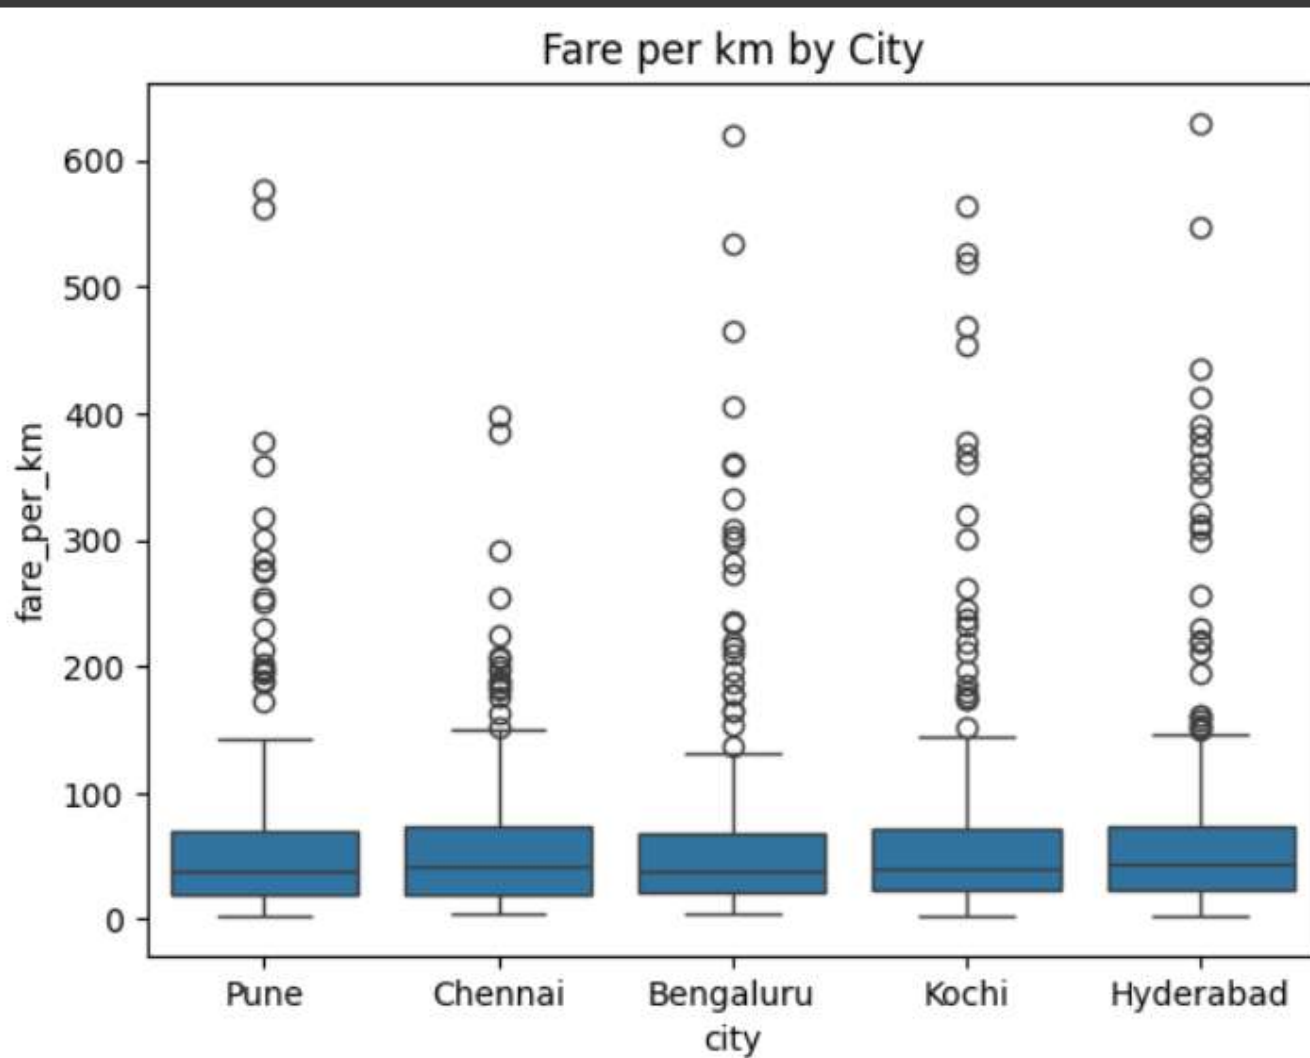



```
daily_rides = df.groupby('ride_date').size()
plt.figure(figsize=(10,5))
daily_rides.plot(kind='line', marker='o')
plt.title('Ride Volume Over Time')
plt.xlabel('Date')
plt.ylabel('Total Rides')
plt.show()
```

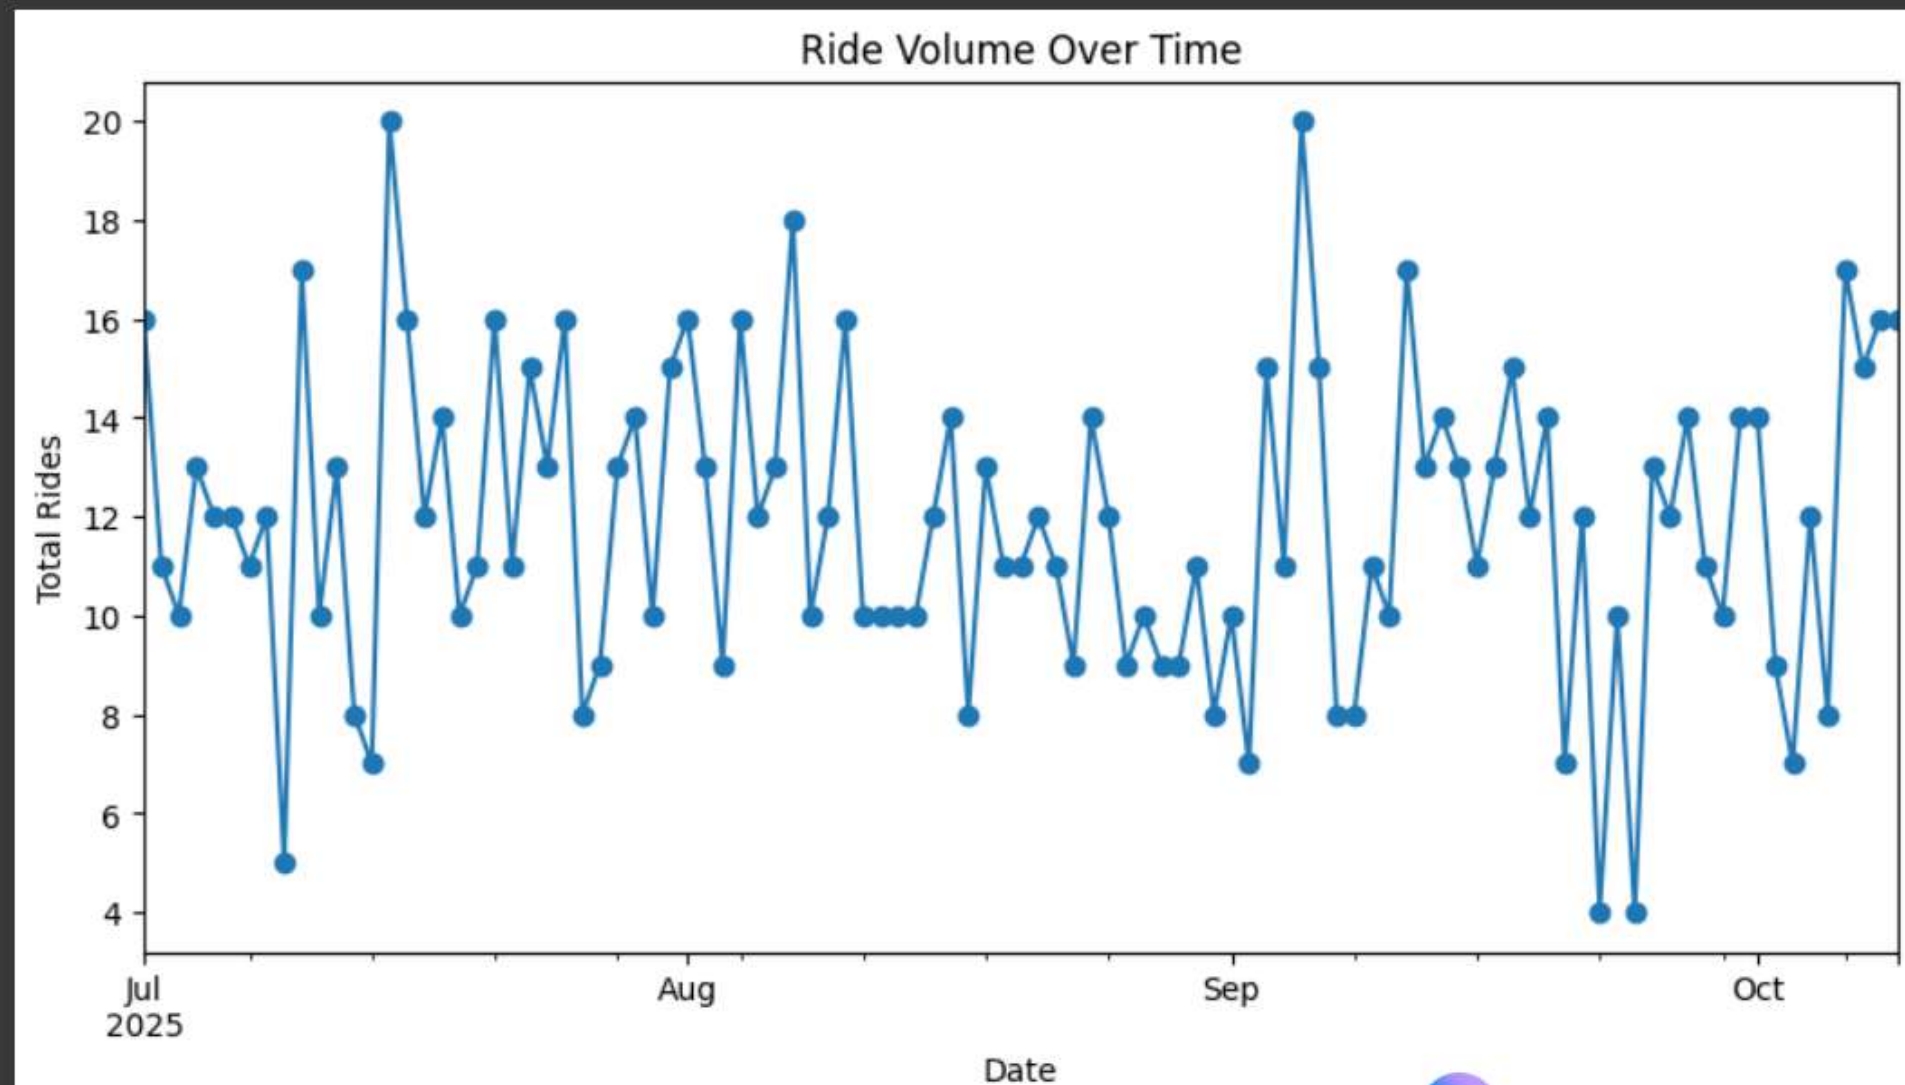



```
from google.colab import drive
drive.mount('/content/drive')
```