


strings

- ♦ Topics:
 - ♦ String Class
 - ♦ Associated Methods
 - ♦ Examples

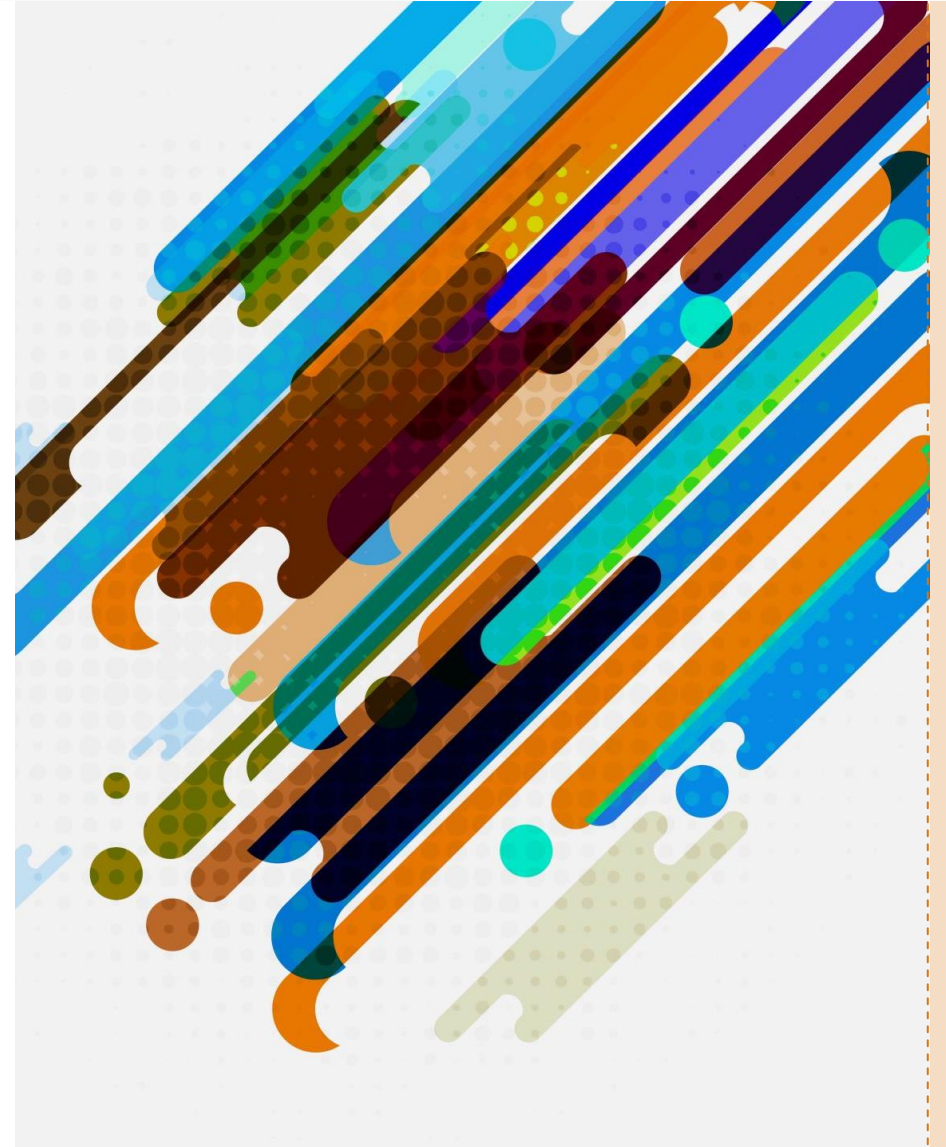

String Class

Strings

Strings in python are surrounded by either single quotation marks, or double quotation marks

You can display a string literal with the `print()` function:

```
print("Hello")  
print('Hello')
```

String Methods

Python has a set of built-in methods that you can use on strings.

`capitalize()`

Converts the first character to upper case

`casefold()`

Converts string into lower case

`center()`

Returns a centered string

`count()`

Returns the number of times a specified value occurs in a string

`endswith()`

Returns true if the string ends with the specified value

String Methods

`index()`

Searches the string for a specified value and returns the position of where it was found

`isalnum()`

Returns True if all characters in the string are alphanumeric

`isalpha()`

Returns True if all characters in the string are in the alphabet

`isdecimal()`

Returns True if all characters in the string are decimals

`isdigit()`

Returns True if all characters in the string are digits

String Methods

`islower()`

Returns True if all characters in the string are lower case

`isprintable()`

Returns True if all characters in the string are printable

`isspace()`

Returns True if all characters in the string are whitespaces

`istitle()`

Returns True if the string follows the rules of a title

String Methods

`isupper()`

Returns True if all characters in the string are upper case

`join()`

Joins the elements of an iterable to the end of the string

`lower()`

Converts a string into lower case

`lstrip()`

Returns a left trim version of the string

`rstrip()`

Returns a right trim version of the string

String Methods

`strip()`

Returns a trimmed version of the string

`split()`

Splits the string at the specified separator, and returns a list

`rsplit()`

Splits the string at the specified separator, and returns a list

`startswith()`

Returns true if the string starts with the specified value

`swapcase()`

Swaps cases, lower case becomes upper case and vice versa

String Methods

`title()`

Converts the first character of each word to upper case

`upper()`

Converts a string into upper case

`splitlines()`

Splits the string at line breaks and returns a list
