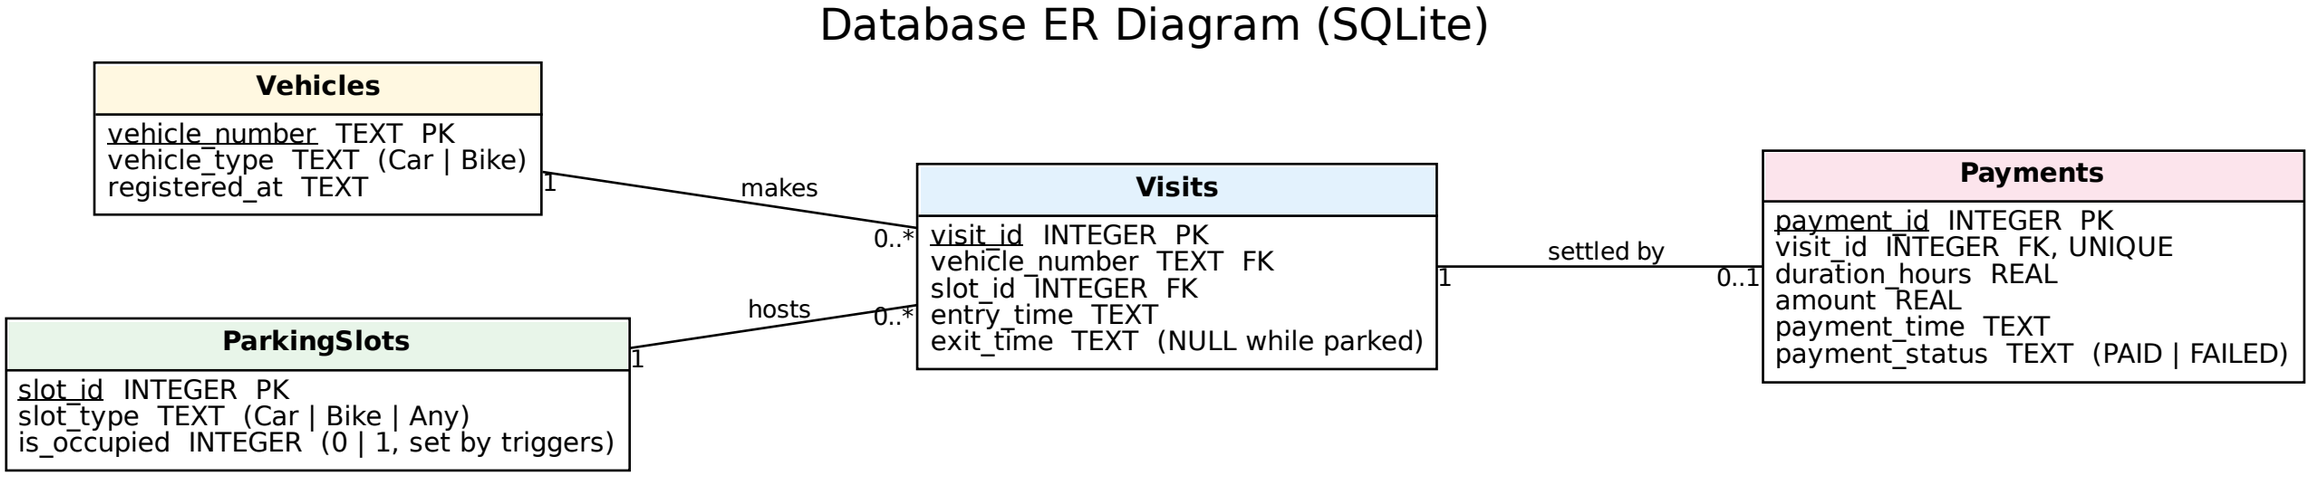
Database ER Diagram (SQLite)
Vehicles
vehicle_number TEXT PK
vehicle_type TEXT (Car | Bike)
registered_at TEXT
ParkingSlots
slot_id INTEGER PK
slot_type TEXT (Car | Bike | Any)
is_occupied INTEGER (0 | 1, set by triggers)
Visits
visit_id INTEGER PK
vehicle_number TEXT FK
slot_id INTEGER FK
entry_time TEXT
exit_time TEXT (NULL while parked)
Payments
payment_id INTEGER PK
visit_id INTEGER FK, UNIQUE
duration_hours REAL
amount REAL
payment_time TEXT
payment_status TEXT (PAID | FAILED)
makes
1
0..*
hosts
1
0..*
settled by
1
0..1