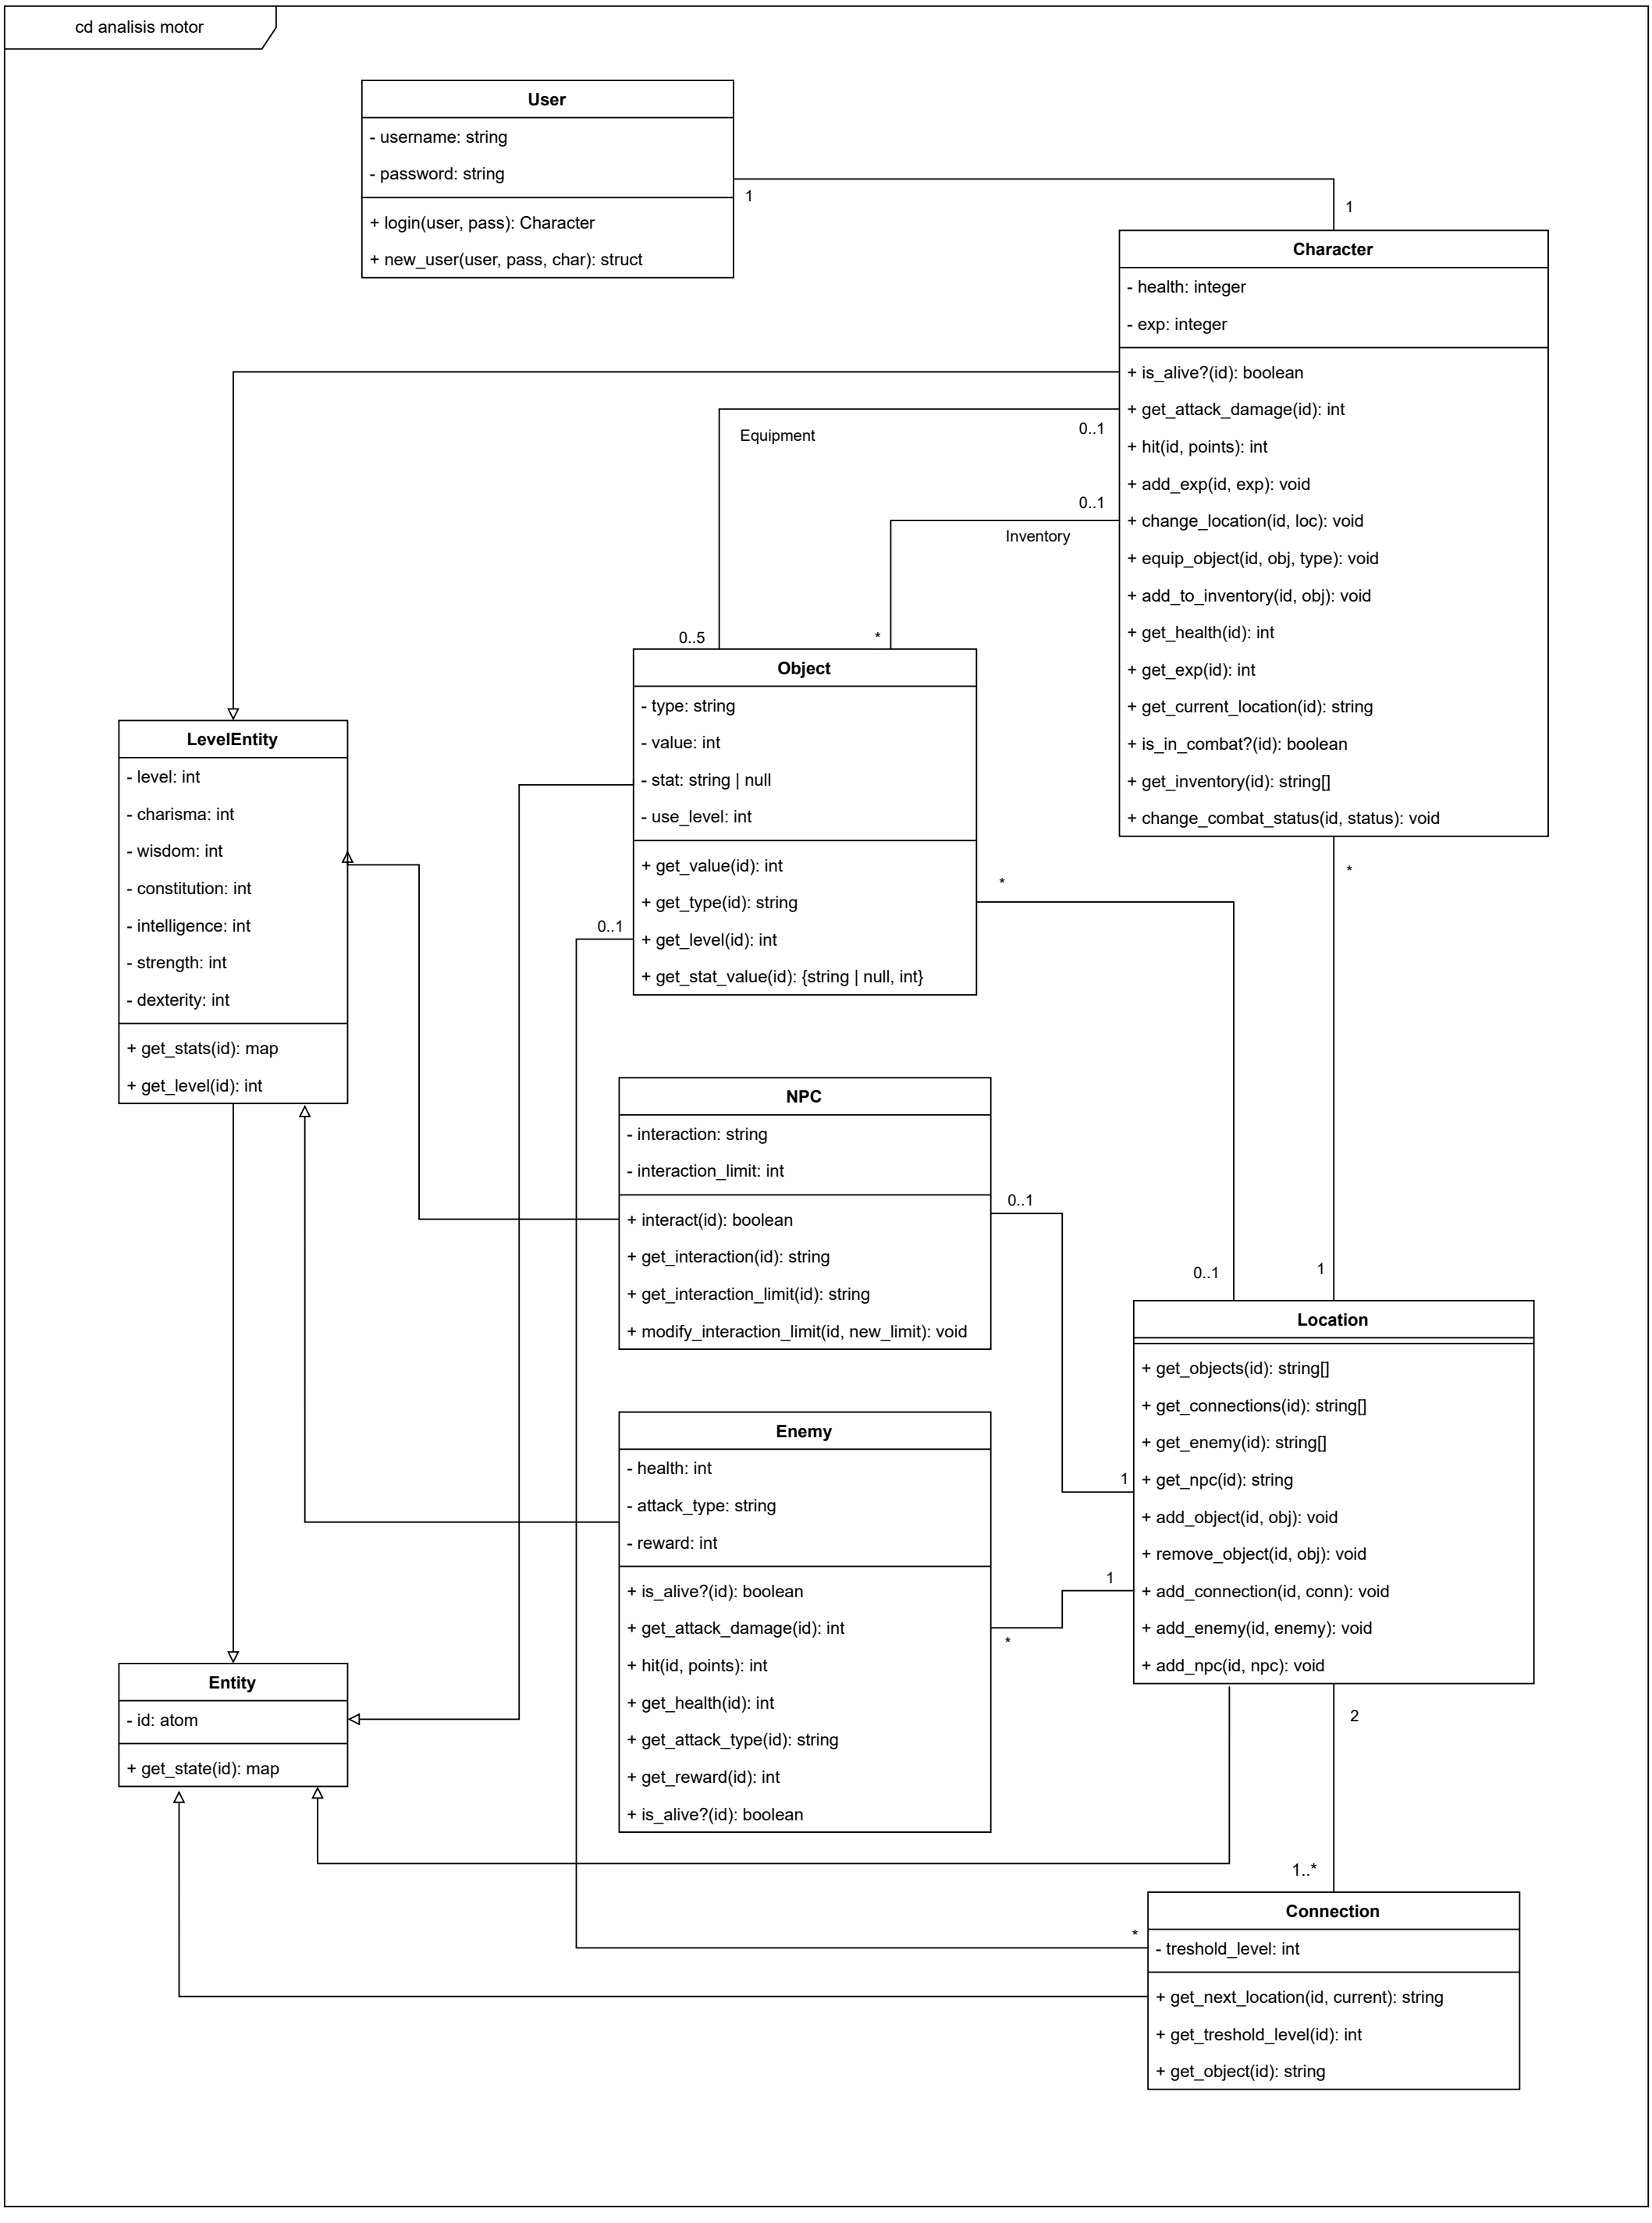
cd analisis motor
User
- username: string
- password: string
+ login(user, pass): Character
+ new_user(user, pass, char): struct
1
1
Character
- health: integer
- exp: integer
+ is_alive?(id): boolean
+ get_attack_damage(id): int
+ hit(id, points): int
+ add_exp(id, exp): void
+ change_location(id, loc): void
+ equip_object(id, obj, type): void
+ add_to_inventory(id, obj): void
+ get_health(id): int
+ get_exp(id): int
+ get_current_location(id): string
+ is_in_combat?(id): boolean
+ get_inventory(id): string[]
+ change_combat_status(id, status): void
Equipment
0..1
0..1
Inventory
0..5
*
Object
- type: string
- value: int
- stat: string | null
- use_level: int
+ get_value(id): int
+ get_type(id): string
+ get_level(id): int
+ get_stat_value(id): {string | null, int}
*
*
0..1
LevelEntity
- level: int
- charisma: int
- wisdom: int
- constitution: int
- intelligence: int
- strength: int
- dexterity: int
+ get_stats(id): map
+ get_level(id): int
NPC
- interaction: string
- interaction_limit: int
+ interact(id): boolean
+ get_interaction(id): string
+ get_interaction_limit(id): string
+ modify_interaction_limit(id, new_limit): void
0..1
0..1
1
Location
+ get_objects(id): string[]
+ get_connections(id): string[]
+ get_enemy(id): string[]
+ get_npc(id): string
+ add_object(id, obj): void
+ remove_object(id, obj): void
+ add_connection(id, conn): void
+ add_enemy(id, enemy): void
+ add_npc(id, npc): void
Enemy
- health: int
- attack_type: string
- reward: int
+ is_alive?(id): boolean
+ get_attack_damage(id): int
+ hit(id, points): int
+ get_health(id): int
+ get_attack_type(id): string
+ get_reward(id): int
+ is_alive?(id): boolean
1
*
2
Entity
- id: atom
+ get_state(id): map
1..*
*
Connection
- treshold_level: int
+ get_next_location(id, current): string
+ get_treshold_level(id): int
+ get_object(id): string