

Challenge: PoisonedCredentials Lab

Platform: SOC Analyst Tier 1

Category: Network Forensics

Tactics: Credential Access, Collection

Tools: Wireshark

VIEWS LAB: [Link](#)

Kịch bản: Analyze network traffic for LLMNR/NBT-NS poisoning attacks using Wireshark to identify the rogue machine, compromised accounts, and affected systems.

Q1

In the context of the incident described in the scenario, the attacker initiated their actions by taking advantage of benign network traffic from legitimate machines. Can you identify the specific mistyped query made by the machine with the IP address 192.168.232.162?


Việc sử dụng bộ lọc Wireshark để cô lập lưu lượng LLMNR (Link-Local Multicast Name Resolution) là bước quan trọng để phát hiện giai đoạn đầu của các cuộc tấn công mạng

Cơ chế dự phòng (Fallback): Khi một máy tính trong mạng Windows không thể phân giải tên miền qua hệ thống DNS chính thống, nó sẽ tự động phát tán gói tin multicast LLMNR ra toàn mạng cục bộ để hỏi các máy khác.

The image shows a Wireshark capture of network traffic from a file named 'PoisonedCredentials.pcap'. A filter is applied to the packet list: 'llmnr and ip.src == 192.168.232.162'. The packet list shows several LLMNR (Link-Local Multicast Name Resolution) queries from the source IP 192.168.232.162 to the destination 224.0.0.252. The packet details pane shows the selected packet (No. 85) as a 'Link-Local Multicast Name Resolution (query)'.


No.	Time	Source	Destination	Protocol	Length	Info
52	74.356170	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0xae2 A filesaare
53	74.356581	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0x2ead AAAA filesaare
69	74.406407	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0x61e8 A filesaare
70	74.407088	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0x9b15 AAAA filesaare
76	74.419239	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0xb281 A filesaare
77	74.419852	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0x6108 AAAA filesaare
84	74.438101	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0xc4a3 A filesaare
85	74.438618	192.168.232.162	224.0.0.252	LLMNR	70	Standard query 0x1ce7 AAAA filesaare

Frame 52: 70 bytes on wire (560 bits), 70 bytes captured on interface (560 bits) on eth0
Ethernet II, Src: VMware fa:cb:e9 (00:0c:29:fa:cb:e9), Dst: 01:00:5e:00:00:01
Internet Protocol Version 4, Src: 192.168.232.162, Dst: 224.0.0.252
User Datagram Protocol, Src Port: 57556, Dst Port: 53
Link-Local Multicast Name Resolution (query)

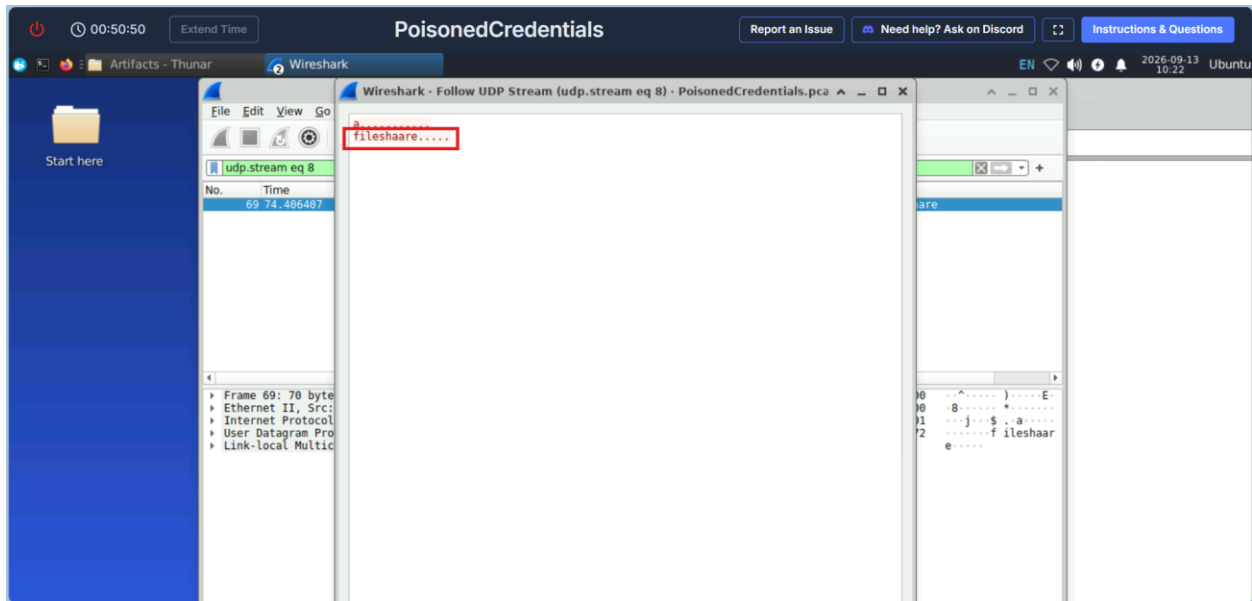


Q2

We are investigating a network security incident. To conduct a thorough investigation, We need to determine the IP address of the rogue machine. What is the IP address of the machine acting as the rogue entity?

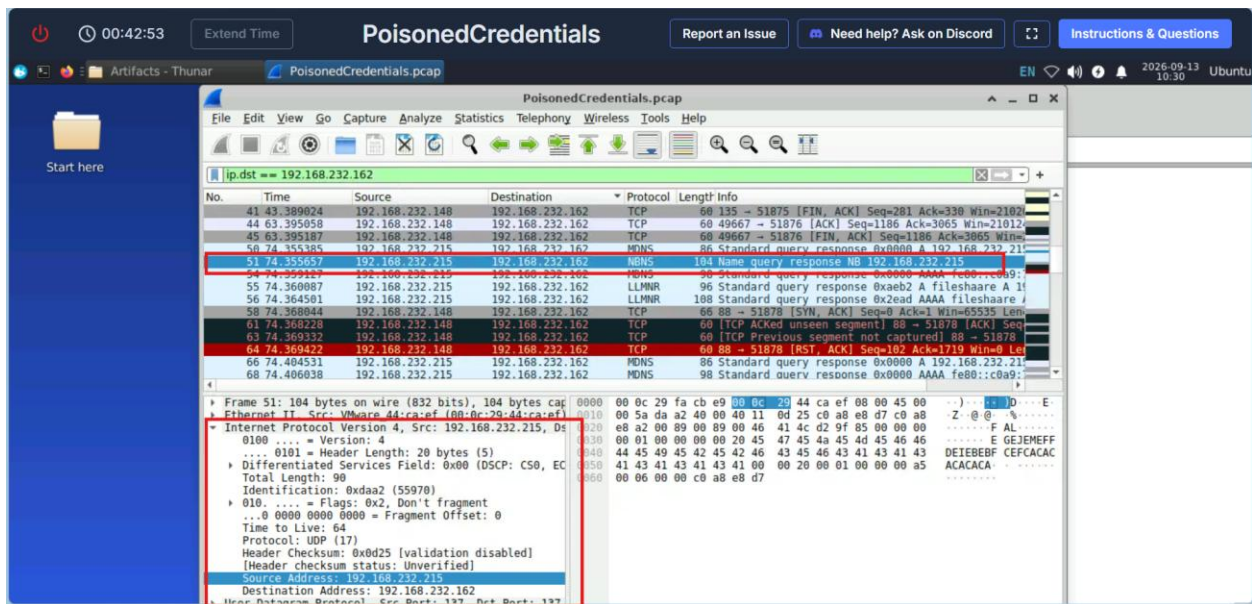


Q3


As part of our investigation, identifying all affected machines is essential. What is the IP address of the second machine that received poisoned responses from the rogue machine?

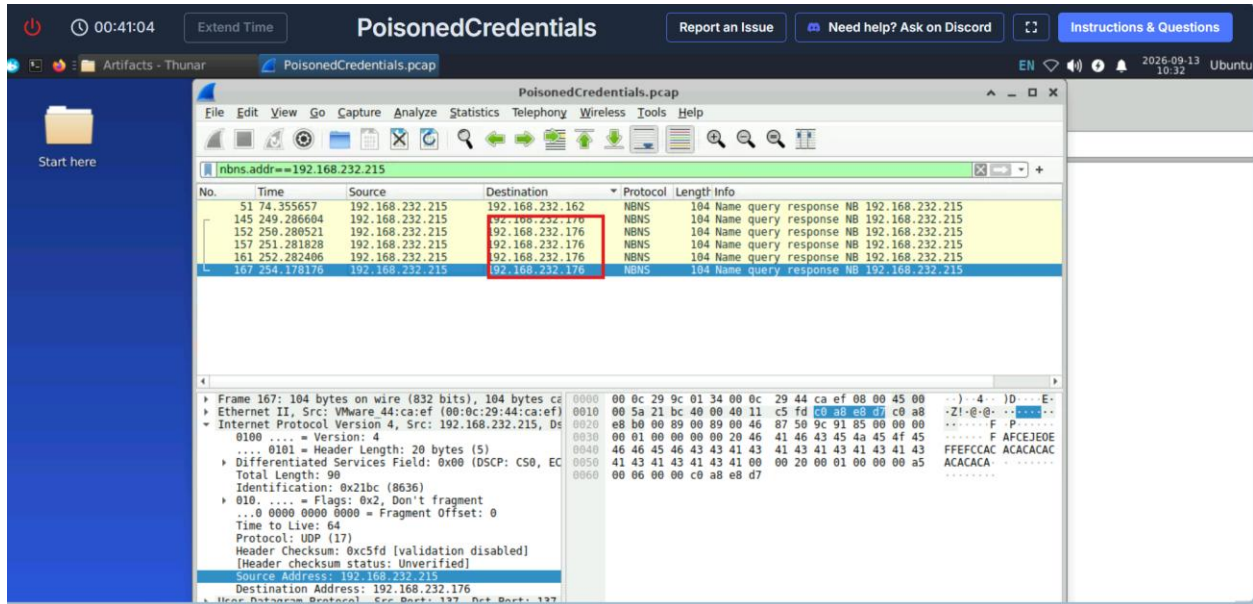

Q4

We suspect that user accounts may have been compromised. To assess this, we must determine the username associated with the compromised account. What is the username of the account that the attacker compromised?

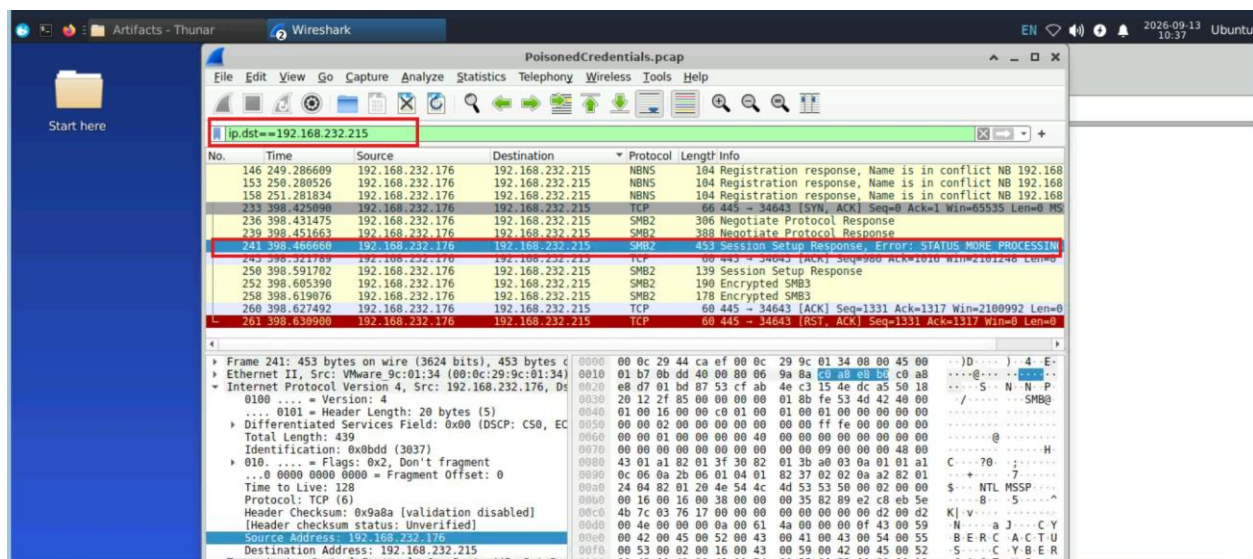

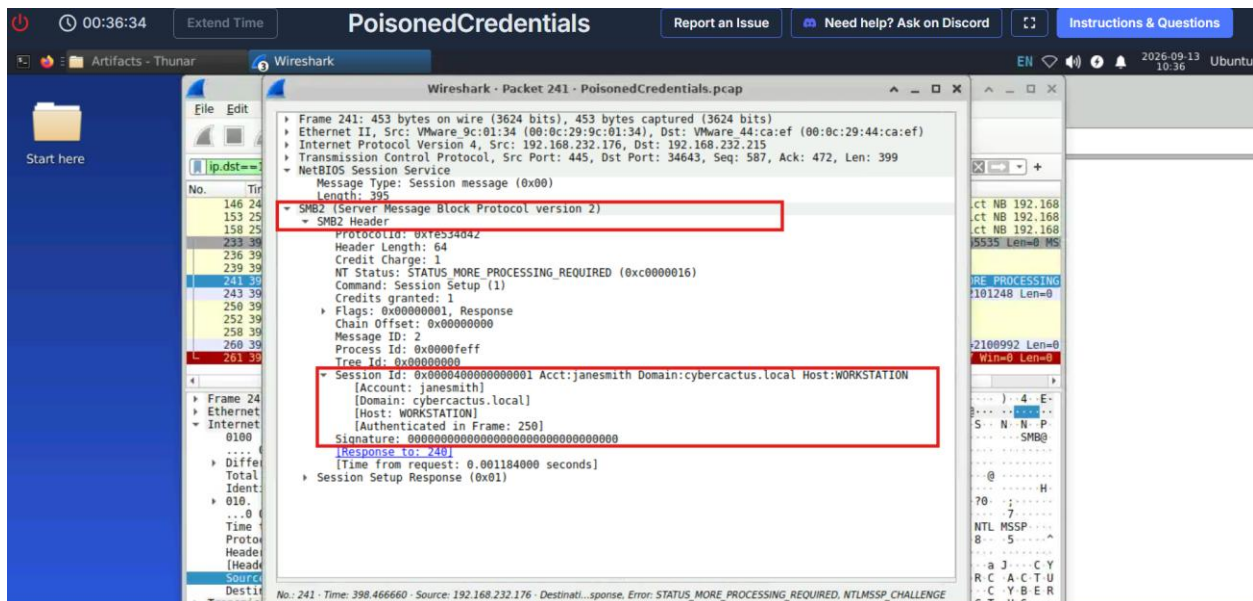

Q5

As part of our investigation, we aim to understand the extent of the attacker's activities. What is the hostname of the machine that the attacker accessed via SMB?

