

Creating Microservices for account and loan

Accounts

AccountController.java

```
package com.cognizant.account.controller;

import org.springframework.web.bind.annotation.*;

import java.util.HashMap;
import java.util.Map;

@RestController
@RequestMapping("/accounts")
public class AccountController {

    @GetMapping("/{number}")
    public Map<String, Object> getAccount(@PathVariable String number) {
        Map<String, Object> response = new HashMap<>();
        response.put("number", number);
        response.put("type", "savings");
        response.put("balance", 234343);
        return response;
    }
}
```

AccountApplication.java

```
package com.cognizant.account;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication
public class AccountApplication {
```

```

    public static void main(String[] args) {


        SpringApplication.run(AccountApplication.class, args);

    }

}

```

Output :

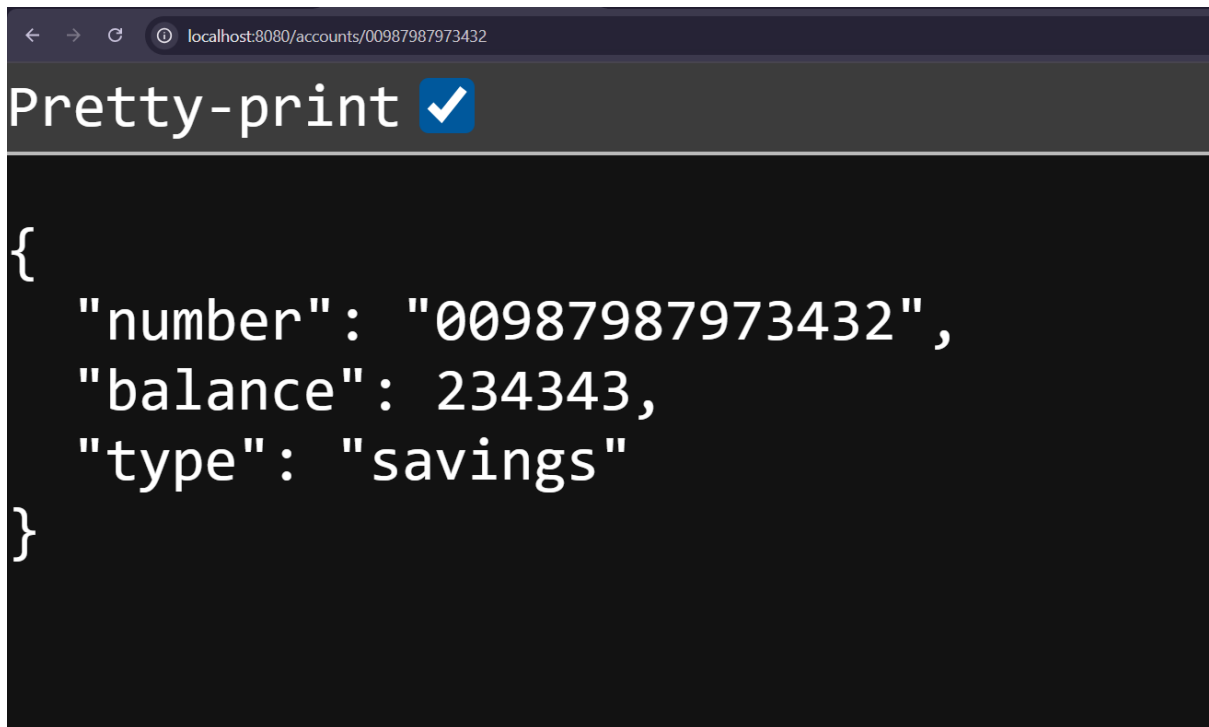

Loans

LoanController.java

```

package com.cognizant.loan.controller;

import org.springframework.web.bind.annotation.*;

import java.util.HashMap;
import java.util.Map;

@RestController
@RequestMapping("/loans")

```

```

public class LoanController {

    @GetMapping("/{number}")
    public Map<String, Object> getLoan(@PathVariable String number) {
        Map<String, Object> response = new HashMap<>();
        response.put("number", number);
        response.put("type", "car");
        response.put("loan", 400000);
        response.put("emi", 3258);
        response.put("tenure", 18);
        return response;
    }
}

```

LoanApplication.java

```

package com.cognizant.loan;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;


@SpringBootApplication
public class LoanApplication {

    public static void main(String[] args) {
        SpringApplication.run(LoanApplication.class, args);
    }

}

```

Output :

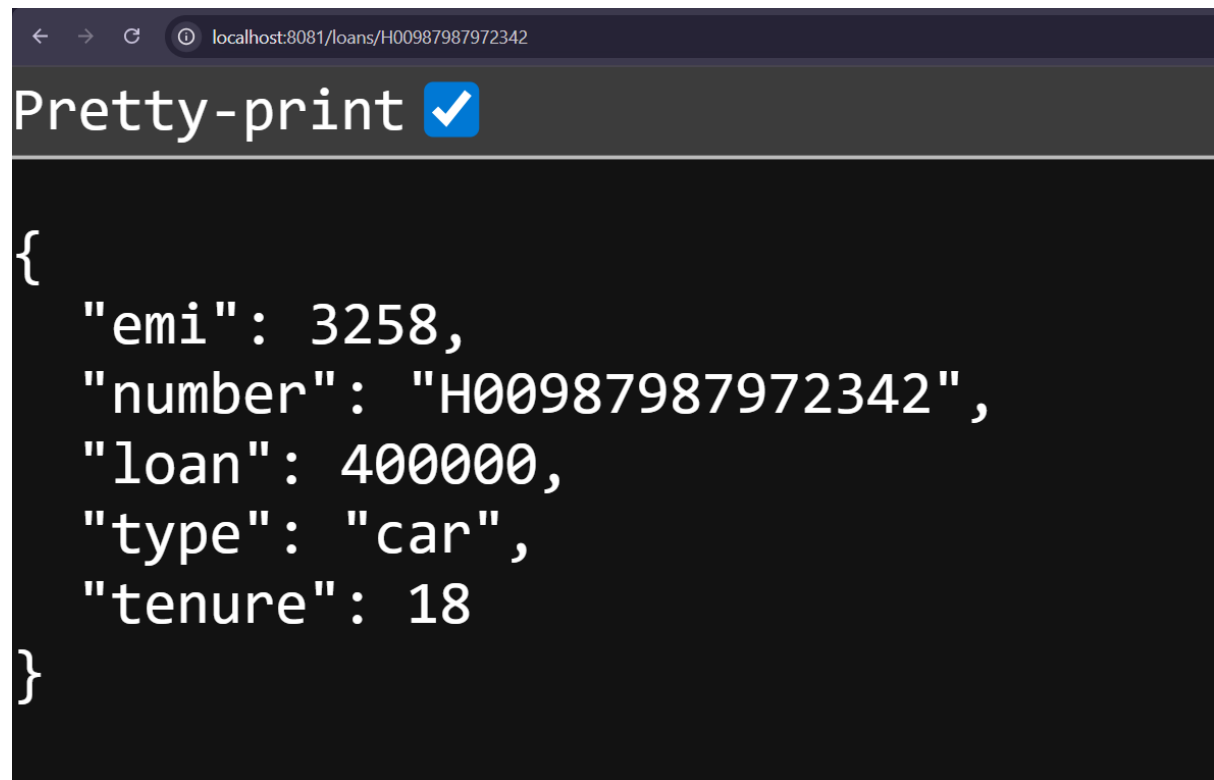

The screenshot shows a web browser window with the address bar displaying 'localhost:8081/loans/H00987987972342'. The page title is 'Pretty-print' with a blue checkmark icon. The main content area displays a JSON object with the following fields: 'emi' (3258), 'number' ('H00987987972342'), 'loan' (400000), 'type' ('car'), and 'tenure' (18).

```
{  
  "emi": 3258,  
  "number": "H00987987972342",  
  "loan": 400000,  
  "type": "car",  
  "tenure": 18  
}
```