C Online Compiler

Ask Gemini

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>
#include <string.h>

int isPalindrome(char str[])
{
    int left = 0;
    int right = strlen(str) - 1;

    while (left < right)
    {
        if (str[left] != str[right])
        {
            return 0;
        }

        left++;
        right--;
    }

    return 1;
}

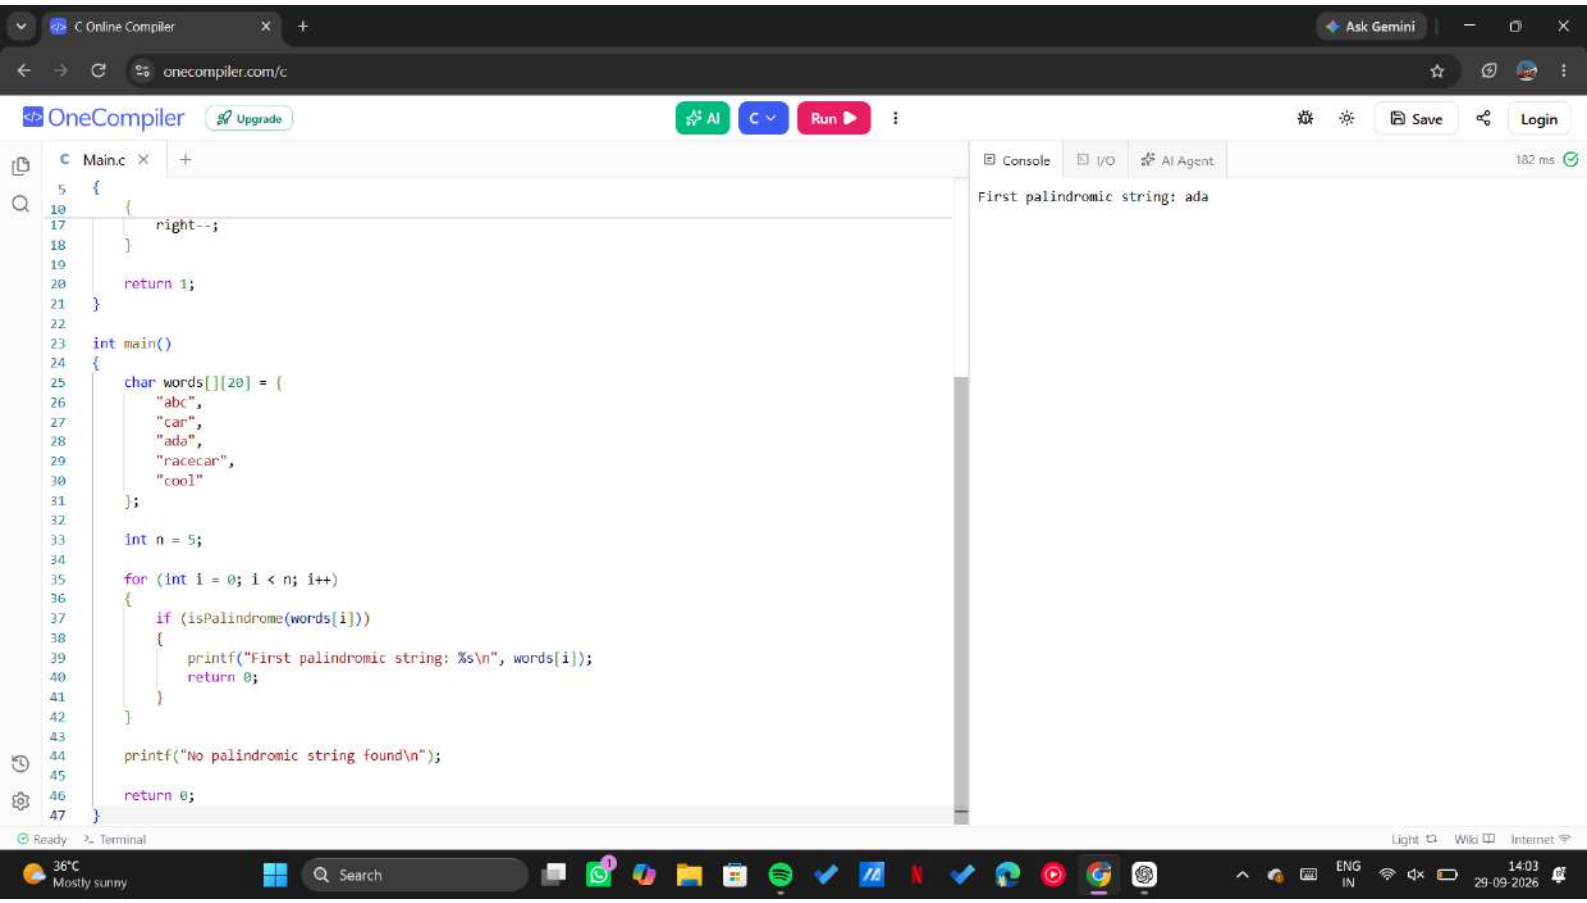
int main()
{
    char words[][20] = {
        "abc",
        "car",
        "ada",
        "racecar",
        "cool"
    };
```

Console | I/O | AI Agent | 182 ms

```
First palindromic string: ada
```

Ready | Terminal | Light | Wiki | Internet

36°C Mostly sunny | Search | ENG IN | 14:03 29-09-2026




```
    {
        {
            right--;
        }

        return 1;
    }

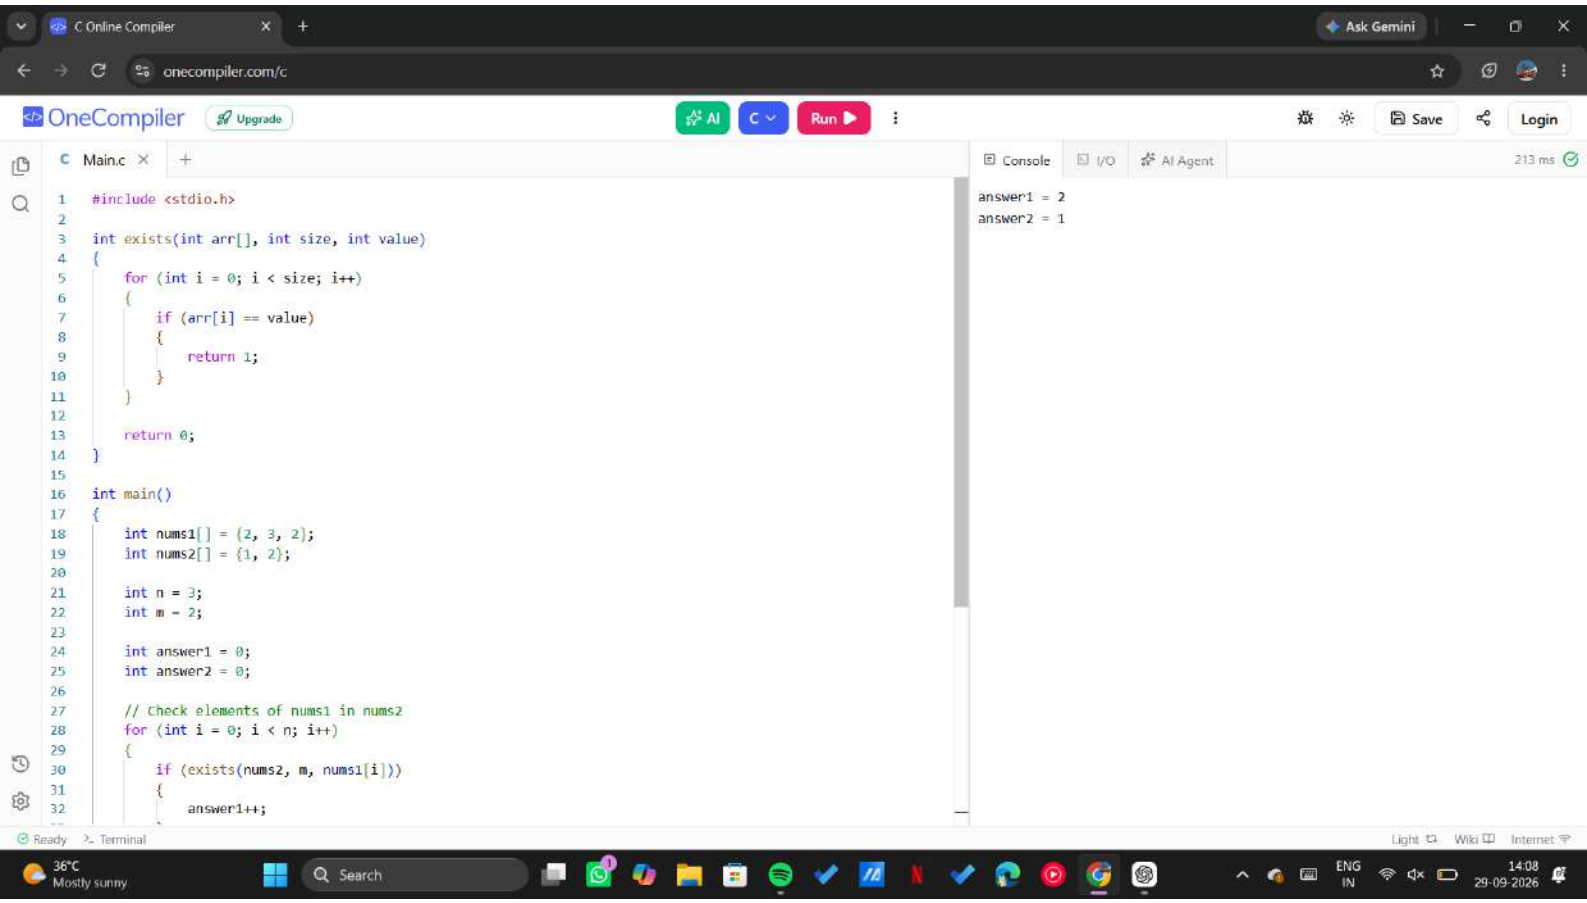
    int main()
    {
        char words[][20] = {
            "abc",
            "car",
            "ada",
            "racecar",
            "cool"
        };

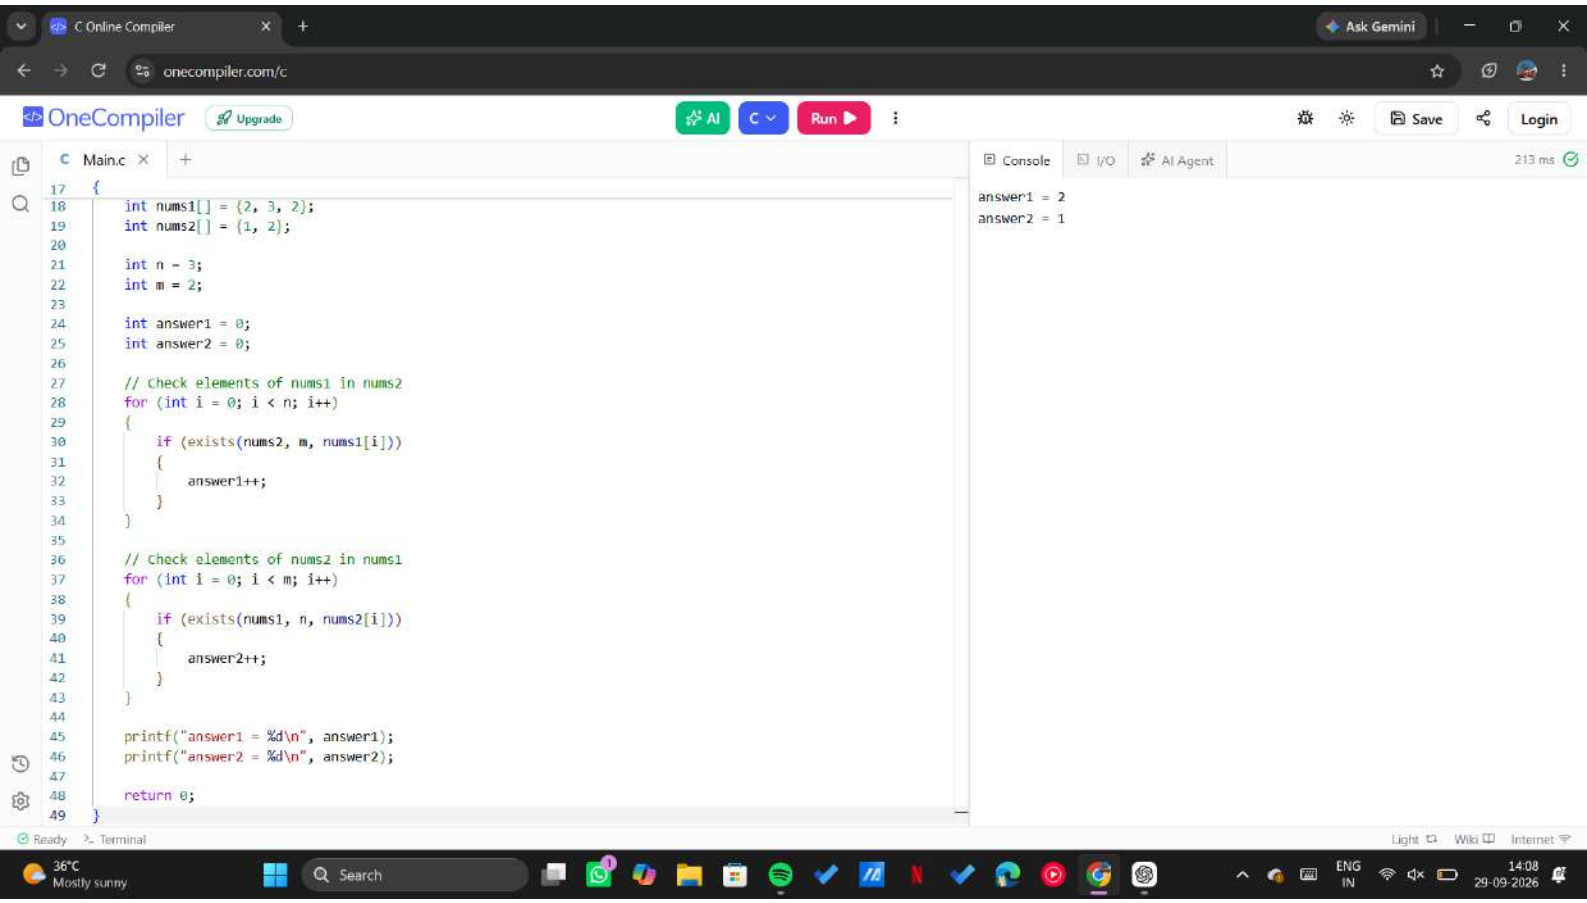
        int n = 5;

        for (int i = 0; i < n; i++)
        {
            if (isPalindrome(words[i]))
            {
                printf("First palindromic string: %s\n", words[i]);
                return 0;
            }
        }

        printf("No palindromic string found\n");

        return 0;
    }
```


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
213 ms
#include <stdio.h>
int exists(int arr[], int size, int value)
{
for (int i = 0; i < size; i++)
{
if (arr[i] == value)
{
return 1;
}
}
return 0;
}
int main()
{
int nums1[] = {2, 3, 2};
int nums2[] = {1, 2};
int n = 3;
int m = 2;
int answer1 = 0;
int answer2 = 0;
// Check elements of nums1 in nums2
for (int i = 0; i < n; i++)
{
if (exists(nums2, m, nums1[i]))
{
answer1++;
answer1 = 2
answer2 = 1
Ready
Terminal
Light
Wiki
Internet
36°C
Mostly sunny
Search
ENG
IN
14:08
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
213 ms
{
int nums1[] = {2, 3, 2};
int nums2[] = {1, 2};
int n = 3;
int m = 2;
int answer1 = 0;
int answer2 = 0;
// Check elements of nums1 in nums2
for (int i = 0; i < n; i++)
{
if (exists(nums2, m, nums1[i]))
{
answer1++;
}
}
// Check elements of nums2 in nums1
for (int i = 0; i < m; i++)
{
if (exists(nums1, n, nums2[i]))
{
answer2++;
}
}
printf("answer1 = %d\n", answer1);
printf("answer2 = %d\n", answer2);
return 0;
}
answer1 = 2
answer2 = 1
Ready
Terminal
Light
Wiki
Internet
36°C
Mostly sunny
Search
ENG
IN
14:08
29-09-2026

C Online Compiler

Ask Gemini

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>

int main()
{
    int nums[] = {1, 2, 1};
    int n = 3;

    int answer = 0;

    // Start of each subarray
    for (int i = 0; i < n; i++)
    {
        int distinct = 0;
        int seen[100];
        int seenCount = 0;

        // End of each subarray
        for (int j = i; j < n; j++)
        {
            int found = 0;

            // Check whether nums[j] was already seen
            for (int k = 0; k < seenCount; k++)
            {
                if (seen[k] == nums[j])
                {
                    found = 1;
                    break;
                }
            }

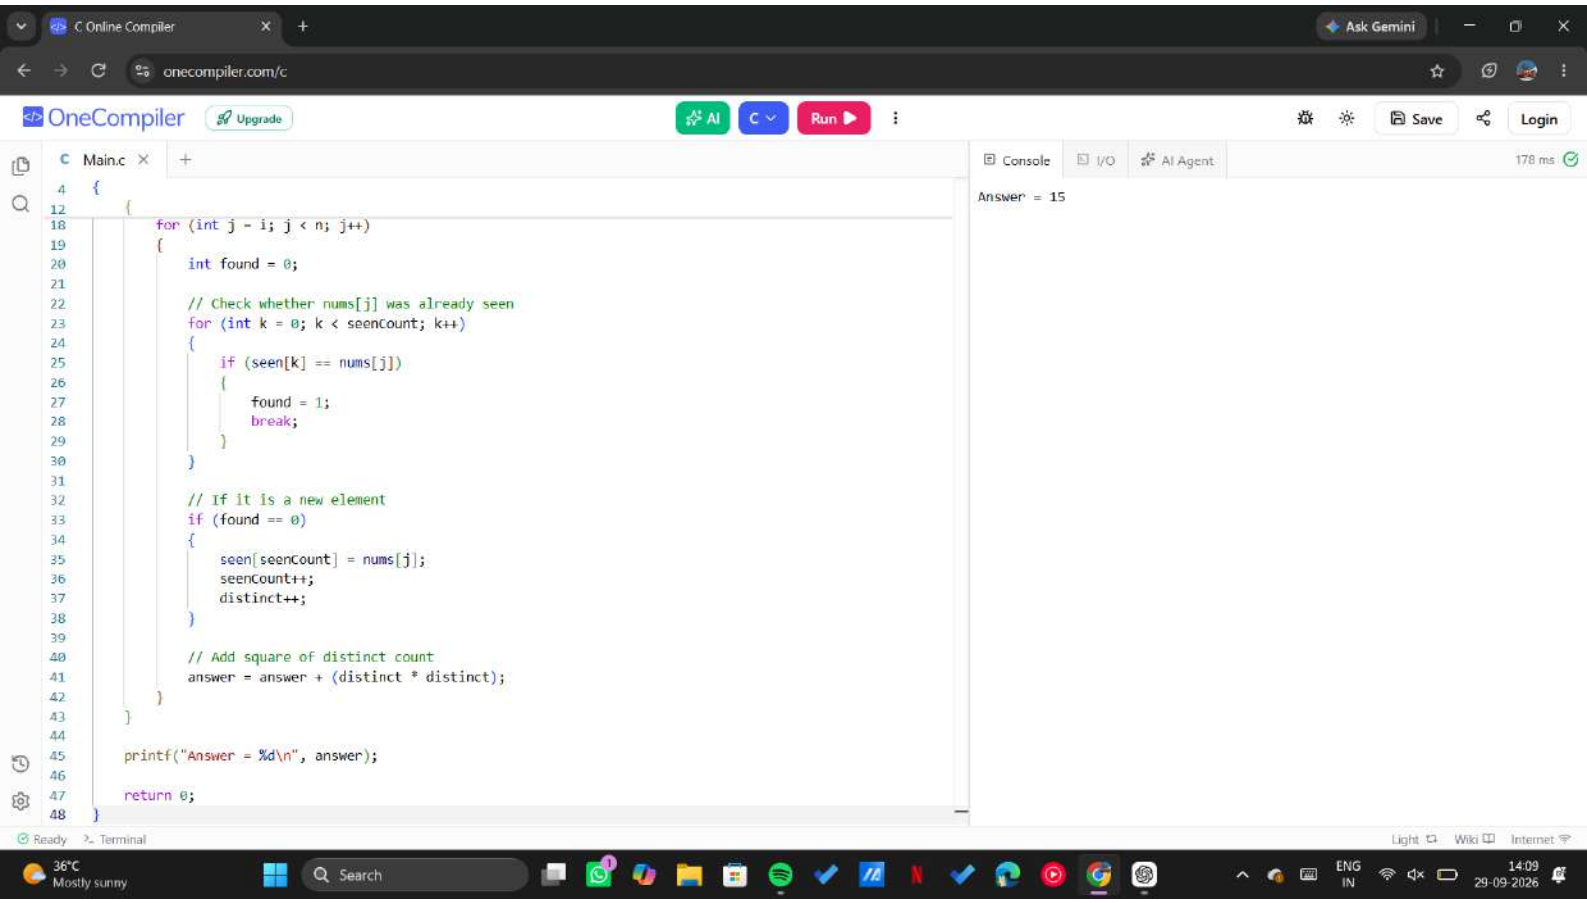
            // If it is a new element
```

Console | I/O | AI Agent | 178 ms

```
Answer = 15
```

Ready | Terminal | Light | Wiki | Internet

36°C Mostly sunny | Search | ENG IN | 14:09 29-09-2026




```c
{
    {
        for (int j = i; j < n; j++)
        {
            int found = 0;

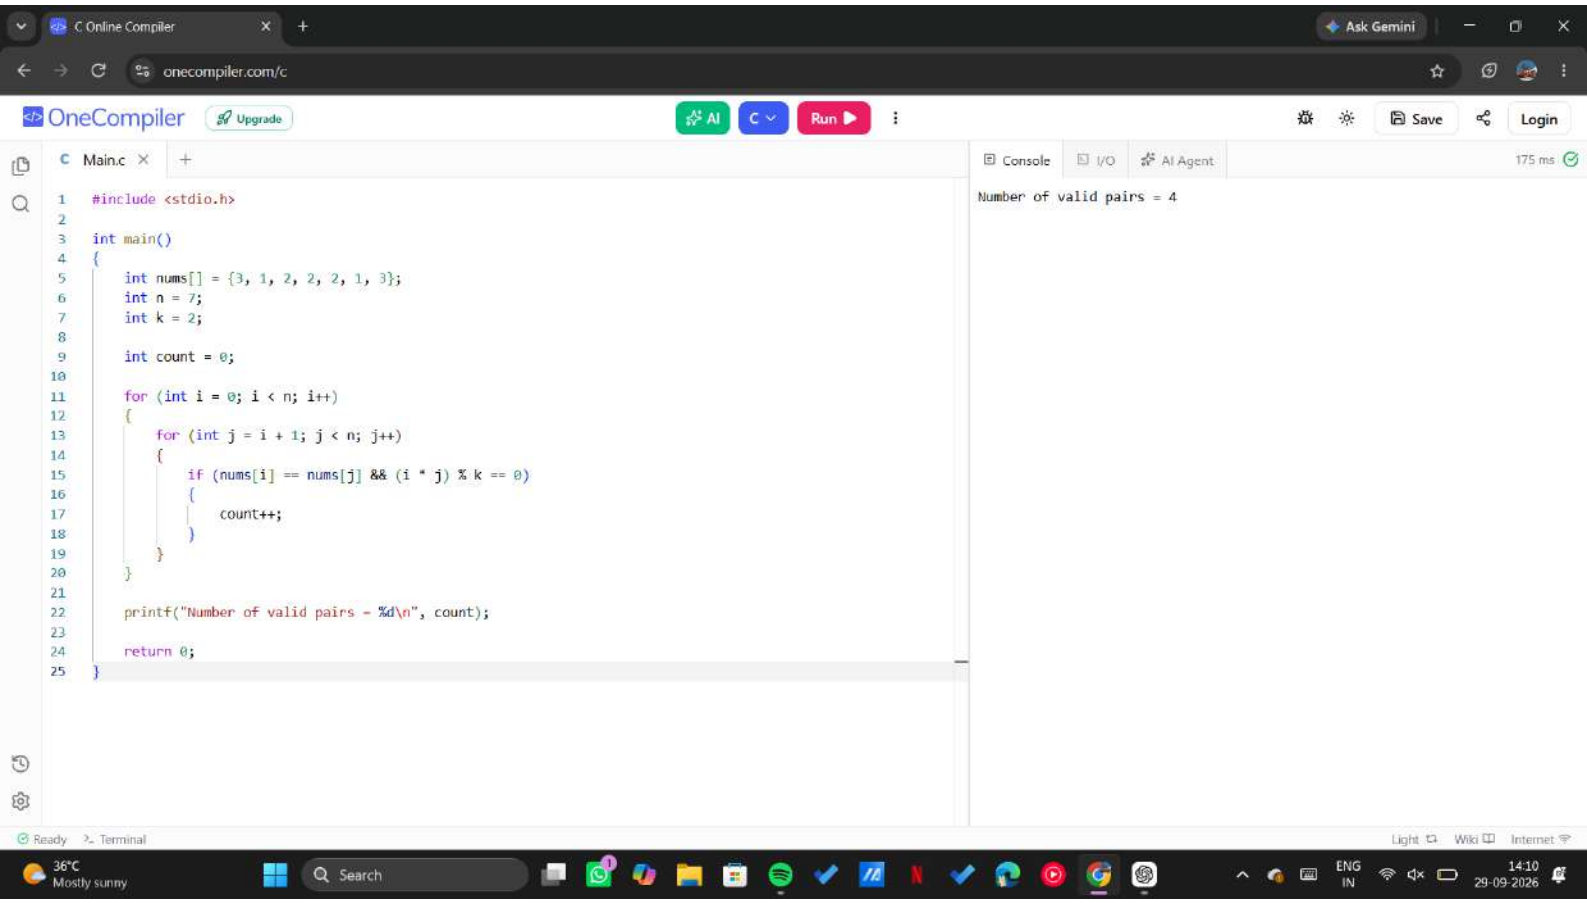
            // Check whether nums[j] was already seen
            for (int k = 0; k < seenCount; k++)
            {
                if (seen[k] == nums[j])
                {
                    found = 1;
                    break;
                }
            }

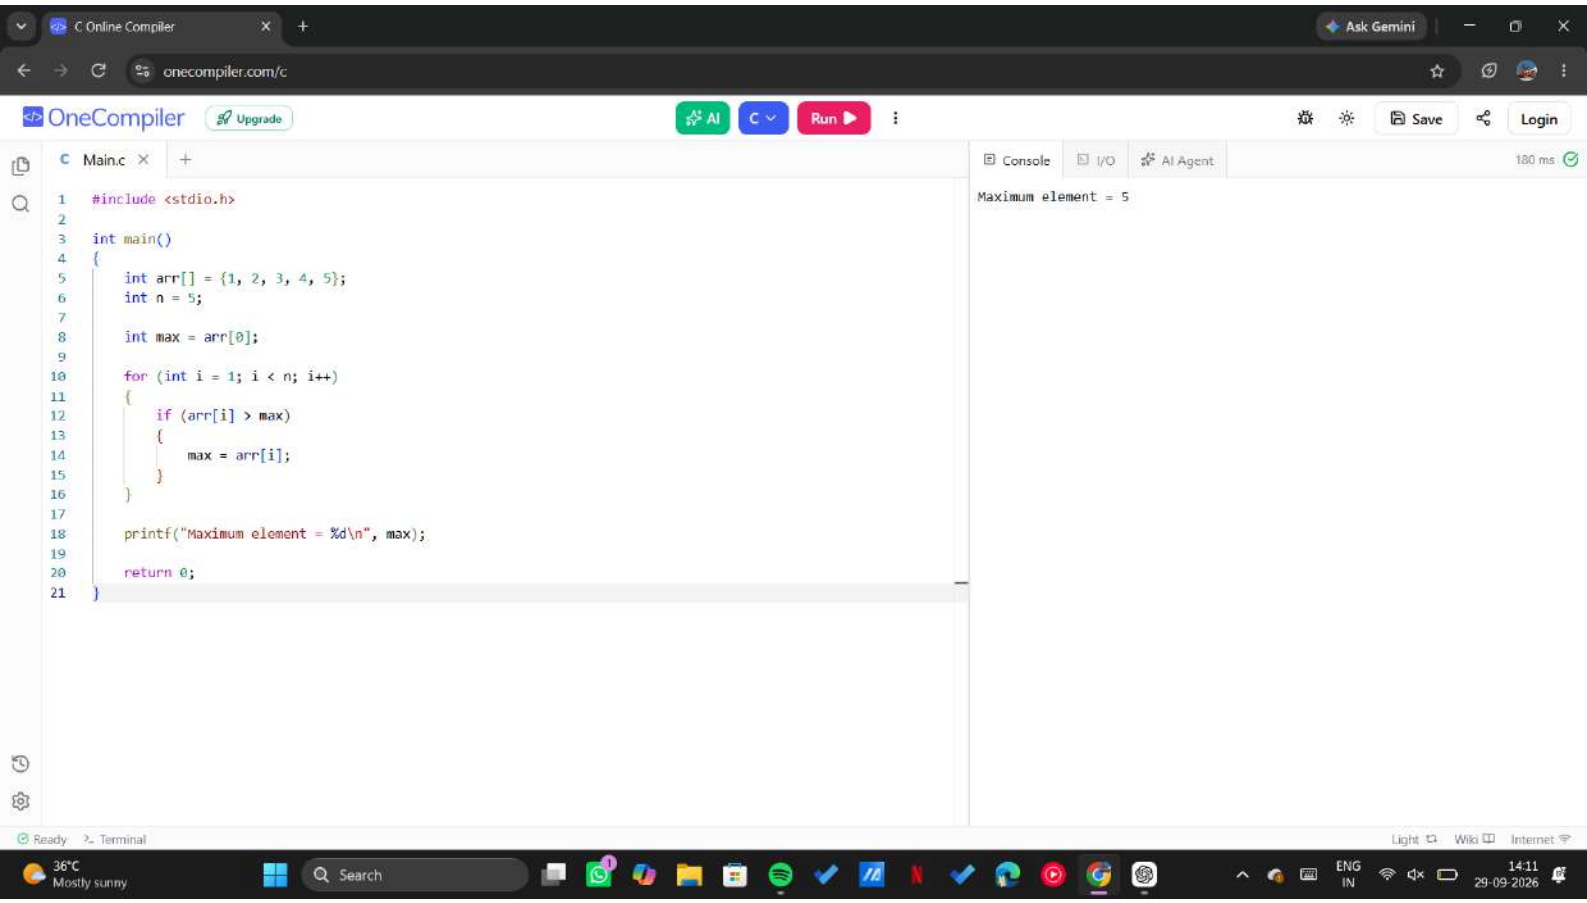
            // If it is a new element
            if (found == 0)
            {
                seen[seenCount] = nums[j];
                seenCount++;
                distinct++;
            }

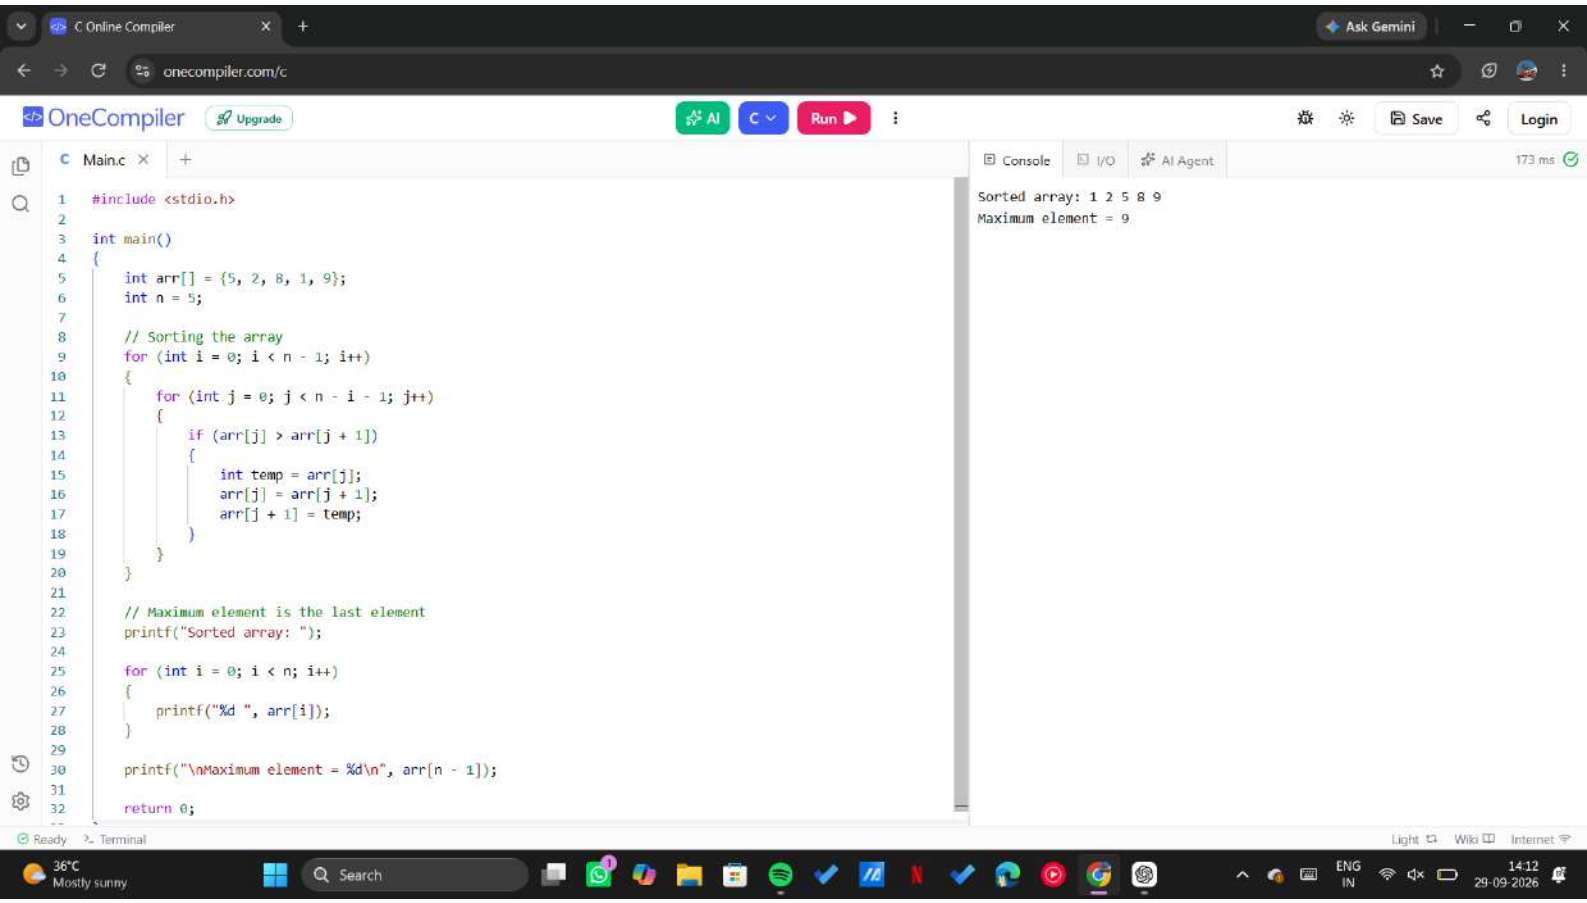
            // Add square of distinct count
            answer = answer + (distinct * distinct);
        }
    }

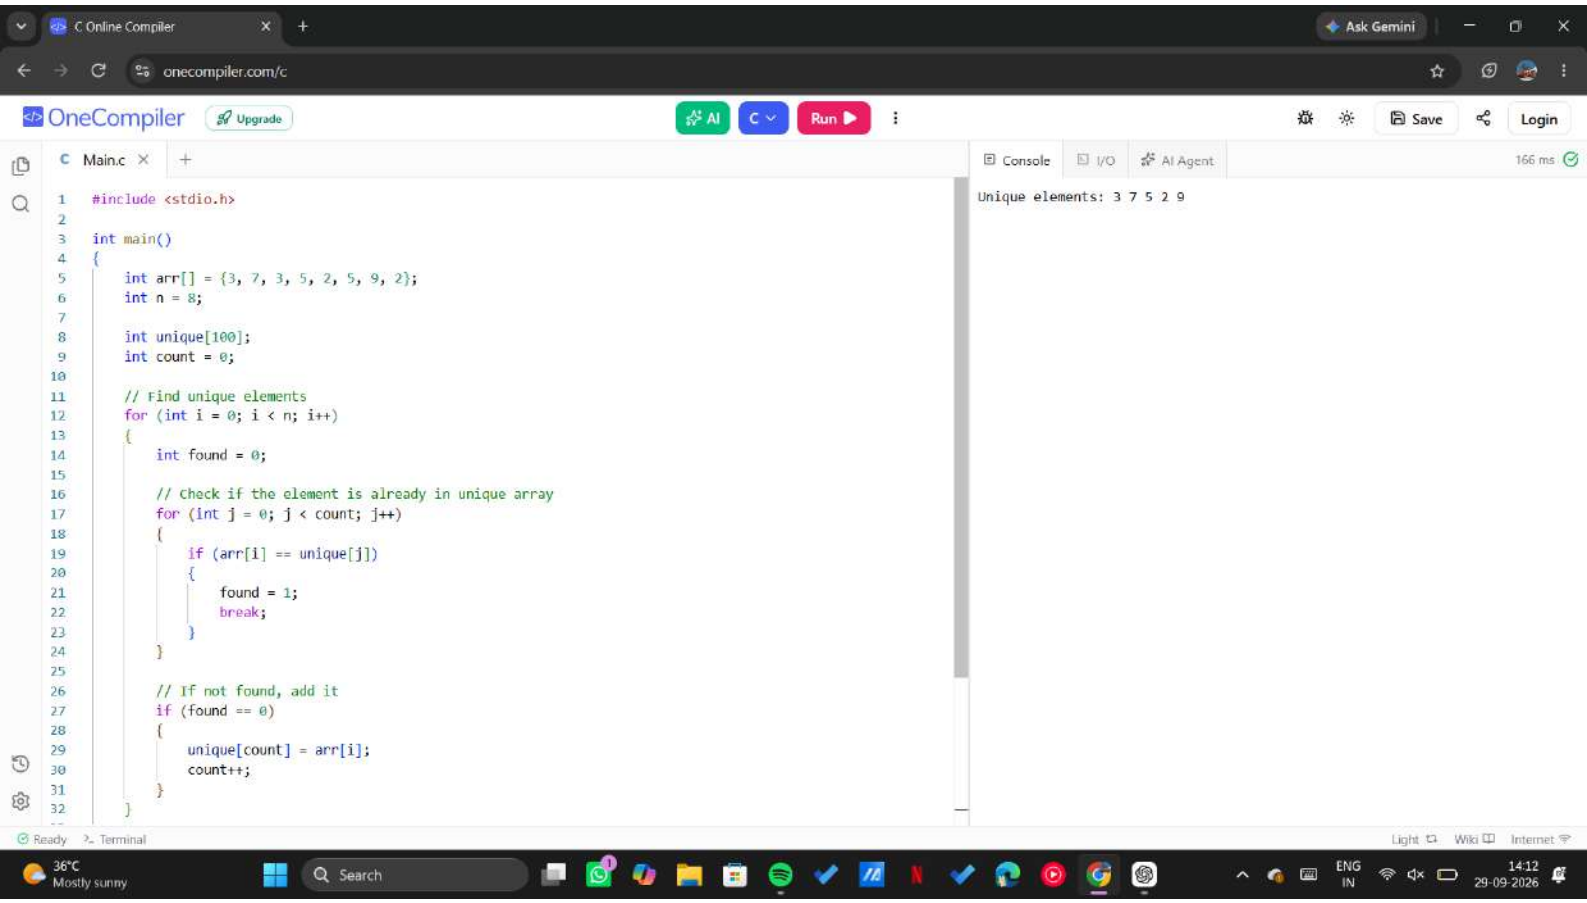
    printf("Answer = %d\n", answer);

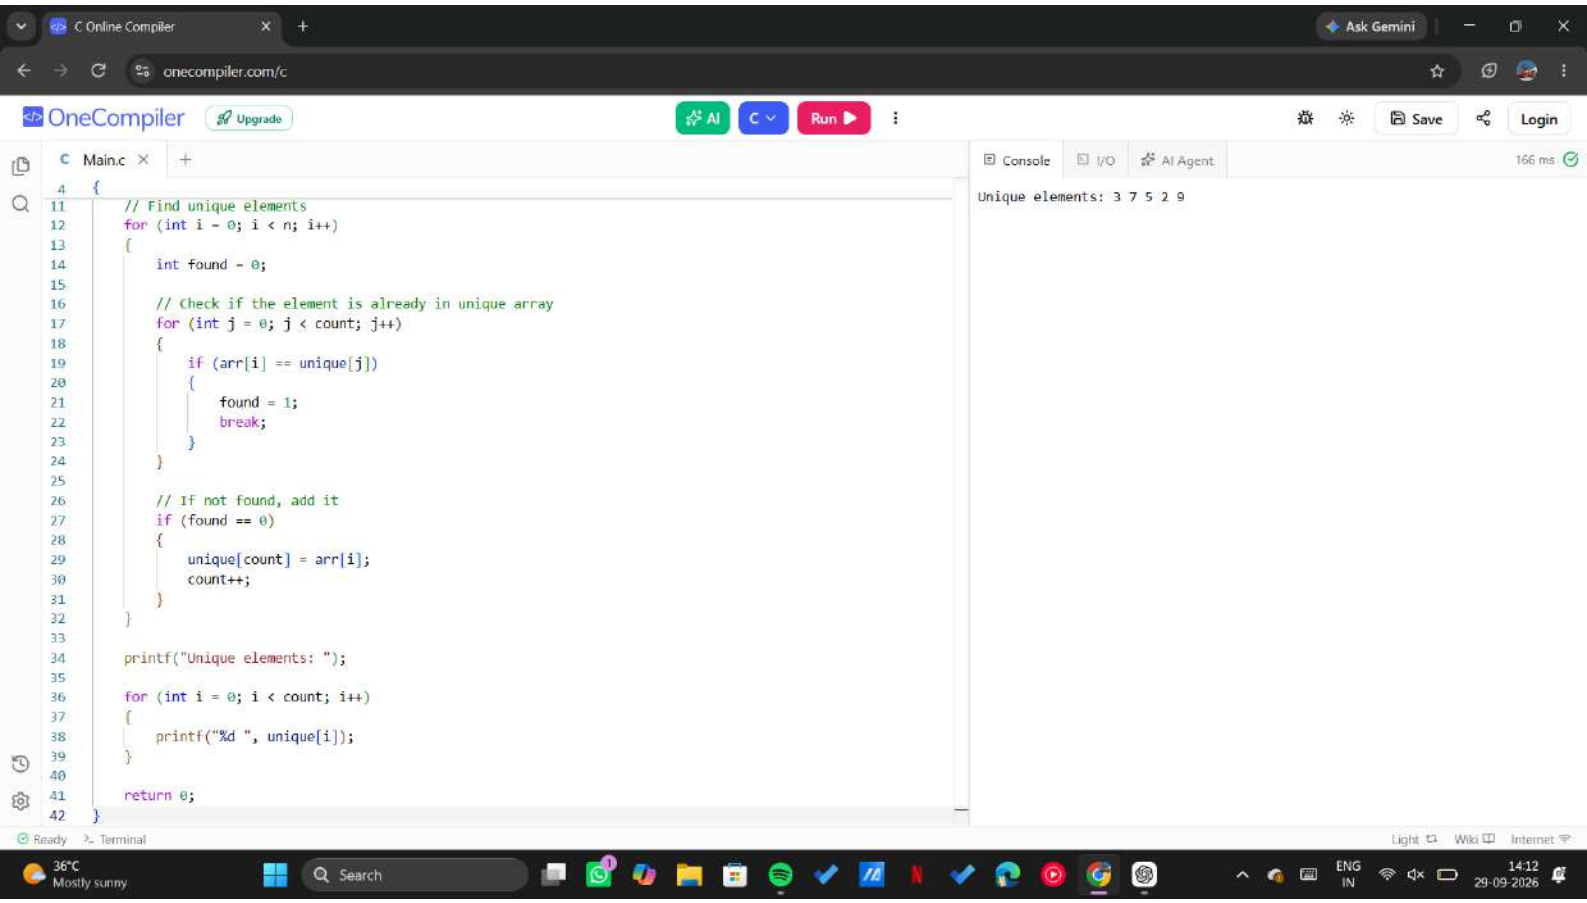
    return 0;
}
```


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
175 ms
#include <stdio.h>
int main()
{
int nums[] = {3, 1, 2, 2, 2, 1, 3};
int n = 7;
int k = 2;
int count = 0;
for (int i = 0; i < n; i++)
{
for (int j = i + 1; j < n; j++)
{
if (nums[i] == nums[j] && (i * j) % k == 0)
{
count++;
}
}
}
printf("Number of valid pairs = %d\n", count);
return 0;
}
Number of valid pairs = 4
Ready
Terminal
Light
Wiki
Internet
36°C
Mostly sunny
Search
ENG
IN
14:10
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
180 ms
#include <stdio.h>
int main()
{
int arr[] = {1, 2, 3, 4, 5};
int n = 5;
int max = arr[0];
for (int i = 1; i < n; i++)
{
if (arr[i] > max)
{
max = arr[i];
}
}
printf("Maximum element = %d\n", max);
return 0;
}
Maximum element = 5
Ready
Terminal
Light
Wiki
Internet
36°C
Mostly sunny
Search
ENG
IN
14:11
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
173 ms
#include <stdio.h>
int main()
{
int arr[] = {5, 2, 8, 1, 9};
int n = 5;
// Sorting the array
for (int i = 0; i < n - 1; i++)
{
for (int j = 0; j < n - i - 1; j++)
{
if (arr[j] > arr[j + 1])
{
int temp = arr[j];
arr[j] = arr[j + 1];
arr[j + 1] = temp;
}
}
}
// Maximum element is the last element
printf("Sorted array: ");
for (int i = 0; i < n; i++)
{
printf("%d ", arr[i]);
}
printf("\nMaximum element = %d\n", arr[n - 1]);
return 0;
Sorted array: 1 2 5 8 9
Maximum element = 9
Ready
Terminal
Light
Wiki
Internet
36°C
Mostly sunny
Search
ENG
IN
14:12
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
166 ms
#include <stdio.h>
int main()
{
int arr[] = {3, 7, 3, 5, 2, 5, 9, 2};
int n = 8;
int unique[100];
int count = 0;
// Find unique elements
for (int i = 0; i < n; i++)
{
int found = 0;
// Check if the element is already in unique array
for (int j = 0; j < count; j++)
{
if (arr[i] == unique[j])
{
found = 1;
break;
}
}
// If not found, add it
if (found == 0)
{
unique[count] = arr[i];
count++;
}
}
Unique elements: 3 7 5 2 9
Ready
Terminal
Light
Wiki
Internet
36°C
Mostly sunny
Search
ENG
IN
14:12
29-09-2026




```c
{
    // Find unique elements
    for (int i = 0; i < n; i++)
    {
        int found = 0;

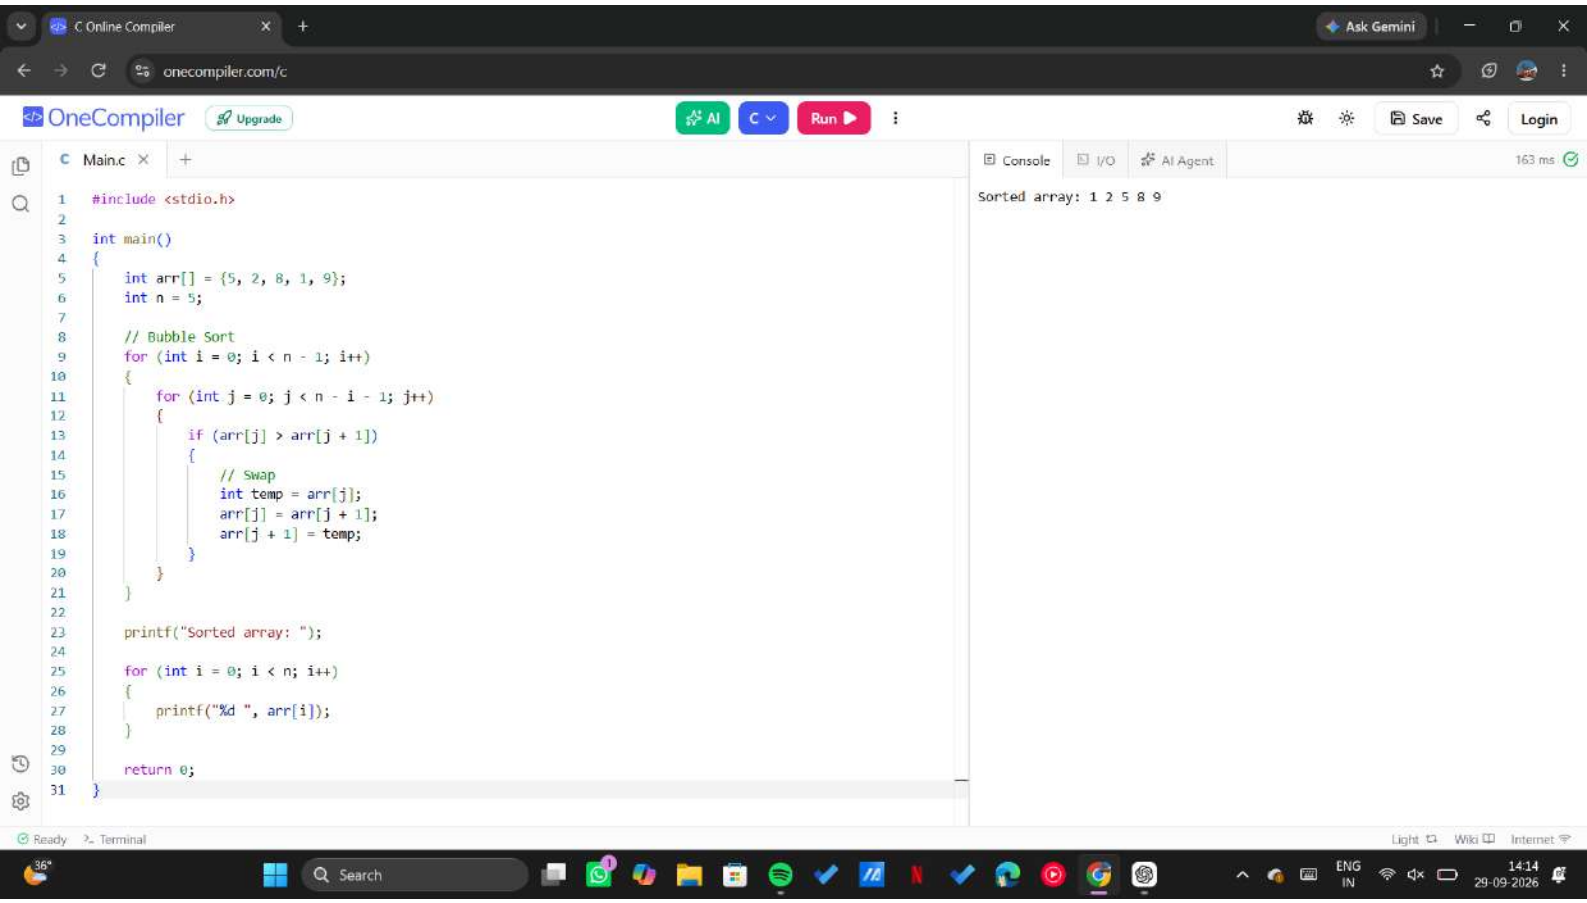
        // Check if the element is already in unique array
        for (int j = 0; j < count; j++)
        {
            if (arr[i] == unique[j])
            {
                found = 1;
                break;
            }
        }

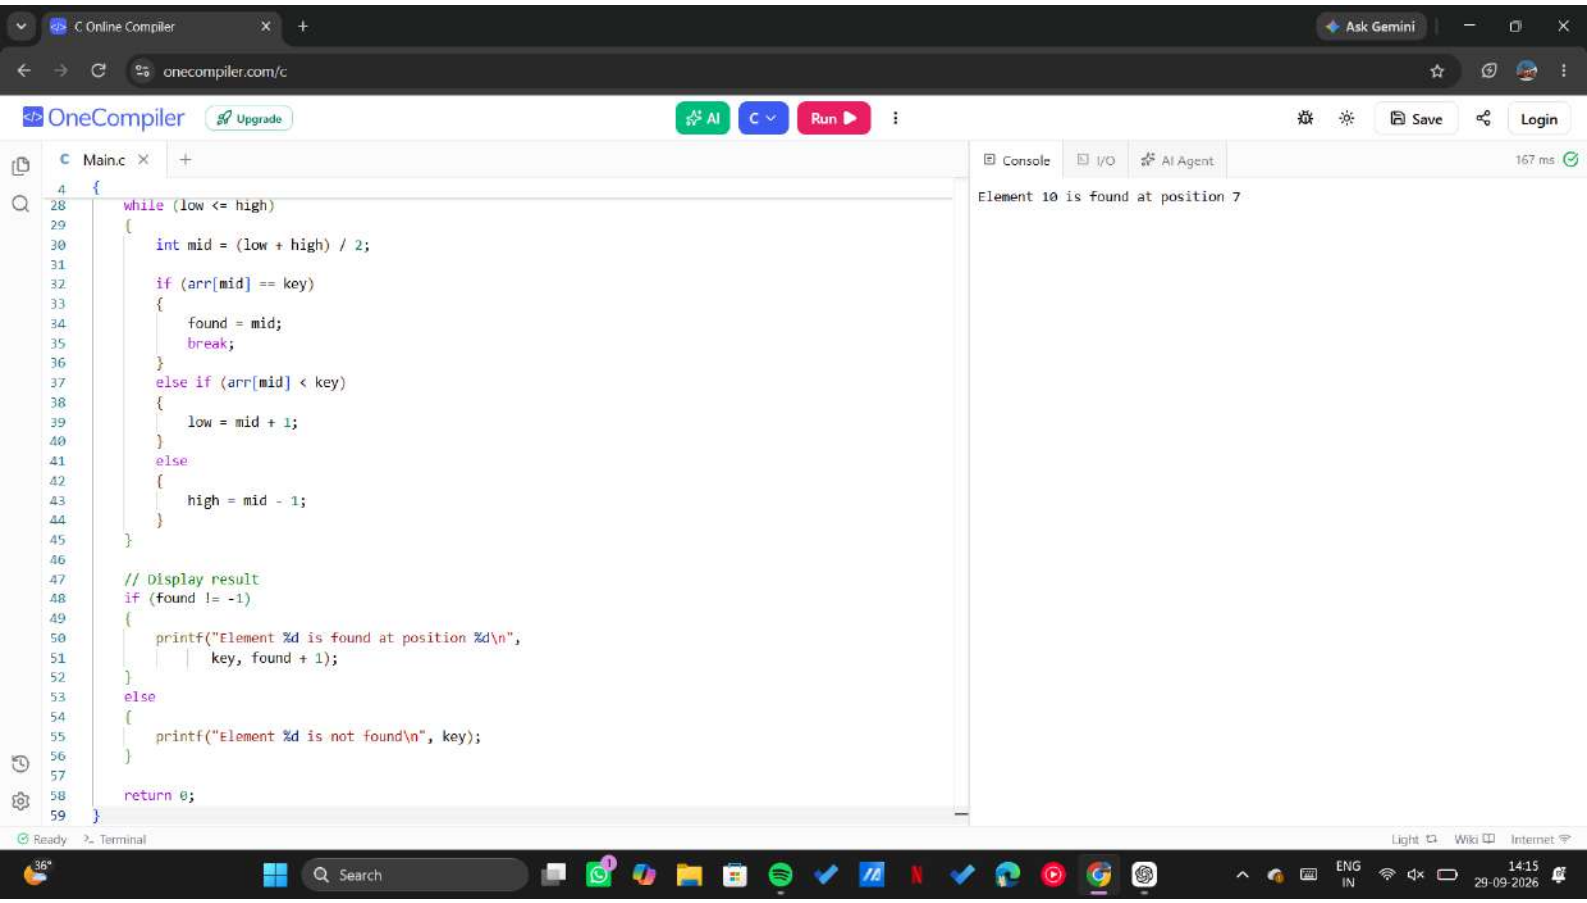
        // If not found, add it
        if (found == 0)
        {
            unique[count] = arr[i];
            count++;
        }
    }

    printf("Unique elements: ");

    for (int i = 0; i < count; i++)
    {
        printf("%d ", unique[i]);
    }

    return 0;
}
```


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
163 ms
#include <stdio.h>
int main()
{
int arr[] = {5, 2, 8, 1, 9};
int n = 5;
// Bubble Sort
for (int i = 0; i < n - 1; i++)
{
for (int j = 0; j < n - i - 1; j++)
{
if (arr[j] > arr[j + 1])
{
// Swap
int temp = arr[j];
arr[j] = arr[j + 1];
arr[j + 1] = temp;
}
}
}
printf("Sorted array: ");
for (int i = 0; i < n; i++)
{
printf("%d ", arr[i]);
}
return 0;
}
Sorted array: 1 2 5 8 9
Ready
Terminal
Light
Wiki
Internet
Search
ENG
IN
14:14
29-09-2026




```c
{
    while (low <= high)
    {
        int mid = (low + high) / 2;

        if (arr[mid] == key)
        {
            found = mid;
            break;
        }
        else if (arr[mid] < key)
        {
            low = mid + 1;
        }
        else
        {
            high = mid - 1;
        }
    }

    // Display result
    if (found != -1)
    {
        printf("Element %d is found at position %d\n",
               key, found + 1);
    }
    else
    {
        printf("Element %d is not found\n", key);
    }

    return 0;
}
```

C Online Compiler

Ask Gemini

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>

int main()
{
    int arr[] = {3, 4, 6, -9, 10, 8, 9, 30};
    int n = 8;
    int key = 10;

    // Step 1: Sort the array
    for (int i = 0; i < n - 1; i++)
    {
        for (int j = 0; j < n - i - 1; j++)
        {
            if (arr[j] > arr[j + 1])
            {
                int temp = arr[j];
                arr[j] = arr[j + 1];
                arr[j + 1] = temp;
            }
        }
    }

    // Step 2: Binary Search
    int low = 0;
    int high = n - 1;
    int found = -1;

    while (low <= high)
    {
        int mid = (low + high) / 2;

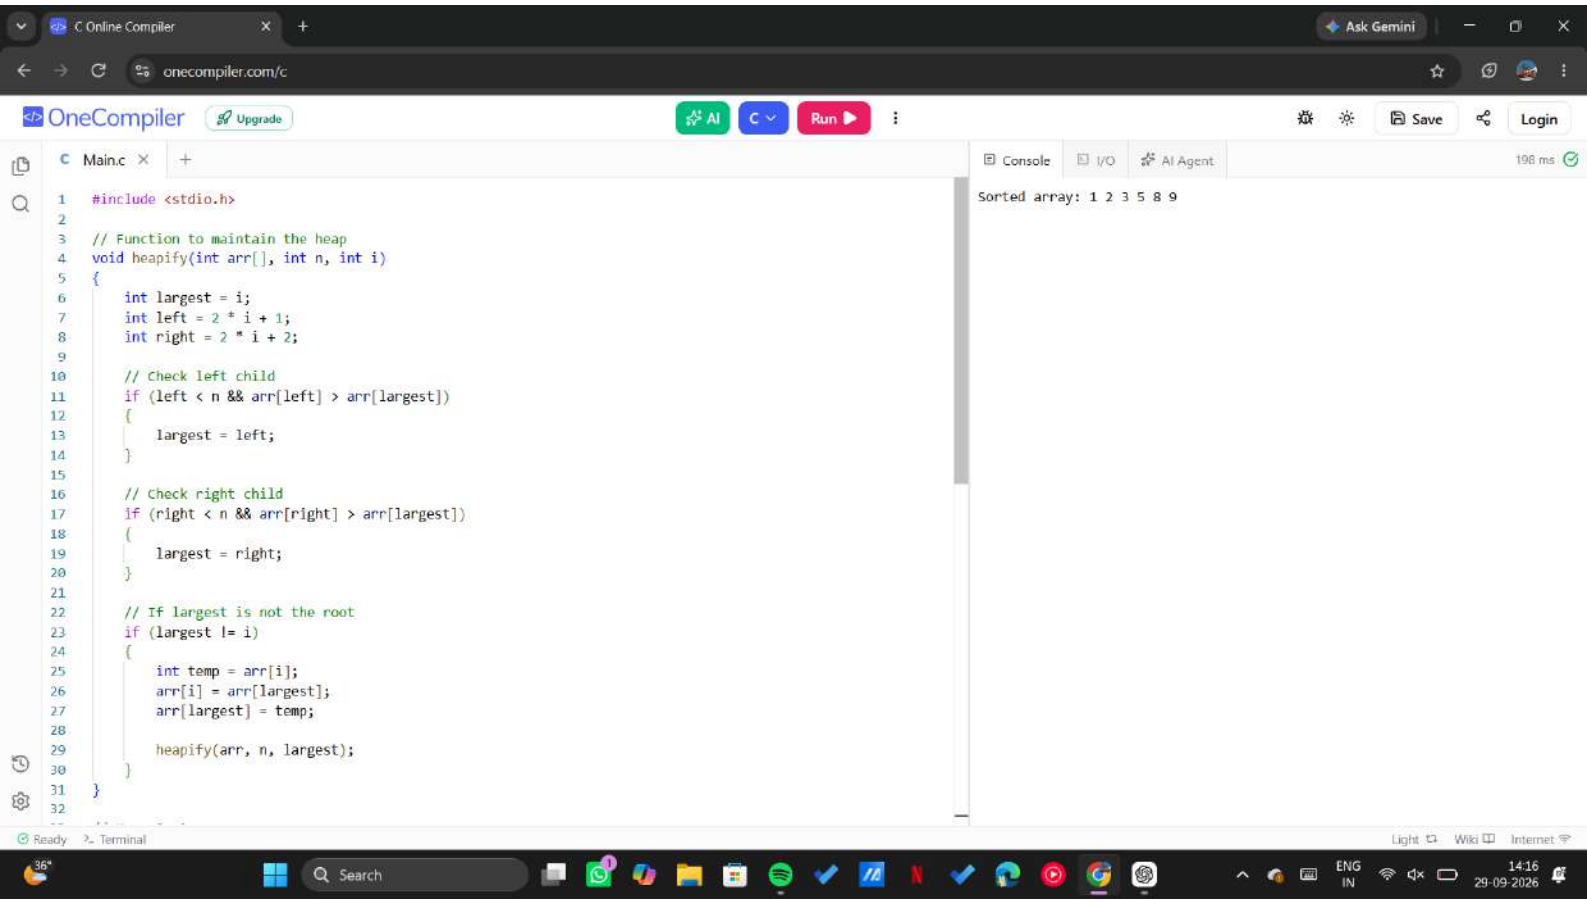
        if (arr[mid] == key)
```

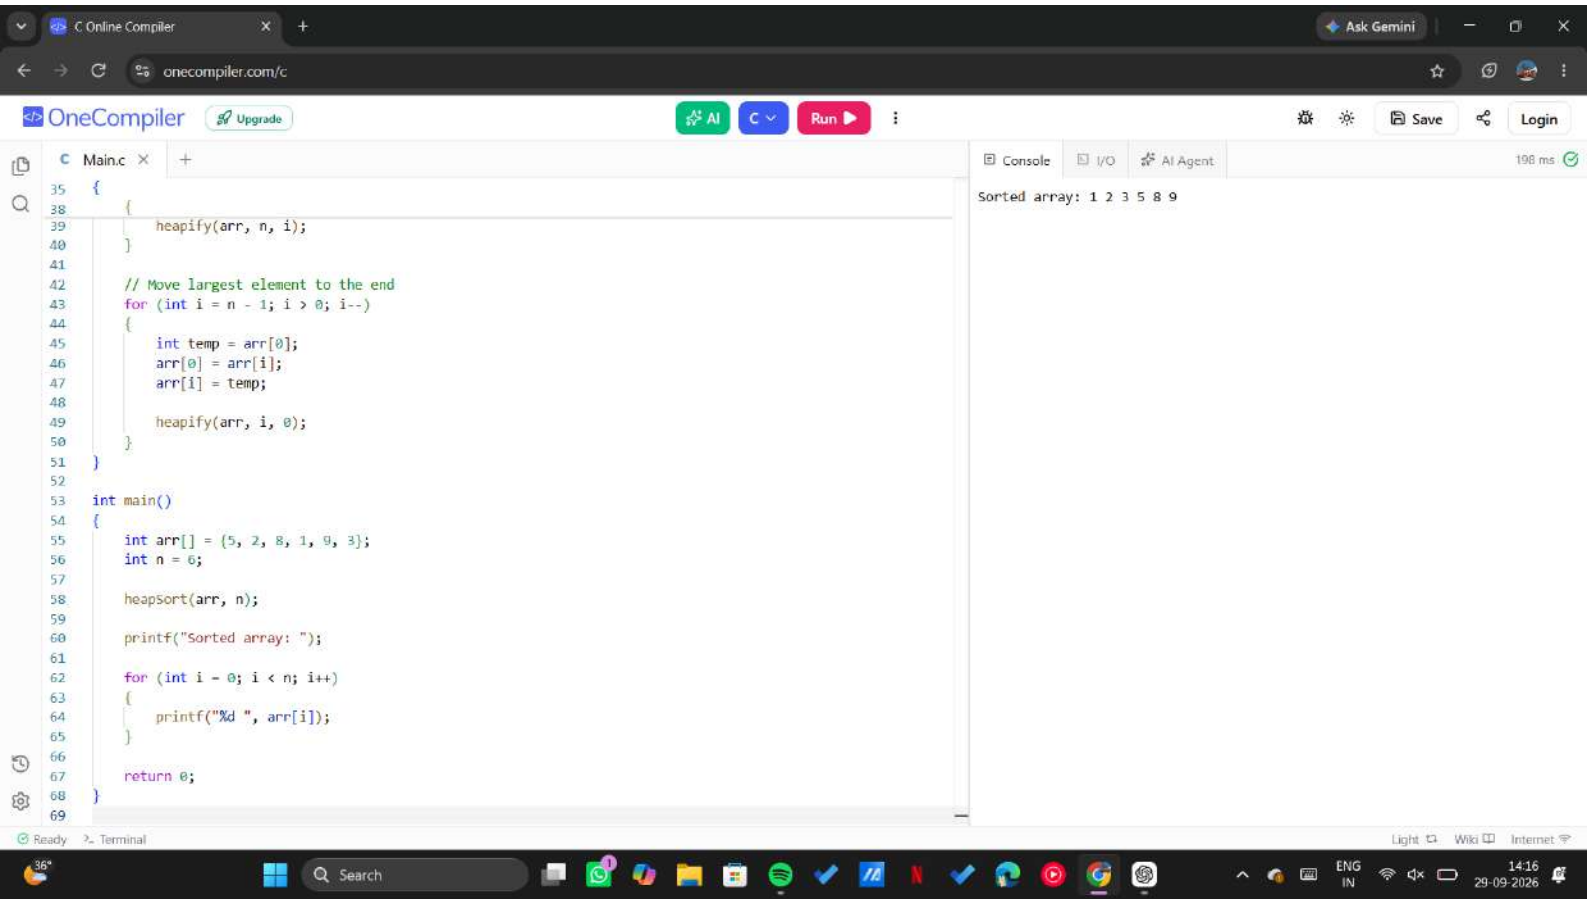
Console | I/O | AI Agent | 167 ms

```
Element 10 is found at position 7
```

Ready | Terminal | Light | Wiki | Internet

36° | Search | ENG IN | 14:15 29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
198 ms
#include <stdio.h>
// Function to maintain the heap
void heapify(int arr[], int n, int i)
{
int largest = i;
int left = 2 * i + 1;
int right = 2 * i + 2;
// Check left child
if (left < n && arr[left] > arr[largest])
{
largest = left;
}
// Check right child
if (right < n && arr[right] > arr[largest])
{
largest = right;
}
// If largest is not the root
if (largest != i)
{
int temp = arr[i];
arr[i] = arr[largest];
arr[largest] = temp;
heapify(arr, n, largest);
}
}
Sorted array: 1 2 3 5 8 9
Ready
Terminal
Light
Wiki
Internet
Search
ENG
IN
14:16
29-09-2026




```
35  {
38      {
39          heapify(arr, n, i);
40      }
41
42      // Move largest element to the end
43      for (int i = n - 1; i > 0; i--)
44      {
45          int temp = arr[0];
46          arr[0] = arr[i];
47          arr[i] = temp;
48
49          heapify(arr, i, 0);
50      }
51  }
52
53  int main()
54  {
55      int arr[] = {5, 2, 8, 1, 9, 3};
56      int n = 6;
57
58      heapSort(arr, n);
59
60      printf("Sorted array: ");
61
62      for (int i = 0; i < n; i++)
63      {
64          printf("%d ", arr[i]);
65      }
66
67      return 0;
68  }
69
```

C Online Compiler

Ask Gemini

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>

int m = 2;
int n = 2;
int N = 2;

// Function to count the number of ways
int countWays(int row, int col, int steps)
{
    // Ball has moved outside the grid
    if (row < 0 || row >= m || col < 0 || col >= n)
    {
        return 1;
    }

    // No steps left and still inside the grid
    if (steps == 0)
    {
        return 0;
    }

    // Move in 4 directions
    int up = countWays(row - 1, col, steps - 1);
    int down = countWays(row + 1, col, steps - 1);
    int left = countWays(row, col - 1, steps - 1);
    int right = countWays(row, col + 1, steps - 1);

    return up + down + left + right;
}

int main()
{
```

Console | I/O | AI Agent | 180 ms

```
Number of ways = 6
```

Ready | Terminal | Light | Wiki | Internet

36° | Search | ENG IN | 14:17 29-09-2026

C Online Compiler

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
{
    // Ball has moved outside the grid
    if (row < 0 || row >= m || col < 0 || col >= n)
    {
        return 1;
    }

    // No steps left and still inside the grid
    if (steps == 0)
    {
        return 0;
    }

    // Move in 4 directions
    int up = countWays(row - 1, col, steps - 1);
    int down = countWays(row + 1, col, steps - 1);
    int left = countWays(row, col - 1, steps - 1);
    int right = countWays(row, col + 1, steps - 1);

    return up + down + left + right;
}

int main()
{
    int startRow = 0;
    int startCol = 0;

    int result = countWays(startRow, startCol, N);

    printf("Number of ways = %d\n", result);

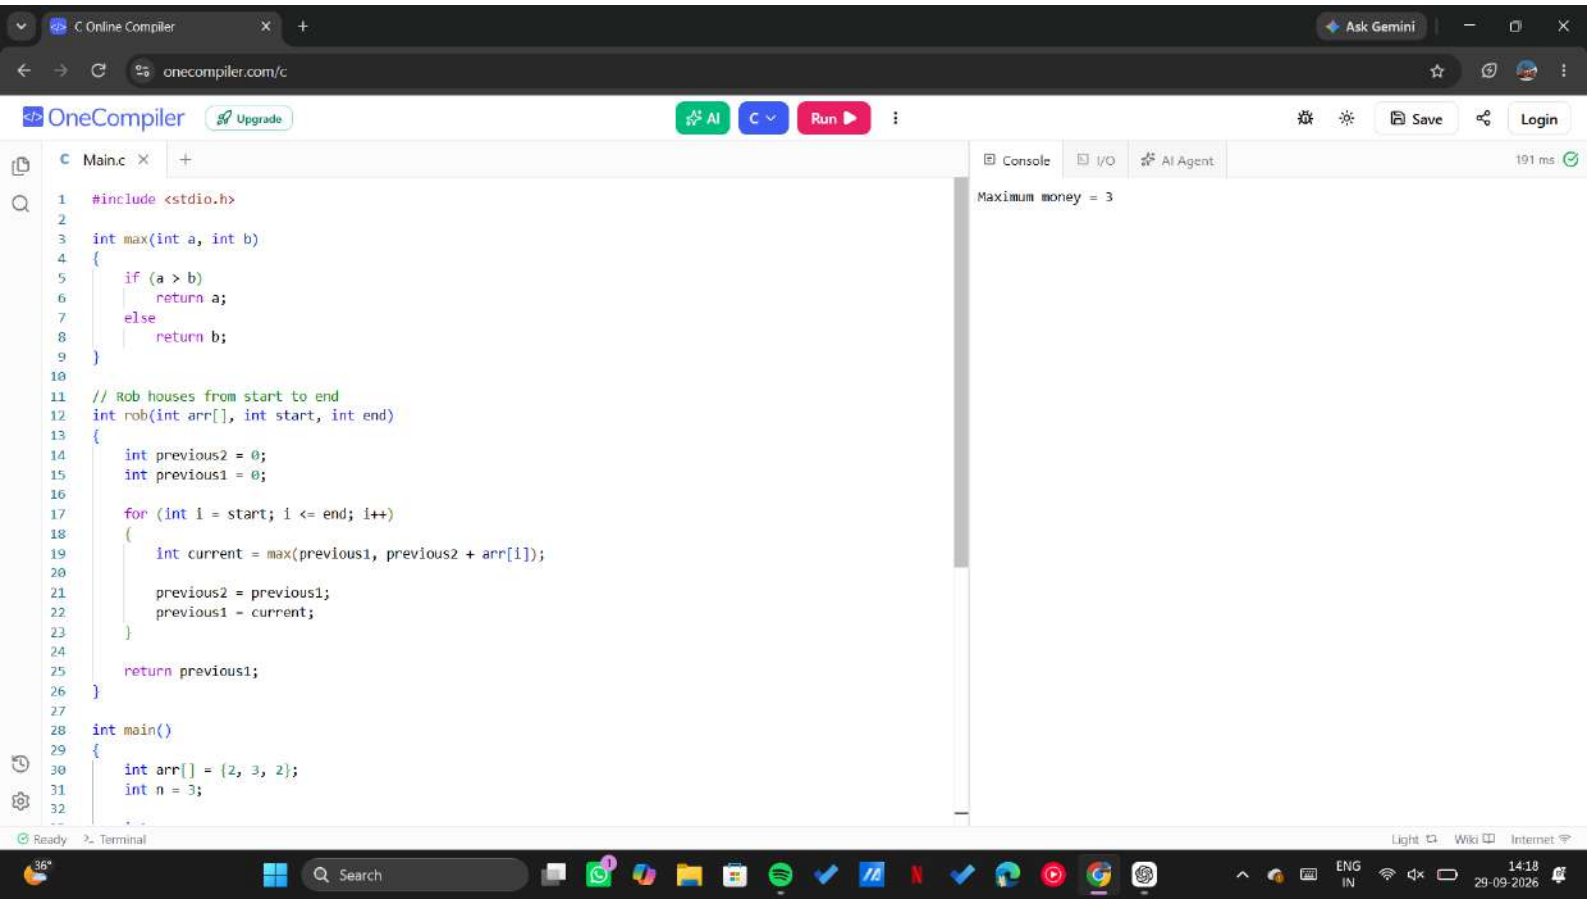
    return 0;
}
```

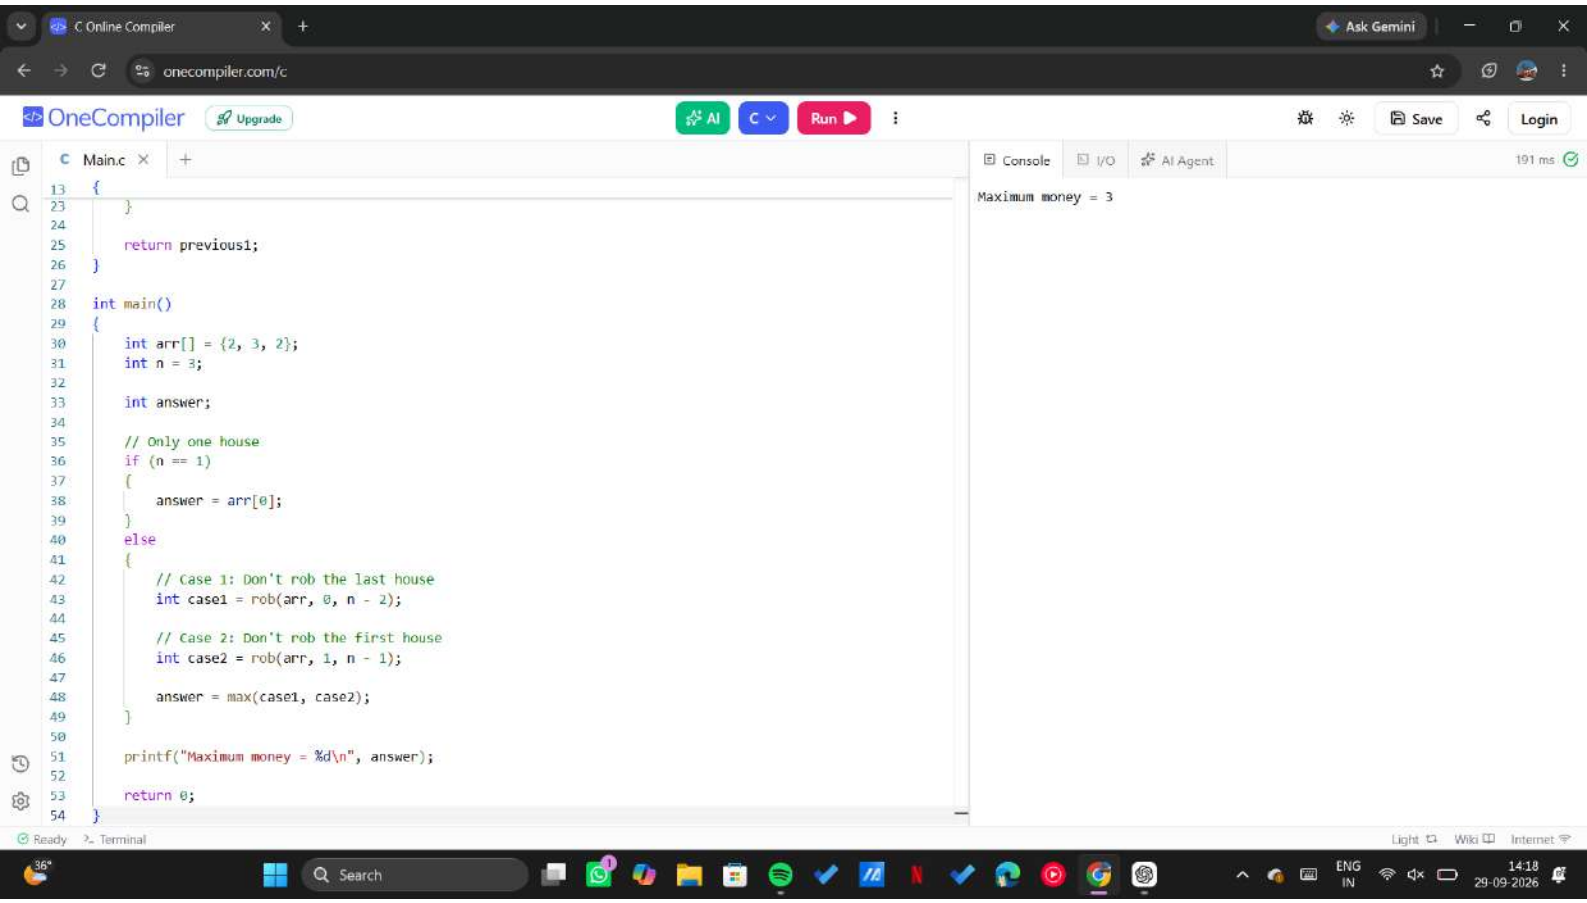
Console | I/O | AI Agent | 180 ms

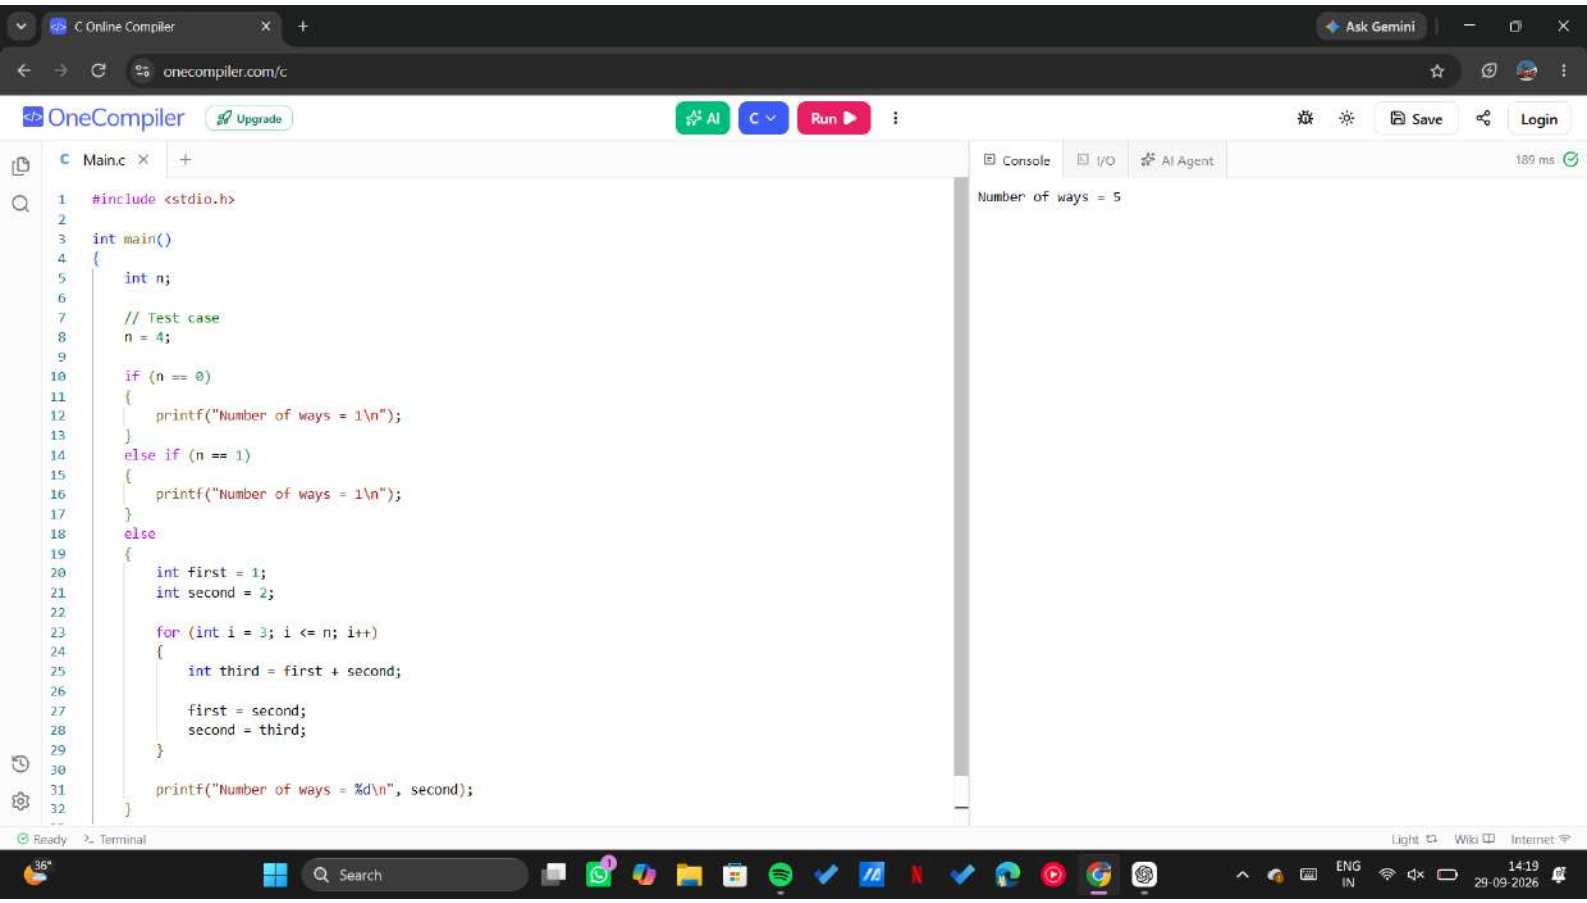
```
Number of ways = 6
```

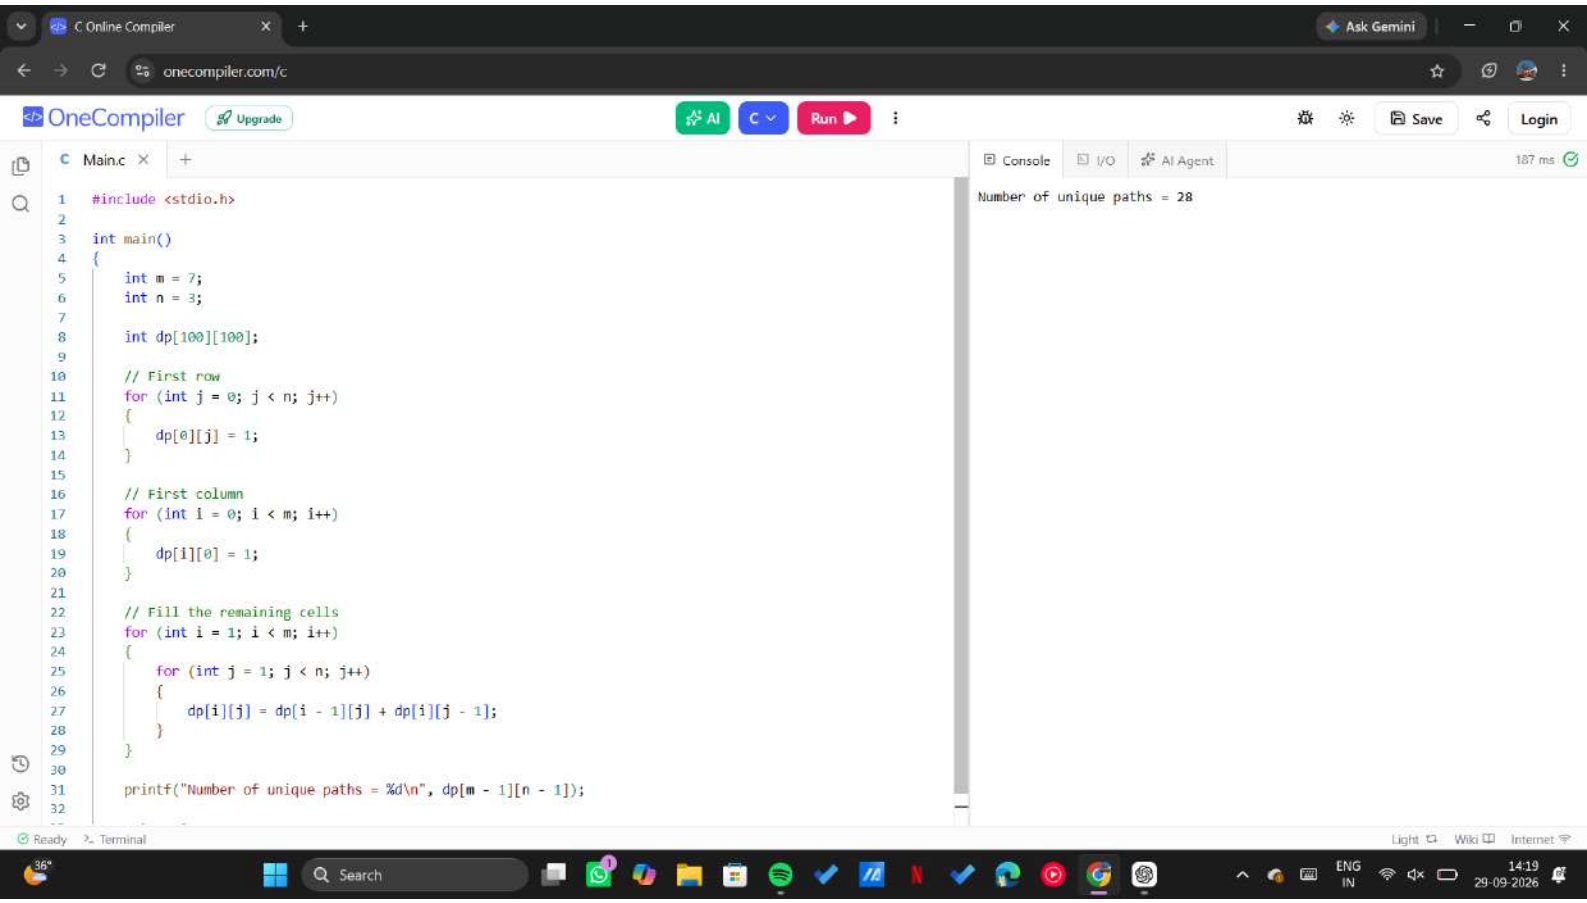
Ready | Terminal | Light | Wiki | Internet

36° | Search | ENG IN | 14:17 29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
191 ms
#include <stdio.h>
int max(int a, int b)
{
if (a > b)
return a;
else
return b;
}
// Rob houses from start to end
int rob(int arr[], int start, int end)
{
int previous2 = 0;
int previous1 = 0;
for (int i = start; i <= end; i++)
{
int current = max(previous1, previous2 + arr[i]);
previous2 = previous1;
previous1 = current;
}
return previous1;
}
int main()
{
int arr[] = {2, 3, 2};
int n = 3;
Maximum money = 3
Ready
Terminal
Light
Wiki
Internet
Search
ENG
IN
14:18
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
191 ms
{
}
return previous1;
}
int main()
{
int arr[] = {2, 3, 2};
int n = 3;
int answer;
// Only one house
if (n == 1)
{
answer = arr[0];
}
else
{
// Case 1: Don't rob the last house
int case1 = rob(arr, 0, n - 2);
// Case 2: Don't rob the first house
int case2 = rob(arr, 1, n - 1);
answer = max(case1, case2);
}
printf("Maximum money = %d\n", answer);
return 0;
}
Maximum money = 3
Ready
Terminal
Light
Wiki
Internet
36°
Search
ENG
IN
14:18
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
189 ms
#include <stdio.h>
int main()
{
int n;
// Test case
n = 4;
if (n == 0)
{
printf("Number of ways = 1\n");
}
else if (n == 1)
{
printf("Number of ways = 1\n");
}
else
{
int first = 1;
int second = 2;
for (int i = 3; i <= n; i++)
{
int third = first + second;
first = second;
second = third;
}
printf("Number of ways = %d\n", second);
}
Number of ways = 5
Ready
Terminal
Light
Wiki
Internet
Search
ENG
IN
14:19
29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
187 ms
#include <stdio.h>
int main()
{
int m = 7;
int n = 3;
int dp[100][100];
// First row
for (int j = 0; j < n; j++)
{
dp[0][j] = 1;
}
// First column
for (int i = 0; i < m; i++)
{
dp[i][0] = 1;
}
// Fill the remaining cells
for (int i = 1; i < m; i++)
{
for (int j = 1; j < n; j++)
{
dp[i][j] = dp[i - 1][j] + dp[i][j - 1];
}
}
printf("Number of unique paths = %d\n", dp[m - 1][n - 1]);
Number of unique paths = 28
Ready
Terminal
Light
Wiki
Internet
Search
ENG
IN
14:19
29-09-2026

C Online Compiler

Ask Gemini

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>
#include <string.h>

int main()
{
    char s[] = "abbxxxxzzy";

    int n = strlen(s);
    int i = 0;

    while (i < n)
    {
        int start = i;

        // Find the end of the group
        while (i + 1 < n && s[i] == s[i + 1])
        {
            i++;
        }

        int end = i;

        // Check if group has 3 or more characters
        if (end - start + 1 >= 3)
        {
            printf("[%d, %d]\n", start, end);
        }

        i++;
    }

    return 0;
}
```

Console | I/O | AI Agent | 167 ms

```
[3, 6]
```

Ready | Terminal | Light | Wiki | Internet

36° | Search | ENG IN | 14:20 29-09-2026

C Online Compiler

Ask Gemini

onecompiler.com/c

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>

int main()
{
    int poured = 1;
    int query_row = 1;
    int query_glass = 1;

    double glasses[100][100] = {0};

    // Pour champagne into the top glass
    glasses[0][0] = poured;

    // Process each row
    for (int i = 0; i < query_row; i++)
    {
        for (int j = 0; j <= i; j++)
        {
            // Calculate overflow
            double overflow = (glasses[i][j] - 1.0) / 2.0;

            if (overflow > 0)
            {
                glasses[i + 1][j] += overflow;
                glasses[i + 1][j + 1] += overflow;
            }
        }
    }

    double answer = glasses[query_row][query_glass];

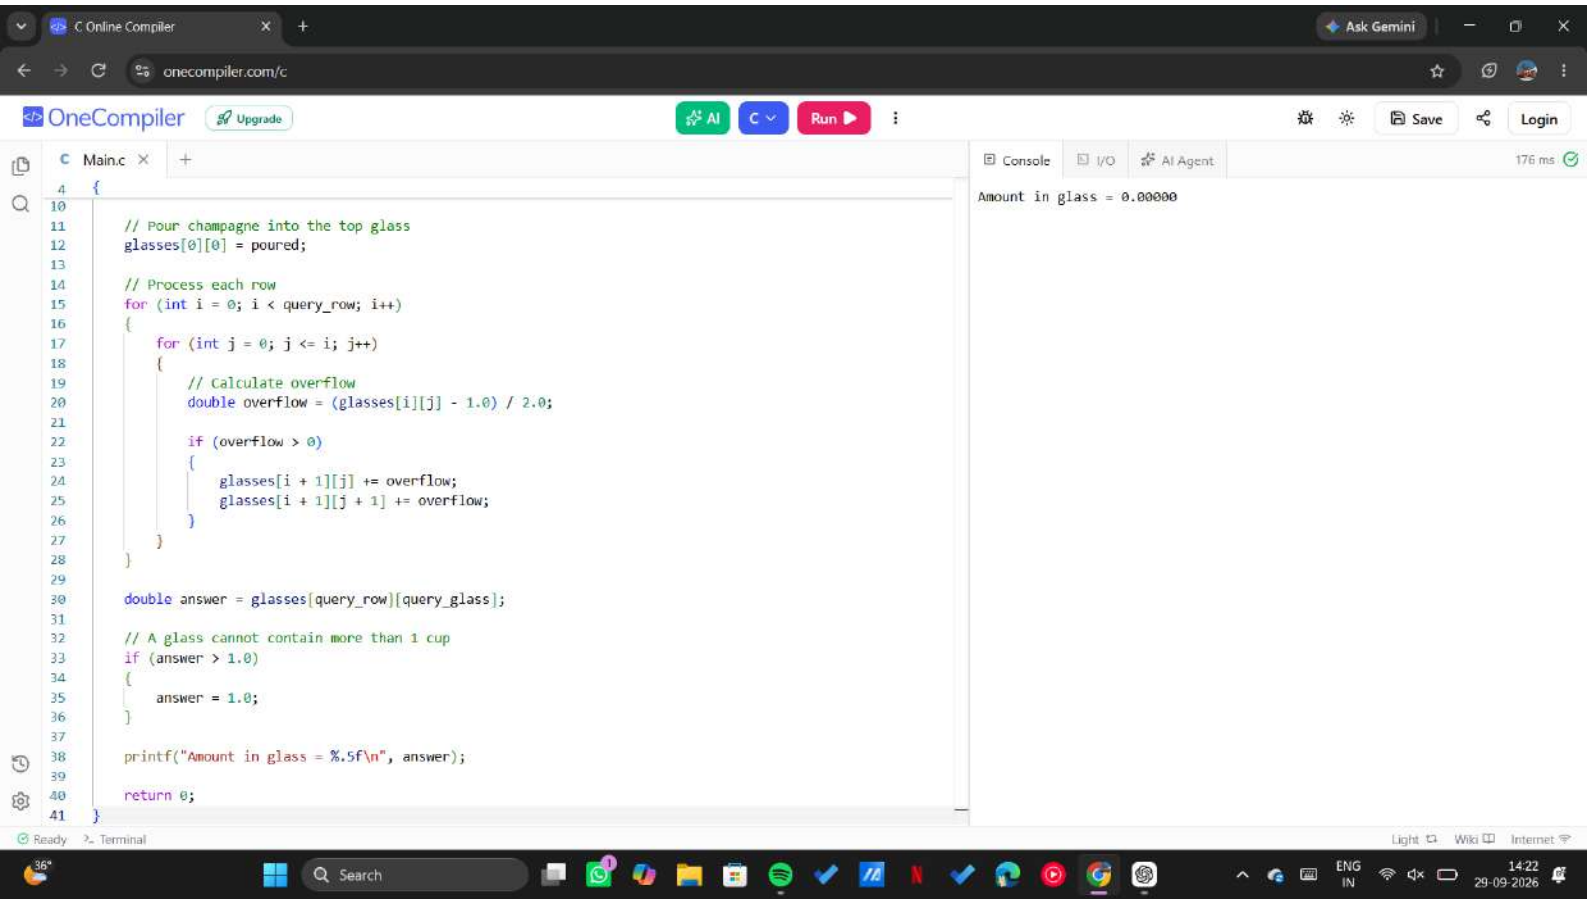
    // A glass cannot contain more than 1 cup
```

Console | I/O | AI Agent | 176 ms

```
Amount in glass = 0.00000
```

Ready | Terminal | Light | Wiki | Internet

36° | Search | ENG IN | 14:22 29-09-2026


C Online Compiler
Ask Gemini
onecompiler.com/c
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
176 ms
{
// Pour champagne into the top glass
glasses[0][0] = poured;
// Process each row
for (int i = 0; i < query_row; i++)
{
for (int j = 0; j <= i; j++)
{
// Calculate overflow
double overflow = (glasses[i][j] - 1.0) / 2.0;
if (overflow > 0)
{
glasses[i + 1][j] += overflow;
glasses[i + 1][j + 1] += overflow;
}
}
}
double answer = glasses[query_row][query_glass];
// A glass cannot contain more than 1 cup
if (answer > 1.0)
{
answer = 1.0;
}
printf("Amount in glass = %.5f\n", answer);
return 0;
}
Amount in glass = 0.00000
Ready
Terminal
Light
Wiki
Internet
Search
ENG
IN
14:22
29-09-2026