

K-CORE DECOMPOSITION OF INTERNET GRAPHS: HIERARCHIES, SELF-SIMILARITY AND MEASUREMENT BIASES

JOSÉ IGNACIO ALVAREZ-HAMELIN

CONICET and Facultad de Ingeniería, Universidad de Buenos Aires
Paseo Colón 850, C1063ACV Ciudad de Buenos Aires, Argentina

LUCA DALL’ASTA

Abdus Salam International Center for Theoretical Physics
Strada Costiera 11, 34014 Trieste, Italy

ALAIN BARRAT

LPT (UMR du CNRS 8627), Université de Paris-Sud, France, and
Complex Networks Lagrange Laboratory, ISI, Torino 10133, Italy

ALESSANDRO VESPIGNANI

School of Informatics, Indiana University, Bloomington, IN 47408, USA, and
Complex Networks Lagrange Laboratory, ISI, Torino 10133, Italy

ABSTRACT. We consider the k -core decomposition of network models and Internet graphs at the autonomous system (AS) level. The k -core analysis allows to characterize networks beyond the degree distribution and uncover structural properties and hierarchies due to the specific architecture of the system. We compare the k -core structure obtained for AS graphs with those of several network models and discuss the differences and similarities with the real Internet architecture. The presence of biases and the incompleteness of the real maps are discussed and their effect on the k -core analysis is assessed with numerical experiments simulating biased exploration on a wide range of network models. We find that the k -core analysis provides an interesting characterization of the fluctuations and incompleteness of maps as well as information helping to discriminate the original underlying structure.

1. Introduction. In recent times, mapping projects of the World Wide Web (WWW) and the physical Internet have offered the first chance to study topology and traffic of large-scale networks. The study of large scale networks, however, faces us with an array of new challenges. The definitions of centrality, hierarchies and structural organizations are in particular hindered by the large size of the systems and the complex interplay of engineering, traffic, geographical, and economical attributes characterizing their construction.

In this paper we propose the k -core decomposition as a graph analysis tool able to highlight interesting structural properties that are not captured by the degree distribution or other simple topological measures. The k -core decomposition [43, 8, 5] consists in identifying particular subsets of the network, called k -cores, each

2000 *Mathematics Subject Classification.* 68R10, 05C90, 68M07.

Key words and phrases. k -core decomposition, Internet maps.

one obtained by a **recursive pruning strategy**. The k -core decomposition therefore provides a probe to study the hierarchical properties of large scale networks, focusing on the network's regions of increasing centrality and connectedness properties. More central cores are indeed more strongly connected, with larger number of possible distinct paths between vertices: this allows to obtain not only more robust routing properties but also a better opportunity to find a path with specific Quality of Service (QoS).

Here we **study a set of basic network models** and the **AS level Internet maps** obtained in two large scale measurement projects using very different techniques. We first characterize the k -core structure of real Internet maps and compare with the structure obtained in the various models. We find that the **k -core structure is extremely different in light tailed and heavy-tailed networks** and is able to clearly discriminate among various models presented in the literature. In this perspective the k -core analysis represents a useful tool in the model validation process. Moreover, any result concerning Internet maps has to consider their incompleteness and the presence of measurements biases. For this reason we also present a **study of the stability of the k -core analysis in the presence of biases and incomplete sampling in all the network models considered**. Our findings indicate that the k -core decomposition's fingerprints allow the discrimination between heterogeneous and homogeneous topologies even after an incomplete sampling: this shows that the signatures observed in the AS Internet maps are qualitatively reliable, even if some biases are unavoidable at a detailed quantitative level.

2. Related work. In the last years, a wealth of studies have focused on the large scale structure and heterogeneities of networked structure of practical interest in social science, critical infrastructures and epidemiology [1, 17, 40]. The Internet has been readily considered as a prototypical example of complex network by the scientific community and starting with the seminal paper by Faloutsos, Faloutsos and Faloutsos [21] an impressive number of papers has dealt with the characterization of its large scale properties and hierarchies [46, 42, 40, 45, 31, 29]. While the initial interest has been focused on the general principles leading to the basic organization features of complex networks, the research activity is now diving into system specific features that distinguish and highlight the various forces and/or engineering at work in each class of networks. This is a particular pressing need in the Internet where even at the Autonomous System (AS) level the large scale self-organization principles are working along with economical and technical constraints, optimization principles and so on [29, 19]. In addition actual Internet maps are not free from errors and measurement biases. For this reason, recent works have been devoted to a better understanding of the possible sources of errors and biases presented by the experimental data [27, 41, 15, 16, 26, 13, 47]. Since Internet maps are typically based on a sampling of routes between sources and destinations (obtained by tools such as **traceroute**), these studies have dealt with simplified models of **traceroute**-like sampling, applied to graphs with various topological properties. They have shown that, except in some peculiar cases [13], the sampling process allows to distinguish qualitatively between networks with strongly different properties (homogeneous vs. heterogeneous), while a quantitative and detailed view of the network may suffer important biases.

Here, we consider the use of the k -core decomposition as a probe for the structure of Internet maps. The k -core decomposition has mostly been used in biologically

related contexts, where it was applied to the analysis of protein interaction networks or in the prediction of protein functions [3, 50]. An interesting application in the area of networking has been provided by Gkantsidis *et al.* [24] and Gaertler *et al.* [23], where the k -core decomposition is used for filtering out peripheral Autonomous Systems (ASes) in the case of Internet maps. The k -core decomposition has also recently been used as a basis for the visualization of large networks, in particular for AS maps [7, 2, 28]. Finally, recent works using the k -core analysis have focused on the analysis of the Internet maps obtained by the DIMES project [32]. In Ref.s [11, 12], an approach based on the k -core decomposition has been used to provide a conceptual and structural model of the Internet, the so-called Medusa model for the Internet. Up to now, no study has however considered the k -core decomposition of the various commonly used models for complex networks, nor compared it to the one of real-world networks. Subramanian *et al.* [45] have proposed to classify ASes in five different levels or “tiers”, and given a method to extract this classification from the AS directed graph. This method can however lead to some biases when the knowledge of the all peer-to-peer relationships is not complete. The k -core decomposition studied in this paper considers on the other hand undirected networks, and yields a finer hierarchy, not based on the commercial relations between vertices, and in which the number of levels is not fixed a priori but depends on the characteristics of the network. It is moreover not restricted to AS maps but can be applied as well for example to Internet router maps or more generally to any real or computer generated graph.

3. k -core decomposition. Let us consider a graph $G = (V, E)$ of $|V| = n$ vertices and $|E| = e$ edges, the definition from [5] of k -cores is the following

Definition 1: A subgraph $H = (C, E|C)$ induced by the set $C \subseteq V$ is a k -core or a core of order k if and only if the degree of every node $v \in C$ induced in H is greater or equal than k (in symbolic form, this reads $\forall v \in C : \text{degree}_H(v) \geq k$), and H is the maximum subgraph with this property.

A k -core of G can therefore be obtained by recursively removing all the vertices of degree less than k , until all vertices in the remaining graph have degree at least k . It is worth remarking that this process is not equivalent to prune vertices of a certain degree. Indeed, a star-like subgraph formed by a vertex with a high degree that connects many vertices with degree one, and connected only with a single edge to the rest of the graph, is going to belong to the first shell no matter how high is the degree of the vertex. We will also use the following definitions

Definition 2: A vertex i has *shell index* k if it belongs to the k -core but not to $(k + 1)$ -core.

Definition 3: A k -shell S_k is composed by all the vertices whose shell index is k . The maximum value k such that S_k is not empty is denoted k_{\max} . The k -core is thus the union of all shells S_c with $c \geq k$.

Definition 4: Each connected set of vertices having the same shell index c is a *cluster* Q^c , where the corresponding set of edges are those connecting vertices of the cluster. Each shell S_c is thus composed by clusters Q_m^c , such that $S_c = \bigcup_{1 \leq m \leq q_{\max}^c} Q_m^c$, where q_{\max}^c is the number of clusters in S_c .

The k -core decomposition therefore identifies progressively internal cores and decomposes the networks layer by layer, revealing the structure of the different k -shells from the outmost one to the most internal one, as sketched in Fig. 1.

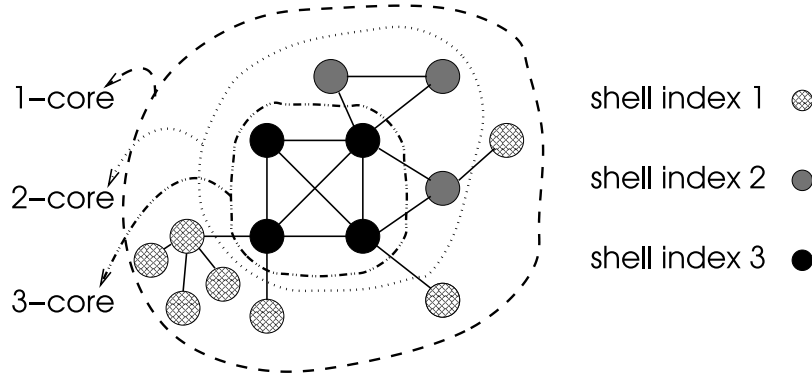


FIGURE 1. Sketch of the k -core decomposition for a small graph. Each closed line contains the set of vertices belonging to a given k -core, while different types of vertices correspond to different k -shells.

It is worth to note that the k -core decomposition can be easily implemented: the algorithm by Batagelj and Zaversnik [6] presents a **time complexity of order $O(n + e)$ for a general graph**. This makes the algorithm very efficient for sparse graphs, where e is of order n .

A very interesting feature of the k -cores concerns their connectivity properties. It has been for example shown experimentally in [12] that the k -cores of the AS map obtained by the DIMES project [32] are k -connected, which means that k disjoint paths are available between any two vertices belonging to the k -core. In fact, for any two vertices u and v of the network, with shell indices respectively c_u and c_v , there are (with some exceptions for small values of c_u and c_v) at least $\min(c_u, c_v)$ disjoint paths between u and v [12]. Such property has important practical consequences since it implies larger and larger robustness and routing capacities for more and more central cores. The knowledge of such capacities identifies a very important hierarchy of ASes that could be taken advantage of by newly created ASes in order to choose to which other ASes to establish connections. We will come back to this point in section 4.1.3.

4. k -core structure of Internet maps and models.

4.1. Internet AS maps. In this section, we inspect Internet maps at the AS level and compare their k -core structure with the insights obtained from models. In order to obtain Internet connectivity information at the AS level it is possible to inspect routing tables and paths stored in each router (passive measurements) or directly ask the network with a software probe (active measurements). In the following we consider data from two recent large scale Internet mapping projects using an active measurement approach. The skitter project at CAIDA [14] has deployed several strategically placed probing monitors using a path probing software. All the data are then centrally collected and merged in order to obtain Internet maps that maximizes the estimate of cross-connectivity. The second set we consider is provided by the Distributed Internet Measurements and Simulations (DIMES) project [32, 44]. At the time where the map was obtained, the project consisted

of more than 5,000 measuring agents performing Internet measurements such as **traceroute** and **ping**. Table 1 displays a summary of the basic properties of the considered Internet maps. We have also investigated Internet maps obtained from the Oregon Routeviews project [38] (not shown), with very similar results. In the following we show how the application of the k -core decomposition can shed light on important hierarchical properties of Internet graphs, focusing on the AS maps obtained by each project in 2005.

The first observation about the structure of the k -cores is that they remain connected. This is not a priori an obvious fact since one can easily imagine networks whose k -core decomposition yields several connected components corresponding, *e.g.* to various communities. Instead, each decomposition step is just *peeling* the network leaving connected the inner part of it, showing a high hierarchical structure, *i.e.* the most connected part of the network is also the most central. Figure 2 displays the size in terms of vertices of each k -shell as a function of its index. As for RSF or BRITE networks (see section 4.2), power-law like shapes are obtained. Important fluctuations appear at large k , which is not very surprising since such shells of large index are relatively small, except for the most central core which contains 50 vertices at $k_{max} = 26$ and 82 vertices at $k_{max} = 39$ for CAIDA and DIMES, respectively. Such a structure has also been observed in the independent study of [12].

source	n	e	$\langle d \rangle$	d_{max}	k_{max}
CAIDA, 2005/04	8542	25492	5.97	1171	26
DIMES, 2005/05	20455	61760	6.04	2800	39

TABLE 1. Main properties of the Internet maps considered in the present study: number of vertices n and of edges e , average degree $\langle d \rangle$, maximum degree d_{max} and maximum shell index k_{max} .

Interestingly, a much larger k_{max} is obtained for the DIMES AS map than for the CAIDA one. It is likely that such discrepancy is linked to the diversity of the exploration methods. The maximum core depends indeed largely on the amount of discovered edges and lateral connectivity. The set of “observers” is 22 for CAIDA but more than 5,000 for DIMES. It is therefore reasonable that the latter has more probability to discover edges, and therefore a larger value of k_{max} .

4.1.1. Self-similarity. The properties of the successive k -cores of Internet maps can be studied by considering their degree distributions and correlation properties.

Figure 3 shows the cumulative degree distribution for the first k -cores, for the various AS maps. Strikingly, the shape of the distribution, *i.e.* an approximate power-law, is not affected by the decomposition. This is illustrated by the fact that the data for the various distributions collapse on top of each other, once the degree is rescaled by the average degree of the k -core. Note that in Fig. 3, as in the following figures, we do not show data for *all* the cores, but only for a representative set of k values, chosen as a function of the maximum k -core. Figure 3 clearly shows how the exponent of the power-law is robust across the various k -cores, although the range of variation of the degree decreases. In other words, each core conserves a broad degree distribution: AS with significantly different number of neighbors are present in each core or hierarchy level.

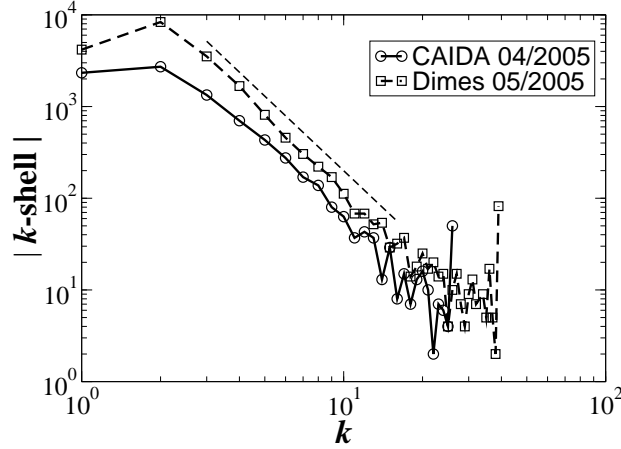


FIGURE 2. Shell size as a function of their index for the AS maps. The dashed line is a power-law $\propto k^{-2.7}$.

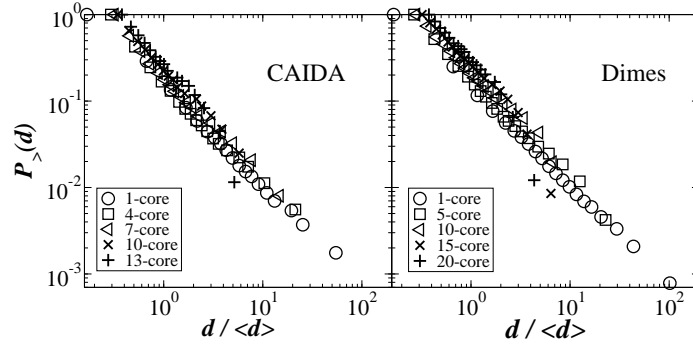


FIGURE 3. Rescaled cumulative degree distributions of some k -cores of the AS Internet maps. The degree is normalized by the corresponding average degree $\langle d \rangle$ in each k -core. The shapes of the distributions are preserved by the successive pruning, pointing to a self-similar behavior of the successive k -cores.

In order to better characterize and check this self-similarity, we have computed also the two and three points correlation functions of the various k -cores. A useful measure to quantify correlations between the degrees of neighboring vertices is the *average degree of nearest neighbors* $d_{nn}(d)$ of vertices of degree d [39]:

$$d_{nn}(d) = \frac{1}{n_d} \sum_{j/d_j=d} \frac{1}{d_j} \sum_{i \in V(j)} d_i, \quad (1)$$

where $V(j)$ is the set of the d_j neighbors of vertex j and n_d the number of vertices of degree d . This last quantity is related to the correlations between the degree of connected vertices since on the average it can be expressed as

$$d_{nn}(d) = \sum_{d'} d' P(d'|d), \quad (2)$$

where $P(d'|d)$ is the conditional probability that a vertex with degree d is connected to a vertex with degree d' . If degrees of neighboring vertices are uncorrelated, $P(d'|d)$ depends only on d' and thus $d_{nn}(d)$ is a constant. When correlations are present, two main classes of possible correlations have been identified: *assortative* behavior if $d_{nn}(d)$ increases with d , which indicates that large degree vertices are preferentially connected with other large degree vertices, and *disassortative* if $d_{nn}(d)$ decreases with d [37]. From a routing point of view, a disassortative behavior corresponds to a network structure where vertices with small degree are preferentially connected to the hubs (i.e., large degree vertices). A second, and often studied, relevant quantity is the *clustering coefficient* [48] that measures the local group cohesiveness and is defined for any vertex j as the fraction of connected neighbors of j

$$cc_j = 2 \cdot n_{\text{link}} / (d_j(d_j - 1)) , \quad (3)$$

where n_{link} is the number of links between the d_j neighbors of j . The study of the clustering spectrum $cc(d)$ of vertices of degree d , defined as

$$cc(d) = \frac{1}{n_d} \sum_{j/d_j=d} cc_j , \quad (4)$$

allows, *e.g.* to uncover hierarchies in which low degree vertices belong generally to well interconnected communities (high clustering coefficient), while hubs connect many vertices that are not directly connected (small clustering coefficient). Large clustering has a clear relevance for routing purposes since it indicates the presence of alternative paths thanks to the presence of many triangles: if a link from a vertex u to a neighbor v goes down, the message can be sent from u to v through a common neighbor.

Figure 4 shows that not only the degree distribution but also the clustering and correlations structures of the Internet maps are essentially preserved as the more and more external parts of the network are pruned. We note however that, as also shown in [12], the largest k -cores are no more scale-free: since they are very densely connected, their degree distribution is rather peaked around an average value and their topology is closer to that of a random graph with large average degree.

In summary, the AS networks exhibit a statistical scale invariance with respect to the pruning obtained with the k -cores decomposition for a wide range of k . Indeed, while this decomposition identifies subgraphs that progressively correspond to the most central regions of the network, the statistical properties of these subgraphs are preserved at many levels of pruning. This hints to a sort of global self-similarity for regions of increasing centrality of the network, and to a structure in which each region of the Internet as defined in terms of network centrality has the same properties than the whole network. This is particularly interesting since the properties of the Internet (heterogeneous degree distributions, correlations, clustering...) have been up to now studied at the level of the whole map, while one can be interested to restrict the analysis to some particular regions of the map, focusing for example on parts of the network with certain routing capabilities (QoS, failure support). At a general level, the k -core decomposition appears therefore as a suitable way to define a pruning procedure equivalent to a scale-change preserving the statistical properties of graphs while focusing on their more and more connected parts.

4.1.2. Shell index and centrality. The identification of the most central vertices is a major issue in networks characterization [22]. While a first intuitive and immediate

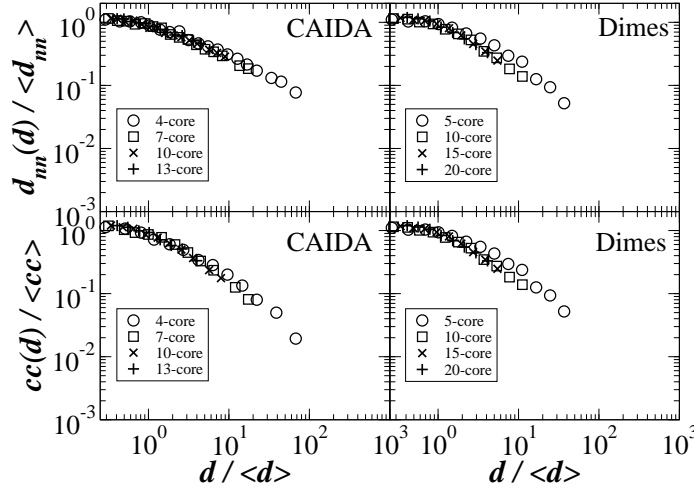


FIGURE 4. Average nearest neighbor (top) and rescaled clustering spectrum (bottom) as a function of the degree for some k -cores of the AS Internet maps. All the quantities are rescaled by the corresponding averages in each k -core. The collapse of the various curves confirm the self-similar structure of the k -cores.

measure of the centrality of vertices is given by their degree, more refined investigations are needed in order to characterize the real importance of various vertices: for example, some low-degree vertices may be essential because they provide connections between otherwise separated parts of the network. In order to uncover such important vertices, the concept of betweenness centrality (BC) is now commonly used [22, 36]. The betweenness centrality of a vertex v is defined as

$$g(v) = \sum_{s \neq t} \frac{\sigma_{st}(v)}{\sigma_{st}}, \quad (5)$$

where σ_{st} is the number of shortest paths going from s to t and $\sigma_{st}(v)$ is the number of shortest paths from s to t going through v . This definition means that central vertices are part of more shortest paths within the network than peripheral vertices. Moreover, the betweenness centrality gives in transport networks an estimate of the traffic handled by the vertices, assuming that the number of shortest paths is a zero-th order approximation to the frequency of use of a given vertex (*e.g.* the load of an AS), in the case of an *all-to-all* communication.

The k -core decomposition intuitively provides a hierarchy of the vertices based on their shell index that is a combination of local and global properties. (*e.g.*, [50] shows that the shell index is a better criterium for centrality than the degree in protein interaction networks). In this perspective, it becomes very interesting to study the correlation between the degree, the betweenness centrality and the shell index of a vertex in order to quantify the statistical level of consistency of the various measures. We show in Fig. 5 the average betweenness centrality (computed on the original graph) of vertices as a function of their shell index, and the shell index as a function of the degree d . A strong correlation is expected, but the fluctuations observed (given by the errorbars) should not be a surprise: while a low-degree vertex has clearly low shell index, large or medium degree vertices do

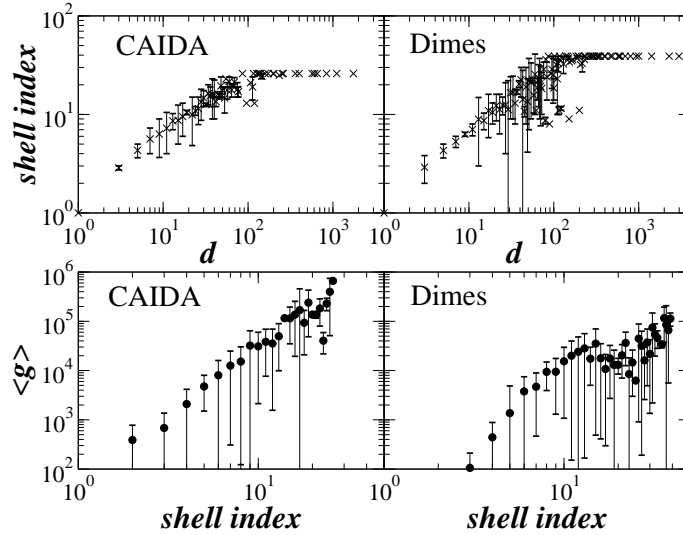


FIGURE 5. Average betweenness centrality as a function of shell index (bottom), and average shell index as a function of the degree (top), for the AS Internet maps. A clear correlation between these quantities is observed, although strong fluctuations are present.

not have necessarily a large shell index. In the AS maps, we observe in fact that all large degree vertices belong to the most central core, while large fluctuations are observed for intermediate degree values. Moreover, the betweenness centrality is a highly non-local quantity which can be large even for small-degree vertices. These quantities are thus pinpointing different kinds of centrality. The shell index appears therefore as a very interesting quantity to uncover central vertices and it has the advantage of a much faster computation time than those required for the betweenness centrality (of order $n^2 \log n$ [9]).

4.1.3. Potential practical implications. The k -core decomposition has interesting immediate applications. First of all, as already mentioned in section 3, it has been shown in ref [12] that each k -core of the DIMES AS map is k -connected, and that the number of disjoint paths between two vertices u and v of this map is bounded from below by the minimum of the shell indices of u and v .

Moreover, it is quite easy to show and understand that similar properties hold for a network under certain assumptions. In particular, if the central core (of shell index k_{max}) of a given network is k_{max} -edge-connected, and if there exists enough edges between the various shells (in particular if any cluster -see Def. 4- of each k -shell is connected to the $k + 1$ -shell by at least k edges), then each k -core of the network turns out to be k -edge connected. We have in fact checked that these conditions are verified for the CAIDA and DIMES maps as well as for the network models under study. Note that k -edge connectivity (*i.e.* the existence of k distinct paths which do not share any common edge) is less restrictive than k -connectivity. In the context of Autonomous Systems and evaluation of routing capacities or of failure possibilities however, it is particularly relevant since a vertex of the AS map represents in fact many different routers, so that different paths may cross at a given AS while being effectively physically disjoint.

Such connectivity properties highlight the fact that the k -core decomposition provides a natural definition for a hierarchy in the network, in which the more central vertices (with larger shell index) have better routing capabilities (*i.e.* they can choose several paths to achieve a certain connection), and each k -core constitutes an ensemble of ASes able to provide a certain QoS, with global larger robustness for larger k .

It is therefore interesting to compare the k -core decomposition with the tiers hierarchy proposed by Subramanian et al. [45]. These two hierarchies have different origins and motivations: on the one hand, the tiers classification is based on the inference of AS commercial relationships; on the other hand, and in a somehow opposite point of view, the k -core decomposition gives a classification of the network's vertices which does not have an a priori fixed number of classes or levels, but which adapts itself to the situation of the network. Moreover, the shell index of a vertex is not fixed once and for all, but may fluctuate in time due to possible connectivity changes (as investigated in the next section). In this aspect, such a hierarchy provides very relevant information about the state of the network at a given time. While the actual routing protocols do not take advantage of such information, one could imagine that future routing protocols may be able to exploit it.

We finally note that the use of the k -core decomposition in order to find a certain hierarchy of connectedness properties is not limited to the analysis of AS maps: it can as well be applied to other kinds of Internet maps, for example at the router level, or to any communication or transportation network.

4.2. k -core structure of network models. In order to better understand the properties of the k -core decomposition of networks and use it as a model validation tool, we also apply this technique to a set of well known and commonly used models of networks, whose main characteristics are summarized in Table 2. In the following, we will consider models representative of two large classes of networks. The first refers to the so-called statistically *homogeneous* networks. The distributions characterizing the degree, betweenness, and other statistical quantities have functional forms with fast decaying or “light” tails such as Gaussian or Poisson distributions. The second class concerns networks with statistically *heterogeneous* connectivity and structural properties usually corresponding to skewed and heavy tailed distributions. For each model, we will present results corresponding to one random instance of the model, and have checked that the highlighted properties do not depend on the particular instance considered.

source	n	e	$\langle d \rangle$	d_{max}	k_{max}
ER	10^5	10^6	20	41	14
BA	$5 \cdot 10^4$	99998	4	642	3
Weibull	10^5	307500	6.15	377	9
RSF $\gamma = 2.3$	97315	293891	6.04	938	22
BRITE	10^5	156145	3.63	433	54
INET 3.0	10000	19676	3.936	984	8

TABLE 2. Main properties of the models considered in the present study: number of vertices n and of edges e , average degree $\langle d \rangle$, maximum degree d_{max} and maximum shell index k_{max} .

4.2.1. *Size of shells.* We first consider for reference the random graph model of Erdős and Rényi (ER) [20], which is the most standard example of graphs with a characteristic value for the degree (the average value $\langle d \rangle$). In this case, the maximum index is clearly related to the average degree $\langle d \rangle$. The vertex degrees have only small fluctuations, thus most vertices belong to the same k -core that is also the highest. Noticeably, the size of the shells is increasing with the index, showing that only few vertices can be considered as peripheral (see Fig. 6), and that the network contains no clear hierarchy between nodes.

A second model we considered is the Barabási-Albert (BA) model [4] that has been put forward to exemplify the concept of preferential attachment and as a paradigm of dynamically evolving networks. In this model, a growing network is constructed according to the preferential attachment mechanism: each new vertex is connected to m already existing vertices chosen with a probability proportional to their starting degree. This model produces graphs with power-law degree distributions, thus characterized by a very large variety of degree values. On the other hand, this is a toy model that should not be considered as a realistic model in the Internet and indeed the corresponding k -core decomposition is somehow trivial, with only few shells at very small index. The construction mechanism provides a simple explanation. Each new vertex enters the system with degree m , but at the following time steps new vertices may connect to it, increasing its degree. Inverting the procedure, we obtain exactly the k -core decomposition. The minimum degree is m , therefore all shells C_c with $c < m$ are empty. Recursively pruning all vertices of degree m , one first removes the last vertex, then the one added at the preceding step, whose degree is now reduced to its initial value m , and so on, up to the initial vertices which may have larger degree. Hence, all vertices except the initial ones belong to the shell of index m .

Other algorithms are widely used to obtain random graphs with prescribed broad degree distributions. In the literature, different definitions of heavy-tailed like distributions exist. While we do not want to enter the detailed definition, we have considered two classes of such distributions: (i) *scale-free* or Pareto distributions of the form $P(k) \sim k^{-\gamma}$ (RSF), and (ii) Weibull distributions (WEI) $P(k) = (a/c)(k/c)^{a-1} \exp(-(k/c)^a)$. The scale-free distribution has a diverging second moment and therefore virtually unbounded fluctuations, limited only by eventual size-cut-off. The Weibull distribution is akin to power-law distributions truncated by an exponential cut-off which are often encountered in the analysis of scale-free systems in the real world. Indeed, a truncation of the power-law behavior is generally due to finite-size effects and other physical constraints. Both forms have been proposed as representing the topological properties of the Internet [10]. We have generated the corresponding random graphs by using the algorithm proposed by Molloy and Reed [34, 35]: the vertices of the graph are assigned a fixed sequence of degrees $\{k_i\}$, $i = 1, \dots, N$, chosen at random from the desired degree distribution $P(k)$, and with the additional constraint that the sum $\sum_i k_i$ must be even; then, the vertices are connected by $\sum_i k_i/2$ edges, respecting the assigned degrees and avoiding self- and multiple-connections. The parameters used are $a = 0.4$ and $c = 0.6$ for the Weibull distribution, and $\gamma = 2.3$ for the RSF case.

The previous construction can be considered as static as it does not imagine a dynamical attachment rule. The topology generator INET3.0 [49] also falls into this class. This generator has been specifically designed to represent the Internet at the AS level by obtaining a closely similar topology. As shown in Fig. 6, such network

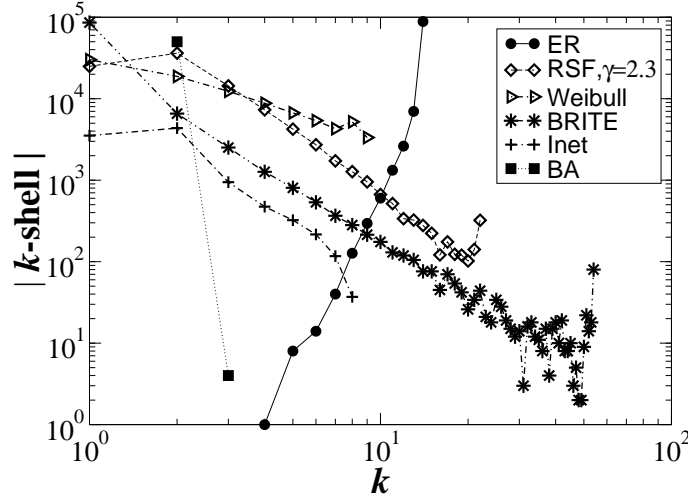


FIGURE 6. Shell size as a function of their index for the various models considered. The various models yield very different shapes, indicating the k -core decomposition as an interesting additional tool for network characterization.

presents a small number of k -cores, with a shell size behavior that is exponentially decreasing for increasing shell index.

Another Internet topology generator often discussed in the literature is the BRITE generator [33], which proposes a growth mechanism combining the addition of vertices with m new links according to the preferential attachment with the addition of new links between already existing vertices, also through a preferential attachment mechanism. In this case, a non-trivial structure of shells is obtained, with a largest shell index k_{max} much larger than the average degree, and a shell size decreasing as a power-law function of the index. This implies a similar power-law relation between the size of each k -core and its index, as observed in real Internet maps. At large k , large fluctuations are observed, with a relatively large central core (see Fig. 6). The difference between BRITE and BA networks highlights the structural relevance of the addition of new links between already existing vertices in a growing heterogeneous network model.

In general, as shown for an example in Fig. 6 (and with the exception of the BA model), random networks with heavy-tailed degree distributions present systematically a large number of shells (we have also checked that k_{max} increases if γ decreases), and much larger than the average degree $\langle d \rangle$. The shell size is decreasing as a power-law of the index [18, 25], with a quite large central core of index k_{max} , as for BRITE. On the contrary, Weibull distributed networks have relatively few shells with a much smaller k_{max} . It is interesting that networks with relatively similar degree distributions can present in fact strongly different k -core decompositions. This points to the k -core decomposition as a supplementary valuable tool for network investigation.

4.2.2. Core statistics and structure. In this paragraph, we compare the characteristics of the different cores, i.e. of more and more central parts of the network. In the following we will focus only on the models that have a core structure resembling

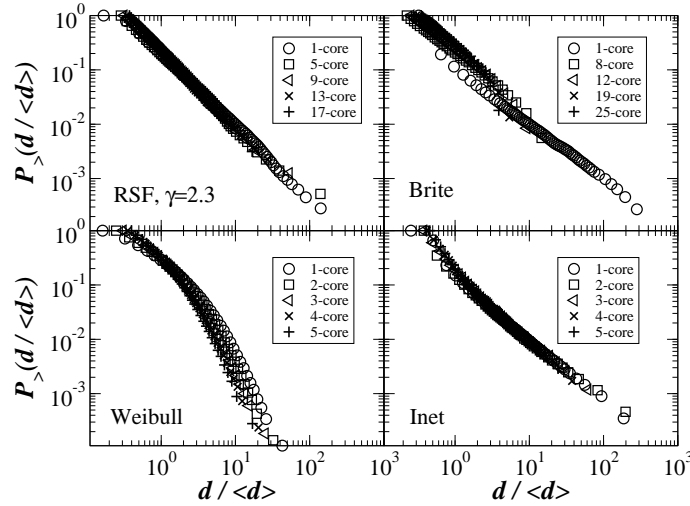


FIGURE 7. Cumulative degree distribution of some k -cores for some model networks. For each k -core, the degree is normalized by the average degree of the core. For these various models, the collapse of the various distributions shows a striking property of statistical self-similarity of the successive k -cores.

that of the Internet as the ER and the BA models are readily ruled out as possible candidates to represent the Internet.

Figure 7 shows the cumulative degree distribution for some k -cores, for some of the studied models; namely, the probability $P_{>}(d)$ that any vertex in the networks has a degree larger than d . Strikingly, the shape of the distribution (power-laws or Weibull) is not affected by the decomposition. This feature, already noted in [18] for uncorrelated scale-free networks, points to a striking property of statistical self-similarity of the generated k -cores, which resemble one with each other under the opportune rescaling of the average degree.

As in the case of Internet maps, we characterize further this self-similarity by computing the 2 and 3 point correlations as defined by the average degree of nearest neighbors $d_{nn}(d)$ of vertices of degree d , and the clustering spectrum $cc(d)$ of vertices of degree d . These quantities are reported in Figs 8 and 9 for the various k -cores. Strikingly, the behavior of the two quantities is preserved in all cases as the network is recursively pruned of its low-degree vertices. In other words, the overall network topology is invariant for k -cores of increasing centrality.

4.2.3. Summary. In summary, the k -core decomposition allows to uncover very different structural properties for different models which may otherwise share e.g. very similar degree distributions. The k -core decomposition is therefore a useful tool in the context of the model validation process. For example, a growing network obtained with the linear preferential attachment rule may have a scale-free distribution of degrees $P(k) \sim k^{-\gamma}$ but will have a trivial shell structure because of its construction mechanism. On the other hand, randomly constructed scale-free networks, which may have weak correlation properties and small clustering, can present a rich hierarchical decomposition with a large central core of high shell

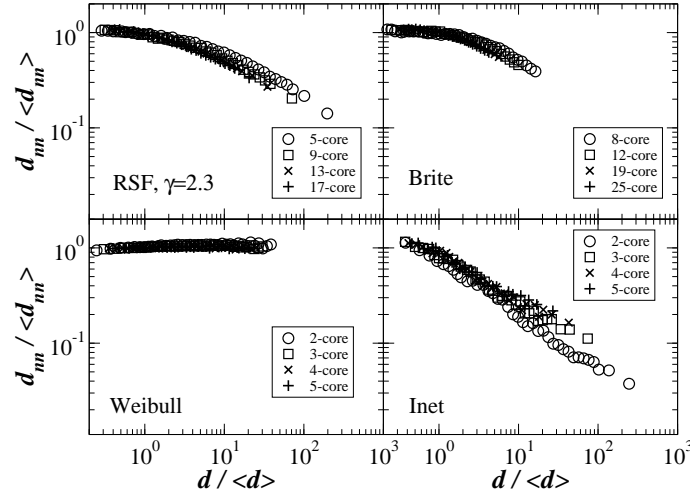


FIGURE 8. Nearest neighbors degree distribution of some k -cores, rescaled by the corresponding average values, for some model networks. The degree of each node is normalized by the average degree of each k -core. The data collapse confirms the statistical self-similarity of the cores.

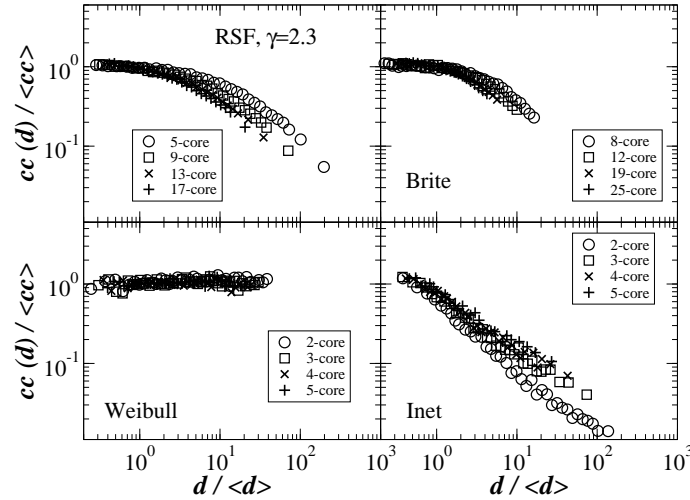


FIGURE 9. Clustering coefficient spectrum of some k -cores for some model networks. The degree of each node is normalized by the average degree of each k -core, and the clustering coefficient is rescaled by the average clustering of each k -core. Once again, a collapse is observed, confirming the self-similarity of the k -cores.

index. This appears in agreement with the results of Ref. [30] where structural correlations and constraints appear to be sufficient to determine most of the observed statistical properties observed in large scale graphs.

date	# n	e	$\langle d \rangle$	d_{max}	k_{max}
2001/05	7400	24791	6.700	1820	28
2002/03	8489	28871	6.802	2007	32
2003/05	8755	27300	6.236	1560	26
2004/04	9238	28016	6.065	1406	26
2005/04	8542	25492	5.969	1171	26

TABLE 3. Characteristics of the CAIDA AS maps considered for the time analysis: number of vertices n and of edges e , average degree $\langle d \rangle$, maximum degree d_{max} and maximum shell index k_{max} .

5. k -cores, dynamics and sampling biases.

5.1. Temporal variations of the k -core structure. The availability of data obtained by the various projects makes it possible to study the temporal evolution of the Internet maps. We have considered the maps obtained by the CAIDA project at various times between 2001 and 2005. Table 3 shows the main characteristics of the analyzed maps, each of which was obtained from the archives of one complete month.

While statistical signatures such as degree distribution, disassortative behavior and clustering spectrum are typically very stable over time, the k -core structure analysis reveals some finer variations. For example, the number of vertices and edges and the maximal shell index fluctuate in the CAIDA maps. This can be tracked down to the fact that the number of sources used by CAIDA changes (14 for the 2001/05 map, 21 for 2002/03, 24 for 2003/05 and 2004/04, and 22 for 2005/04), and that the locations of some of these sources also change.

Interesting informations also arise from the study of the change in the composition of the various k -shells: we show as an example in Fig. 10 the probability for a given AS to change from a shell of index x in a map obtained at a given time to a shell of index y in the successive map. While most vertices do not change their shell index, as shown by the dark area around the diagonal, some suffer an important change of status, from a highly central shell to a peripheral one or vice-versa. This highlights the presence of strong structural fluctuations in the evolution of CAIDA AS maps.

A further fingerprint of such structural changes is provided by the analysis of the shell index of vertices that appear in or disappear from the maps between one snapshot and the other, as shown in Fig. 11: vertices in all shells, even central ones, disappear from the CAIDA maps even in the most recent maps, between 2004 and 2005. The fluctuations observed in the shell index of ASes may be related to three factors. A first one is the natural evolution of the Internet structure. A second factor is the re-numbering of the ASes for administrative reasons (see <http://www.iana.org>). A third factor is the uncertainty and bias in the data collection. In this respect, CAIDA maps seem to exhibit a high level of instability, indicative of a mapping process less stable in time. In this context, the k -core analysis appears as an interesting tool to highlight the temporal changes of the Internet structure as well as the measurement reliability in each particular experimental set-up, at an intermediate level between global quantities and local ones such as the degree. It will certainly be of interest in the future to study similar data for evolving DIMES maps, which are obtained with a much larger set of sources.

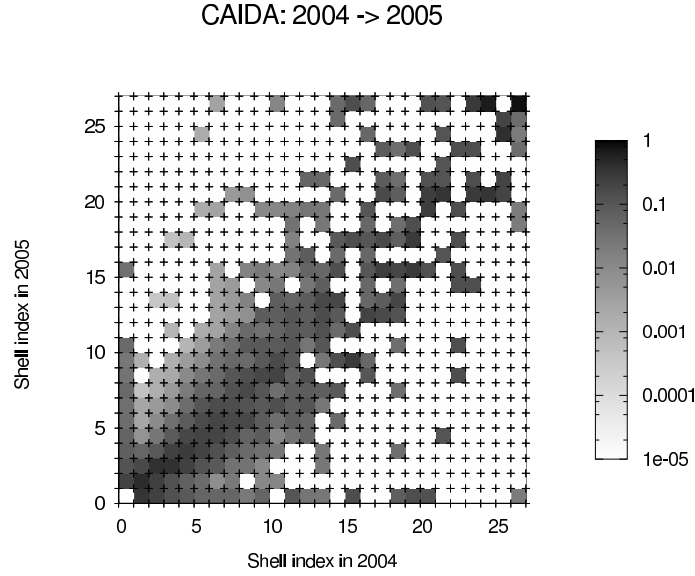


FIGURE 10. The grayscale code gives the probability of a change in shell index, from the CAIDA map of 2004/04 (x axis) to the one of 2005/04 (y axis). The points in line 0 correspond to ASes that are present in 2004 but not in 2005, and the column 0 corresponds to the reverse situation. Most nodes do not change shell index, as the dark area around the diagonal shows, but some important changes occur, with central nodes becoming peripheral, or vice-versa.

5.2. Sampling biases. In this paragraph, we perform a sensitivity analysis of the k -core decomposition with respect to potential sampling biases. In particular we want to assess the effect of incompleteness and sampling biases on the resulting structure of sampled graphs. For this reason we will produce incomplete synthetic sampling processes of network models and compare the k -core structure of the sampled graph with that of the original one.

Internet maps are currently obtained through sampling methods of the real Internet, which are based on a merging of paths between sources and destinations, obtained either through Border Gateway Protocol routing tables or through active `traceroute` measurements. Such sampling processes present possible sources of errors and biases whose effect has been up to now studied essentially for the degree distributions [27, 41, 15, 16, 13, 26]. The analysis of idealized sampling processes on networks with various topologies has in particular revealed that the broadness of the degree distributions observed in Internet maps is a genuine feature, although important biases can remain on the exact form of the distribution, due to an undersampling of vertices with small degree. Moreover, although a path-based sampling process can produce a heterogeneous graph out of an homogeneous initial network (such as an ER graph), as rigorously shown in [13], this is restricted to the case of a single source probing. It is therefore interesting to note that a single source `traceroute`-like probing of any network yields essentially a tree, whose k -core decomposition is by definition trivial (with $k_{max} = 1$). Another obvious but

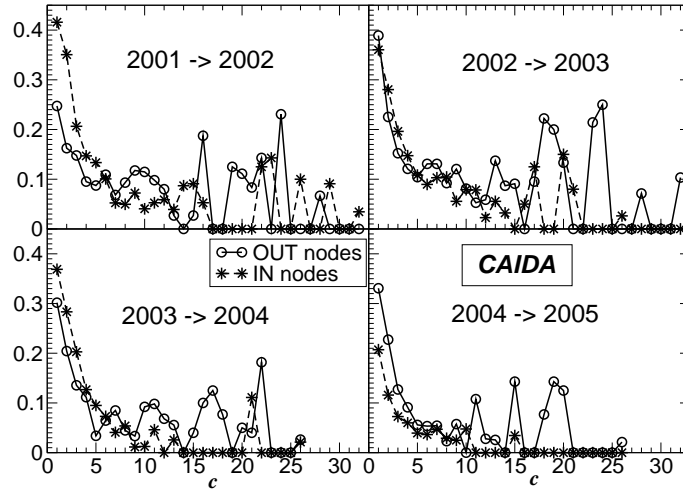


FIGURE 11. Probabilities that the vertices entering (IN nodes) or disappearing from (OUT nodes) the CAIDA maps have shell index c . Note how even nodes with large shell index disappear from one year to the next.

important confirmation regards the largest shell index: by definition, a sampling cannot discover paths or edges that do not exist, so that the maximal shell index of a network, k_{max} , cannot be increased by partial sampling (nor can the maximal degree observed). In fact the actual k_{max} is thus *at least* equal to the one found by a sampling of the true network.

Since more central cores are more connected, and more paths go through them, path-based sampling should intuitively discover and sample better more central cores, while the peripheral shells could suffer from stronger biases. In order to check such ideas, we perform a `traceroute`-like probing of the various model networks considered in section 4.2, and compare their k -core decomposition before and after sampling. We use the same model for `traceroute` as in [15, 16, 26]: a set of N_S sources sends probes to N_T destinations randomly placed on the network, and the shortest paths between the source-destination pairs are merged to compose the sampled network. We use $N_S = 50$ sources, and various probing efforts measured by $\epsilon = N_S N_T / N$ (where N is the size of the initial network), from a small value $\epsilon = 0.1$ (corresponding to a small density of targets $N_T / N = 2 \cdot 10^{-3}$) to a much larger $\epsilon = 5$ (relatively large density of targets $N_T / N = 10^{-1}$).

Figure 12 presents the curves of the k -shell size as a function of the index for various network models and various sampling efforts. For ER networks, the populated shells change from being at index values only slightly under $k = \langle d \rangle$ to much smaller values, with an almost uniform population of shells. The observed behavior is therefore completely different from the one observed in AS maps. On the contrary, the power-law shape obtained for RSF or BRITE networks, and comparable to the one of the AS maps, is very robust, even if the slope is affected. Indeed, shells of smaller indices are less well sampled. In particular, the size of the first shell is most strongly decreased by the sampling procedure; in some cases in fact, the first shell is larger than the second in the original network, but becomes smaller

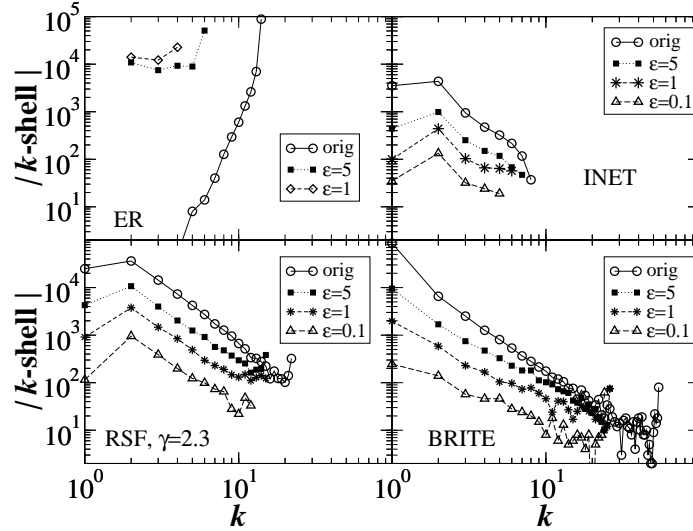


FIGURE 12. Plot of the size of the k -shells vs. k for various models, before and after `traceroute`-like sampling, with different probing efforts ϵ . The qualitative shapes are preserved by sampling.

in the sampled network. We note that in the available AS maps, the first shell is indeed typically smaller than the second, and that the true AS network thus very probably exhibits a much larger shell of index $k = 1$. Similarly, one can expect that the exponent close to 2.7 of the power-law behavior of the shell size vs. its index (see [12] and Fig. 2) is a lower bound and that such value might be reconsidered in the future thanks to more and more extensive sampling efforts. On the other hand, the fact that the shell of largest index is substantially larger than the ones with immediately lower indices is well preserved, even if its index is substantially decreased by the fact that many edges are ignored during the sampling process.

Figures 13 and 14 moreover show that the self-similar properties of the k -core decomposition are preserved by the sampling process. Although the precise form of the degree distribution of the whole network is slightly altered, the basic correlation properties are conserved by the sampling. Moreover, the self-similar structure of the k -core decomposition is also preserved, as a comparison of Figs 13 and 14 with Figs 8 and 9 clearly shows.

While the main statistical properties of the k -core decomposition are therefore largely conserved by the sampling process, allowing to distinguish between networks with different topological structures, important quantitative biases can appear and compromise the accuracy of the measurements, as we now investigate. In order to understand such effects in more details, we indeed show in Figs 15 and 16 the probability for a vertex of given shell index in the original network to have another shell index in the sampled network, in the case of an original network obtained by the BRITE generator. At low sampling effort, many vertices are simply left undiscovered, and the shell index properties can be strongly affected in a seemingly erratic way, as shown by the important scattering of data in Fig. 15. As soon however as the sampling effort is increased to a more reasonable level, a strong

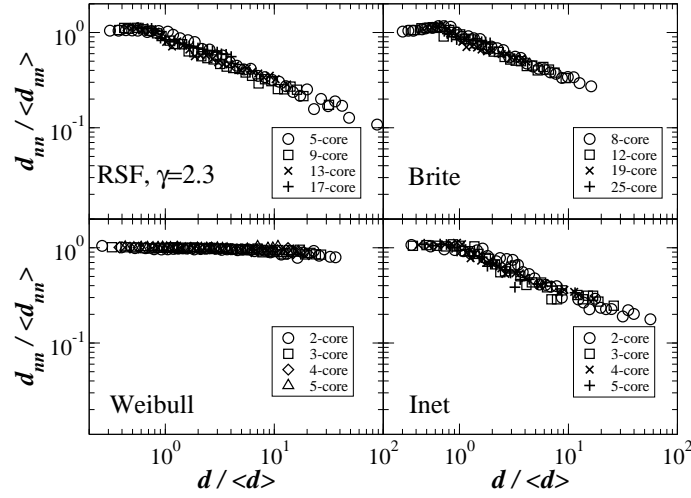


FIGURE 13. Nearest neighbors degree distribution of some k -cores, rescaled by the corresponding average values, for some network models after sampling through a `traceroute`-like process with $N_S = 50$ sources and target density $N_T/N = 0.1$. The data collapse shows that the self-similarity is preserved by sampling.

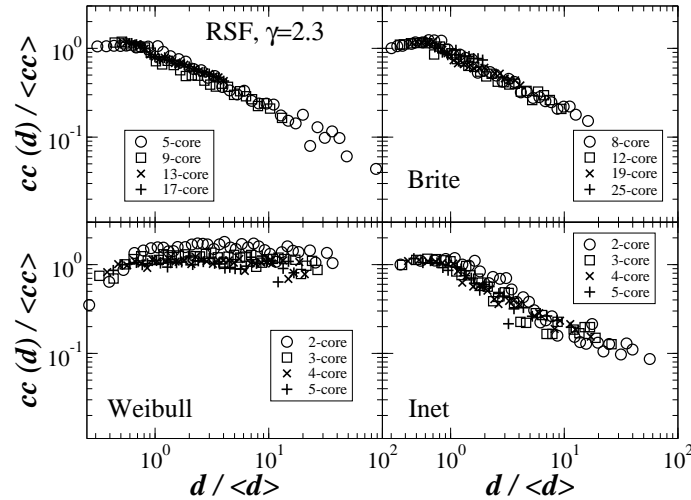


FIGURE 14. Clustering spectrum of some k -cores, rescaled by the corresponding average values, for some network models after sampling through a `traceroute`-like process with $N_S = 50$ sources and target density $N_T/N = 0.1$.

correlation appears between the true shell index and its value in the sampled graph, even if a systematic downwards trend is observed (Fig. 16).

In summary, our results indicate that the sampling biases do in fact affect only slightly the measure of the statistical properties of heterogeneous graphs and of their k -core decomposition, even at relatively low level of sampling. In fact, the

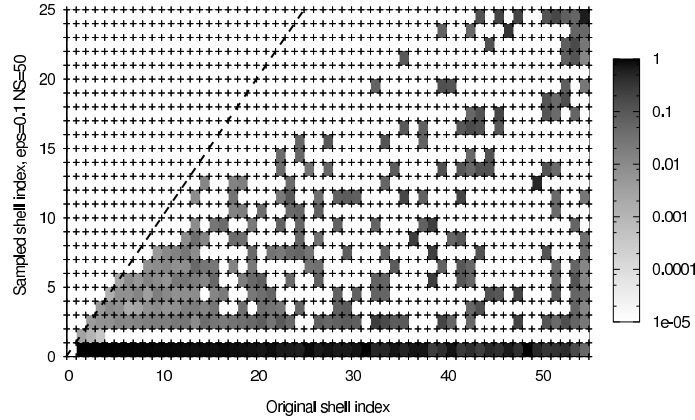


FIGURE 15. The grayscale code gives the probability of a change in shell index due to the `traceroute`-like sampling, from a certain index before sampling (x axis) to another one after sampling (y axis). The line at $y = 0$ represents the probability of vertices of shell index x to be absent from the sampled graph. The initial network is obtained by the BRITE generator. Here $N_S = 50$ sources and a fraction $N_T/N = 2.10^{-3}$ of targets are used. The low sampling effort implies that many nodes are not discovered, and that the measured shell index can differ strongly from the original one.

routing properties as “measured” by the shell indices will be rather underevaluated due to the incomplete sampling of edges, which can be taken as a rather good news showing that the AS network probably offers better performance (QoS, robustness) than what can be measured by the present maps.

6. Conclusions. We have presented the application of the k -core decomposition to the analysis of large scale networks models and of large scale Internet maps. The k -core decomposition allows the progressive pruning of the networks and the identification of subgraphs of increasing centrality. These subgraphs have the property of being more and more densely connected, and therefore of presenting more and more robust routing capabilities. The study of the obtained subgraphs uncovers the main hierarchical layers of the network and allows for their statistical characterization. Strikingly, we observe for the Internet at the Autonomous System a statistical self-similarity of the topological properties for cores of increasing centrality.

The k -core decomposition proves useful to uncover not only the hierarchical decomposition of real maps, but also for model validations. For example, many models, although having, *e.g.* degree distribution and clustering properties similar to those of real maps, do not present shell index values as large as the real data, nor a similar structure in which each k -core is composed by a constant fraction of the $k - 1$ -core. The k -core decomposition should therefore be considered as a *supplementary* valuable tool for network characterization and model validation.

It is also worth mentioning that the router level k -core structure of the Internet appears to have different properties than those appearing at the AS level [32, 28]. This calls for repeating the present analysis for different router level maps available

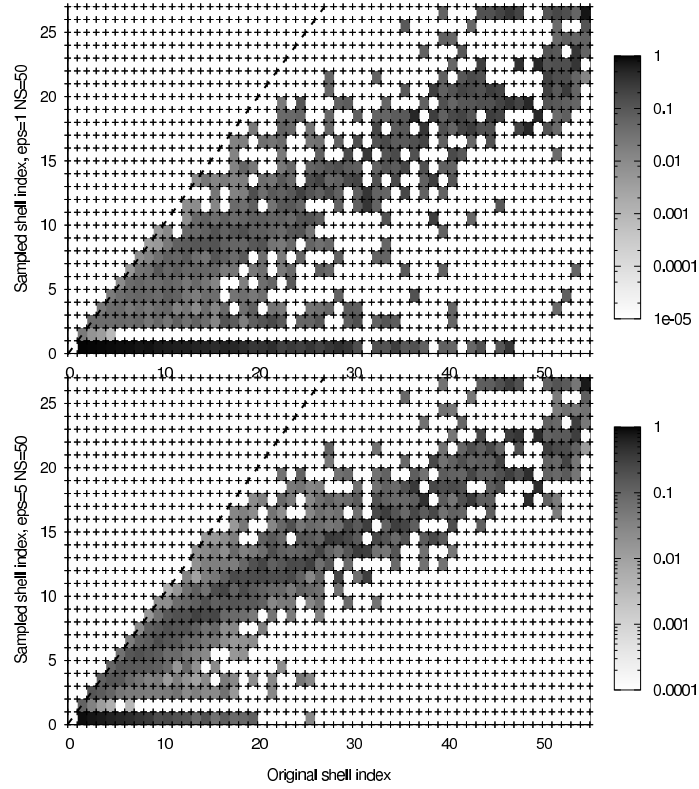


FIGURE 16. Same as Fig. 15 for $N_S = 50$ sources and $N_T/N = 2.10^{-2}$ (top) and $N_T/N = 10^{-1}$ (bottom). As the sampling effort is increased, the measured and the original shell index become more correlated.

at the moment in order to better emphasize the structural difference exhibited by the two different mapping granularities.

Moreover, the k -core analysis allows to compare maps obtained by different mapping processes, follow their temporal evolution and assess the stability of these maps. It also appears as an interesting way of discriminating between various topologies, even after sampling biases have been introduced: for example, a sampled ER network may display a power-law like degree distribution in case of a very limited sampling effort, but its k -core decomposition will in any case remain very different from the one of sampled heterogeneous networks.

Finally, the k -core decomposition may be used also to define a computational feasible centrality measure and a hierarchy between the nodes of a network. It combines the degree ranking with more global structural properties, connectedness and routing capabilities, providing a centrality measure that is highly correlated with the various standard definitions such as degree and betweenness centrality.

In conclusion, the k -core decomposition appears at a general level as a very interesting and useful additional tool for analysis of complex networks, with particular relevance in the context of technological and communication networks.

Acknowledgments. This work has been partially supported by the EU within the 6th Framework Program under contract 001907 (DELIS). We acknowledge also interesting discussions with Pierre Fraigniaud. A.V. is partially funded by the NSF IIS-0513650 award.

REFERENCES

- [1] R. Albert and A.-L. Barabási, *Statistical mechanics of complex networks*, Rev. Mod. Phys., **74** (2002), 47–97.
- [2] J. Ignacio Alvarez-Hamelin, L. Dall'Asta, A. Barrat and A. Vespignani, *Large scale networks fingerprinting and visualization using the k-core decomposition*, in “Advances in Neural Information Processing Systems 18” (Y. Weiss, B. Schölkopf and J. Platt, editors), 41–50, Cambridge, MA, MIT Press, 2006.
- [3] G. D. Bader and C. W. V. Hogue, *An automated method for finding molecular complexes in large protein interaction networks*, BMC Bioinformatics, **4** (1993).
- [4] A.-L. Barabási and R. Albert, *Emergence of scaling in random networks*, Science, **286** (1999), 509–512.
- [5] V. Batagelj and M. Zaversnik, *Generalized cores*, CoRR, cs.DS/0202039, 2002.
- [6] V. Batagelj and M. Zaversnik, *An $O(m)$ algorithm for cores decomposition of networks*, cs.DS/0310049, 2003.
- [7] M. Baur, U. Brandes, M. Gaertler and D. Wagner, *Drawing the AS graph in 2.5 dimensions*, In “12th International Symposium on Graph Drawing, Springer-Verlag editor,” 43–48, 2004.
- [8] B. Bollobás and A. Thomason, *Random graphs of small order*, In “Random graphs 83,” 47–97, M. Karonski and A. Rucinski, eds, 1985.
- [9] U. Brandes, *A faster algorithm for betweenness centrality*, Journal of Mathematical Sociology, **25** (2001), 163–177.
- [10] A. Broido and K. C. Claffy, *Internet topology: connectivity of IP graphs*, In “San Diego Proceedings of SPIE International symposium on Convergence of IT and Communication. Denver, CO,,” 2001.
- [11] S. Carmi, S. Havlin, S. Kirkpatrick, Y. Shavitt and E. Shir, http://www.cs.huji.ac.il/~kirk/Jellyfish_Dimes.ppt.
- [12] S. Carmi, S. Havlin, S. Kirkpatrick, Y. Shavitt and E. Shir, *A model of internet topology using k-shell decomposition*, Proc. Natl. Acad. Sci. (USA), **104** (2007), 11150–11154.
- [13] A. Clauset and C. Moore, *Accuracy and scaling phenomena in the internet*, Phys. Rev. Lett., **94** (2005), 018701.
- [14] Router-Level Topology Measurements, Cooperative Association for Internet Data Analysis, http://www.caida.org/tools/measurement/skitter/router_topology/.
- [15] L. Dall'Asta, I. Alvarez Hamelin, A. Barrat, A. Vázquez and A. Vespignani, *Traceroute-like exploration of unknown networks: A statistical analysis*, LNCS, Springer, Berlin, **3405** (2005), 140–153.
- [16] L. Dall'Asta, I. Alvarez Hamelin, A. Barrat, A. Vázquez and A. Vespignani, *Exploring networks with traceroute-like probes: theory and simulations*, TCS, **355** (2006), 6–24.
- [17] S. N. Dorogovtsev and J. F. F. Mendes, “Evolution of Networks: From Biological Nets to the Internet and WWW,” Oxford University Press, 2003.
- [18] S. N. Dorogovtsev, A. V. Goltsev and J. F. F. Mendes, *K-core organization of complex networks*, Phys. Rev. Lett., **96** (2006), 040601.
- [19] J. C. Doyle, D. L. Alderson, L. Li, S. Low, M. Roughan, S. Shalunov, R. Tanaka and W. Willinger, *The robust yet fragile nature of the Internet*, Proc. Natl. Acad. Sci. (USA), **102** (2005), 14497–14502.
- [20] P. Erdős and A. Rényi, *On random graphs I*, Publ. Math. Debrecen, **6** (1959), 290–297.
- [21] M. Faloutsos, P. Faloutsos and C. Faloutsos, *On power-law relationship of the Internet topology*, Comput. Commun. Rev., **29** (1999), 251–263.
- [22] L. C. Freeman, *A set of measures of centrality based on betweenness*, Sociometry, **40** (1977), 35–41.
- [23] M. Gaertler and M. Patrignani, *Dynamic analysis of the autonomous system graph*, In “IPS 2004, International Workshop on Inter-domain Performance and Simulation, Budapest, Hungary,” 13–24, 2004.
- [24] C. Gkantsidis, M. Mihail and E. Zegura, *Spectral analysis of internet topologies*, In “Proceedings of INFOCOM 2003,” 2003.

- [25] A. V. Goltsev, S. N. Dorogovtsev and J. F. F. Mendes. *K-core (bootstrap) percolation on complex networks*, Phys. Rev. E, **73** (2006), 056101.
- [26] J.-L. Guillaume and M. Latapy. *Relevance of massively distributed explorations of the Internet topology: Qualitative results*, In “24-th IEEE Infocom’05,” 2005.
- [27] A. Lakhina, J. W. Byers, M. Crovella and P. Xie. *Sampling biases in IP topology measurements*, Technical report BUCS-TR-2002-021, Department of Computer Sciences, Boston University.
- [28] LARge NETwork VISualization tool. <http://xavier.informatics.indiana.edu/lanet-vi/>.
- [29] L. Li, D. Alderson, W. Willinger and J. Doyle. *A first-principles approach to understanding the internet’s router-level topology*, In “SIGCOMM ’04: Proceedings of the 2004 Conference on Applications, Technologies, Architectures, and Protocols for Computer Communications,” 3–14, New York, NY, USA, ACM Press, 2004.
- [30] P. Mahadevan, D. Krioukov, K. Fall and A. Vahdat. *Systematic topology analysis and generation using degree correlations*, In “Proceedings of SIGCOMM 2006,” 2006.
- [31] P. Mahadevan, D. Krioukov, M. Fomenkov, B. Huffaker, X. Dimitripoulos, Kc. Claffy and A. Vahdat. *Lessons from three views of the Internet topology*, Preprint, cs.NI/0508033, 2005.
- [32] “Distributed Internet MEasurements and Simulations,” <http://www.netdimes.org>.
- [33] A. Medina, A. Lakhina, I. Matta and J. Byers. *Brite: An approach to universal topology generation*, In “Proceedings of the International Workshop on Modeling, Analysis and Simulation of Computer and Telecommunications Systems- MASCOTS ’01, Cincinnati, Ohio,” 2001.
- [34] M. Molloy and B. Reed, *A critical point for random graphs with a given degree sequence*, Random Struct. Algorithms, **6** (1995), 161–179.
- [35] M. Molloy and B. Reed, *The size of the giant component of a random graph with a given degree distribution*, Combinatorics, Probab. Comput., **7** (1998), 295–305.
- [36] M. E. J. Newman, *Scientific collaboration networks. II. Shortest paths, weighted networks, and centrality*, Phys. Rev. E, **64** (2001), 016132.
- [37] M. E. J. Newman, *Assortative mixing in networks*, Phys. Rev. Lett., **89** (2002), 208701.
- [38] University of Oregon Route Views Project, <http://www.routeviews.org/>.
- [39] R. Pastor-Satorras, A. Vázquez and A. Vespignani, *Dynamical and correlation properties of the internet*, Phys. Rev. Lett., **87** (2001), 258701.
- [40] R. Pastor-Satorras and A. Vespignani, “Evolution and Structure of the Internet: A Statistical Physics Approach,” Cambridge University Press, 2004.
- [41] T. Petermann and P. De Los Rios, *Exploration of scale free networks*, Eur. Phys.J. B, **38** (2004), 201–204.
- [42] C. Qian, H. Chang, R. Govindan, S. Jamin, S. J. Shenker and W. Willinger, *The origin of power laws in Internet topologies revisited*, In “INFOCOM 2002. Twenty-First Annual Joint Conference of the IEEE Computer and Communications Societies. Proceedings IEEE , Volume 2,” pages 608–617. IEEE Computer Society Press, 2002.
- [43] S. B. Seidman, *Network structure and minimum degree*, Social Networks, **5** (1983), 269–287.
- [44] Y. Shavitt and E. Shir, *Dimes: Let the internet measure itself*, Preprint, cs.NI/0506099, 2005.
- [45] L. Subramanian, S. Agarwal, J. Rexford and R. H. Katz, *Characterizing the Internet hierarchy from multiple vantage points*, In “IEEE INFOCOM 2002,” page 618, 2002.
- [46] H. Tangmunarunkit, R. Govindan, S. Jamin, S. Shenker and W. Willinger, *Network topologies, power laws, and hierarchy*, Comput. Commun. Rev., **32** (2002), 76–76.
- [47] F. Viger, A. Barrat, L. Dall’Asta, C.-H. Zhang and E. Kolaczyk, *What is the real size of a sampled network? the case of the Internet*, Phys. Rev. E, **75** (2007), 056111.
- [48] D. J. Watts and S. H. Strogatz, *Collective dynamics of small-world networks*, Nature, **393** (1998), 440–442.
- [49] J. Winick and S. Jamin, *Inet-3.0: Internet topology generator*, Technical Report UM-CSE-TR-456-02, Department of EECS, University of Michigan, 2002.
- [50] S. Wuchty and E. Almaas, *Peeling the Yeast protein network*, Proteomics., **5** (2005), 444–449.

Received February 2008; revised March 2008.

E-mail address: ignacio.alvarez-hamelin@cnet.fi.uba.ar

E-mail address: alain.barrat@u-psud.fr

E-mail address: dallasta@ictp.it

E-mail address: alexv@indiana.edu