


# Subtitle Edit main window

## Menu in main window

In the menu you can find many tools like change casing, split, append, spell check, synchronization, change frame rate, Google translate, find, replace, remove text for hearing impaired, and much more!


You can import subtitles from Blu-ray sup, transport streams, DVD, vobsub, text and images – even subtitles inside Matroska files can be imported.

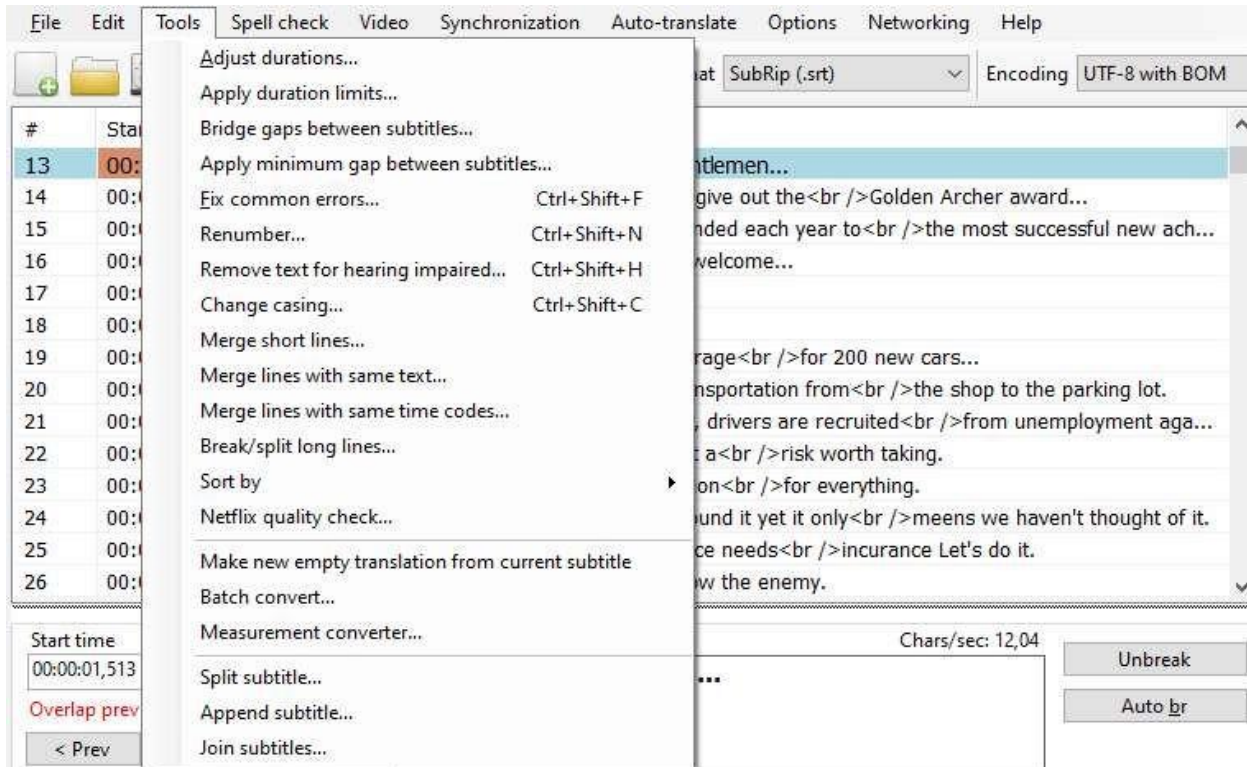

**NOTE:** Many tools are also available via right click in the list view.

The toolbar can use external images. Create a folder called “Icons” (besides the “Dictionaries” and the “Waveforms” folder). Png files (32x32 pixels) with these names are used if exists: New, Open, Save, SaveAs, Find, Replace, FixCommonErrors, RemoveTextForHi, VisualSync, SpellCheck, Netflix, AssaStyle, AssaProperties, Settings, Help, WaveformToggle, VideoToggle.

## Subtitle/file formats

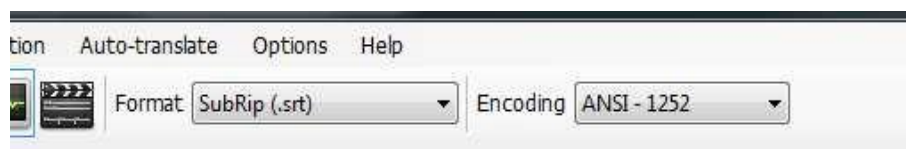

## SUBTITLE EDIT – GUIDE DOCUMENT


In the top menu you can choose format and encoding. The first dropdown list shows subtitle formats. SubRip (extension is “.srt”) is the most widely used format today, so it is recommended to save subtitles in this format.

Originally SubRip was a text only format, but in recent years html tags have been common. Especially the italic and font tags are widely used. For a list of SubRip support in players check this out.

File encoding is auto detected in most cases. ANSI is the old, formerly the most common found format, but it requires your system to have a specific culture setting. UTF-8 is recommended for new subtitles, as it can handle non-English letters better than ANSI (UTF-8 subtitles will work on all computers no matter what culture settings a computer has), and can display other symbols like music nodes. The only drawback of using UTF-8 is that some older programs do not support UTF-8.


*If you have an ANSI file in another language than the current culture/language (or you have an invalid UTF/Unicode file) then you can use the menu item: File -> Import subtitle with manual chosen encoding.*

### ***Import subtitles with manual chosen encoding (with preview)***

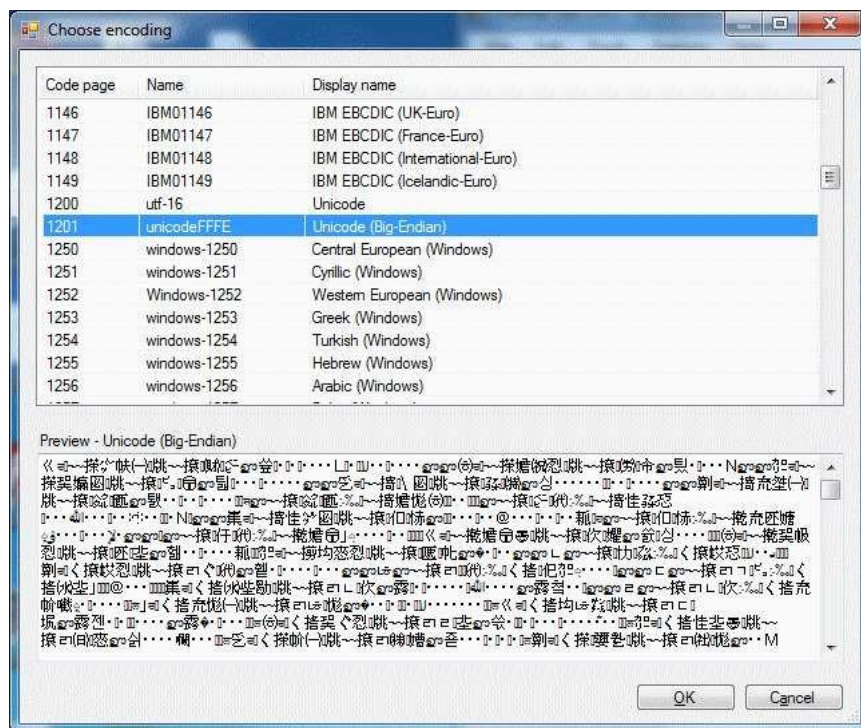

This dialog lets you pick a specific code page (e.g. Unicode, Windows-1250 Central European, Windows-1251 Cyrillic, Windows-1252 Western European, Windows-1253 Greek, Windows-1254 Turkish, Windows-1255 Hebrew, Windows-1256 Arabic, IBM EBCDIC variants, etc.) and shows a live preview of how the text decodes with that encoding.

## Frame rate



Frame rate is not displayed by default, but you can enable it via the menu Options -> Settings: Toolbar: Show frame rate in toolbar. Frame rate is used when converting between subtitle formats based on frames and formats based on time. SubRip is based on time. MicroDvd (widely used 7–9 years ago, and still widely used in some countries) is based on frames.

Subtitles based on time is preferred as videos may not have a constant frame rate – which makes working with subtitles based on frames not very flexible at all.


To change the frame rate use Synchronization -> Change frame rate – or use one of the other synchronization tools.

## Subtitle view – List view or source view

There are two ways of looking at a subtitle - list view or source view.

You can switch between list view and source view with the F2 key or via the context menu.

**List view is the default. This view is column based and has customizable columns:**

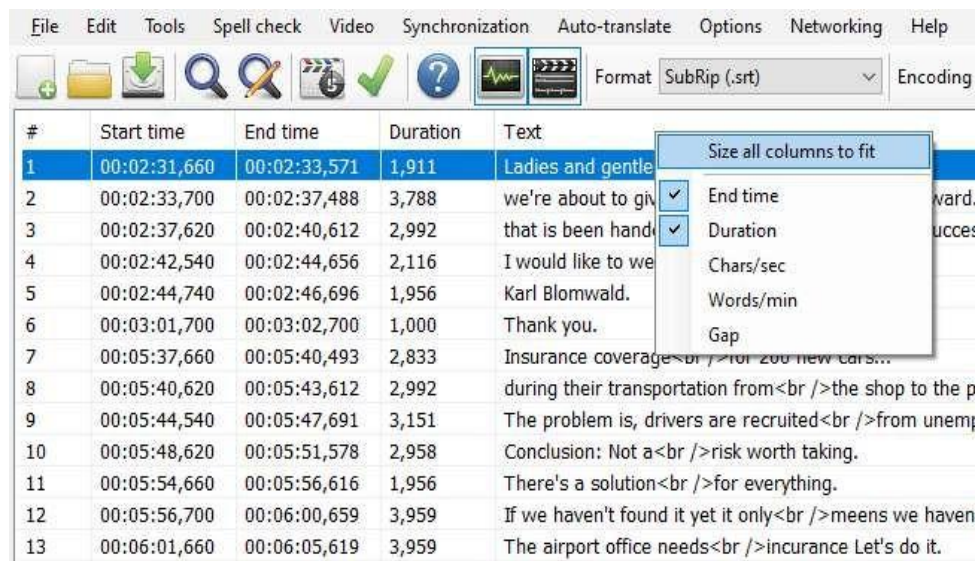

- End time
- Duration
- Chars/sec
- Words/min
- Gap

The list view gives an excellent overview of the subtitle – the same for all formats.


## SUBTITLE EDIT – GUIDE DOCUMENT

You can edit text and time codes here, delete and insert lines easily.

To select multiple lines in a block, select the first one, and then **<Shift+click>** on the last line (standard Windows functionality).

**<Ctrl+a>** is “select all” and **<Ctrl+Shift+i>** is “inverse selection”. **<Ctrl+click>** adds clicked line to selection.

It is also possible to select several lines and use tools like Google translate or Visual sync on the selected lines.

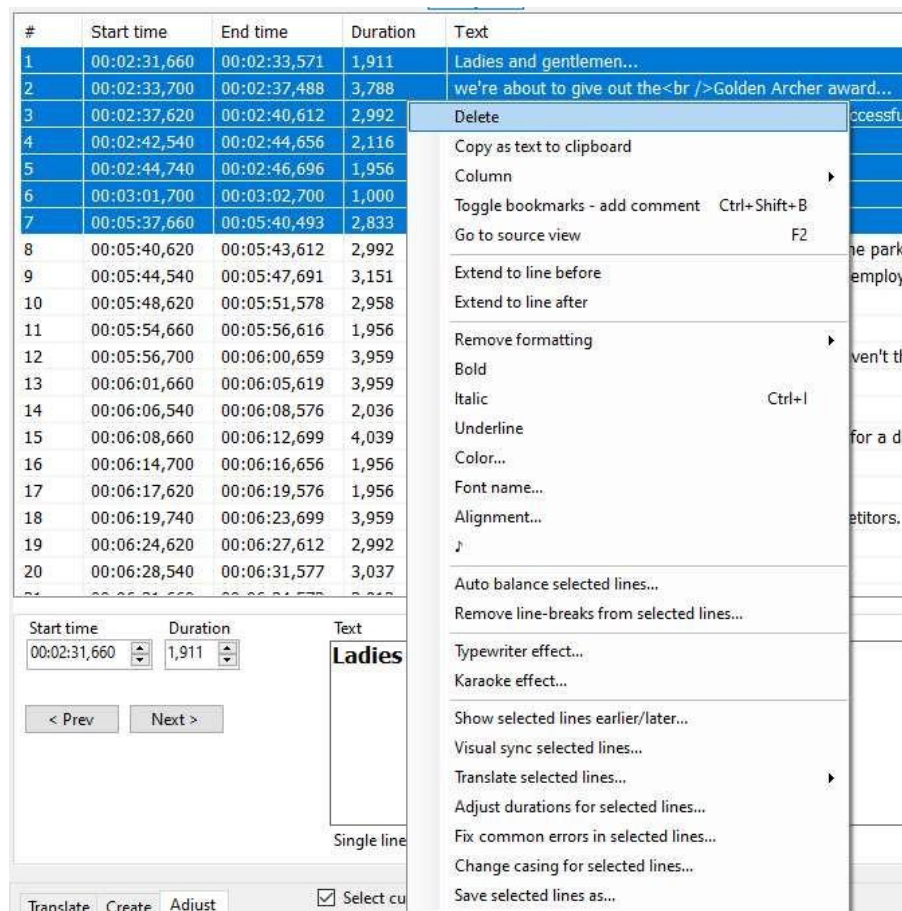

Right-click context menu on selected lines includes options such as:


- Delete
- Copy as text to clipboard
- Column
- Toggle bookmarks – add comment (Ctrl+Shift+B)
- Go to source view (F2)
- Extend to line before / Extend to line after
- Remove formatting, Bold, Italic (Ctrl+I), Underline, Color..., Font name..., Alignment...



## SUBTITLE EDIT – GUIDE DOCUMENT

- Auto balance selected lines... / Remove line-breaks from selected lines...
- Typewriter effect... / Karaoke effect...
- Show selected lines earlier/later... / Visual sync selected lines... / Translate selected lines...
- Adjust durations for selected lines... / Fix common errors in selected lines... / Change casing for selected lines... / Save selected lines as...

### Source view (F2 toggles between source view and list view)

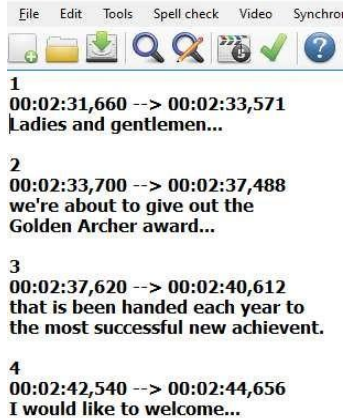

This is how the subtitle file actually looks – different for all formats.


You can edit text and time codes here, but be careful – it's easy to mess things up.

You can make Subtitle Edit start in Source view under Settings.

## Text box

Above the text box where you can type the actual subtitle is a label called “Chars/sec”.

If it's higher than your max CPS (CPS = Characters Per Second, e.g. 25), it will be colored red.

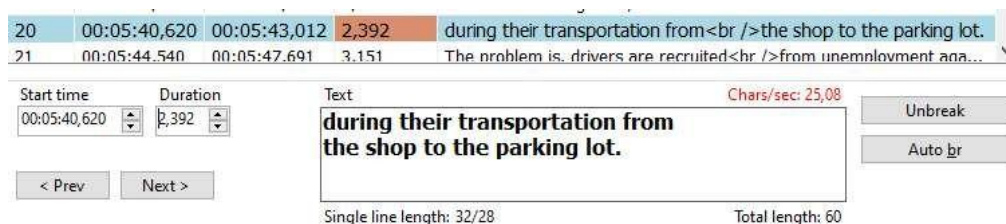

Below the text box is a label called “Single line length”. First line has 32 characters, and second line has 28 characters. If this label turns red, then one of the lines has exceeded your single line max length.


This single line max length value can be adjusted in Options - Settings - General via “Single line max length” (43 is default).

SE will default only allow one line break with the normal '**Enter**' key - if you want more line breaks you must use '**Ctrl+Enter**'.

You can change the max number of lines to e.g. 3 in Options - Settings - General via “Max. number of lines”.

## Show video and/or waveform/spectrogram

The main window can show video and/or wave form. Video controls can even be un-docked – nice if you have two monitors! The horizontal/vertical red lines show where you can resize inside the main window (via splitters).

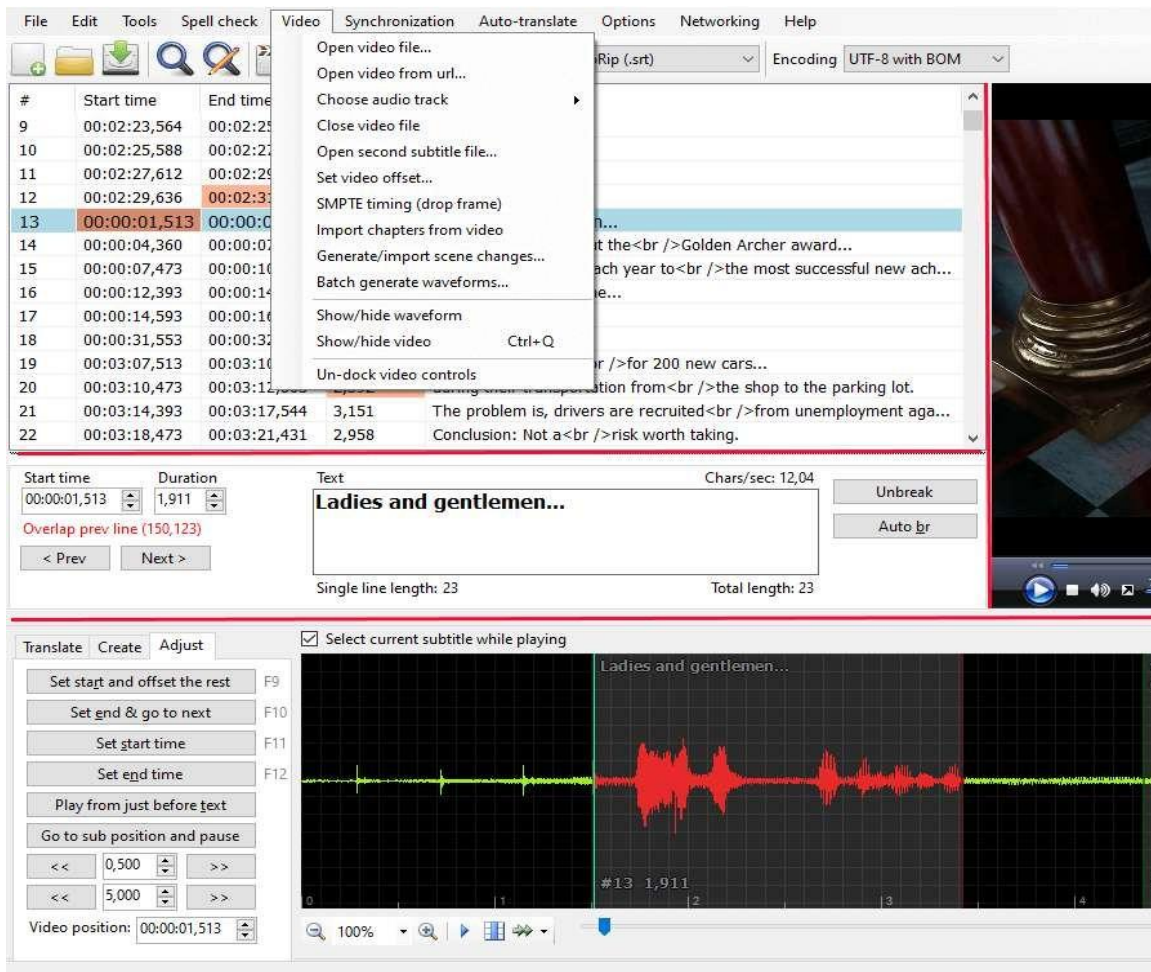


The Video menu offers: Open video file..., Open video from url..., Choose audio track, Close video file, Open second subtitle file..., Set video offset..., Import chapters from video, Generate/import scene changes..., Batch generate waveforms..., Show/hide waveform, Show/hide video (**Ctrl+Q**), and Un-dock video controls.

You can edit both new translation and original subtitle at the same time. You can make the original read-only via Options -> Settings.

When editing both original and translated subtitle, changing start time/duration/deleting/inserting will affect both subtitles!

In Options - Settings - Shortcuts, you can find shortcuts for toggle original subtitle and switching translated / original subtitle.

## SUBTITLE EDIT – GUIDE DOCUMENT

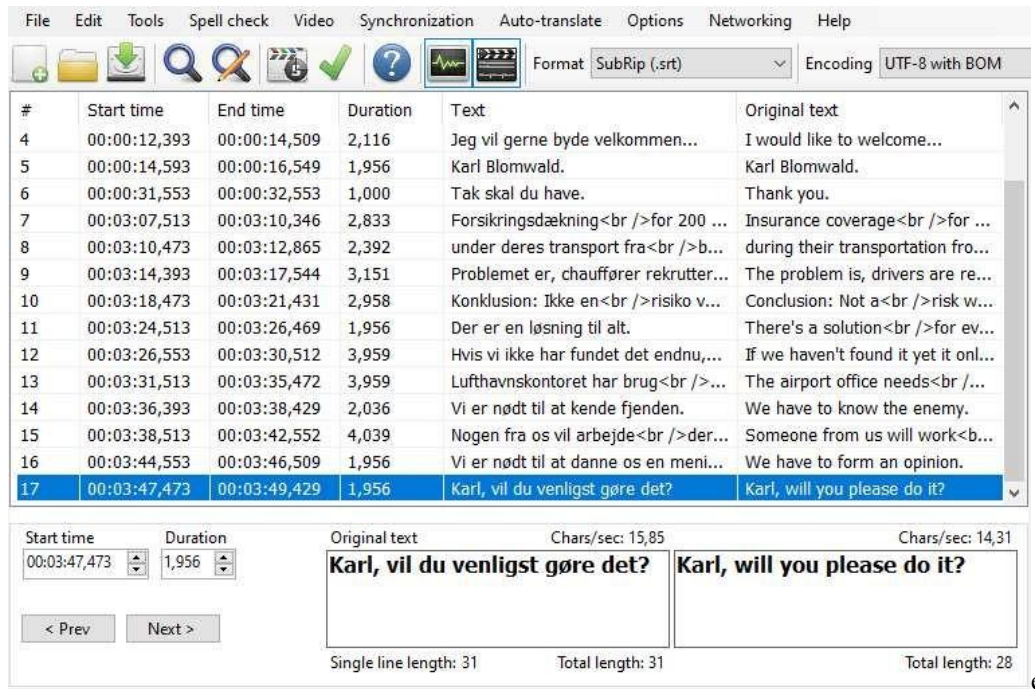

### Play rate (speed)




The play rate can be adjusted from a slow 50% to a very fast 300% via the green double arrow in the waveform controls or via shortcuts.

The play rate will not be remembered when re-starting Subtitle Edit.

When the play rate is not 100% (which is normal speed), the green double arrow will have a darker background.

### Search

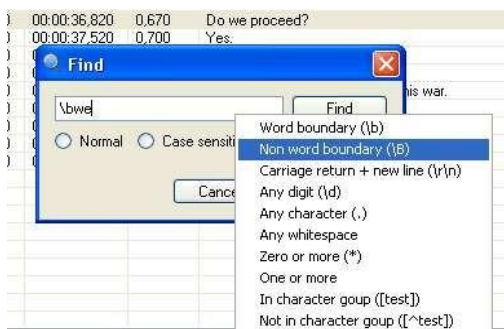

You can search by pressing **Ctrl+F** (F3 is find next). Regular expression search is available for nerds ;)

The Find dialog offers helper options for building a regex, such as: Word boundary (\b), Non word boundary (\B), Carriage return + new line (\r\n), Any digit (\d), Any character (.), Any whitespace, Zero or more (\*), One or more, In character group ([test]), and not in character group ([^test]).

## Find and replace

You can find and replace by pressing **Ctrl+H**. Regular expression search is available for nerds ;)

To change something to a new line via the replace string use “\n”.

## Multiple Replace

In Edit -> Multiple replace you can create your own rules for fixing a subtitle – even advanced rules using regular expressions!


When writing regular expressions grouping and backreferences are very useful. Parts of a regular expression inside parentheses are groups and can be referenced in the replace string where \$1 is a reference to the first group and \$2 is a reference to the second and so on.

| Example                                                                 | Result                                                                                                                                                                                   |
|-------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>^J(.+) + replace string ♪ \$1</code>                              | Only the starting “J” will be replaced, so if the text is “J Mus Playing J” it becomes “♪ Mus Playing J”.                                                                                |
| <code>([a-z]+)([0-9]+) + replace string \$2\$1</code>                   | Two groupings that will be switched, so if the text is “number123” it becomes “123number”.                                                                                               |
| <code>[.\s\S]*www.addsite.com[.\s\S]*<br/>+ empty replace string</code> | Will remove any subtitles containing “www.addsite.org”.                                                                                                                                  |
| <code>\p{L} + empty replace string</code>                               | Will remove all Unicode letters (e.g. also Danish letters). <code>\p{Lu}</code> matches an uppercase letter; <code>\p{Ll}</code> matches a lowercase letter.                             |
| <code>&lt;[^&gt;]*&gt; + empty replace string</code>                    | Will remove all html tags.                                                                                                                                                               |
| <code>\A + replace string {\an8}</code>                                 | <code>\A</code> matches only the first line in each subtitle (unlike <code>^</code> ). E.g. Hello world” becomes “{\an8}Hello world” and Hello\r\nworld” becomes “{\an8}Hello\r\nworld”. |
| <code>(.+)n(.+) + replace string \$1</code>                             | E.g. “Hello world [new-line] Bye world” becomes “Hello world”.                                                                                                                           |

You can test/build regular expressions on many web pages, like <http://regexstorm.net>.


If the result of a replace rule is an empty string, the subtitle will be removed.



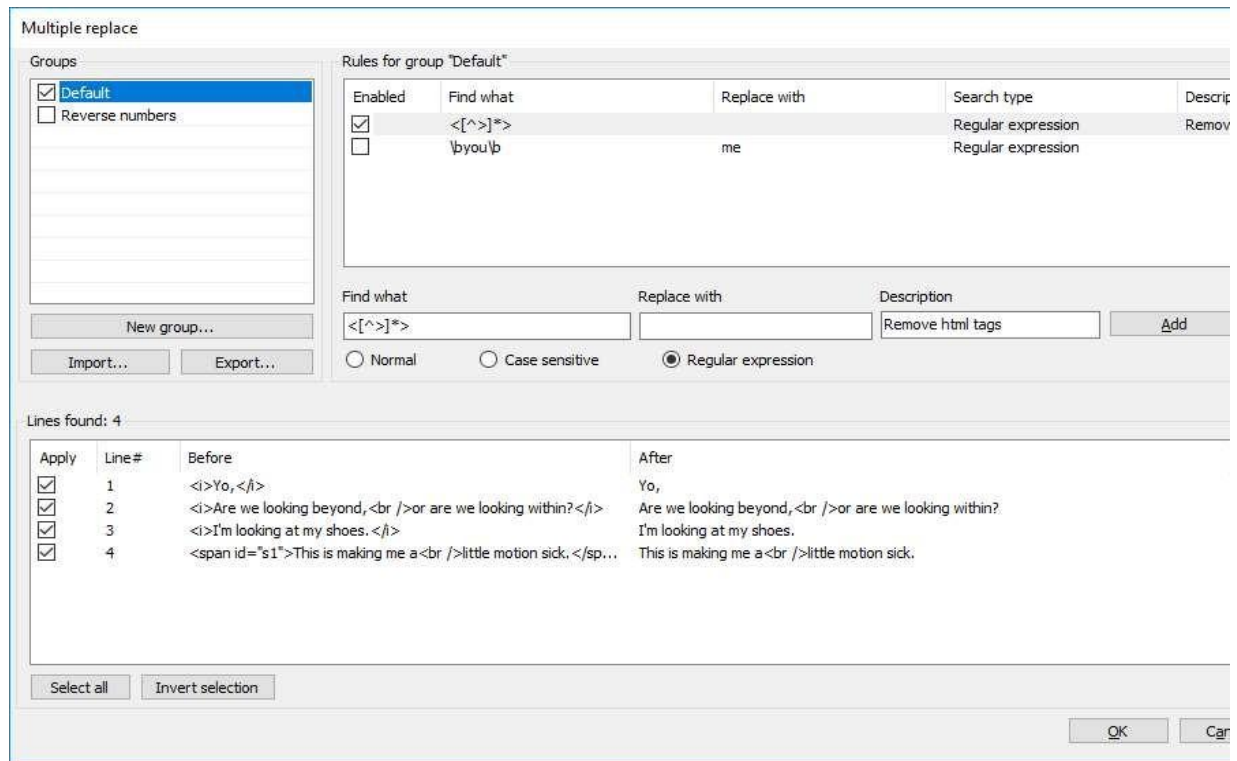

## Video/wave form modes

When using video and/or wave form three different modes (tabs) are available: Translate, Create, and Adjust.

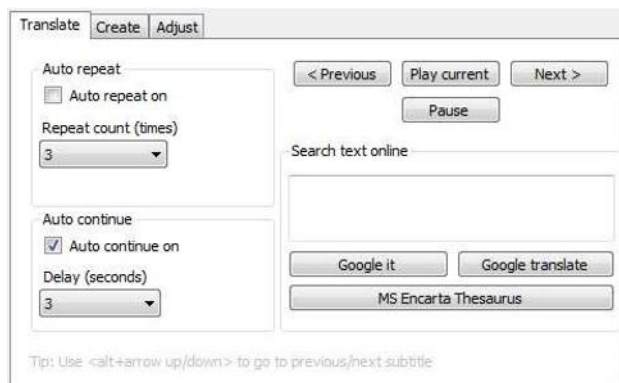

## Translate mode

In translate mode you can translate a subtitle from one language to another manually (or correct a machine translated subtitle) while watching the video – and hearing the audio.


If “Auto repeat” is on, then the subtitle will be repeated x-times while you are typing in the correct text.

Use File -> Open original subtitle (translator mode) to also display the original text.

Hint: Do use the <alt+arrow up/down> for going to previous/next subtitle.

**Controls include:** Auto repeat (on/off, repeat count), Auto continue (on/off, delay in seconds), Previous/Play current/Next/Pause buttons, and a search box with Google it, Google translate, and MS Encarta Thesaurus buttons.

## Create mode

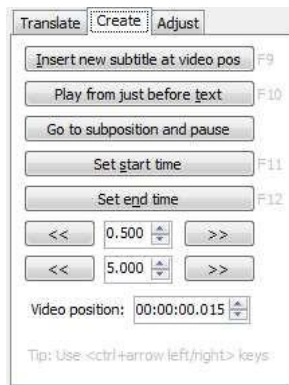

This is the place to create subtitle lines from scratch or manually adjust existing lines. To create subtitle lines from scratch, pause the video file where the subtitle line should start and press the button “Insert new subtitle at video pos” (F9). Then enter the text – duration is auto suggested. Now press the button “Play from just before text” (F10) and if the text does not start exactly when the speech starts, then adjust “Start time” via the up/down arrows until it does. The duration can be set via the button “Set end time” (F12) while the video playing or via the “Duration up/down” arrows.

To insert a subtitle right after the current line, press the Insert button (while the list view is focused).

You can also click on the right audio wave form or in the list view to insert/merge/split/delete lines.

## Adjust mode



This is the place to adjust existing lines.

To adjust subtitle lines manually one by one starting from the top. Use the buttons “Set start and offset the rest” (F9) and “Set end & go to next” (F10). Fine-tuning of “Start time” and “Duration” should be done by using the up/down arrows.

You can also click on the right audio wave form or in the list view to insert/merge/split/delete lines.

## Wave form

The wave form control makes it easy to see exactly where speech starts/ends.



With the right click menu, you can split/merge/delete subtitles.



To create a new paragraph, make a new selection with the mouse and press Enter (or right click + choose “Add text here”).



Right-click on a marked area also offers: Go to previous subtitle, Go to next subtitle, Play selection, Add scene change, Guess time codes..., Seek silence..., and Insert subtitle here...

### Wave form mouse/keys usage

- Mouse single click: Go to position
- Mouse double click on existing subtitle: Select clicked subtitle
- Mark area + right click on marked area: Prompt for add new paragraph / play current selection
- Mouse drag left/right border of subtitles (adjusting start or end time)
- Move/drag on middle of subtitle (adjusting both start and end time – but not duration)
- Mouse right click can either add new subtitle or perform delete/split/merge on existing subtitle line
- Mouse wheel scrolls waveform forward/back
- alt+arrow left/right moves video position
- alt+arrow up/down goes previous/next subtitle
- Numeric +/- will zoom in/out
- Mouse single click+Shift will set start for selected line (not moving end time)
- Mouse single click+Ctrl will set end for selected line (not moving start time)
- Mouse single click+Alt will set start for selected line (and keep duration)
- Mouse double click on non-paragraph – toggle play
- Mouse single click+Ctrl+Shift will set start of selected line + offset all lines after selected line (keeping durations)
- Holding down ALT when moving start/end will move nearest subtitle start/end too if it's closer than 500 milliseconds

### Waveform extraction

The extracting of wave data can be done with FFmpeg (configure in Options - Settings - Waveform) or VLC, and then a very small wave file (with a VERY low sample rate) is generated and saved in the “WaveForms” folder.

**Note:** You cannot use waveform without the video or the audio.


## Export

Subtitle Edit can save via “Save as...” in many different text formats, but if you want to save a subtitle in a binary format (like pac or 890) or an image based format (like png or Blu-ray sup) you must use File -> Export.

Many settings like font, colors and also box style can be chosen.

These tags are preserved when exporting a subtitle to an image based format:

- i – for setting font to italic
- font color – for setting the font color
- &123;\an1&125;–&123;\an9&125; – alignment tags
- ASSA (Advanced Sub Station alpha) or SSA styles like color, font size and box (only ASSA has color alpha/translucency)

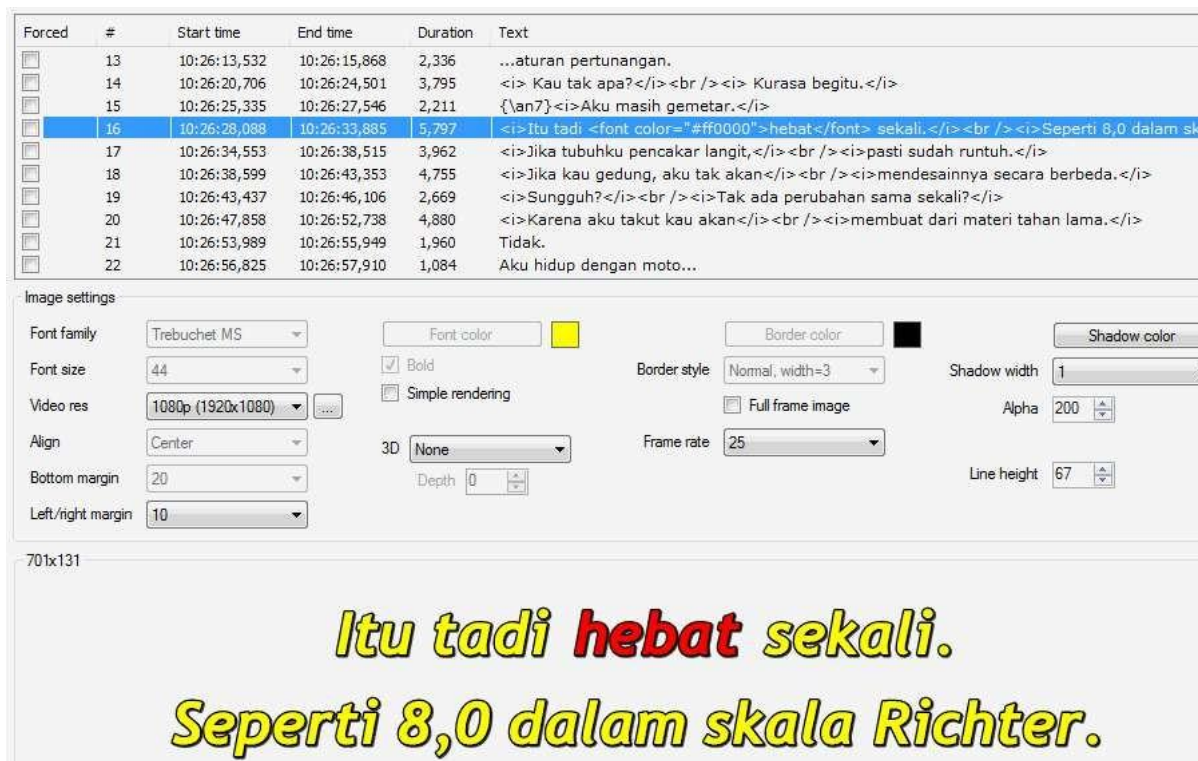


Export image settings include: Font family, Font size, Bold, Font color, Border color/style, Shadow color/width, Video res, Align, Bottom margin, Left/right margin, Simple rendering, Full frame image, 3D, Frame rate, and Line height.

**Note:** Arabic might require “Simple rendering”.

**Note:** SE requires TTS fonts, and does not support OTF font files.



## Synchronization

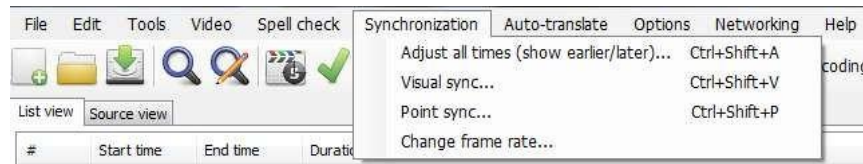

Subtitle Edit offers several ways to synchronize subtitles.

Adjust all times (show earlier/later) (Ctrl+Shift+A): This is useful if you for example need to show all texts 3 seconds earlier.


Visual sync (Ctrl+Shift+V): Sync by matching start/end scene.

Point sync (Ctrl+Shift+P): This allows synchronization by using 2 or more points – sync point time codes can be entered manually which makes it easy to use time codes from another subtitle already in sync.

Point sync via other subtitle: If you have another subtitle in sync (perhaps in another language – it helps if you can understand it a bit) you can match one of the first lines, match one of the last lines, sync, and then all lines should be in sync.

Change frame rate: This makes it easy to match text from a video with one frame rate to a video with another frame rate (can also be done by visual sync or point sync).

## Visual sync

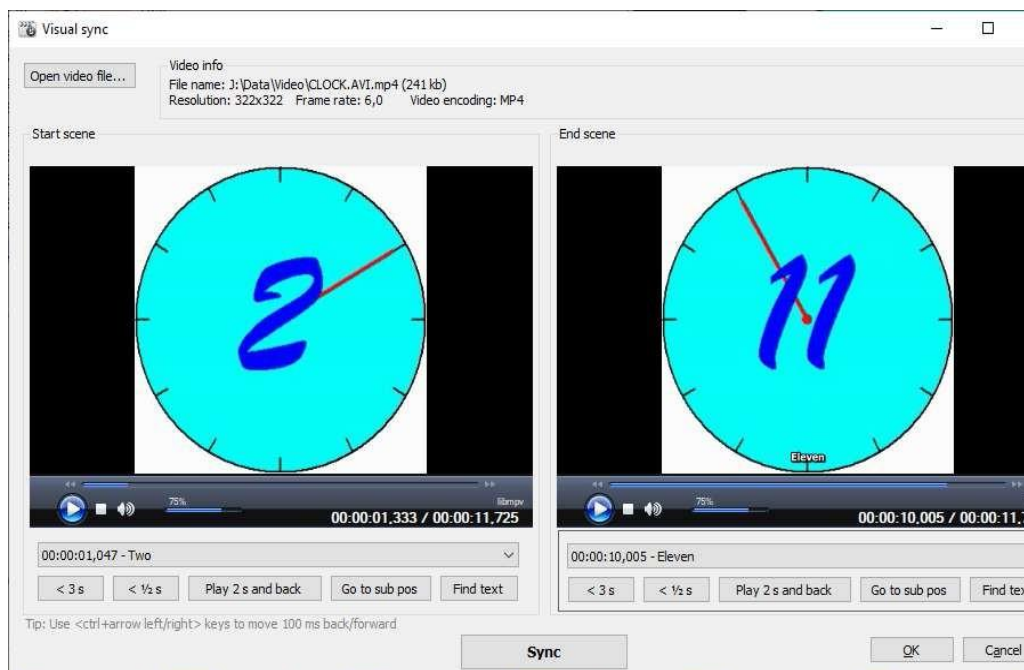

Visual sync is a really easy way to synchronize a subtitle with a video file.

Match one of the first subtitle lines with the start scene. Then match one of the last subtitle lines with the end scene. Press “Sync” and that's it :)

There are a few helper buttons which will help find the right place in the video where the subtitle should start (just about where the first word comes out). The “Play 1 sec and back” button is a test button, so you can easily verify that the current position really is correct. Also check the Shortcuts.

In some cases a subtitle is impossible to synchronize because one or more scenes have been removed/added. In these cases you can select a number of subtitles in the subtitle list view, right click and choose Visual sync selected lines. This way you can adjust the subtitle in smaller parts.

### Translation (auto)

Subtitle Edit can translate a subtitle by using Google translate, Bing Microsoft translator, or Facebook's NLLB (No Language Left Behind). Automatic translation works fairly well, but translated subtitles will still need manual correction (hint: use main window translate mode).

For Google translate you need to set up a Google Cloud API key (or use the limited free quota) and for Microsoft translate you need to setup a cognitive services 'Translator Text' key and be sure to use the correct token endpoint. Note that if you do get an API key for Google Cloud (read more here) you need to add billing info – even for the free trial period.

After getting the key, you need to paste it into the “API Key” field for “Google translate” via the menu Options - Settings - Tools.

Running Facebook's NLLB (with support for 200 languages) works via nllb-serve or nllb-api running as a local web API:

nllb-serve requires git and Python/pip. Install with these commands:

```
git clone https://github.com/thammegowda/nllb-serve
cd nllb-serve
pip install -e .
```

Run with this command line:

```
nllb-serve
```

nllb-api requires Docker. Start the docker container with this command line:

```
docker run --rm -e SERVER_PORT=5000 -e APP_PORT=7860 -p 7860:7860 -v
C:\Windows\Temp\cache.bin:/home/user/.cache ghcr.io/winstxnhdw/nllb-api:main
```

Running LibreTranslate works via a local web API (requires Python/pip):

Install with this commands:

```
pip install libretranslate
```

Run with this command line:


```
libretranslate
```

Running Ollama works via a large language models locally.

Install their program and pull the model you want to use via cmd line:


```
ollama pull llama3
```

Also do check the translate plug-ins, see File -> Plugins.

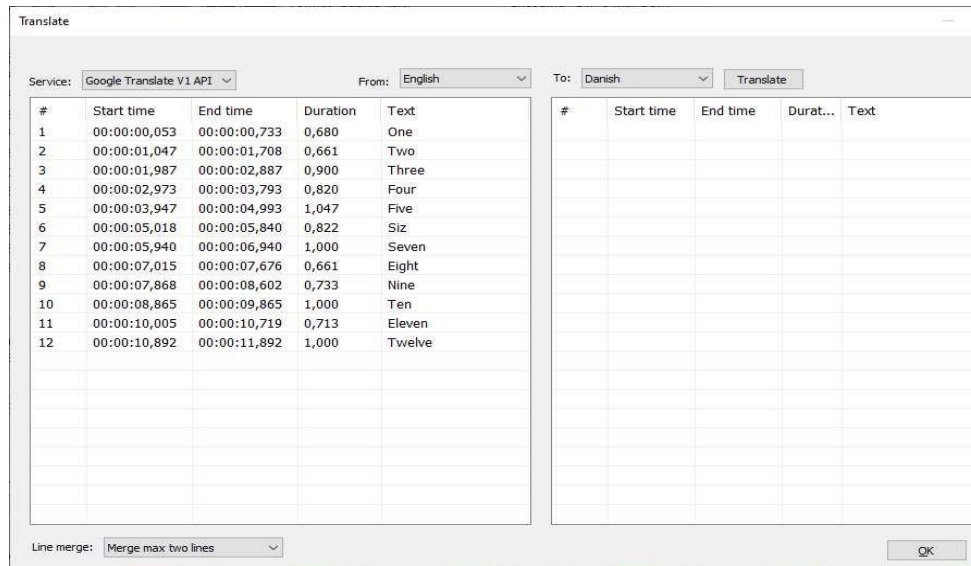

The Translate dialog lets you pick a Service (e.g. Google Translate V1 API), a From and To language, and shows the original lines on the left and translated lines on the right, with a “Line merge” option (e.g. “Merge max two lines”).

## Fix common errors

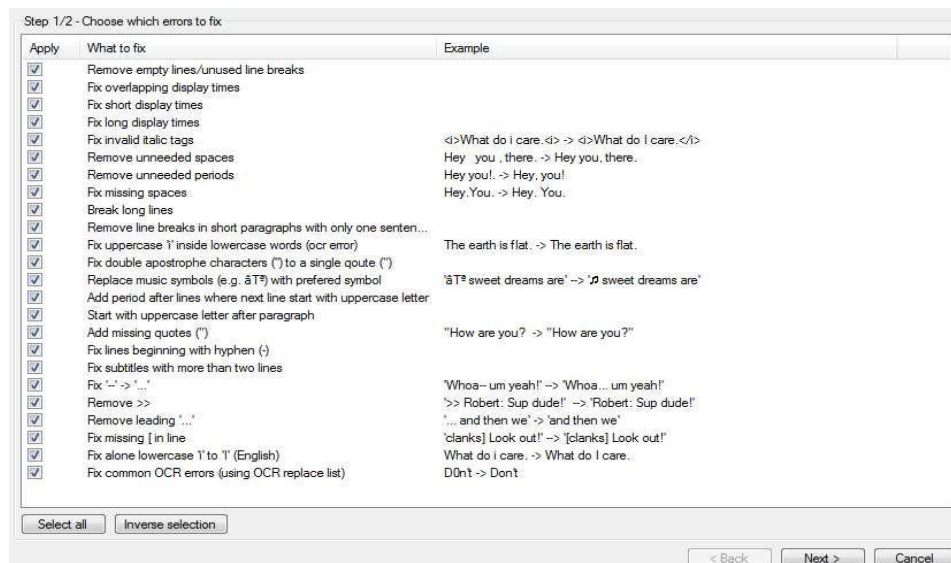


## SUBTITLE EDIT – GUIDE DOCUMENT

Some subtitles have a lot of errors (often these subtitles are created using OCR software).

“Tools -> Fix common errors” provides an easy way to fix a lot of these errors.

The first window shows a list of actions to fix, just tick the checkboxes you want fixed and click “Next”.

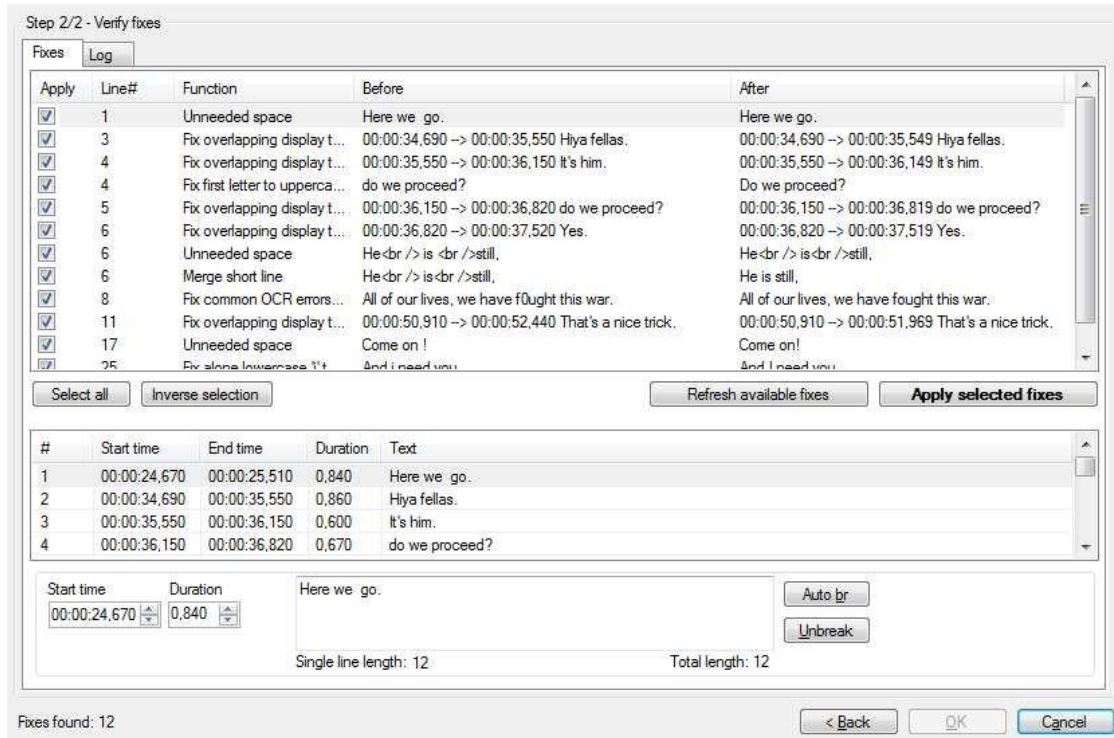

Available fixes include, among others:

- Remove empty lines/unused line breaks
- Fix overlapping display times
- Fix short/long display times
- Fix invalid italic tags
- Remove unneeded spaces / periods
- Fix missing spaces
- Break long lines
- Remove line breaks in short paragraphs with only one sentence
- Fix uppercase 'i' inside lowercase words (OCR error), e.g. “The earth is flat.” → “The earth is flat.”
- Fix double apostrophe characters (’’) to a single quote (’)
- Replace music symbols with preferred symbol
- Add period after lines where next line start with uppercase letter
- Start with uppercase letter after paragraph
- Add missing quotes (“



- Fix lines beginning with hyphen (-)
- Fix subtitles with more than two lines
- Fix '-' to '...', Remove >>, Remove leading '...'
- Fix missing [ in line
- Fix alone lowercase 'l' to 'I' (English)
- Fix common OCR errors (using OCR replace list)

Step 2/2 shows a “Verify fixes” screen listing each fix found (line #, function, before/after) with checkboxes so you can apply only the ones you want. A Log tab gives an overview of what will be done, and what was not possible to fix. The “Apply selected fixes” button applies the fixes.


Selected fixes will be remembered in future sessions.

## Remove text for hearing impaired

Many subtitles include text for hearing impaired (also known as “SDH” in the American movie industry which is an initialism for “Subtitles for the deaf or hard-of-hearing”). For people with perfect hearing (and no noisy kids) these texts can be annoying – and easily removed with Tools -> Remove text for hearing impaired.

SE offers many options for configuring removal of text for HI and in the preview you can see what changes will be made – and skip any wrongly made removals.

You can also remove interjections and you can maintain your own interjections. Interjections are not case sensitive and SE will try to remove them by descending text length.

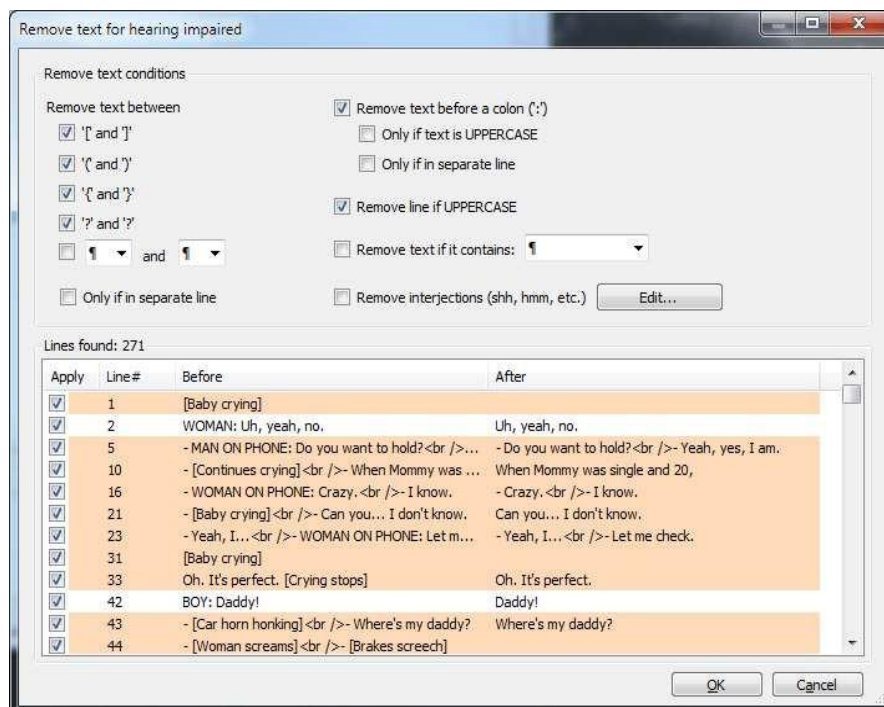

Options in the “Remove text for hearing impaired” dialog include:

- Remove text between [ and ], ( and ), { and }, custom markers
- Only if in separate line
- Remove text before a colon (':') – only if text is UPPERCASE / only if in separate line
- Remove line if UPPERCASE
- Remove text if it contains a custom marker (e.g. ♪)
- Remove interjections (shh, hmm, etc.) – editable list


## Spell check

Spell check uses Hunspell (which is also used by Open/LibreOffice, Firefox, Chrome, and Opera).

Only English dictionary is included, but you can easily find more dictionaries via the toolbar menu Spell check -> Get dictionaries...!

If you download Open Office 3.x dictionaries with the extension .oxt, then rename to .zip, and then unpack the .dic file and the .aff file to the Subtitle Edit Dictionary folder.

The spell check dialog shows the full text, the unrecognized word, the language, and a list of suggestions.

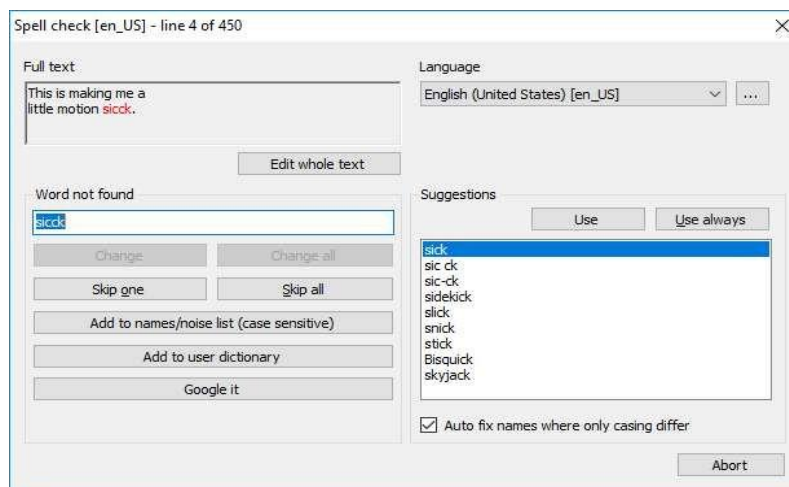


Available actions include:

- Edit whole text – enable editing of the whole text (not only the current word) for this one sub only
- Change all / Use always – always change current word, also in future works (saved in the OCR Fix Replace list)
- Change / Use – change current word just this once
- Add to names/noise list (case sensitive) – remember the name in the edit text box with current casing, also in future works
- Add to user dictionary – remember the word and not prompt for it any more (user dictionary is not case sensitive)


## Import/OCR image-based subtitles - like DVD Sub/idx or Blu-ray sup

If you open an image based subtitle like Blu-ray sup or sub/idx (vobsub), an OCR screen comes up showing the subtitle image, subtitle text list, and OCR auto correction/spellchecking options.

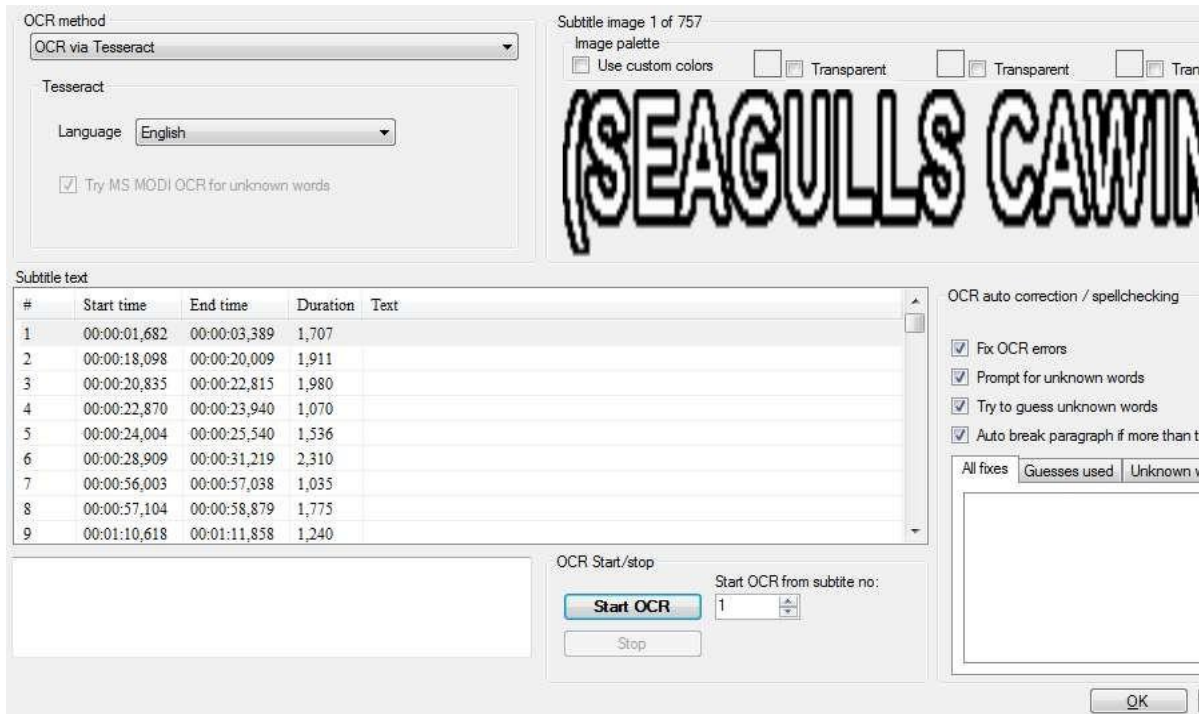

The list view now contains empty subtitle text lines with only timestamps. You can enter the text manually, but it's much easier to let one of the OCR engines do the work:

- OCR via binary image compare (recommended): does not require third party software installed, but requires the user to manually enter letters based on image parts. “No of pixels is space” should be decreased if not all translated words are separated, and increased if there are too many separations.
- OCR via Tesseract 3.02 (recommended): Tesseract is an open source OCR engine. Additional language data files are available on GitHub and need to be unpacked to [Subtitle Edit folder]\Tesseract302\tessdata.
- OCR via Tesseract 5 (recommended for text without italics or languages not available for Tesseract 3.02):

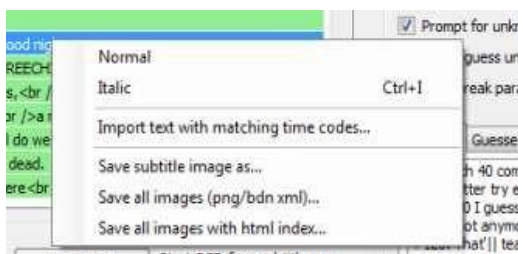


uses a new OCR engine based on LSTMs. It is a bit slower and has limited support for detecting italic font style, but brings accuracy gains, especially for smaller/unclear fonts. Works best with black letters

on a white background, or white letters on black background (avoid an outline). Requires Visual C++ 2017 runtime.

- OCR via nOCR (recommended for larger subtitles like Blu-ray .sup): you can train nOCR with your own fonts fairly easy/quick.
- OCR via Paddle OCR (recommended for Chinese/English/Japanese/Korean): works well with complex images, e.g. from hard-coded subtitles.


Right-clicking in the list view gives a context menu with these options:

- Import text with matching time codes... – continue working on an earlier created subtitle
- Save subtitle image as... – save current image as png, gif, bmp, or tiff
- Save all images with html index... – display all subtitle images in an html page for easy proofreading

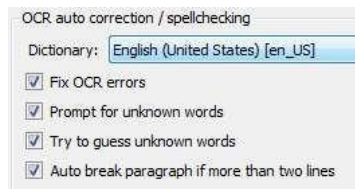

OCR via Tesseract will work best if you also have spell check dictionaries. “Prompt for unknown words” and “Try to guess unknown words” will only work if a dictionary is available. “Fix OCR errors” will also benefit from a dictionary.

If you think Tesseract is too slow, you could set the spell check dictionary to “None” for better performance and then fix errors e.g. via “Fix common errors” plus spell check afterwards.

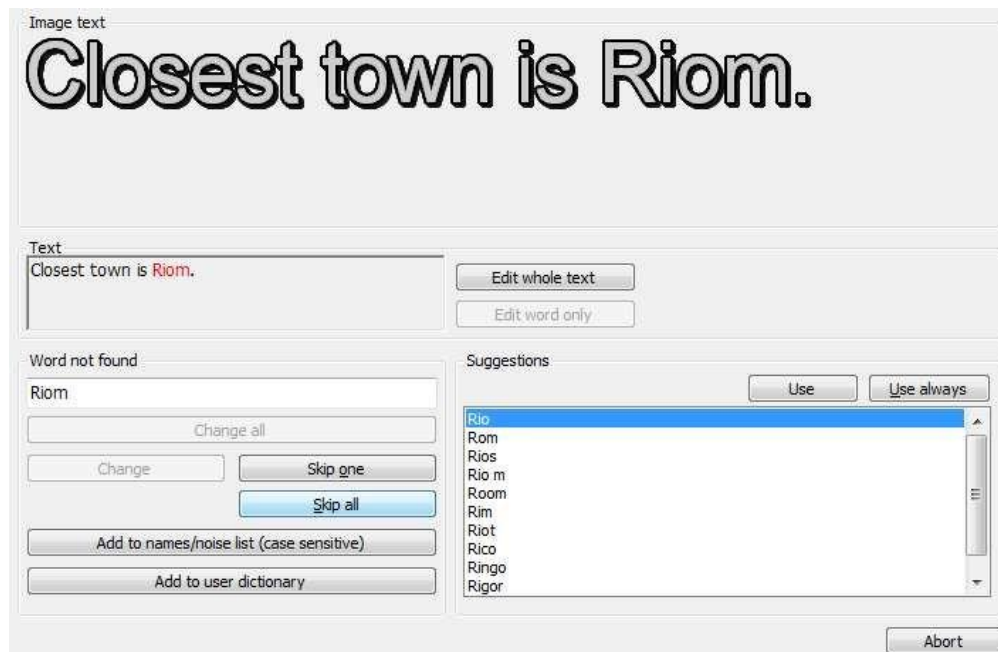

Select one of the OCR methods and click on the button “Start OCR”.

When you are done just click “OK” and do remember that an OCR'ed subtitle most likely contains some errors that need correction.

If a VobSub/TS subtitle contains more than one language, you will be prompted for language.


## Edit Blu-ray sup/TS-images/BdnXml image based subtitles

In File - Import - Blu-ray (.sup) subtitle file for edit it's possible to edit and re-save while keeping existing positions. You can change color/size/alpha/position/forced/sync/duration of lines/insert and even replace a whole image and much more. In the preview to the right, you can see subtitles in a black box (the black box only shows the size of the image). The subtitle preview box can be moved with the mouse or via the position number up/down controls.

In File - Save as... you can save as Blu-ray sup or BdnXml.


## Settings

In Settings you can adjust how Subtitle Edit will behave, so it's pretty important to take a look at these settings – especially single line maximum length and maximum characters per second as these settings will be used throughout all functionality, like “Fix common error” and other tools like syntax coloring in the main window list view (see the “Syntax coloring” settings for adjustments).

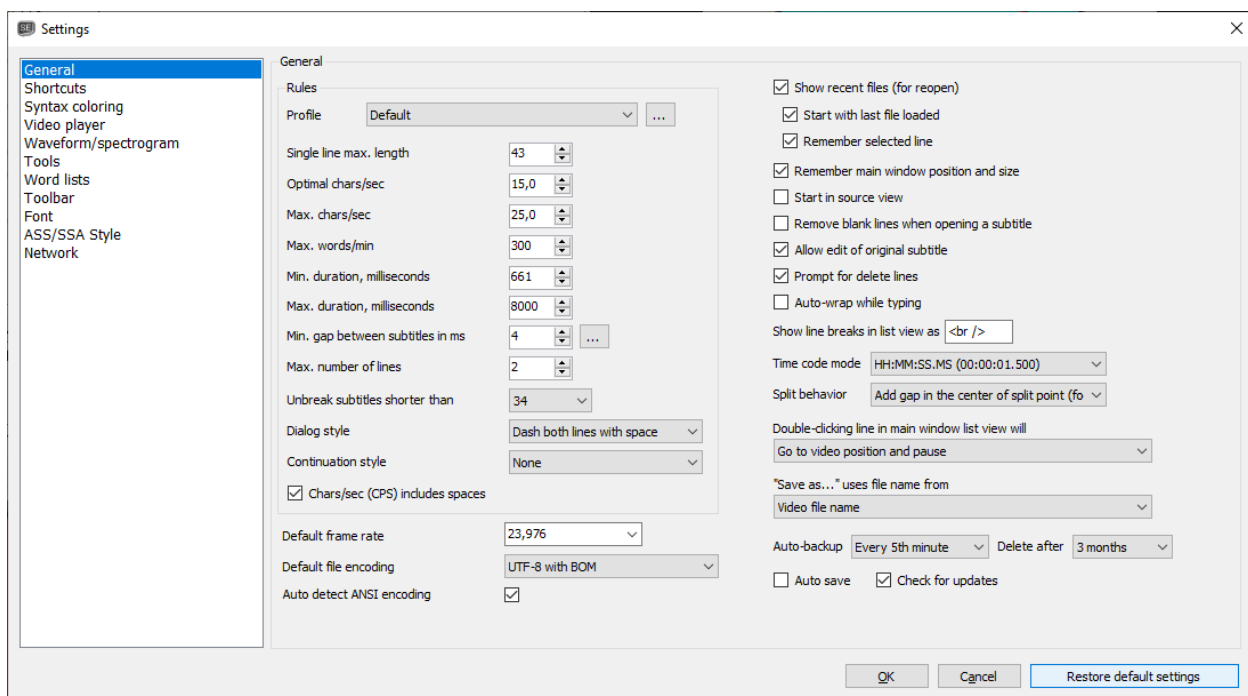



## SUBTITLE EDIT – GUIDE DOCUMENT

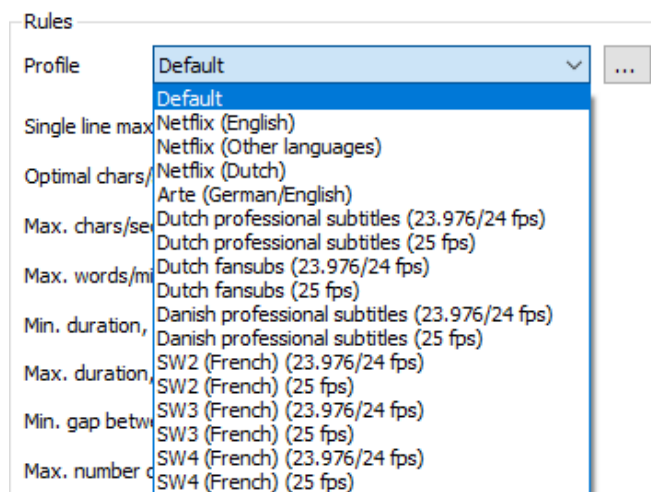

The most important rules are grouped in a “Profile” – you can use the default, choose one of the pre-defined profiles (e.g. Netflix English, Netflix Other languages, Netflix Dutch, Arte German/English, various Dutch/Danish/French professional subtitle profiles), or define your own.

General settings include: Single line max. length, Optimal chars/sec, Max. chars/sec, Max. words/min, Min. duration (ms), Max. duration

(ms), Min. gap between subtitles (ms), Max. number of lines, Unbreak subtitles shorter than, Dialog style, Continuation style, Chars/sec (CPS) includes space, Default frame rate, Default file encoding, and Auto detect ANSI encoding.

Other general options: Show recent files (for reopen), Start with last file loaded, Remember selected line, Remember main window position and size, Start in source view, Remove blank lines when opening a subtitle, Allow edit of original subtitle, Prompt for delete lines, Auto-wrap while typing, Show line breaks in list view as <br />, Time code mode, Split behavior, Double-clicking line in main window list view will go to video position and pause, “Save as...” uses file name from Video file name, Auto-backup (every 5th minute), Auto save, and Check for updates.


### Settings – Shortcuts

A few of the most important shortcuts are:

| Window              | Control            | Shortcut              | Function                          |
|---------------------|--------------------|-----------------------|-----------------------------------|
| Main                | –                  | Ctrl+F (customizable) | Open the Find dialog              |
| Main (customizable) | –                  | F3                    | Find next                         |
| Main                | –                  | Ctrl+Z (customizable) | Show history/undo                 |
| Main                | –                  | Ctrl+G (customizable) | Go to subtitle number             |
| Main                | –                  | Alt+Arrow up          | Go one line up in subtitle list   |
| Main                | –                  | Alt+Arrow down        | Go one line down in subtitle list |
| Main                | Subtitle list view | Ctrl+A                | Select all lines                  |

A complete list of shortcuts is available online.

Shortcuts are configurable via Options -> Settings -> Shortcuts. Examples of configurable shortcuts include:

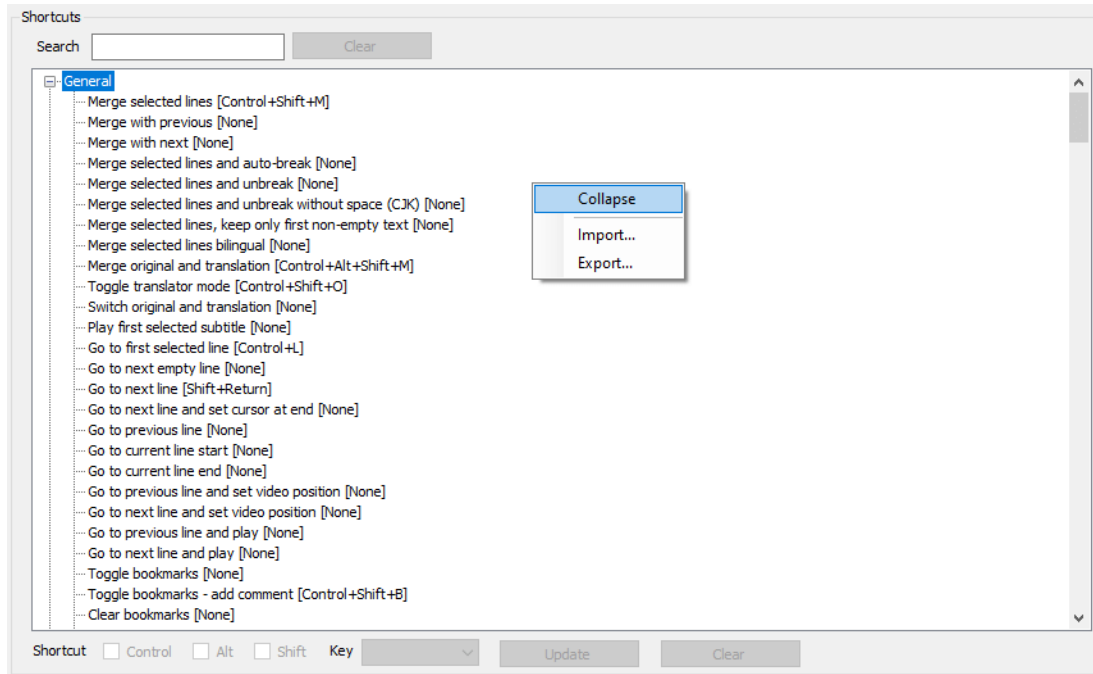


Merge selected lines (Control+Shift+M), Merge with previous, Merge with next, Merge selected lines and auto-break, Merge selected lines and unbreak, Merge selected lines and unbreak without space (CJK), Merge selected lines, keep only first non-empty text, Merge original and translation (Control+Alt+Shift+M), Toggle translator mode (Control+Shift+O), Switch original and translation, Play first selected subtitle, Go to first selected line (Control+L), Go to next empty line, Go to next line (Shift+Return), Go to previous line, Go to current line start, Go to current line end, Go to previous/next line and set video position, Go to previous/next line and play, Toggle bookmarks, Toggle bookmarks - add comment (Control+Shift+B), and Clear bookmarks.

**Note:** Shortcuts in menus has a stricter validation than hidden shortcuts (e.g. [Shift+N] is not allowed in a menu but is fine for a hidden shortcut).

## Settings – Video player

In the “Video player” section you can choose which video engine to use inside SE:

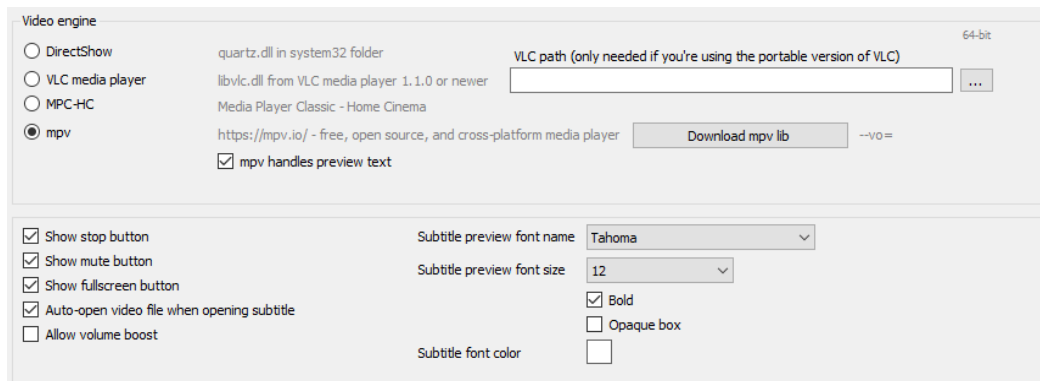

DirectShow (quartz.dll in system32 folder), VLC media player (libvlc.dll from VLC media player 1.1.0 or newer), MPC-HC (Media Player Classic - Home Cinema), or mpv (<https://mpv.io/> – free, open source, and cross-platform media player).

Currently “mpv” is recommended as it has precise seeking and on-video-preview. Click on “Download mpv lib” to download and use “mpv”.

If you have problems downloading mpv via the download button, you can download the file directly from GitHub. Download the libmpv2-64.zip file if you have a 64-bit OS.

Unpack the zip file and copy “mpv-2.dll” to the SE data folder (press Ctrl+Shift+Alt+D in the SE main window to open the SE data folder). You can get cutting edge versions of mpv from SourceForge.

Other options: Show stop button, Show mute button, Show fullscreen button, Auto-open video file when opening subtitle, Allow volume boost, Subtitle preview font name/size, Bold, Opaque box, Subtitle font color, and “mpv handles preview text” (VLC path only needed if you're using the portable version of VLC)..

## Settings – Tools

Here you can setup/tweak different tools:

Visual sync

Play X seconds and back, X is

Start scene paragraph is

End scene paragraph is

Fix common errors

Music symbols to replace (separate by comma)

Music symbol

☒ Fix common OCR errors - also use hard-coded rules

☐ Fix short display time - allow move of start time

☐ Skip step one (choose fix rules)

Spell check

☒ Auto fix names where only casing differs

☒ Also fix names via 'spell check suggestions'

☒ Prompt for unknown one letter words

☐ Treat word ending " in " as " ing " (English only)

☐ Remember "Use always" list

Auto br

☐ Use do-not-break-after list

☒ Break early for dialog dash

☐ Break early for end of sentence (.!?)

☐ Break early for comma

☒ Break by pixel width

☒ Prefer bottom heavy  %

Google Translate

[How to sign up](#)

API key

Microsoft Translator

[How to sign up](#)

Key

Token endpoint

- Visual sync: Play X seconds and back (X is 2), Start scene paragraph is (First + 1), End scene paragraph is (Last - 1)
- Fix common errors: Music symbols to replace (comma separated), Music symbol, Fix common OCR errors (also use hard-coded rules), Fix short display time (allow move of start time), Skip step one (choose fix rules), Edit settings for fixing continuation style...

## SUBTITLE EDIT – GUIDE DOCUMENT

- Spell check: Auto fix names where only casing differs (also fix names via 'spell check suggestions'), Prompt for unknown one letter words, Treat word ending 'in' as 'ing' (English only), Remember 'Use always' list
- Auto br (line split): Use do-not-break-after list, Break early for dialog dash, Break early for end of sentence (!?), Break early for comma, Break by pixel width (with Prefer bottom heavy %)
- Google Translate: API key field
- Microsoft Translator: Key field and Token endpoint (default <https://api.cognitive.microsoft.com/sts/v1.0/issueToken>)

If you often use “Fix common errors” and always use the same fix rules, then enable “Skip step one” to save time.

Often people want to customize line split, so many options are available for this incl. do-not-break-after list. The “auto br” line split settings are used in “Fix common errors”, the main window “Auto br” button, and the list view context menu “Auto balance selected lines”. Note that the “Auto br” button works on selected lines.

### Settings – Appearance

Here you can set font and other UI properties for the SE interface.


The screenshot shows the 'Appearance' settings window. It is organized into three main sections: 'UI Font', 'Text box', and 'Dark theme'. The 'UI Font' section includes a 'General' sub-section with 'Subtitle font' (Tahoma), 'Subtitle font color' (black), and 'Subtitle background color' (white). It also has a 'List view' sub-section with 'Subtitle font size' (10) and a 'Bold' checkbox. The 'Text box' section includes 'Subtitle font size' (12), 'Bold' checkbox, 'Center' checkbox, 'Use syntax coloring' checkbox, 'Live spell check' checkbox, 'Html color' (blue), and 'ASSA color' (purple). The 'Dark theme' section includes 'Use dark theme' checkbox, 'Text color' (grey), 'Back color' (black), and 'Show list view grid lines' checkbox.

- General: Subtitle font, Subtitle font color, Subtitle background color
- List view: Subtitle font size, Bold
- Text box: Subtitle font size, Bold, Center, Use syntax coloring, Live spell check, Html color, ASSA color


## SUBTITLE EDIT – GUIDE DOCUMENT

- Dark theme: Use dark theme, Text color, Back color, Show list view grid lines

“Use syntax coloring” will enable syntax coloring of html tags and optional spelling errors.

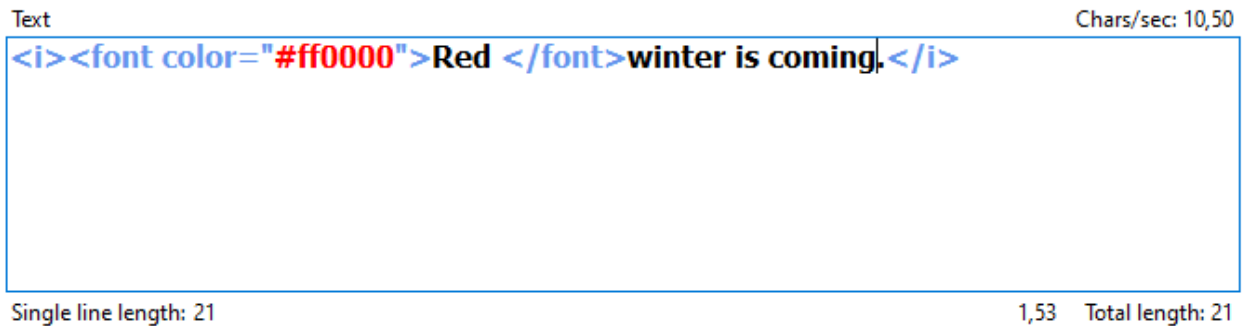

“Dark theme / Dark mode” will switch the color theme to a dark interface.

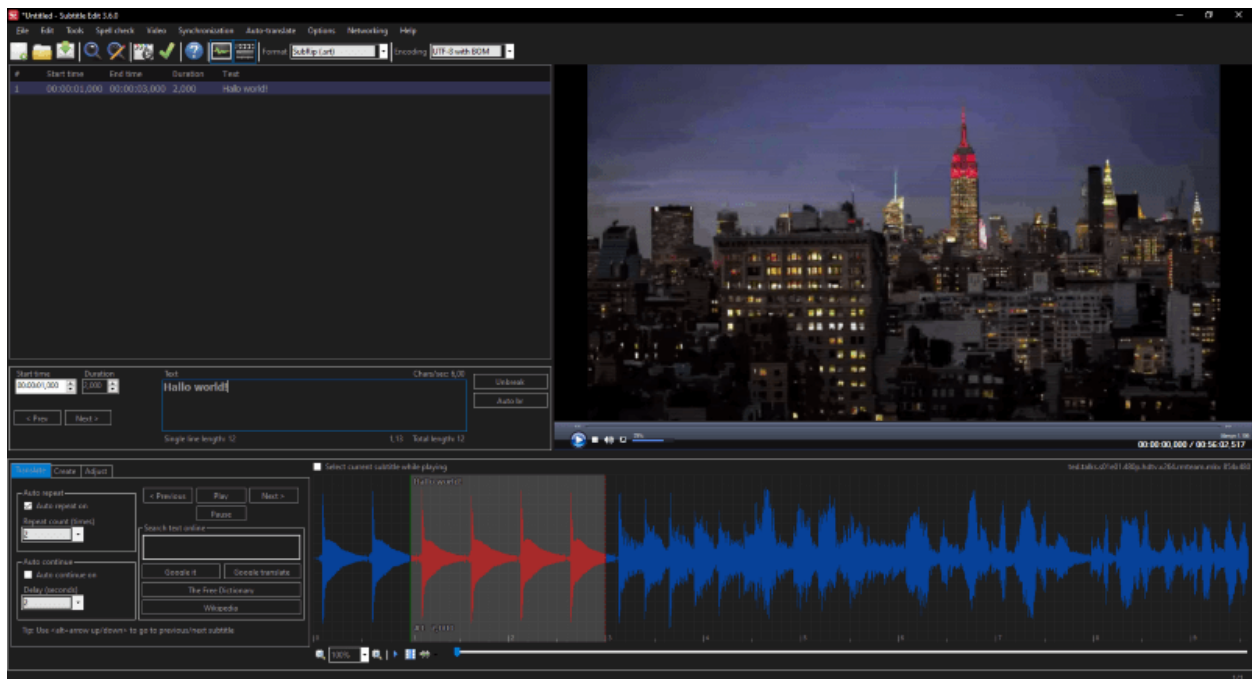


## Bookmarks

You can add a bookmark for a line by activating one of the “Toggle bookmark” shortcuts (see Options - Settings - Shortcuts). In the “Add bookmark with comment” window you can enter a comment to the bookmark (use Shift+Enter for more than one line).

Bookmarks are saved in a separate file. If you're working on “video.srt”, then SE will save the bookmarks in a file called “Video.srt.SE.bookmarks”, so you can actually email both files to other people using SE, and they can also see the bookmarks.



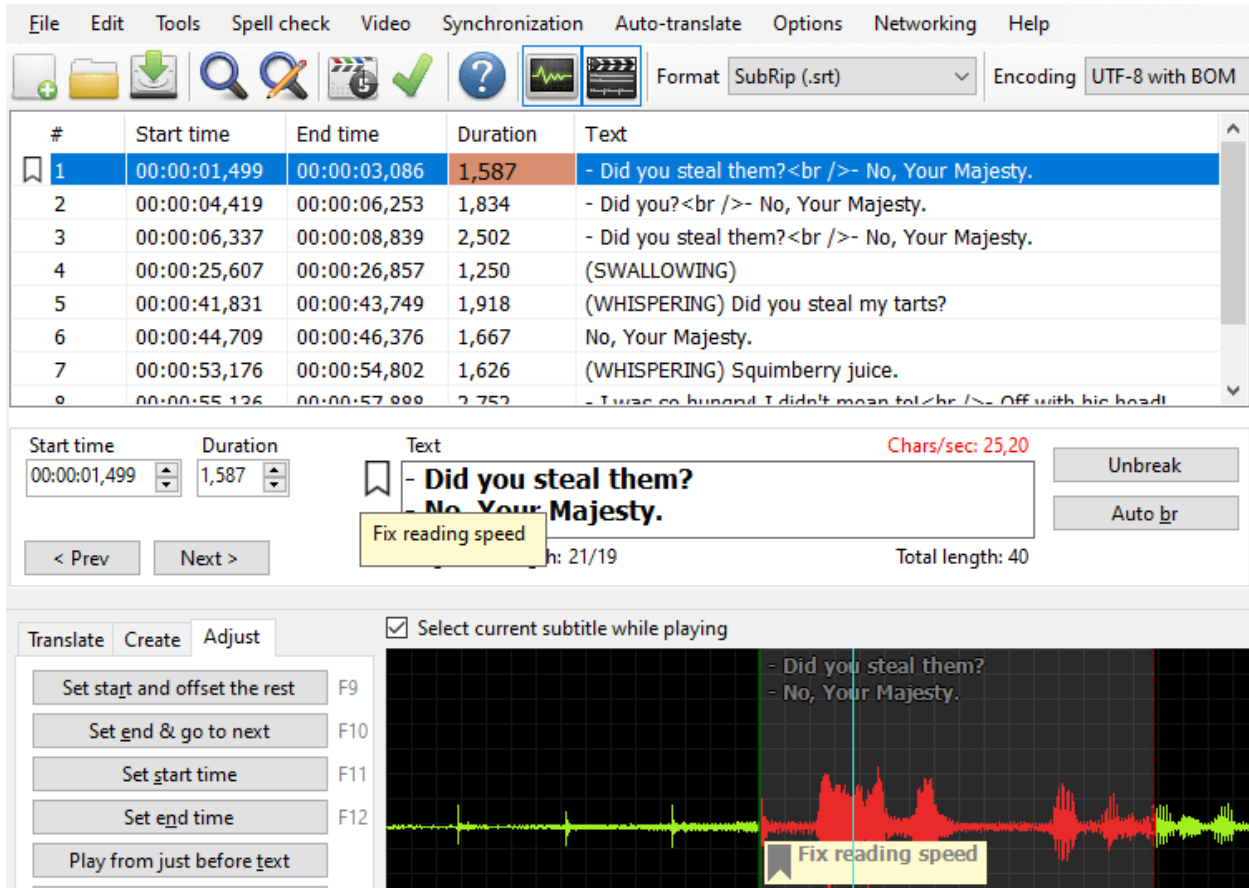

**Tip 1:** You can right click on the bookmark image left of the text box to get a context menu.

**Tip 2:** You can double click on the yellow text label to edit the text.

## Generate background box (for Advanced Sub Station Alpha)

Generate a box with e.g. rounded corners behind the text.

It's also possible to add a drawing (logo/flag/etc.) to each background box or even instead of the box.


Drawings can use a little scripting inside brackets ([ ]) with these constants which are calculated from current subtitle text: left, top, right, bottom, width, height.

Example of coordinate: `[left+width*0.9],[top+10]`

The preview will update if the drawing source file is changed, e.g. if you edit it in notepad.

**Important note:** Background box should be made when finishing a subtitle. Box sizes will reflect the text at the time of generation!

Dialog options include: Padding (Left, Right, Top, Bottom), Fill width (with margins), Style (e.g. Rounded corners, Radius), Box color, Outline (color and width), Shadow (color and width), Drawing file, Drawing MarginX/MarginY, Alignment, and “Only drawing”.

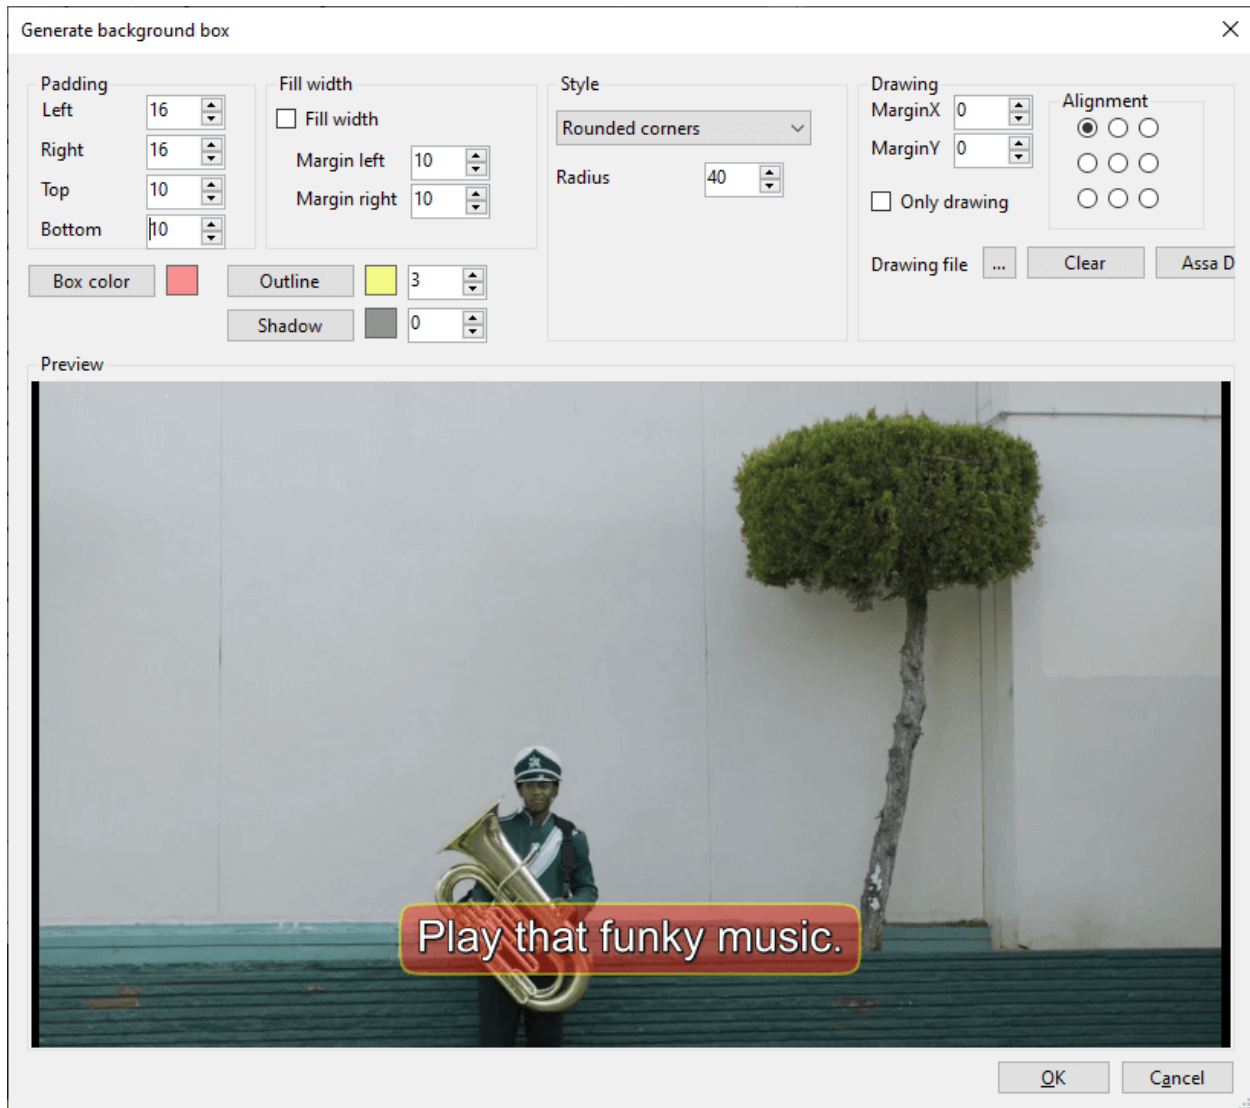

## Translating Subtitle Edit to another language

To translate Subtitle Edit first download the English xml language file and save it to your “Subtitle Edit\Languages” folder.

Translate the content of all tags with an xml editor or just notepad. You can also use Xml Content Translator!

Save your edited xml file as 'CultureName'.xml ('CultureName' must be an existing culture name – and also a tag in the xml file) in the SubtitleEdit\Languages folder. In Options > Choose language, you can now test your translation by choosing your language as language.

Please do send any translations to me, so I can include them in Subtitle Edit – thx :)

**Tip 1: WinMerge is an excellent tool for comparing files.**

*Tip 2: In the About section you can put your email (with “mailto:” before to make a clickable link) or homepage.*


*Tip 3: The help file tag can point to an url where the help is – keep it blank to just point to the English help file.*

The installer can be localized by translating this file.

## Networking – online collaboration

If you and a few friends want to translate the same subtitle at the same time over the internet, then do try the “Networking” feature.

First load the subtitle you want translated (and optionally the original subtitle). Then choose “Start new session” in the “Networking” menu.

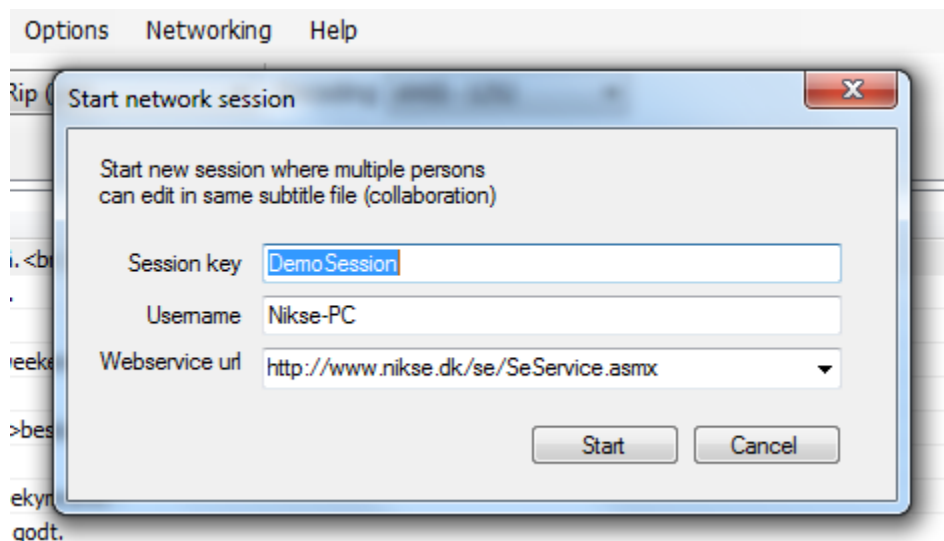


The “Start network session” dialog asks for: Session key, Username, and Webservice url (e.g. <http://www.nikse.dk/se/SeService.asmx>).

The “session key” is your subtitle id (can be any text you like) – other people need this in order to join (via menu Networking -> Join session) your session.

The “username” will be displayed when updating/inserting/deleting lines and in the chat window.

The “webservice url” points to a small server program hosting the session (initially developed via direct p2p, but decided to use a webservice instead, as it works much better with stuff like firewalls). Source code for this webservice is available and should make it easy to use your own server for hosting the session.


Subtitle Edit running in networking mode below. In the “User/action” column in the list view you can follow the translation progress – this might sparkle some synergistic effect! A chat window is also available for coordinating with other translators.

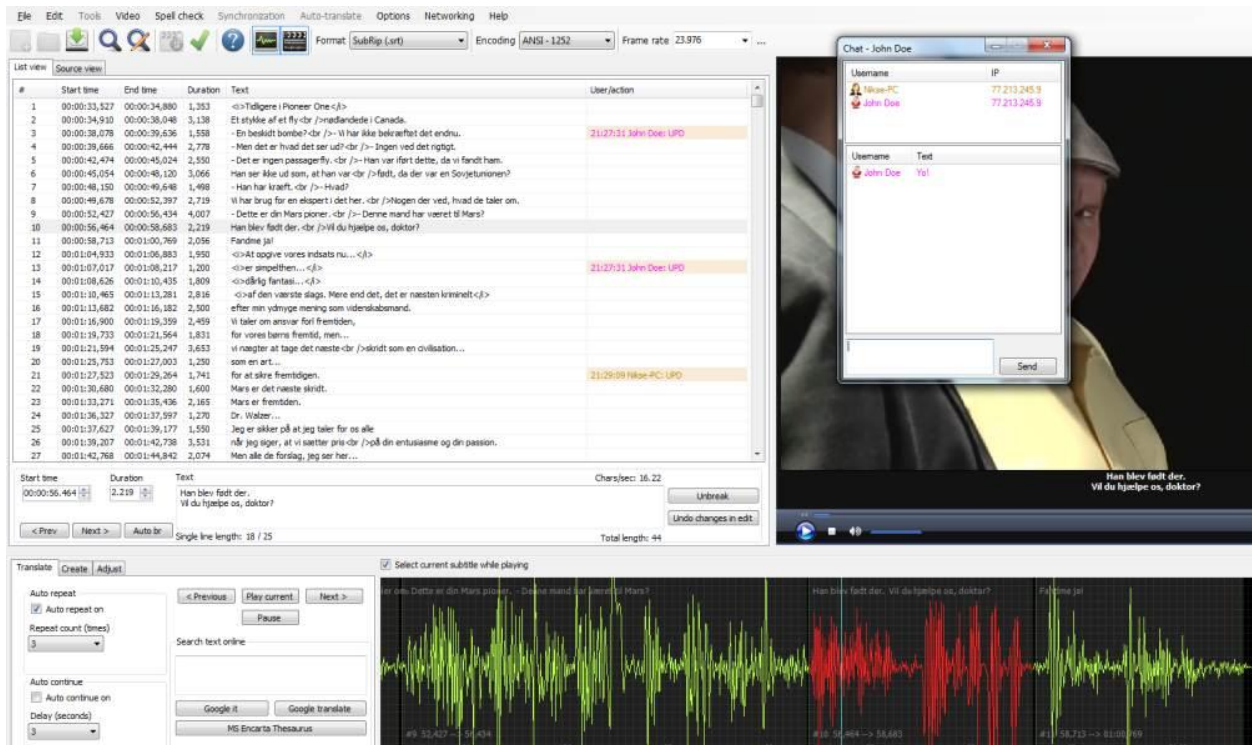


## Beautify time codes

Beautify time codes can round time codes to frame time codes, and/or put cues on shot changes if they are near enough.

With ffprobe (in-program download) you can round time code milliseconds to frame time codes. Snap to shot changes with advanced rules. Shot changes can be generated by ffmpeg (ffmpeg is an in-program download).

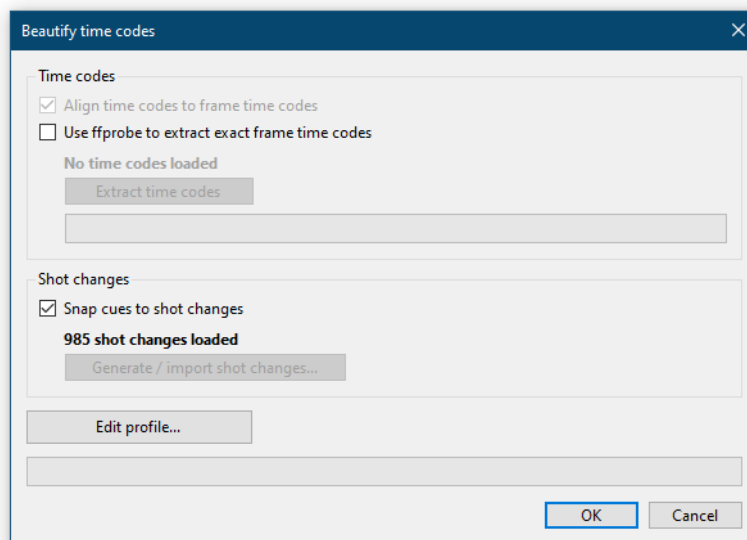

The Beautify time codes dialog offers: Align time codes to frame time codes, Use ffprobe to extract exact frame time codes, Snap cues to shot changes, and an Edit profile... button.

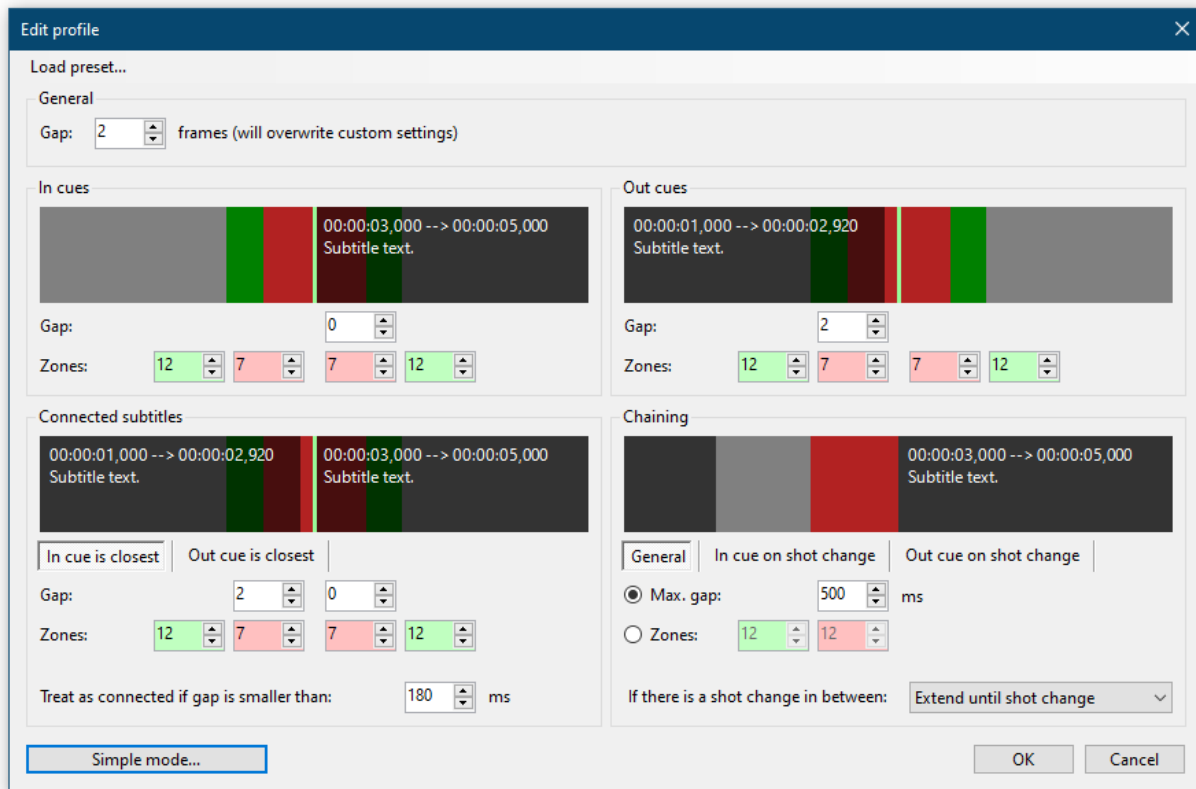

The rules are very configurable, and can e.g. be configured to support Netflix rules. The Edit profile dialog includes settings for General gap (frames), In cues (gap, zones), Out cues (gap, zones), Connected subtitles (in cue is closest / out cue is closest, gap, zones, “treat as connected if gap is smaller than”), and Chaining (general, in cue on shot change, out cue on shot change, max gap or zones, and behavior if there is a shot change in between).

## Batch convert via UI


Batch convert is accessible via Tools -> Batch convert... or you can start the batch convert directly via SubtitleEdit /batchconvertui

Batch convert is a powerful tool that can convert between 300 different subtitle formats with a lot of options. Many formats can also be read from mkv/mp4/ts/m2ts files.

Some of the batch convert options have their own settings, e.g. “Merge short lines”. To show the settings for “Merge short lines”, the list box line with the “Merge short lines” option should be selected (note: it's not enough to click on the check box, a click on the text is needed).



Transport streams (.ts/.m2ts) can only be converted to Blu-ray sup files – check the TS settings if you want to resize or do re-positioning.

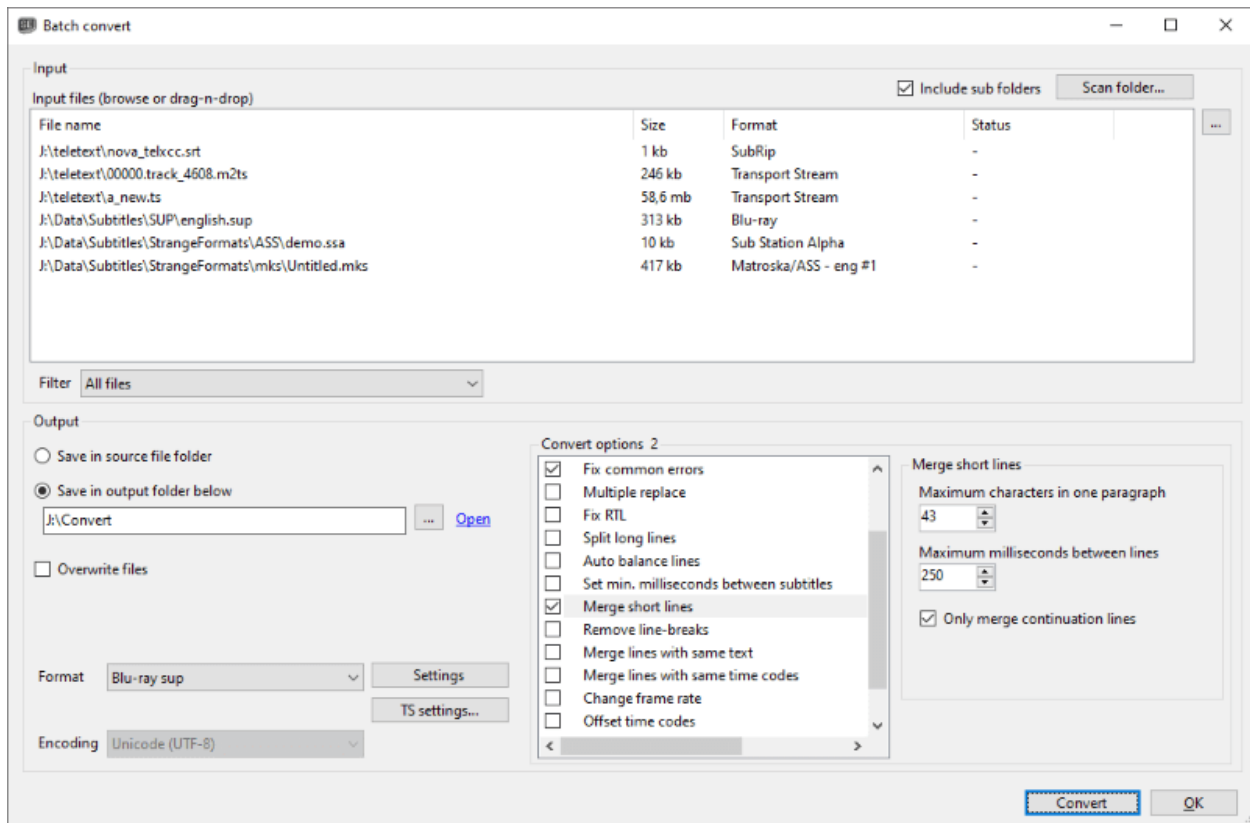

The Batch convert dialog lets you add Input files (browse or drag-n-drop, with “Include sub folders”), shows File name/Size/Format/Status, and lets you filter by file type.


Output options: Save in source file folder, or Save in output folder below (with Overwrite files option), Format, Settings, TS settings..., and Encoding.

Convert options include (among many others): Fix common errors, Multiple replace, Fix RTL, Split long lines, Auto balance lines, Set min. milliseconds between subtitles, Merge short lines, Remove line-breaks, Merge lines with same text, Merge lines with same time codes, Change frame rate, and Offset time codes. “Merge short lines” has its own settings for Maximum characters in one paragraph, Maximum milliseconds between lines, and “Only merge continuation lines”.

## Audio to text

Audio to text (also called “speech to text” or “speech recognition”) is accessible via Video -> Audio to text... or you can make a custom shortcut.

Audio to text (Whisper) is a new experimental speech recognition framework that works on around 100 languages.

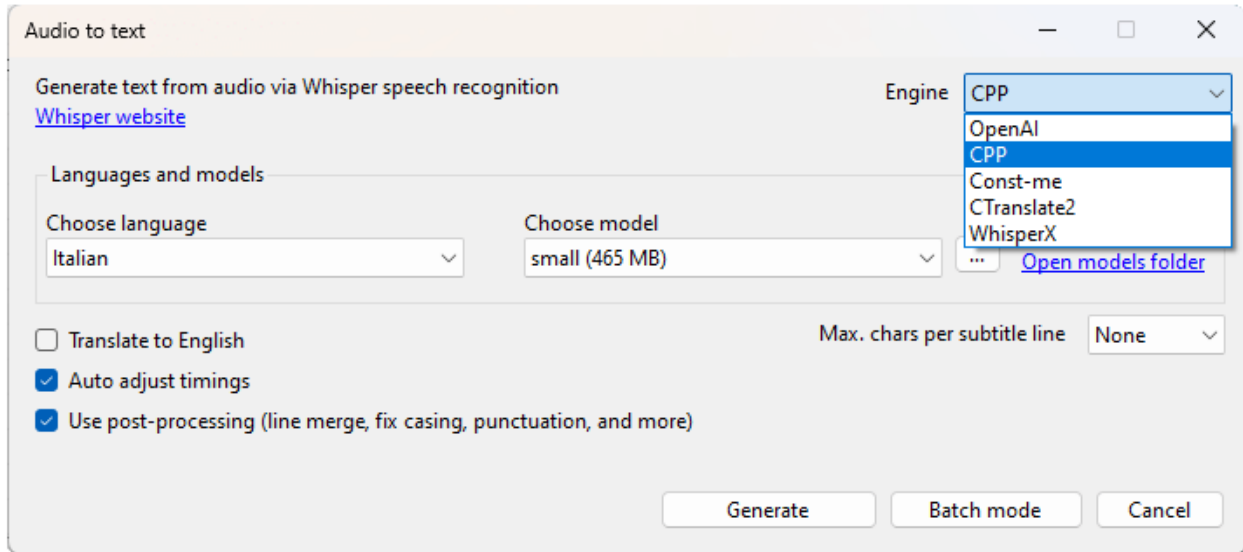

The Audio to text dialog lets you choose an Engine (OpenAI, CPP, Const-me, CTranslate2, WhisperX), a Language and Model, and options for Translate to English, Auto adjust timings, Use post-processing (line merge, fix casing, punctuation, and more), and Max chars per subtitle line. Buttons: Generate, Batch mode, Cancel.

You can use one of these Whisper versions:

- The original OpenAI Whisper (requires Python)
- Purfview's Faster-Whisper (Windows only)
- A simplified/optimized version called whisper.cpp (written in C++)
- A GPU optimized version of CPP with cuBLAS support (written in C++)
- A GPU optimized version called Whisper Const-me (written in C++)
- An optimized version called Faster Whisper with CTranslate2 (requires Python)
- Another Python version called stable-ts (requires Python)
- Another Python version called whisperX (requires Python)

To install and run the OpenAI Python version, you will need to follow the installation instructions.

Before installing Whisper Python versions, install Python and remember to check “Add Python to PATH” and you also might need Git too.

Manual model download links are available for OpenAI Python version (tiny.en, tiny, base.en, base, small.en, small, medium.en, medium, largev2, large (v3)), for Faster-Whisper versions, and for CPP versions (same set of model sizes).

Requirements for “CPP cuBLAS”: <https://developer.nvidia.com/cuda-downloads>

Requirements vary depending of Whisper engine and model. The large model can require up to 16 GB of ram. Whisper CPP/Const-me require a newer CPU with AVX instruction set.

If you do not want to install Python, Purfview has Whisper OpenAI and Whisper CTranslate2 compiled binaries.

*Note: A whisper log is written to the file “whisper\_log.txt” in the “SE data folder” (press Ctrl+Alt+Shift+D in the SE main window to open the SE data folder).*


*Note: You can press F2 in the Whisper windows too see the actual command line output during transcribe.*

*Note: All Python Whisper can be very difficult to install, so follow the authors installation instructions very carefully. It's probably best to use Python 3.10 and often different Whisper versions cannot require different versions of the same packages so do something like Anaconda.*

Audio to text (Vosk/Kaldi) can convert speech to text for more than 20 languages.

The resulting quality depends on how clear the speech is and how good the model is.


Batch conversion is available and you can also use Audio to text on selected lines in the list view via context menu (right click).

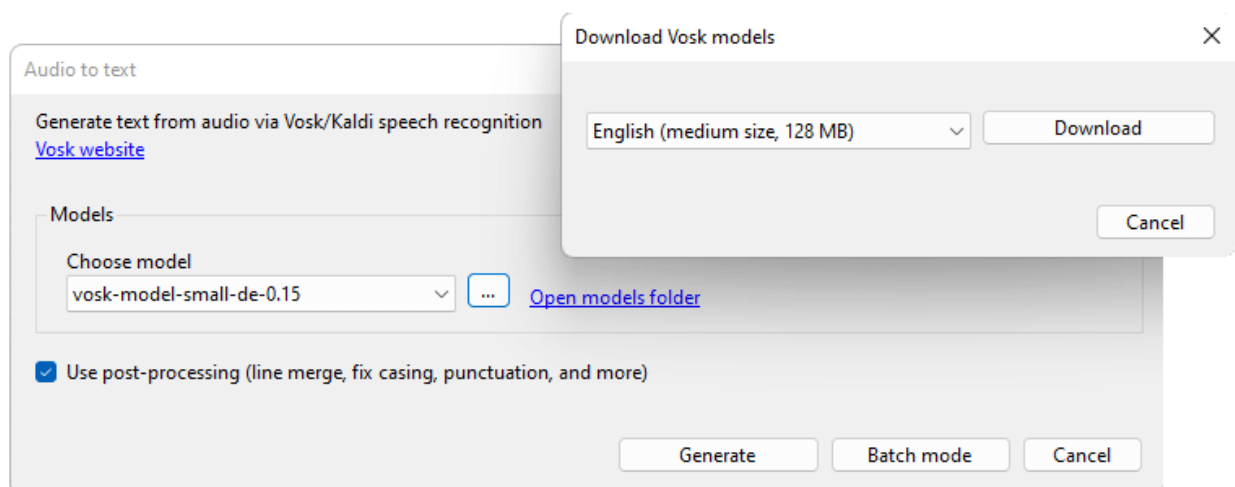

Audio to text (Vosk/Kaldi) requires libvosk and audio to text models as well as FFmpeg.

libvosk, FFmpeg and models download should be handled by the SE UI, and the folder structure will be like this:

- FFmpeg: [SE Data folder]\ffmpeg (should contain ffmpeg.exe)
- libvosk: [SE Data folder]\Vosk (should contain libvosk.dll etc.)
- models: [SE Data folder]\Vosk\[model name] (should contain final.mdl in the “am” folder)

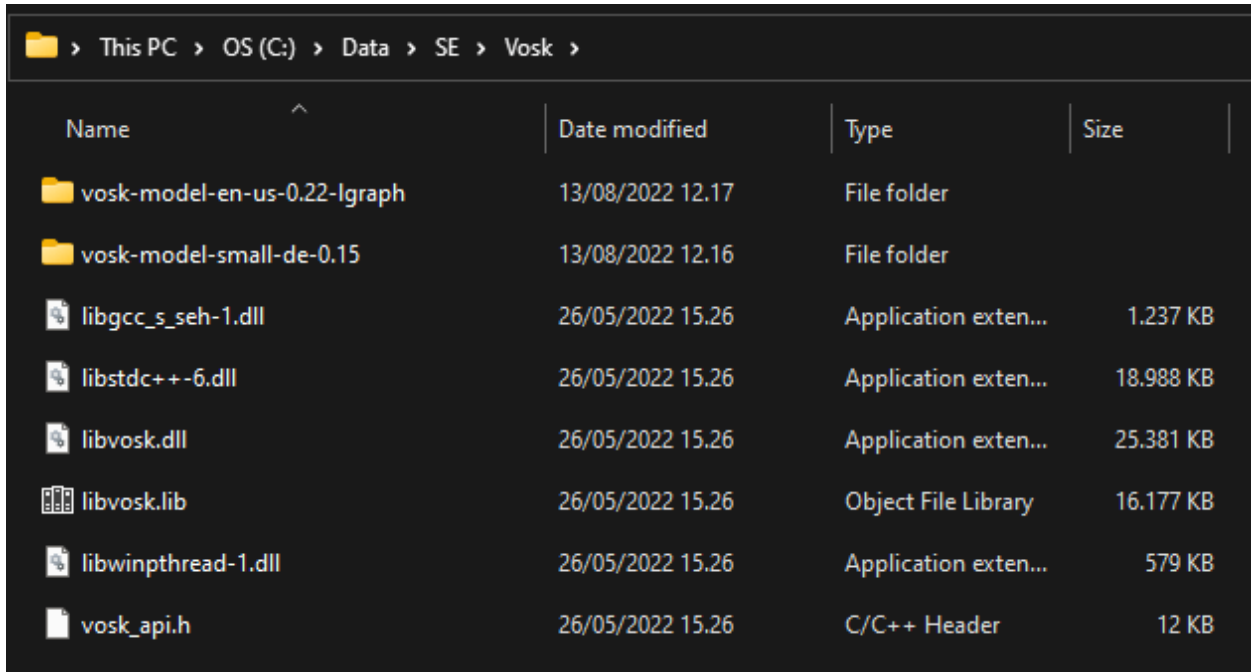

The screenshot shows a Windows File Explorer window with the address bar displaying the path: > This PC > OS (C:) > Data > SE > Vosk >. The main area displays a list of files and folders with columns for Name, Date modified, Type, and Size.

| Name                         | Date modified    | Type                  | Size      |
|------------------------------|------------------|-----------------------|-----------|
| vosk-model-en-us-0.22-lgraph | 13/08/2022 12.17 | File folder           |           |
| vosk-model-small-de-0.15     | 13/08/2022 12.16 | File folder           |           |
| libgcc_s_seh-1.dll           | 26/05/2022 15.26 | Application extension | 1.237 KB  |
| libstdc++-6.dll              | 26/05/2022 15.26 | Application extension | 18.988 KB |
| libvosk.dll                  | 26/05/2022 15.26 | Application extension | 25.381 KB |
| libvosk.lib                  | 26/05/2022 15.26 | Object File Library   | 16.177 KB |
| libwinpthread-1.dll          | 26/05/2022 15.26 | Application extension | 579 KB    |
| vosk_api.h                   | 26/05/2022 15.26 | C/C++ Header          | 12 KB     |

On Linux you need to install vosk with “pip3 install vosk” and setup a symlink file like:

```
sudo ln -s /usr/local/lib/python3.8/dist-packages/vosk/libvosk.so ~/Downloads/SubtitleEdit/libvosk.so
```

## Text to speech

Text to speech (TTS) is accessible via Video -> Text to speech and add to video... or you can make a custom shortcut.

Note that split sentences should be merged before using TTS. Formatting should also be removed.

CPS (characters per second) should not be too high or the audio will sound bad (too fast).

Will convert all texts from a subtitle and to audio and optionally add this new audio track to your video file.

For ASSA format, you can assign a voice to each actor.

- Piper TTS: Requires an in-program download for Windows + requires model downloads. Good quality and speed. Includes many voices.
- Tortoise TTS: Requires an installation via Python. Good but very slow, especially without CUDA.
- Coqui AI TTS: SE will run against the api (tts-server). Only one voice at a time.
- ElevenLabs: Online. Requires an API key. Good quality and many voices.
- Microsoft Speech Synthesizer TTS: Old, fast, and very robotic. Included with Windows (probably).

### Subtitle Edit command line conversion

Subtitle Edit can do command line conversion between formats listed in the main window format drop down list.

Syntax:

```
SubtitleEdit /convert "pattern" "name-of-format-without-spaces" [/encoding:?] [/fps:?] [/outputfolder:?]
```

#### ***Example 1:***

```
SubtitleEdit /convert sub1.srt sami
```

Result: Will convert sub1.srt to sub1.sub to SAMI format

#### ***Example 2:***

```
SubtitleEdit /convert *.srt adobeencore
```

Result: Will convert all .srt files to Adobe Encore format

#### ***Example 3:***

```
SubtitleEdit /convert *.srt adobeencore /encoding:windows-1252
```

Result: Same as above but using windows-1252 file encoding (see Info.Name list for more encodings)

#### ***Example 4:***

```
SubtitleEdit /convert a.sub subrip /fps:25
```

Result: Converts frame based a.sub to time based a.srt via a frame rate of 25

#### ***Example 5:***

```
SubtitleEdit /convert a.sub subrip /outputfolder:C:\Temp
```

Result: Converts a.sub to C:\Temp\a.srt

#### ***Example 6:***

```
SubtitleEdit /convert a.sub CustomText:MyFormat
```

Result: Converts a.sub to a.txt in a custom format named “MyFormat”

#### ***To list supported formats:***

```
SubtitleEdit /convert /list
```

Result: Show the more than 300 supported formats in command line conversion!



## Portable version and VLC

To use Subtitle Edit portable with VLC portable, download VLC portable (at least version 1.1.0, like VLC 3.0.8 64-bit or VLC 3.0.8 32-bit).

Now you can unpack to a sub folder in the Subtitle Edit folder called “VLC” or go to Options -> Settings -> Video player and browse to VLC portable version.

**Note:** You need VLC 64-bit on 64-bit operating systems, and VLC 32-bit on 32-bit operating systems.

## Make your own plugin

If you can code C# or VB.net you can make your own plugins for SE (SE 3.3 and later).

You can visit the GitHub plugin page for more information and download.

“Haxor” is a very basic example.

“Fix Hyphens” is a more complete example with a form and some basic helper classes.


At the moment it is possible to use plugins here: File, Tools, Sync, Translate, and “Spell check”.

Compile to “Any CPU” and not x86 or x64.

## Subtitle Edit on Linux

Even though Subtitle Edit is a Windows program, it runs (mostly) well on Linux via Mono.

Note that a dotnet CLI version is also available (no mono).

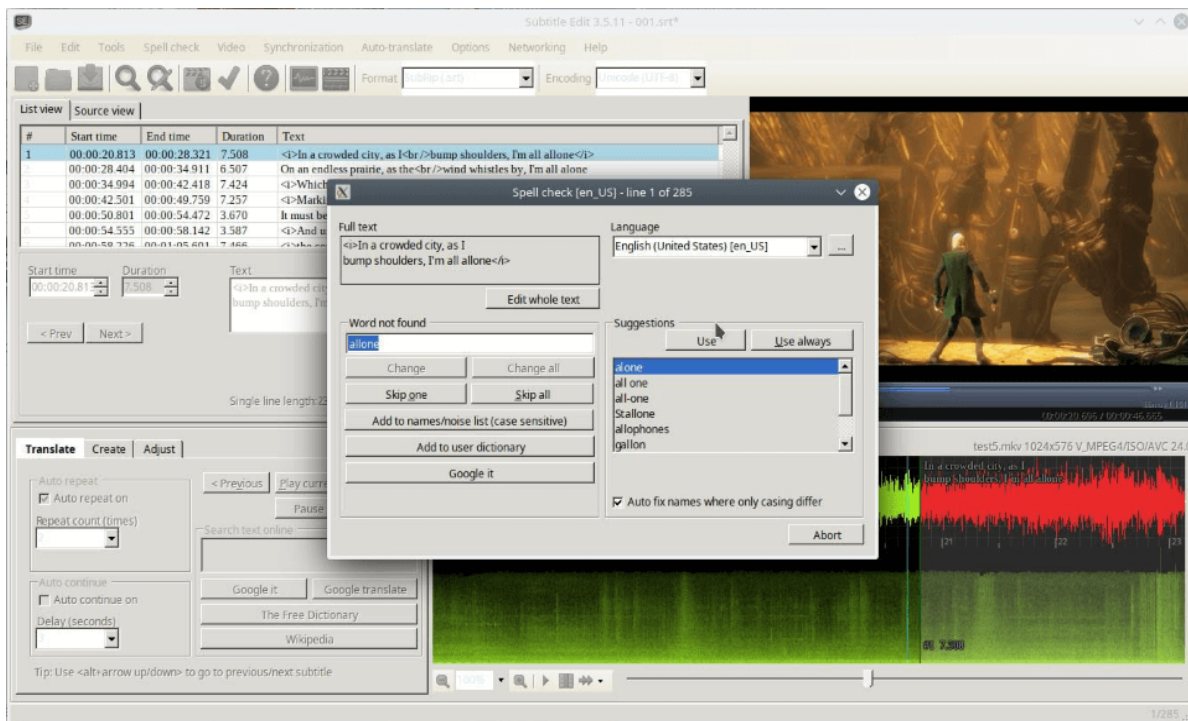

Download the portable version of SE (and not the installer).

### ***Packages required for Ubuntu based distros:***

```
sudo apt-get install mono-complete
sudo apt-get install libhunspell-dev
sudo apt-get install libmpv-dev (libmpv.so)
sudo apt-get install tesseract-ocr
sudo apt-get install vlc (already installed on some distros, SE uses (libvlc.so))
sudo apt-get install ffmpeg (already installed on some distros)
```

### ***Packages required for Arch based distros (like Manjaro):***

```
sudo pacman -S mono
sudo pacman -S mpv
sudo pacman -S hunspell
sudo pacman -S ttf-dejavu (Unicode font)
sudo pacman -S tesseract
sudo pacman -S tesseract-data-eng (or install via "sudo mono SubtitleEdit.exe")
```

### ***Packages required for Fedora:***

```
sudo dnf -y install mono-complete hunspell dejavu-sans-fonts tesseract tesseract-langpack-eng vlc vlc-extras ffmpeg
```

Fedora: To use libmpv you will need to enable rpmfusion and install “mpv mpv-libs” packages + Change “<MpvVideoOutputLinux />” to “<MpvVideoOutputLinux>x11</MpvVideoOutputLinux>” in Settings.xml.

To use spell check you will need to make a symlink link like this:

```
sudo ln -s /usr/lib64/libhunspell-1.7.so.0 ~/Downloads/SubtitleEdit/libhunspell.so
```

After unpacking SE and installing the packages, you can start SE by running “mono SubtitleEdit.exe” in a terminal. (The “Tesseract302” folder and the two hunspell dll files can be deleted as they are for Windows only.) Tesseract languages must be installed via a package – e.g. on Ubuntu “sudo apt-get install tesseract-ocr-eng”.

Note that these lib are required (a symlink file may be needed): libc.so.6, libdl.so (libdl.so.2 in SE 3.5.16). Adding a missing symlink for libvlc could look like this:

```
sudo ln -s /usr/lib/x86_64-linux-gnu/libvlc.so.5.6.0 ~/Downloads/SubtitleEdit/libvlc.so
```

### ***Known issues (Linux)***

- Setting focus on a control programmatically does not work

- The letter è (and some other Unicode characters) will crash SE – read more in the related Github issue
- Some languages like Chinese or Arabic might require a different font.
- Text to bitmap rendering is not working well. In image exporting try “Simple rendering” if you have problems.
- Winforms layout issues may occur.

## Compiling Subtitle Edit

Compiling your own version of Subtitle Edit is not that hard :)

If you don't have MS Visual Studio, then download and install MS Visual Studio Community. Then download the Subtitle Edit source code and edit the file “SubtitleEdit.csproj” and remove the following line:

```
<Exec Command="%22$(SolutionDir)..\build_helpers.bat%22 rev %22$(ConfigurationName)%22" />
```

Open “SubtitleEdit.csproj” in Visual Studio, go to Tools -> NuGet Packet Manager -> Manage NuGet packages for Solution... - and click “Restore” (this will download required components).

Hit F5 and you should be up and running.

Now you can change/add features you want or fix my bugs – if there were any ;)

## Known issues

Subtitle Edit has a few known problems!

| Problem                                                                  | Solution                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Subtitle Edit does not detect VLC in options (it's grayed out)           | SE requires VLC 64-bit version on 64-bit operating systems (use VLC 32-bit on 32-bit systems).                                                                                                                                                                  |
| Subtitle Edit portable is not working properly in “Program files” folder | Use the installer if you want to have Subtitle Edit in “Program files” (removes need for write access). The portable version requires write access to its own folder.                                                                                           |
| Tesseract 3.0.2 will not run properly                                    | You might need the Microsoft Visual C++ 2008 Redistributable Package. If it still don't work, try to delete “C:\Program files\Subtitle Edit”, “C:\Program files (x86)\Subtitle Edit”, “C:\Users\[Username]\App Data\Roaming\SubtitleEdit” before re-installing. |

## SUBTITLE EDIT – GUIDE DOCUMENT

|                                                                                         |                                                                                                                                      |
|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Subtitle Edit fails to run from a network drive (“The publisher could not be verified”) | If you do not have sufficient access to run Subtitle Edit from a network drive, copy it to a local disk or obtain the needed access. |
| Subtitle Edit fails to display some non-English lines in waveform                       | Known error.                                                                                                                         |
| Whisper will not run on some computers                                                  | Whisper might require a CPU with AVX support and up to 16GB of free RAM.                                                             |