

24

```
import React, { useEffect, useState } from 'react';


export const Home = () => {
  let [num, add] = useState(1);

  const increaseValue = () => {
    num++;
    add(num);
    console.log(num);
  }

  useEffect(() => {
    console.log("useEffect hook triggers on every render");
  });

  return (
    <div className="home">
      <p>{num}</p>
      <button onClick={increaseValue}>Add</button>
    </div>
  )
}
```

25

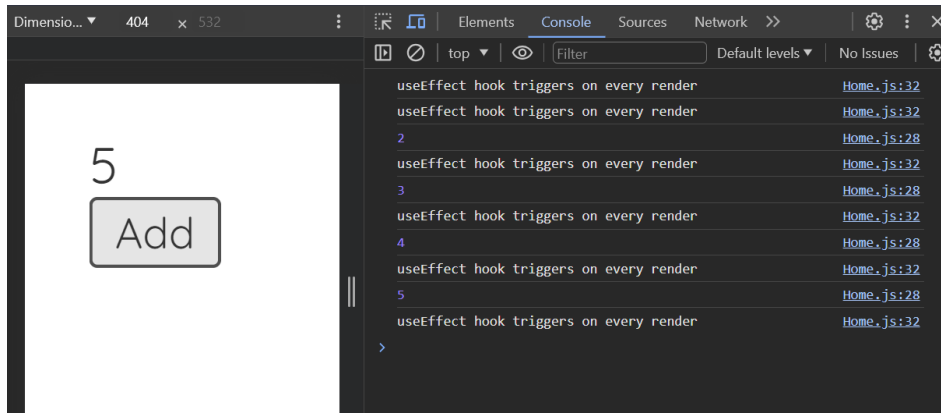

26

```
// This useEffect runs only once after the initial render
useEffect(() => {
  console.log("Triggers once after initial render");
}, []);

// This useEffect triggers when greet state changes
useEffect(() => {
  console.log("Triggers when dependency changed");
}, [greet]);
```

27

```
import React, { useState } from 'react';

export const Home = () => {
  const [blogs, setBlogs] = useState([
    { title: 'Title 01', body: 'Lorem ipsum 1...', author: 'John', id: '1' },
    { title: 'Title 02', body: 'Lorem ipsum 2...', author: 'Peter', id: '2' },
    { title: 'Title 03', body: 'Lorem ipsum 3...', author: 'Thomas', id: '3' }
  ]);

  return (
    <div className="home">
      { /* JS code to iterate and display items */ }
      {blogs.map((blog) => (
        <div className="blog-preview" key={blog.id}>
          <h2>{blog.title}</h2>
          <p>Written by {blog.author}</p>
        </div>
      ))}
    </div>
  )
}
```

28

Title 01

Written by John

Title 02

Written by Peter

Title 03

Written by Thomas

29

App.tsx

```
import { BrowserRouter, Route, Routes } from 'react-router-dom';
import DefaultLayout from './view/common/DefaultLayout/DefaultLayout';
import Login from './view/pages/Login/Login';

function App() {
  return (
    <BrowserRouter>
      <Routes>
        <Route path="/" Component={DefaultLayout}></Route>
        <Route path="/login" Component={Login}></Route>
      </Routes>
    </BrowserRouter>
  );
}

export default App;
```

30

Add links

```
import React, { Component } from 'react'
import { Link } from 'react-router-dom';

export default class Login extends Component {
  render() {
    return (
      <div>
        <Link to="/"> Back to Home </Link>
      </div>
    );
  }
}
```

31

```
import { BrowserRouter, Route, Routes } from 'react-router-dom';

function App() {
  return (
    <BrowserRouter>
      <div className="App">
        <Navbar />
        <div className="content">
          <Routes>
            <Route path='/blogs/:id' Component={BlogDetails}></Route>
          </Routes>
        </div>
      </div>
    </BrowserRouter>
  );
}

export default App;
```

```
import React from 'react'
import { useParams } from 'react-router-dom'

export const BlogDetails = () => {
  const { id } = useParams();

  return (
    <div className="blog-details">
      <h2> Blog Details - {id}</h2>
    </div>
  )
}
```