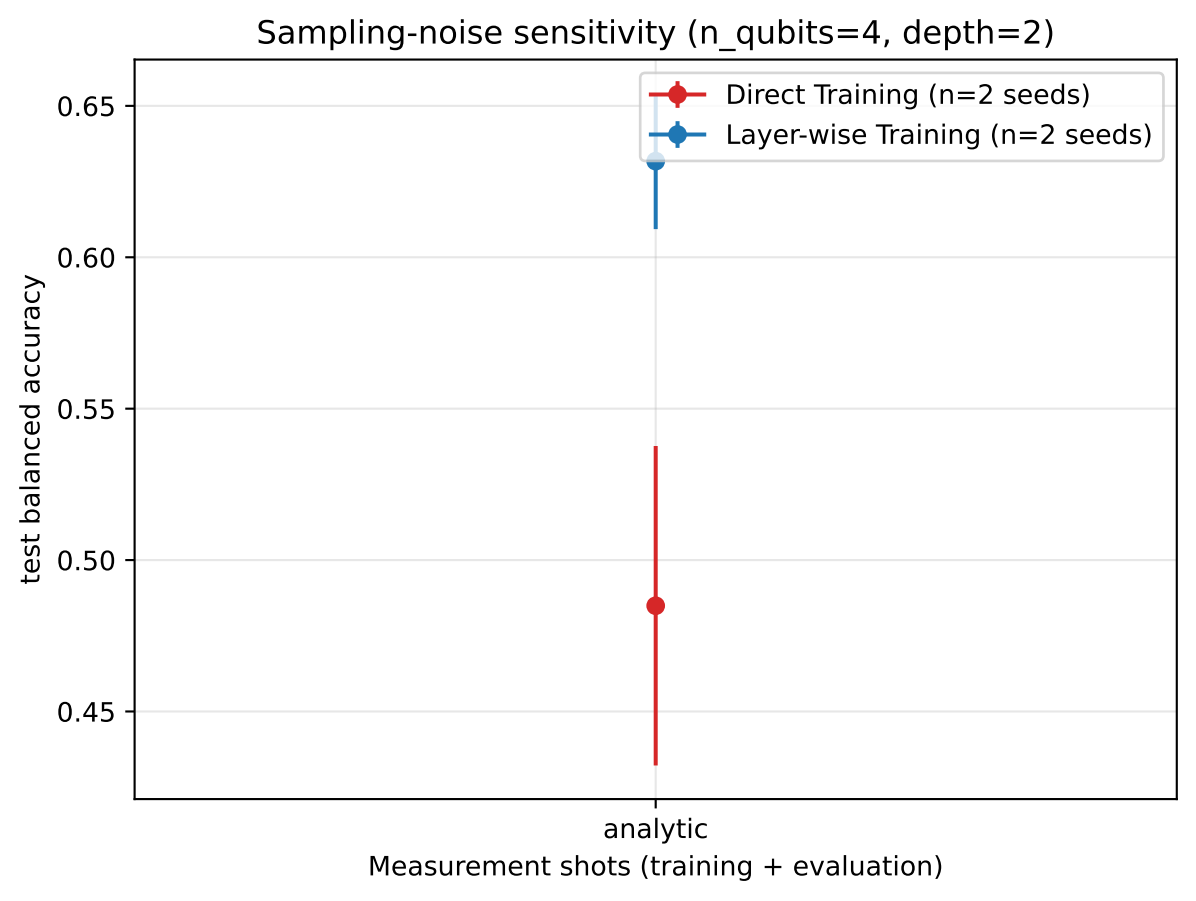
Sampling-noise sensitivity (n_qubits=4, depth=2)
Direct Training (n=2 seeds)
Layer-wise Training (n=2 seeds)
0.65
0.60
0.55
0.50
0.45
test balanced accuracy
analytic
Measurement shots (training + evaluation)