

25.09.2026

PRACTICAL - 8 (A) NMAP HOST DISCOVERY

AIM:-

To discover live hosts using Nmap Scans (ARP, ICMP, TCP/UDP) on the Toy Hack Me Platform Room.

INTRODUCTION:-

Nmap (Network Mapper) is a free and open source network scanning tool used to discover live hosts and identify services running on the network. Host discovery is performed before port scanning to determine which systems are online. Nmap supports different host discovery techniques using ARP, ICMP, TCP and UDP.

NMap Host discovery using ARP:-

ARP is used to discover hosts on the same local subnet. Nmap sends ARP requests and live hosts respond with ARP replies. The -PR is used for ARP-based host discovery.

Answer the questions below

How many hosts are found alive after scanning the CONNECTION_IP/24?

1

✓ Correct Answer

Nmap Host discovery using ICMP:-

ICMP provides different req/reply mechanisms for discovering live hosts. Nmap suggests ICMP Echo (-PE), Timestamp (-PP) and Address Mask (-PM) scans.

Answer the questions below

What is the option required to tell Nmap to use ICMP Timestamp to discover live hosts?

PP

✓ Correct Answer

What is the option required to tell Nmap to use ICMP Address Mask to discover live hosts?

PM

✓ Correct Answer

What is the option required to tell Nmap to use ICMP Echo to discover live hosts?

PE

✓ Correct Answer

Nmap Host discovery using TCP and UDP:-

When ICMP is filtered, Nmap can use TCP and UDP packets to determine whether a host is online. TCP host discovery includes TCP SYN Ping (-PS) and TCP ACK Ping (-PA), while UDP host discovery uses -PU.

Answer the questions below

Which TCP ping scan does not require a privileged account?


TCP SYN Ping ✓ Correct Answer

Which TCP ping scan requires a privileged account?

TCP ACK Ping ✓ Correct Answer

What option do you need to add to Nmap to run a TCP SYN ping scan on the telnet port?

PS23 ✓ Correct Answer 9

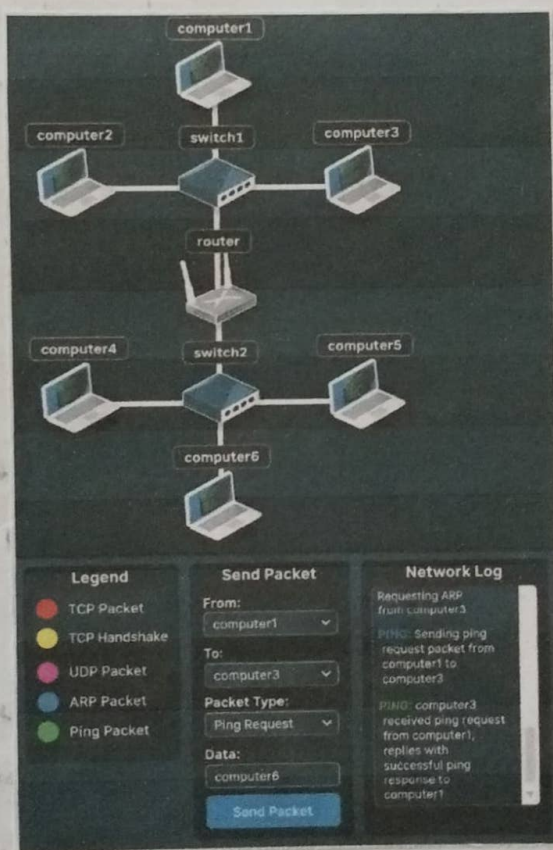

Alt

Result:-

Thus, live hosts in the network were successfully discovered using Nmap host discovery techniques such as ARP, ICMP and TCP, UDP ping scans. The different scanning methods are used to identify active hosts and verify their availability in the network.