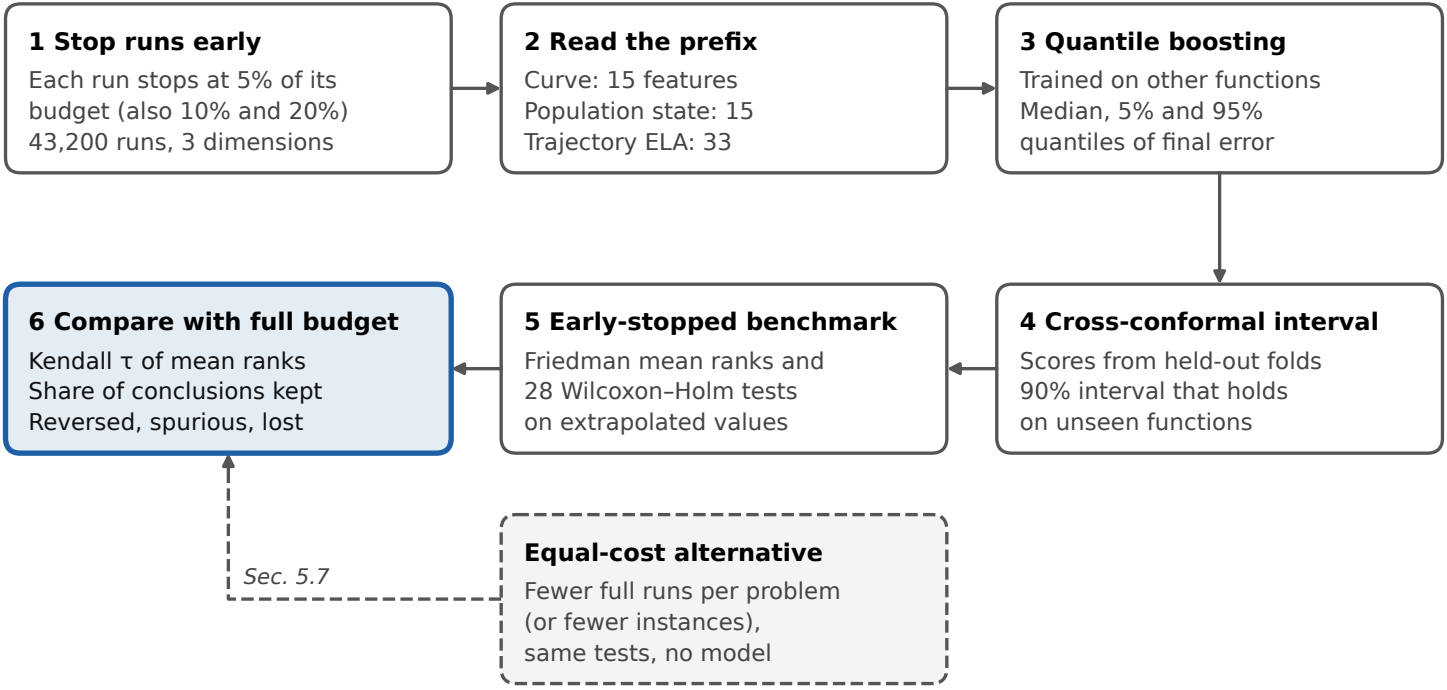
1 Stop runs early
Each run stops at 5% of its budget (also 10% and 20%)
43,200 runs, 3 dimensions
2 Read the prefix
Curve: 15 features
Population state: 15
Trajectory ELA: 33
3 Quantile boosting
Trained on other functions
Median, 5% and 95% quantiles of final error
4 Cross-conformal interval
Scores from held-out folds
90% interval that holds on unseen functions
5 Early-stopped benchmark
Friedman mean ranks and 28 Wilcoxon–Holm tests on extrapolated values
6 Compare with full budget
Kendall τ of mean ranks
Share of conclusions kept
Reversed, spurious, lost
Sec. 5.7
Equal-cost alternative
Fewer full runs per problem (or fewer instances), same tests, no model