



Shipped against recomputed: the identity line

HT115 vs pos-1, every marker. Grey line is $y = x$. The shipped column IS the package convention, and it regenerates from z alone.

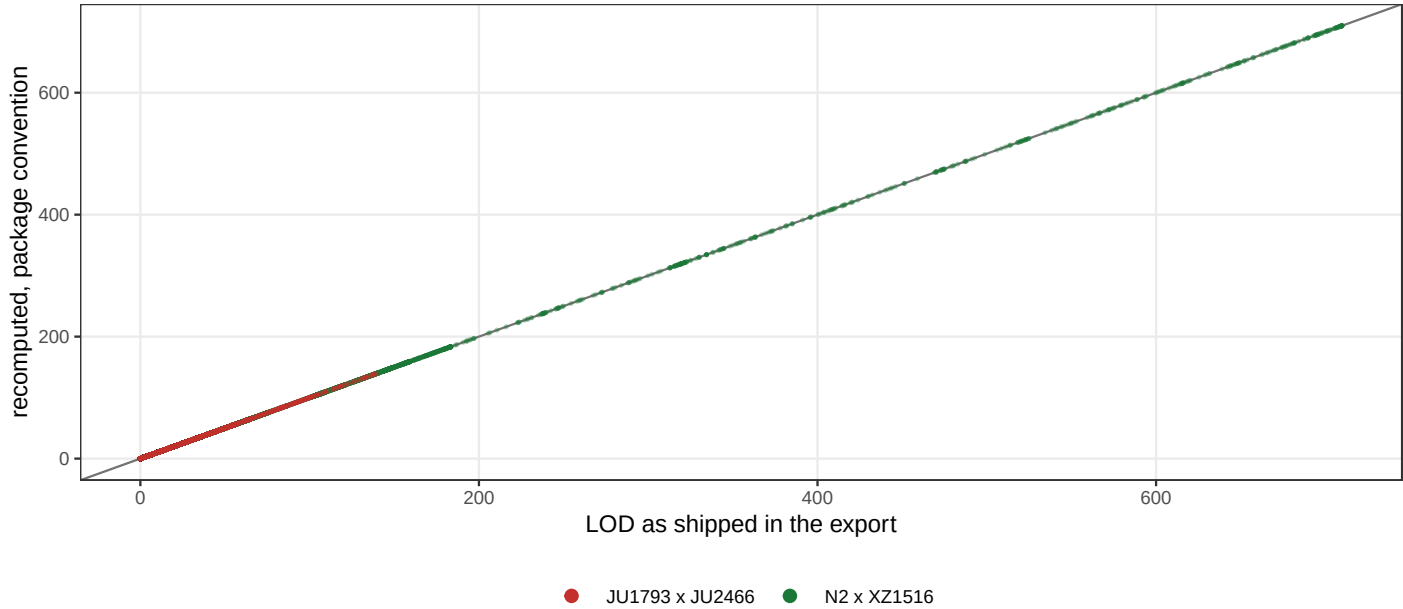

The conventions differ by $\log_{10}(2)$ ASYMPTOTICALLY, and converge slowly

The gap is 0.2859 at the genome-wide threshold of LOD 3.57, not 0.30103. It reaches 0.290 at LOD 5.2, 0.295 at LOD 10.1 and 0.300 only at LOD 62.7. So for a marker near the threshold the two conventions are 0.286 apart, and treating the offset as a flat 0.301 misstates it by 0.015 LOD.

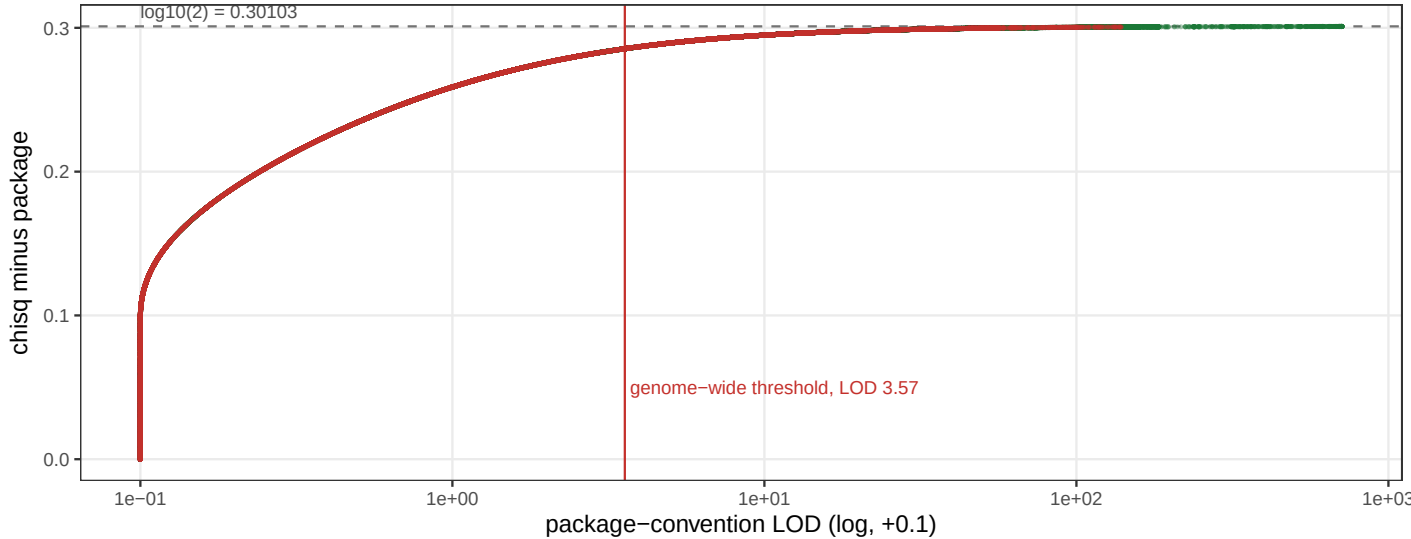

Where the offset stops being constant, and why cross does not matter here

Below $|z| = 0.6745$ the doubled argument to `qchisq` exceeds 1, `PvalToLOD()` returns 0, and the package LOD is pinned there while the `chisq` LOD is not. Nothing significant lives here. The two crosses lie on ONE curve because the gap is a deterministic function of $|z|$ -- colour separates them only in panel A, where the LOD ranges differ.

