Nama: Thoriq Abdurrohman taqy

Kelas: SE-48-04

Nim: 103022430006

Kode asaprak: Rah

Link repo:

https://github.com/Thbetyfu/Modul9_103022430006.git

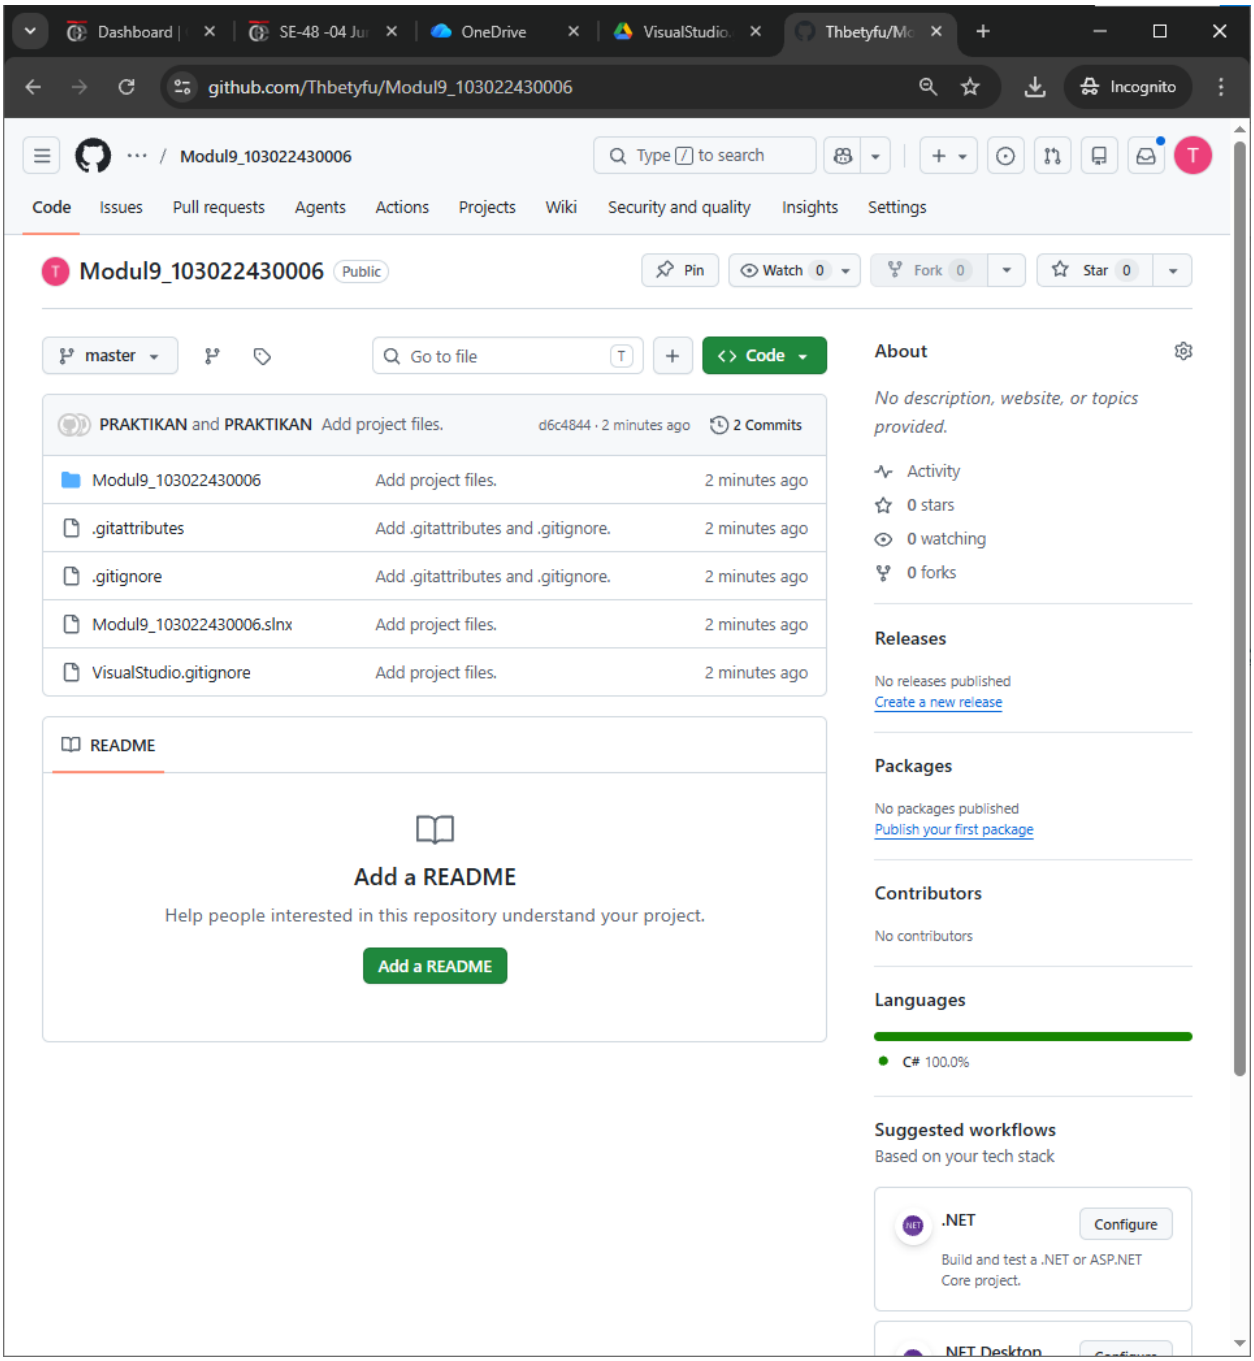
Dashboard
SE-48 -04 Ju
OneDrive
VisualStudio
Thbetyfu/Mo
github.com/Thbetyfu/Modul9_103022430006
Incognito
Modul9_103022430006
Type / to search
Code
Issues
Pull requests
Agents
Actions
Projects
Wiki
Security and quality
Insights
Settings
Modul9_103022430006
Public
Pin
Watch 0
Fork 0
Star 0
master
Go to file
Code
PRAKTIKAN and PRAKTIKAN Add project files.
d6c4844 · 2 minutes ago
2 Commits
Modul9_103022430006 Add project files. 2 minutes ago
.gitattributes Add .gitattributes and .gitignore. 2 minutes ago
.gitignore Add .gitattributes and .gitignore. 2 minutes ago
Modul9_103022430006.slnx Add project files. 2 minutes ago
VisualStudio.gitignore Add project files. 2 minutes ago
README
Add a README
Help people interested in this repository understand your project.
Add a README
About
No description, website, or topics provided.
Activity
0 stars
0 watching
0 forks
Releases
No releases published
Create a new release
Packages
No packages published
Publish your first package
Contributors
No contributors
Languages
C# 100.0%
Suggested workflows
Based on your tech stack
.NET
Configure
Build and test a .NET or ASP.NET Core project.
NET Desktop

Developer PowerShell

Developer PowerShell

```
n branch master
our branch is up to date with 'origin/master'.

othing to commit, working tree clean
S D:\Praktikan\Modul9_103022430006> git status
our branch is up to date with 'origin/master'.

hanges not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Modul9_103022430006/Program.cs

o changes added to commit (use "git add" and/or "git commit -a")
S D:\Praktikan\Modul9_103022430006> git add .
S D:\Praktikan\Modul9_103022430006> git commit -m "coba coba"
master b02cb4e] coba coba
1 file changed, 2 insertions(+), 1 deletion(-)
S D:\Praktikan\Modul9_103022430006> gi5t push -u origin master
i5t : The term 'gi5t' is not recognized as the name of a cmdlet, function, script file, or operable
rogram. Check the spelling of the name, or if a path was included, verify that the path is correct and
ry again.
t line:1 char:1
+ gi5t push -u origin master
+ ~~~~
    + CategoryInfo          : ObjectNotFound: (gi5t:String) [], CommandNotFoundException
    + FullyQualifiedErrorId : CommandNotFoundException

S D:\Praktikan\Modul9_103022430006> git push -u origin master
numerating objects: 7, done.
ounting objects: 100% (7/7), done.
elta compression using up to 12 threads
ompressing objects: 100% (4/4), done.
riting objects: 100% (4/4), 371 bytes | 371.00 KiB/s, done.
otal 4 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
emote: Resolving deltas: 100% (3/3), completed with 3 local objects.
o https://github.com/Thbetyfu/Modul9_103022430006.git
   d6c4844..b02cb4e  master -> master
ranch 'master' set up to track 'origin/master'.
```

rror List Output

Modul9_103022430006 | Modul9_103022430006.Program | Main(string[] args)

```
using System;
using System.Collections.Generic;
using System.IO;
using System.Text.Json;
using System.Runtime.CompilerServices;
using System.Transactions;

namespace Modul9_103022430006
{
    0 references
    internal class Program
    {
        0 references
        static void Main(string[] args)
        {
            BankTransferConfig bankTransferConfig = new BankTransferConfig();

            if (bankTransferConfig.config.lang == "eng")
            {
                Console.WriteLine($"Please insert the amount of money to transfer:");

            }

            else if (bankTransferConfig.config.lang == "id")
            {
                Console.WriteLine($"Masukkan jumlah uang yang akan di transfer:");
            }

            double uang = Convert.ToInt32(Console.ReadLine());
            double biaya = 0;
            if (uang <= bankTransferConfig.config.transfer.threshold)
            {
                biaya = bankTransferConfig.config.transfer.low_fee;
            }
            else
            {
                biaya = bankTransferConfig.config.transfer.high_fee;
            }

            if (bankTransferConfig.config.lang == "eng")
            {
                Console.WriteLine($"Transfer fee: {biaya}");
                Console.WriteLine($"Total amount: {uang + biaya}");
                Console.WriteLine($"Select transfer method:");
            }
            else if (bankTransferConfig.config.lang == "id")
```

80 % | 0 | 8 | Ln: 1, Ch: 14 | SPC | CRLF | UTF-8 with BOM

Modul9_103022430006 | Modul9_103022430006.Program | Main(string[] args)

```
            if (bankTransferConfig.config.lang == "eng")
            {
                Console.WriteLine($"Transfer fee: {biaya}");
                Console.WriteLine($"Total amount: {uang + biaya}");
                Console.WriteLine($"Select transfer method:");
            }
            else if (bankTransferConfig.config.lang == "id")
            {
                Console.WriteLine($"Biaya transfer: {biaya}");
                Console.WriteLine($"Total biaya: {uang + biaya}");
                Console.WriteLine($"Pilih metode transfer:");
            }

            Console.WriteLine($"1. {bankTransferConfig.config.methods[0]}");
            Console.WriteLine($"2. {bankTransferConfig.config.methods[1]}");
            Console.WriteLine($"3. {bankTransferConfig.config.methods[2]}");
            Console.WriteLine($"4. {bankTransferConfig.config.methods[3]}");

            int pilih = Convert.ToInt32(Console.ReadLine());

            if (bankTransferConfig.config.lang == "eng")
            {
                Console.WriteLine($"Please type {bankTransferConfig.config.confirmation.en} to Confirmacion transaction :");
            }
            else if (bankTransferConfig.config.lang == "id")
            {
                Console.WriteLine($"Silahkan ketik {bankTransferConfig.config.confirmation.id} untuk mengkonfirmasi transaksi:");
            }

            else
            {
                if (bankTransferConfig.config.lang == "en")
                {
                    Console.WriteLine("Transaction Canceld");
                }

                else if (bankTransferConfig.config.lang == "id")
                {
                    Console.WriteLine("Transaksi dibatalkan");
                }
        }
    }

    3 references
    public class BankTransferConfig
    {
```

80 % | 0 | 8 | Ln: 1, Ch: 14 | SPC | CRLF | UTF-8 with BOM

Modul9_103022430006 | Modul9_103022430006.Program | Main(string[] args)

```
        }
    }

    3 references
    public class BankTransferConfig
    {
        public Config config;
        string configFilePath = "bank_transfer_config.json";

        1 reference
        public BankTransferConfig()
        {
            try { ReadConfigFile(); }
            catch (FileNotFoundException)
            {
                setdefault();
                WriteConfigFile();
            }
        }
            1 reference
            private void setdefault()
        {
            config = new Config(
                lang: "en",
                transfer: new TransferConfig(25000000, 6500, 15000),
                methods: new List<string> { "RTO(real - time)", "SKN", "RTGS", "BI FAST" },
                confirmation: new ConfirmationConfig("yes", "ya")
            );
        }

        1 reference
        private void ReadConfigFile()
        {
            string jsonString = File.ReadAllText(configFilePath);
            config = JsonSerializer.Deserialize<Config>(jsonString);
        }

        1 reference
        private void WriteConfigFile()
        {
            string jsonString = JsonSerializer.Serialize(config, new JsonSerializerOptions { WriteIndented = true });
            File.WriteAllText(configFilePath, jsonString);
        }

        0 references
        public void setDefaulth()
```

80 % | 0 | 8 | Ln: 1, Ch: 14 | SPC | CRLF | UTF-8 with BOM

Modul9_103022430006 | Modul9_103022430006.Program | Main(string[] args)

```
                string jsonString = File.ReadAllText(configFilePath);
                config = JsonSerializer.Deserialize<Config>(jsonString);
            }

            1 reference
            private void WriteConfigFile()
            {
                string jsonString = JsonSerializer.Serialize(config, new JsonSerializerOptions { WriteIndented = true });
                File.WriteAllText(configFilePath, jsonString);
            }

            0 references
            public void setDefaulth()
            {
            config = new Config();
            config.lang = "en";
            config.transfer = new TransferConfig(25000000, 6500, 15000);
            config.methods = new List<string> { "RTO(real - time)", "SKN", "RTGS", "BI FAST" };
            config.confirmation = new ConfirmationConfig("yes", "ya");
            }

        }
    }


        6 references
        public class TransferConfig
        {
            1 reference
            public int threshold { get; set; }
            1 reference
            public int low_fee { get; set; }
            1 reference
            public int high_fee { get; set; }

            0 references
            public TransferConfig()
            {

            }

            2 references
            public TransferConfig(int threshold, int low_fee, int high_fee)
            {
                this.threshold = threshold;
                this.low_fee = low_fee;
                this.high_fee = high_fee;
            }
```

80 % | 0 | 8 | Ln: 1, Ch: 14 | SPC | CRLF | UTF-8 with BOM

Developer PowerShell

Options | GitHub Copilot Walkthrough | bank_transfer_config.json | bank_transfer_config.json | Program.cs*

Modul9_103022430006 | Modul9_103022430006.Program | Main(string[] args)

```
138
139             }
140
                2 references
141             public TransferConfig(int threshold, int low_fee, int high_fee)
142             {
143                 this.threshold = threshold;
144                 this.low_fee = low_fee;
145                 this.high_fee = high_fee;
146             }
147         }
                6 references
148         public class ConfirmationConfig
149         {
                2 references
150             public string en { get; set; }
                2 references
151             public string id { get; set; }
152
                0 references
153             public ConfirmationConfig()
154             {
155
156             }
157
                2 references
158             public ConfirmationConfig(string en, string id)
159             {
160                 this.en = en;
161                 this.id = id;
162             }
163
164         }
165
                6 references
166         public class Config
167         {
                10 references
168             public string lang { get; set; }
                5 references
169             public TransferConfig transfer { get; set; }
                6 references
170             public List<string> methods { get; set; }
                4 references
171             public ConfirmationConfig confirmation { get; set; }
                1 reference
172             public Config()
173             {
```

80 % | 0 | 8 | Ln: 1, Ch: 14 | SPC | CRLF | UTF-8 with BOM

```
Modul9_103022430006 | Modul9_103022430006.Config | Config()

        public string lang { get; set; }
        5 references
        public TransferConfig transfer { get; set; }
        6 references
        public List<string> methods { get; set; }
        4 references
        public ConfirmationConfig confirmation { get; set; }
        1 reference
        public Config()
        {
        }
        1 reference
        public Config(string lang, TransferConfig transfer, List<string> methods, ConfirmationConfig confirmation)
        {
            this.lang = lang;
            this.transfer = transfer;
            this.methods = methods;
            this.confirmation = confirmation;
        }
    }

}
```

80 % | 0 | 8 | Ln: 173, Ch: 1 | (25 chars, 1 lines) | SPC | CRLF | UTF-8 with BOM

Developer PowerShell

Options | GitHub Copilot Walkthrough | bank_transfer_config.json | **bank_transfer_config.json**

Schema: <No Schema Selected>

```
{
  "lang": "en",
  "transfer": {
    "threshold": 25000000,
    "low_fee": 6500,
    "high_fee": 15000
  },
  "methods": [ "RTO (Real-time)", "SKIN", "RTGS", "BI FAST" ],
  "confirmation": {
    "en": "YES",
    "id": "YA"
  }
}
```

Penjelasan kode:

Kodenya terdapat class banktransferconfihg Dimana berguna untuk mmebaca config dari json nya, Dimana ada set default berupa

```
    private void setdefault()
  {
    config = new Config(
      lang: "en",
      transfer: new TransferConfig(25000000, 6500, 15000),
      methods: new List<string> { "RTO(real - time)", "SKN", "RTGS", "BI FAST" },
      confirmation: new ConfirmationConfig("yes", "ya")
    );
  }
```

Untuk membaca file JSON nya

Clas tranbsferconfig yang berguna untuk meng get dan set file yang berda pada JSOn, Dimana sytax yang diigunakan sebagai berikut:

```
public class TransferConfig
{
  public int threshold { get; set; }
  public int low_fee { get; set; }
  public int high_fee { get; set; }

  public TransferConfig()
  {

  }

  public TransferConfig(int threshold, int low_fee, int high_fee)
  {
```

```
        this.threshold = threshold;
        this.low_fee = low_fee;
        this.high_fee = high_fee;
    }
}
```

Lalu berikutnya ada confirmastion config yang berguna untuk meng get dan set , bayhasa pada program Dimana English dan indo :

```
public class ConfirmationConfig
{
    public string en { get; set; }
    public string id { get; set; }

    public ConfirmationConfig()
    {

    }

    public ConfirmationConfig(string en, string id)
    {
        this.en = en;
        this.id = id;
    }
```

Llau yang mengkonfirmasi seluruhnya berapada pada class config, lalu seluruhnya berjalan pada calass program, yang Dimana berguna untuk menampilkan seluruhnya seperti instruksi cara penggunaan dan eksekusi setiap clas yang sudah di buat.