

IVF-Bench: A Rubric-Based Standard for Evaluating Vision-Language Models on IVF Clinical Reasoning

Andrew G. A. Correa
Monostate
andrew@monostate.ai

Brittany Yoon
The Fertility Plan
b@thefertilityplan.com

August 2026

Abstract

Embryo selection in IVF remains a morphology-driven judgment, and the deep learning systems built to standardize it operate on images alone, ranking blastocysts without the patient context that clinicians actually weigh; the largest randomized trial of that approach did not demonstrate noninferiority to trained embryologists. We present IVF-Bench, a rubric-based benchmark for evaluating whether vision-language models can perform the full assessment: 753 blastocyst cases from the public Kromp dataset, each pairing a real embryo image and its Gardner annotation with real cycle data and outcomes, together with patient-history fields sampled from published population distributions and explicitly labeled as generated, since no public dataset links such context to embryo images. Models produce open-ended assessments graded on five clinical rubrics by an LLM judge, and their stated implantation probabilities are scored against recorded outcomes. Across eight systems, seven of them frontier or open-weight baselines, clinical integration is uniformly strong while outcome discrimination is not, with AUROC never exceeding 0.562 and every system scoring a worse Brier than a constant set to the cohort pregnancy rate. Post-training Qwen 3.5-9B with ORPO on 500 benchmark-derived training pairs improves all five rubrics and places it second of eight, ahead of Claude Opus 4.6 (4.11 against 4.01 held out, $p=0.007$, as scored by a single judge that also authored most of the training targets) at roughly one seventh of the marginal inference cost, indicating that the reasoning component of embryo assessment does not require frontier-scale models, while the prediction ceiling reflects the absence of context-linked outcome data rather than a limitation of the models themselves. We release the benchmark, the trained model, and all 5,194 responses with judge transcripts.

1 Introduction

Few decisions in IVF carry more weight than the choice of which embryo to transfer, and in most clinics that choice still rests on visual assessment: an embryologist examines the blastocyst on day 5 and assigns a Gardner grade capturing the degree of expansion, the organization of the inner cell mass, and the cohesion of the trophoctoderm [Gardner and Schoolcraft, 1999]. The grade is clinically useful, but it is also subjective, and when embryologists at different centers are shown the same day-5 embryos and asked to select one for transfer, their agreement falls well short of what the confidence of the decision would suggest [Storr et al., 2017].

That variability has motivated a decade of machine learning work, nearly all of it framed as a scoring problem in which an image or a time-lapse sequence is mapped to a scalar and embryos are

ranked by that scalar. The largest randomized evaluation of this paradigm, a double-blind trial across 14 clinics and 1,066 patients, compared a deep learning ranker against trained embryologists and did not demonstrate noninferiority [Illingworth et al., 2024], which suggests that further refinement of image-only ranking is unlikely to be the most productive direction.

Figure 1 contrasts that regime with the one this paper proposes.

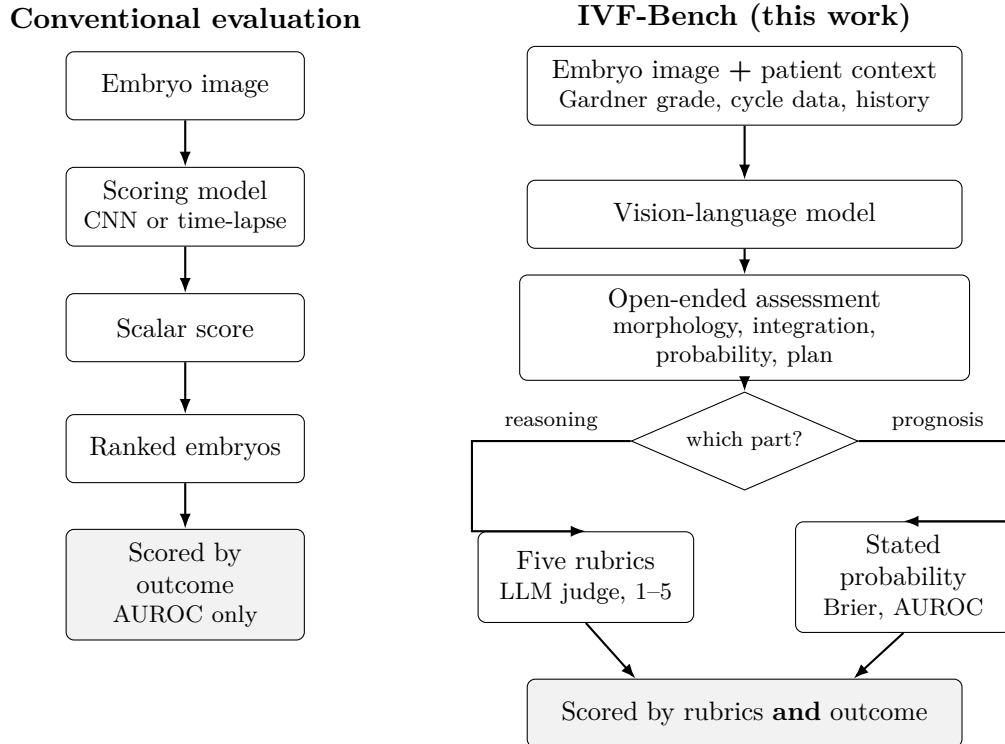


Figure 1: Conventional embryo-selection evaluation against IVF-Bench. Prior work maps an image to a scalar and is scored only by how well that scalar ranks outcomes, so a system that reasons well about a patient and one that does not are indistinguishable. IVF-Bench supplies the patient context alongside the image, elicits an open-ended assessment, and scores the reasoning against five clinical rubrics while separately scoring the stated probability against the recorded outcome.

We argue that the limitation lies in the framing rather than in the architecture. The embryo image captures only part of what determines whether a transfer succeeds; the remainder is patient-level, comprising ovarian reserve, endometrial receptivity, body mass index and lifestyle, the history of previous cycles, and the andrology profile. In clinical practice most of this information resides with the treating physician and rarely reaches the embryologist at the microscope, still less the imaging model, so a system operating on pixels alone is not so much failing at prediction as being asked to predict without the covariates that govern the outcome.

Vision-language models are, in principle, capable of consuming both modalities, but the claim has never been testable, because the data required to test it are not publicly available: embryo images are sensitive clinical records, outcome-linked patient context is more sensitive still, and the regulatory and privacy requirements for assembling the two together are stringent enough that essentially every substantial dataset in this field remains private. This, rather than model capacity, is the binding constraint, and it motivates the first contribution of this work, which is an instrument

for measuring whether a model can use patient context at all.

IVF-Bench comprises 753 blastocyst cases imaged on day 5, of which 641 were transferred on day 5 and 112 on day 4, each pairing a real embryo image and its silver-standard Gardner annotation with the cycle data and recorded outcomes of the same patient, together with the patient-history fields that no public dataset supplies and that we therefore generate from published population distributions, labeling each as generated and defending the choice in Section 3.3. A model is asked to describe the embryo, integrate the patient factors, estimate an implantation probability, and recommend next steps, and its answer is scored on five clinical rubrics while the stated probability is compared against the recorded outcome. The generated fields are sampled without reference to those outcomes and add no prognostic information beyond the measured covariates, as Section 3.3 quantifies, so every outcome-prediction result reported here is bounded by the data before any model is involved.

We evaluate seven frontier and open-weight systems and then post-train a 9B open model on preference pairs derived from the benchmark, obtaining the following results:

1. Targeted post-training substitutes for scale on this task: 500 training pairs are sufficient to move a 9B open model past Claude Opus 4.6 into second position of eight at roughly one seventh of the marginal inference cost, indicating that the reasoning component of embryo assessment is accessible to models well below frontier scale, though the comparison is made by a single judge and Section 7 bounds what that permits us to conclude.
2. The improvement is distributed across all five rubrics rather than concentrated in one, which distinguishes a procedure that improves the assessment as a whole from one that optimizes a single reported quantity.
3. Outcome discrimination remains weak for every system evaluated, and we quantify the deficit against a baseline that ignores its inputs entirely, attributing the ceiling to the available data rather than to model capacity, for the reason given above.
4. Morphology grounding and guideline alignment are the two weak rubrics, averaging roughly a point below clinical integration, and because our judge does not observe the image we treat morphology scores as an upper bound on image comprehension. Removing the image entirely costs between 0.07 and 0.23 points on a five-point scale, and nothing measurable for half the systems tested, so once the expert grade is supplied in text the pixels add very little that current systems can use, which is the same conclusion the negative randomized trial of image-only ranking reached by a different route.

The practical implication is that progress in this area depends less on model development than on the construction of a public dataset linking embryo images to measured patient context and recorded outcomes, and IVF-Bench provides the instrument with which the value of such a dataset can be quantified.

2 Related work

Embryo selection models. Most published systems predict a label from pixels, whether by grading blastocysts automatically, ranking embryos within a cohort, or estimating implantation from time-lapse sequences, and the commercial products deployed in clinics follow the same pattern, positioned as adjunctive scoring tools rather than autonomous decision makers; the strongest randomized evidence for any of them is the trial discussed above [Illingworth et al., 2024]. None of this work evaluates open-ended clinical reasoning, for the simple reason that none of it produces language.

Language about embryos. The group that released the dataset we build on has recently moved in this direction, publishing an expert-annotated set of embryo images paired with natural-language morphological descriptions [Neu et al., 2026a] together with a fine-tuned PaliGemma-2 model that generates such descriptions [Neu et al., 2026b]. That work and ours are complementary but differ in what they ask of a model: they evaluate whether a model can describe an embryo, whereas we evaluate whether it can reason about the patient carrying that embryo, which additionally requires the cycle data, the history, a calibrated probability, and a recommendation. Their descriptions are the morphology ground truth our evaluation most lacks, as we note in Section 8.

Rubric-graded evaluation of medical language models. The practice of scoring open-ended clinical answers against written criteria, with a language model performing the scoring, was established at scale by HealthBench, for which 262 physicians authored 48,562 rubric criteria across 5,000 conversations [Arora et al., 2025]. Our five rubrics are considerably narrower, written for a single decision rather than for medicine in general, but the methodological inheritance is direct, and we adopt the same principle of grading against criteria rather than against a reference answer.

Preference optimization. We post-train with ORPO [Hong et al., 2024], which folds the preference objective into the supervised loss and removes the need for a separate reference model, in the family of methods opened up by DPO [Rafailov et al., 2023].

3 The benchmark

3.1 Where the data comes from

Open embryo data is rare, because embryo images are sensitive clinical records and most published systems are trained on private single-clinic collections. We build on the Kromp blastocyst dataset [Kromp et al., 2023], which is public under CC BY 4.0 and links day-5 embryo images to Gardner grades, selected cycle variables, and pregnancy outcomes. The clinical annotation file contains 754 records spanning 732 patients, one of which references an image absent from the distributed archive, leaving 753 usable cases from 731 patients.

Preparing the source data required more correction than we anticipated, and we document it because anyone reusing the dataset will encounter the same issues. The clinical annotation file is semicolon-separated and Latin-1 encoded, and had at some point been opened in a German-locale spreadsheet, which silently converted 500 AMH values and 144 endometrial thickness values into dates, so that a value of 1.26 appears as *Jän.26*; we recover these by mapping the month abbreviations back to numbers. Oocyte counts occasionally appear in additive form such as *7+1*, which we sum, and missing values remain missing, presented to models as “not available” rather than imputed. One record carries a live birth without the clinical pregnancy that must precede it, and we retain it unaltered, on the view that silently repairing a source dataset is less defensible than reporting the inconsistency.

3.2 What a case contains

Each case combines measured fields drawn from Kromp with generated patient context: the measured fields are the embryo image, the Gardner grades, patient age, AMH, endometrial thickness, oocytes retrieved, mature oocytes, transfer day, and the three pregnancy outcomes, while the generated fields are body mass index, basal FSH, diagnosis, stimulation protocol, previous cycles and their outcomes, partner age, semen parameters, and a lifestyle summary.

3.3 Why the patient context is generated, and what that costs

An embryo image accompanied by an age does not constitute a case: a clinician reasoning about a transfer draws on the patient’s history, and a benchmark that omits that history cannot determine whether a model uses one. No public dataset, however, carries body mass index, lifestyle, stimulation protocol, or cycle history alongside embryo images and outcomes. Such data exist in clinics, largely in physicians’ notes and frequently only in their recollection, and they do not circulate: they seldom reach the embryologist at the microscope and have never reached a public research corpus, because assembling images together with outcome-linked patient records is precisely the combination that regulatory and privacy review is designed to constrain.

We therefore generate these fields, sampling each from a published population distribution, with every parameter and its source given in Appendix C. Generation is deterministic per case, seeded from a hash of the case identifier, and each case record enumerates its generated fields explicitly, so that no result can depend on generated values being mistaken for measured ones. Identifiers are assigned positionally over the sorted corpus, so regeneration is exact for a fixed corpus, while changing its size or the split proportions reassigns identifiers and therefore resamples the profiles that depend on them.

This procedure yields a case-level reasoning task that can be constructed and reproduced entirely from public sources, at two costs that bear directly on the interpretation of our results. First, the generated fields are sampled without reference to the recorded outcomes. Two of them are nonetheless conditioned on the patient’s real age, namely basal FSH and partner age, which correlate with it at 0.32 and 0.73 respectively, and each therefore functions as a weak age proxy: taken alone they reach AUROC 0.527 and 0.532 against clinical pregnancy. Because age is itself supplied as a measured field, these fields add no information a model did not already have, but the stronger claim that the generated context is entirely uninformative is not one we can make. The outcome metrics in Section 5 should be read as a floor that quantifies what is missing rather than as a verdict on what vision-language models can achieve given measured context. Second, apart from those two dependencies and the conditioning of previous outcomes on previous cycle count, the fields are sampled independently of one another, so genuine clinical correlations, such as that between polycystic ovary syndrome and body mass index, are absent, and a model that has internalized those correlations receives no credit for them here. Neither limitation can be remedied by a more sophisticated generator; both are remedied by a real dataset, which is precisely the argument of this paper.

3.4 Ethics and data use

This work is a secondary analysis of a publicly released, de-identified dataset and required no additional review. The underlying embryo images and clinical records were collected under approval from the Ethics Committee of the Faculty of Medicine at Johannes Kepler University Linz (Nr. 1238/2021) with informed consent obtained from participants, and were released by the original investigators under CC BY 4.0 [Kromp et al., 2023]; we redistribute no images and our release regenerates every case from that source. The patient-history fields we add are sampled from published population distributions and correspond to no real individual.

The model released with this benchmark is a research artifact and is not a medical device. It has no regulatory clearance, has not been evaluated in a clinical trial, and must not be used to inform the care of any patient. We regard the risk of misuse as material rather than hypothetical, because the model produces fluent, confident, guideline-shaped counseling text whose surface

quality substantially exceeds its demonstrated prognostic validity, which is the combination most likely to induce unwarranted confidence in a reader. The strongest randomized evidence in this area found that a deep learning system did not outperform trained embryologists [Illingworth et al., 2024], and nothing in this paper meets a lower bar than that.

3.5 Splits

The 753 cases are partitioned deterministically into 550 test, 100 validation, and 103 held out, with the test split carrying the main leaderboard. The validation split was reserved for judge and threshold calibration and, in the end, was not used: no system was run against it, and we release it unused so that future work has a split untouched by anything reported here. The held-out split remained untouched through all training, hyperparameter search, and judge calibration, and exists to answer a single question: whether the test-split ordering survives on cases that nothing was optimized against.

One property of these splits should be stated plainly, since it is a defect: they were drawn per image rather than per patient, and because twenty-two patients contributed two embryos each, for six of those patients the two embryos fell into different splits, so that four of the 103 held-out cases share a patient with a test-split case. We quantify the effect in Section 7, where it changes no ranking, but a subsequent version should partition on patient.

3.6 The prompt

Every model receives the embryo image together with a structured case description containing the Gardner grade with plain-language descriptors, the laboratory fields, and the patient profile, and is asked for five components: a morphology description, an integration of the patient factors, the risks and favorable features, a numeric implantation probability, and recommendations for the present transfer and for future cycles. The full template appears in Appendix A.

3.7 The five rubrics

A judge model reads the case and the response and returns a 1 to 5 score with a short justification for each of five rubrics.

- **Morphological accuracy.** Does the description of the embryo match the image and the Gardner annotation?
- **Clinical integration.** Does the response connect the patient factors to this embryo and this prognosis, rather than listing them?
- **Reasoning coherence.** Is the argument internally consistent, with uncertainty where uncertainty belongs?
- **Guideline alignment.** Is the advice consistent with evidence-based reproductive medicine?
- **Actionability.** Could a clinician act on this, or is it generic?

Full rubric text and the 1 to 5 anchors for each appear in Appendix B.

4 Evaluation setup

We evaluate seven models through their public APIs plus our own post-trained model served locally, and we grade every response with the same judge.

Model	Served by	Size	Reasoning
GPT-5.4 (2026-03-05)	OpenAI	not disclosed	effort: high
Claude Opus 4.6	Bedrock	not disclosed	8K thinking budget
Claude Sonnet 4.6	Bedrock	not disclosed	8K thinking budget
Qwen 3.5-397B-A17B	OpenRouter	397B, 17B active	native
Kimi K2.5	OpenRouter	1T, 32B active	native
Gemini 2.5 Flash	OpenRouter	not disclosed	native
Qwen 3.5-9B	OpenRouter	9B	native
IVF-Bench-Qwen9B-ORPO (ours)	local vLLM, 2×H100	9B	native

Table 1: The eight systems evaluated. Baselines run at temperature 0 with reasoning enabled. Our model uses the sampling settings recommended on the Qwen 3.5 card (temperature 1.0, top-p 0.95, top-k 20, repetition penalty 1.05), because greedy decoding traps it in a repetition loop.

The judge. GPT-5.4 grades every response against the five rubrics in a single call and additionally extracts the numeric probability, observing the case text and the response but not the embryo image. This is a deliberate limitation whose cost we state explicitly: the morphology rubric measures whether a description is consistent with the Gardner annotation supplied to the model rather than whether the model read the image correctly, and a judge that cannot see the image cannot detect a fluent description of an embryo that is not there.

Two evaluation defects. Two defects in our own pipeline, described in full in Appendix D, invalidated an earlier version of these results: failed judge calls were persisted as all-zero score records that subsequent runs treated as complete, and our locally served model was graded on its chain of thought because vLLM was run without a reasoning parser, which depressed its test-split score from 4.17 to 3.81. All results reported below follow both corrections, so that every score in the study is produced by GPT-5.4 and no score record contains a judge failure.

5 Results

5.1 Reading the two outcome metrics

Brier score (lower is better) is the mean squared error between the stated probability and the observed outcome, and it rewards honesty about the odds; always predicting 50% yields 0.25, which is the comparison most papers adopt and the wrong one, since the sharper reference is a constant set to the cohort’s own pregnancy rate, against which we report in Table 3. **AUROC** (higher is better, with 0.5 denoting chance) is the probability that a randomly chosen success is ranked above a randomly chosen failure, and it rewards discrimination between embryos. Counseling a patient depends on the first quantity and selecting an embryo for transfer on the second, and a system can be respectable on one while remaining useless on the other.

5.2 The leaderboard

Model	Rubrics (1–5)						Outcome	
	Overall	Morph	Clin	Reas	Guide	Rec	Brier↓	AUROC↑
<i>Test split, 550 cases</i>								
GPT-5.4	4.54	3.96	5.00	4.66	4.15	4.92	0.245	0.553
Qwen9B-ORPO (ours)	4.17	3.60	4.83	4.00	3.96	4.44	0.249	0.531
Opus 4.6	4.01	3.52	4.97	3.96	3.20	4.38	0.245	0.541
Qwen 397B	3.75	3.33	4.27	3.84	3.31	3.98	0.260	0.538
Kimi K2.5	3.63	3.39	4.38	3.66	3.00	3.72	0.242	0.552
Sonnet 4.6	3.58	2.92	4.48	3.64	2.79	4.06	0.241	0.544
Gemini 2.5 Flash	3.40	3.34	3.88	3.58	3.53	2.66	0.269	0.537
Qwen 9B (base)	3.35	3.08	3.93	3.38	2.81	3.56	0.255	0.554
<i>Held-out split, 103 cases</i>								
GPT-5.4	4.55	3.98	5.00	4.65	4.23	4.88	0.246	0.562
Qwen9B-ORPO (ours)	4.11	3.56	4.76	3.93	3.93	4.37	0.245	0.547
Opus 4.6	4.01	3.60	4.92	3.98	3.22	4.31	0.247	0.551
Gemini 2.5 Flash	3.83	3.34	4.40	3.90	3.54	3.98	0.289	0.504
Qwen 397B	3.82	3.48	4.31	3.88	3.44	3.98	0.265	0.551
Kimi K2.5	3.73	3.48	4.42	3.80	3.04	3.90	0.254	0.518
Sonnet 4.6	3.65	3.07	4.51	3.73	2.89	4.06	0.242	0.534
Qwen 9B (base)	3.31	2.99	3.91	3.18	2.85	3.64	0.285	0.450

Table 2: IVF-Bench leaderboard on both splits, ordered within each split by overall score. Rubrics are morphology grounding, clinical integration, reasoning coherence, guideline alignment, and recommendation usefulness. All systems ran with reasoning enabled and were graded by GPT-5.4. Qwen 9B base completed 520 of 550 test cases, the remaining 30 having exhausted their token budget inside a reasoning loop; every system answered all 103 held-out cases.

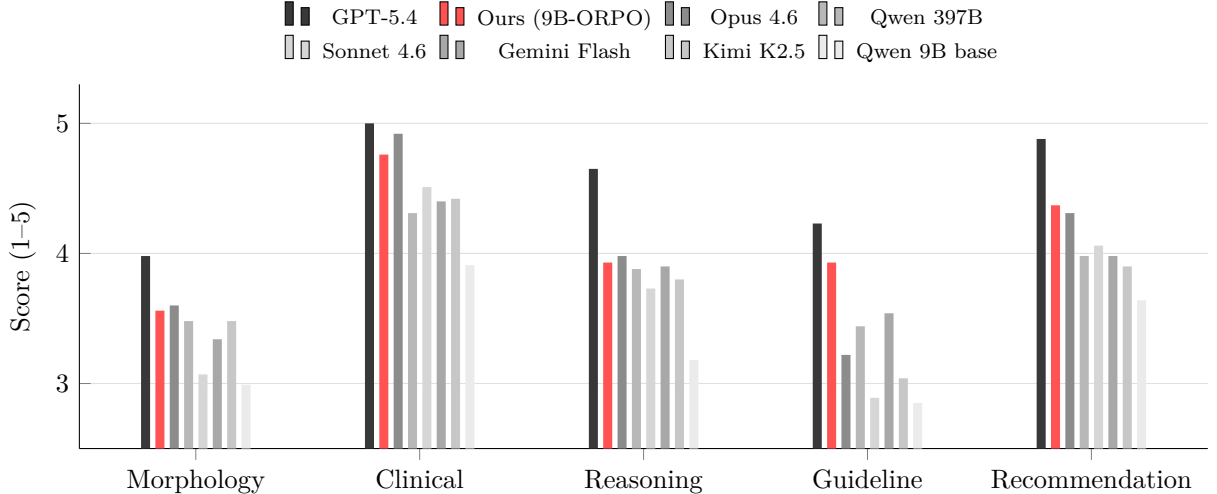


Figure 2: Per-rubric scores on the held-out split. Clinical integration is the strongest rubric for every system, while morphology grounding and guideline alignment sit roughly a point below it, a pattern that holds across three orders of magnitude in model size. Our post-trained 9B model tracks the frontier systems on every rubric except morphology grounding, where all systems are compressed into a narrow band.

5.3 Which gaps are real

A leaderboard reported without intervals invites readers to treat a difference of 0.02 as meaningful, so we resample cases with replacement 10,000 times and, for each adjacent pair of systems, bootstrap the paired per-case difference over the cases both answered.

On the test split every adjacent gap is separable at the 95% level, the narrowest being Kimi K2.5 over Sonnet 4.6 at $+0.052$ (95% CI $[+0.005, +0.098]$, $p=0.031$), whereas on the held-out split, with 103 cases rather than 550, two gaps close: Gemini Flash over Qwen 397B ($+0.015$, CI $[-0.049, +0.082]$, $p=0.66$) and Kimi K2.5 over Sonnet 4.6 ($+0.076$, CI $[-0.023, +0.169]$, $p=0.12$), both of which should be read as ties. The two comparisons that carry the paper’s argument survive on both splits: GPT-5.4 over our model ($+0.44$ held out, CI $[+0.38, +0.51]$) and our model over Opus 4.6 ($+0.10$ held out, CI $[+0.03, +0.17]$, $p=0.007$).

5.4 What the numbers say

1. Case explanation is uniformly strong. Clinical integration is the highest-scoring rubric for every system evaluated, with GPT-5.4 reaching a maximal 5.00 on both splits; models reliably incorporate age, AMH, endometrial thickness, and prior cycle history into a coherent account of the patient’s prognosis, such that if the task were confined to producing the counseling narrative it would be close to solved.

2. Outcome prediction sits at a floor, and the deficit can be stated precisely. AUROC spans 0.450 to 0.562 across the systems evaluated, against 0.5 for chance, so that the best value obtained, 0.562, corresponds to ranking a conceiving embryo above a non-conceiving one on 56% of such pairs.

The Brier scores appear more favorable than they are. They span 0.241 to 0.289, straddling the 0.25 obtained by always predicting 50%, which nine of the sixteen model-split combinations

improve on and seven do not. Even that comparison is the wrong reference point: the clinical pregnancy rate in this cohort is 0.350, so a constant predictor that returns 35% for every case, disregarding the embryo, the image, and the patient entirely, scores 0.2274, and every language model in the study performs worse; Section 5.6 reports the one baseline that does not.

Predictor	Brier (test)	Brier (held out)
Constant, the cohort base rate of 0.35	0.2278	0.2274
Constant, 0.50	0.2500	0.2500
GPT-5.4	0.2447	0.2465
Qwen9B-ORPO (ours)	0.2491	0.2447
Qwen 9B (base)	0.2552	0.2851

Table 3: Brier score against a predictor that ignores its inputs. No language model in this study beats the cohort base rate on either split; a fitted tabular baseline does on one of the two, as Section 5.6 reports. Model rows are computed on the cases where a probability could be extracted.

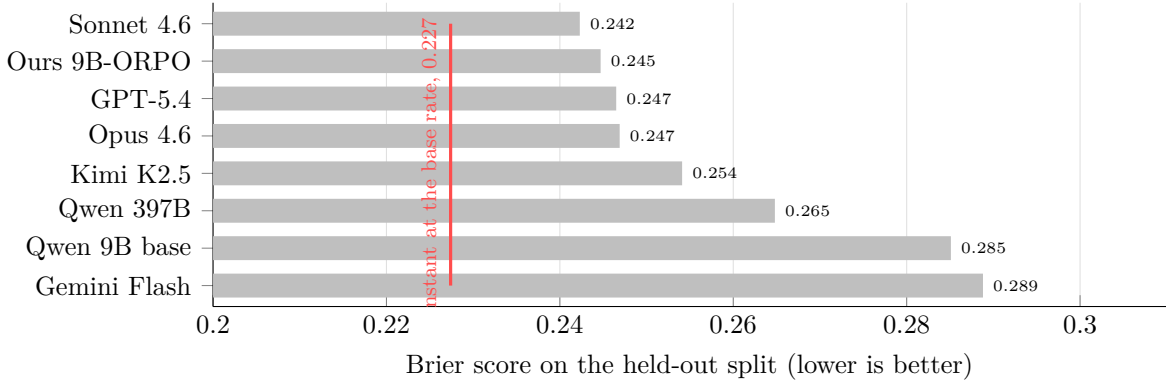


Figure 3: Brier score of every evaluated system against a constant predictor that returns the cohort’s clinical pregnancy rate of 0.350 for every case, ignoring the embryo, the image, and the patient. No system reaches the constant, shown as the vertical line. We attribute this to the absence of outcome-linked patient context in the available data rather than to model capacity, for the reason given in Section 3.3.

This is the result we most want a reader to retain, and it is not a verdict on the models, for the reason given in Section 3.3: the patient-context fields we supply add no prognostic information beyond the measured covariates, while the measured data that remain are age, AMH, endometrial thickness, oocyte counts, and a single morphology grade from one day-5 frame. Predicting clinical pregnancy from that combination appears to approach the limit of what the public data support, since a logistic regression given the same measured fields reaches a cross-validated AUROC of 0.538 (Section 5.6), inside the range the language models span; the inputs that would move the number are embryo genetics, longitudinal development rather than a single frame, uterine and endometrial context, and the lifestyle and history data that at present never leave the physician’s notes. IVF-Bench is constructed so that these fields can be substituted from generated to measured as they become available, which is exactly the experiment the field is currently unable to run.

The same reasoning reframes the calibration result reported for our post-trained model in Section 6: its held-out Brier of 0.245 is second of the eight, behind Sonnet 4.6 at 0.242, and

all eight fall below a constant predictor. What post-training achieved is a model whose stated probabilities moved back toward the population rate, correcting the overconfidence of the base model, which on these data is the correct behavior and is not predictive skill.

3. Morphology grounding and guideline alignment are the two weak rubrics, and clinical integration the strong one. Averaged across systems, guideline alignment is lowest on both splits (3.34 on test, 3.39 held out) with morphology grounding just above it (3.39 and 3.44), while clinical integration reaches 4.47 and 4.53; no system reaches 3.99 on morphology grounding on either split. Morphology is the single weakest rubric for only two of eight systems on test and three of eight held out, so the accurate statement is that both rubrics sit roughly a point below clinical integration rather than that morphology is uniquely weak. Models reason more effectively about the structured data supplied in text than about the image itself. Because our judge does not observe the image, a system can score well on this rubric by restating the Gardner grade it was given, so these values constitute an upper bound on image comprehension rather than a measurement of it; the ablation in Section 5.5 measures the image’s contribution directly and finds it small, which bounds what this rubric can be taken to show.

4. Cost and quality are only loosely coupled. Opus 4.6 incurs \$170.43 of inference to process the 550 test cases and scores 4.01, while Gemini 2.5 Flash, the least expensive commercial system evaluated, finishes seventh on that split and rises to fourth on held out, the largest between-split movement of any system. Our post-trained model is excluded from this comparison because it was served on hardware we already owned, so its marginal inference cost is not commensurable with an API price; Section 6 states the comparison in the terms that are.

5.5 What the embryo image contributes

Because each prompt supplies the Gardner grade in text alongside the image, a system could in principle score well on morphology grounding without consulting the image at all, which would make the vision component of this benchmark decorative. We tested this by re-running four systems on the same cases with the image removed and the attachment marker replaced, holding everything else constant, and grading both arms with the same judge; differences are evaluated by paired bootstrap over the cases each system answered in both conditions.

The design of this experiment matters more than we first appreciated, and we report the correction because the uncorrected version produced a dramatic and entirely spurious result. In our first attempt the judge received the stored case prompt, which still declared an image attached, while the model in the withheld arm had been told none was provided. The judge then penalized models for correctly reporting that they had no image to describe: GPT-5.4’s morphology grounding appeared to fall from 3.94 to 1.98, and we briefly believed we had demonstrated that the vision channel carries substantial information. Once the judge is shown the same prompt the model received, that effect very largely disappears.

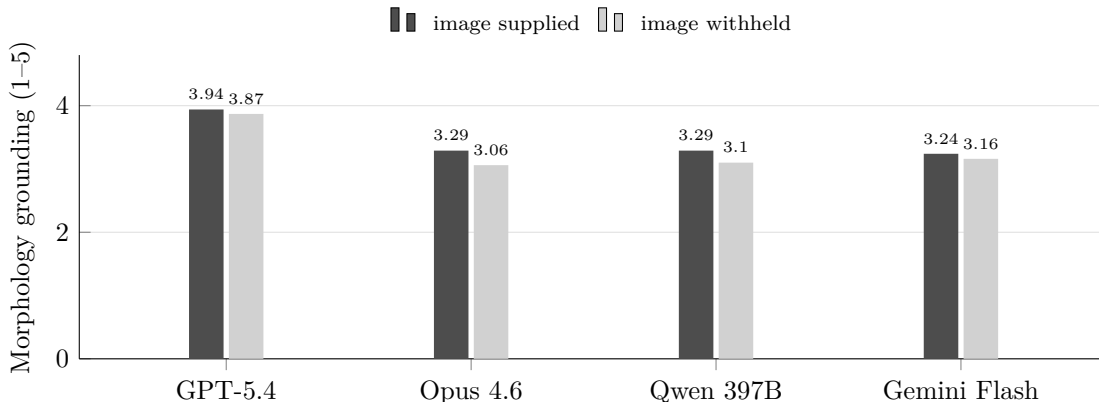


Figure 4: Morphology grounding with the embryo image supplied and withheld, on identical cases, with the judge shown the same prompt the model received. Withholding the image costs between 0.07 and 0.23 points on a five-point scale, and the difference is distinguishable from zero for only two of the four systems. A model given the Gardner grade in text scores nearly as well without the image as with it, which bounds how far this rubric can be read as a measure of image comprehension.

Model	n	Overall			Morphology grounding		
		image	none	Δ	image	none	Δ
GPT-5.4	100	4.50	4.50	+0.00	3.94	3.87	+0.07
Opus 4.6	100	3.93	3.72	+0.21	3.29	3.06	+0.23
Qwen 397B	126	3.71	3.77	-0.06	3.29	3.10	+0.18
Gemini 2.5 Flash	100	3.33	3.72	-0.39	3.24	3.16	+0.08

Table 4: Scores with the embryo image supplied and withheld, on identical cases per system, with the judge shown the same prompt the model received. Four of the eight differences survive Bonferroni correction across the eight comparisons ($\alpha=0.00625$): Opus 4.6 on both overall ($p < 0.001$) and morphology ($p=0.003$), Qwen 397B on morphology ($p=0.005$), and Gemini 2.5 Flash on overall ($p < 0.001$), the last of these because its score is substantially *higher* without the image. GPT-5.4’s morphology difference of +0.07 ($p=0.13$), Gemini’s of +0.08 ($p=0.32$) and Qwen 397B’s overall difference ($p=0.06$) are not distinguishable from zero.

The corrected result is a finding about the models and about the Gardner grade, and it needs to be stated precisely, because the natural paraphrase is wrong. The grade is itself a human reading of the image: an embryologist looked at the blastocyst and compressed it into three ordinal values, so the image is upstream of the text rather than redundant with it, and nothing here shows that the image is unnecessary. What the experiment measures is narrower, namely the residual information a model can currently extract from the pixels *beyond* an expert summary it has already been handed, and on this sample that residual is small: between 0.07 and 0.23 points on a five-point scale, and for two of four systems not distinguishable from zero at $n=100$, where the paired design can resolve differences of roughly 0.12.

Three considerations bound how far that should be generalized. The compression is lossy, since two independent expert readings of these same embryos agree on all three components in only 60% of the cases where both recorded a determination (Section 3.3), so information the grade discards demonstrably exists in the image. The cases in which that information should matter most, where

morphology is ambiguous or where the grade and the appearance diverge, are by construction rare, and a hundred-case sample contains few of them. And the quantity measured is what today’s systems extract from this corpus, not what is extractable in principle: a model that attends jointly over the image and the patient context can learn precisely the regularities that a three-ordinal summary throws away, given enough data to learn them from, whereas a fixed image classifier and a three-value summary are both capped by construction. The increment we report bounds the present, not the asymptote.

What the result does establish is that on the public data available today, a decade of effort directed at the image has been working against a strong baseline that a human grader already provides for free, which is the same conclusion the negative randomized trial of image-only ranking reached by a different route [Illingworth et al., 2024].

Two per-system observations follow. Opus 4.6 shows the clearest dependence on the image, on both overall score and morphology grounding, which inverts the conclusion we drew from the confounded run and is a reminder that an experimental artifact can manufacture a confident story in either direction. Gemini 2.5 Flash scores markedly better without the image on every rubric other than morphology, so for that system the visual input degrades the assessment rather than informing it, which is the kind of per-system dissociation a leaderboard alone cannot reveal.

One limit of this design should be stated. Because the prompt supplies the grade and the image together, the experiment cannot separate a model that cannot read the image from a model for which the grade has already answered the question. Withholding the grade rather than the image, and withholding both, would separate them, and that two-by-two is the natural next experiment. Separately, our judge does not see the image, so these differences bound the visual contribution as this benchmark can observe it; a judge with sight, or reference descriptions written by embryologists such as those of Neu et al. [2026a], would measure image comprehension directly rather than by difference.

5.6 Two controls on the headline claims

Two objections bear directly on the results above and we address both with additional analysis rather than argument.

Is the ceiling really the data? Our claim that the outcome ceiling reflects the available data rather than model capacity rests, so far, on the observation that the generated fields add nothing beyond the measured covariates, which says nothing about what those measured covariates themselves support. We therefore fit logistic regression to the measured fields alone, namely age, AMH, endometrial thickness, oocytes retrieved, mature oocytes, transfer day, and the three Gardner components, with missing values imputed at the column median. Cross-validated within the 550-case split it reaches AUROC 0.538 (95% CI [0.487, 0.586]), and fit on those 550 cases and evaluated on the 103 held out it reaches 0.608 (95% CI [0.484, 0.725]), an interval wide enough to include chance. The better-powered estimate, 0.538, sits squarely inside the 0.450 to 0.562 range spanned by the vision-language systems, which is the result that matters: a linear model given the same measured covariates extracts about as much prognostic signal as the frontier systems do, so those systems are operating near the limit of what these covariates support rather than failing to use them.

One qualification follows from the same experiment and cuts against us. On the held-out split the tabular model attains a Brier score of 0.2197, which does beat the constant predictor at 0.2274, so the claim that nothing in this study beats the base rate holds for the language models and not

for a fitted tabular model. The margin is small, the sample is 103 cases, and the cross-validated Brier on the larger split is 0.2297, which does not beat the constant; we report the result as it stands rather than choose the split that suits us.

Is the post-training margin an artifact of verbosity? The judge rewards length, as Section 7 quantifies, and our model was trained toward a teacher whose responses are long, so the comparison against Opus 4.6 could plausibly be measuring output length. It is not. On the held-out split our model’s responses average 9,485 characters against Opus 4.6’s 11,933, so our model is the shorter of the two, and regressing score on length within each system and comparing at a common length widens the margin rather than narrowing it, from +0.103 raw to +0.205 adjusted. The verbosity confound runs against our result, not for it.

6 Post-training a small model

The natural question raised by the gap between a 9B open model and a frontier system is whether that gap reflects a capability ceiling or a deficit of domain-specific training data, and we tested this directly.

6.1 Building preference pairs from the benchmark

For each of the 550 test-split cases we already had scored responses from the seven baseline systems, or from six on the 30 cases the base 9B model failed to complete, and we took the highest-scoring as **chosen** and the lowest-scoring as **rejected**, giving 550 pairs with a mean score gap of 1.49 points, of which 500 were used for training and 50 held for evaluation during the run. We then fine-tuned Qwen 3.5-9B with ORPO [Hong et al., 2024], LoRA rank 8 and alpha 36 applied to all linear layers including the vision tower, three epochs on two H100s, with the learning rate and the preference weight chosen by an eight-trial search.

Two properties of this dataset bear on the interpretation of the result. The pairs are drawn from the test split, so the trained model is in-domain on the 550-case leaderboard and the held-out split provides the honest measurement, and the chosen responses approach a monoculture, since GPT-5.4 authored 460 of the 500 chosen sides in the training split, or 92%, which means the student is largely distilling a single teacher that also serves as the judge.

6.2 What it bought

Rubric	Base 9B	After ORPO	Change
Overall	3.31	4.11	+24.0%
Morphology grounding	2.99	3.56	+19.2%
Clinical integration	3.91	4.76	+21.6%
Reasoning coherence	3.18	3.93	+23.5%
Guideline alignment	2.85	3.93	+38.2%
Recommendation usefulness	3.64	4.37	+20.0%
Brier score ↓	0.285	0.245	−0.040
AUROC ↑	0.450	0.547	+0.098

Table 5: Base Qwen 3.5-9B against the same model after ORPO on 500 training pairs, measured on the 103-case held-out split. Every rubric improves, guideline alignment most of all. Rubric changes are given as percentages of the base score; Brier and AUROC are given as absolute differences, since neither has zero as its reference point.

Five hundred training pairs moved a 9B model from last position to second, ahead of Claude Opus 4.6, and every rubric improved, which is the result worth emphasizing: the procedure raises the assessment as a whole rather than optimizing a single reported quantity, and it is reproducible by anyone with the released dataset and two GPUs.

Its held-out Brier of 0.245 is second of the eight, behind Sonnet 4.6 at 0.242, and should be read alongside Table 3. What the fine-tune fixed is overconfidence: the base model’s mean stated probability was 0.452 against a true rate of 0.350, and the trained model’s is 0.396. Whether the same recipe yields real predictive skill when the context fields are measured rather than generated is the open question this benchmark exists to make answerable.

The base model’s AUROC differs sharply between splits, 0.554 on test against 0.450 on held out, but with roughly 36 positive cases in the held-out split the standard error on that statistic is near 0.06, so the difference is not distinguishable from sampling noise and we draw no inference from it.

The cost structure is the consideration most relevant to deployment, and it requires care, because the two systems are not billed on the same basis. Opus 4.6 incurred \$170.43 of API inference over the 550 test cases, or \$0.310 per case, whereas our model was served on a two-GPU instance we already operated, so its marginal cost is GPU time rather than a per-token price: at 19 seconds per case on the \$8.38 per hour instance used throughout this study, that is \$0.044 per case, or roughly one seventh of the Opus figure, and it falls further under batching. We report both bases rather than the single ratio, since the seven-fold figure is the defensible one and a comparison against our recorded \$7.98, which is almost entirely judge cost, would not be.

7 What the benchmark itself gets wrong

A benchmark paper should attempt to falsify its own instrument, and we report four such checks, each of which reuses the collected responses and therefore incurs no additional cost.

Do the five rubrics measure five distinct constructs? Only partly: the mean correlation between distinct rubrics is 0.49 and the first principal component accounts for 60% of the variance

across 4,370 judgments, indicating a substantial general quality factor. The structure is nonetheless not degenerate, since recommendation usefulness correlates with clinical integration at 0.69 but with guideline alignment at only 0.28, which justifies reporting the five separately while cautioning against treating their unweighted mean as five independent measurements.

Does the judge reward verbosity? It does, and unevenly: pooled across systems the Spearman correlation between response length and overall score is 0.61, and per system it ranges from -0.01 for Opus 4.6 to $+0.76$ for Gemini 2.5 Flash, which is both the lowest-scoring commercial system and the one whose score depends most heavily on output length. Future versions of this benchmark should control for length explicitly, and readers comparing closely spaced scores should consider whether one system simply produced more text.

Does patient-level leakage affect the results? It does not: twenty-two patients contributed two embryos each, and retaining only one embryo per patient removes 16 cases from the test split without changing any ranking or moving any score by more than 0.01. The defect is real and should be addressed by splitting on patient rather than on image, but it did not contaminate these results.

Does judge self-preference inflate our result? We cannot exclude it, and this remains the principal open question in the paper: GPT-5.4 serves as the judge, produced 92% of the chosen responses from which our model was trained, and occupies the top of the leaderboard, so a model optimized to resemble the judge should be expected to satisfy it. Confirming the ordering with a judge from a different model family is the most immediate extension of this work, and until that is done our model’s second position should be read as second according to GPT-5.4 rather than as an unconditional ranking.

8 Limitations

- **The judge cannot see the embryo**, so morphology grounding measures consistency with the Gardner grade supplied in the prompt rather than fidelity to the image; the ablation of Section 5.5 recovers the image’s contribution by differencing rather than by direct verification, and the natural remedy is the expert-written morphological descriptions released by Neu et al. [2026a], which would allow a future version to score image reading against a reference.
- **One judge, and it is also a contestant**. GPT-5.4 grades a leaderboard it appears on, and it wrote 92% of the responses our model was trained to imitate. Scoring a subset with a judge from a different family would settle how much that inflates our second place. It is unfinished work, not a design choice.
- **The prompt asks for implantation probability and we score against clinical pregnancy**. Both endpoints are computed in the code; the leaderboard reports clinical pregnancy. Treat the outcome metrics as a stress test rather than a matched forecast.
- **Part of the patient context is generated**, for the reasons and with the consequences set out in Section 3.3. The two that bind hardest are that these fields add no prognostic information beyond the measured covariates, so they cap what any outcome metric here can show, and that they are drawn independently of one another, so genuine clinical correlations such as that between polycystic ovary syndrome and body mass index are absent.
- **One clinic, one scanner, one population**. Everything here comes from the Kromp release. Transfer to other labs is untested.
- **Splits are per image rather than per patient**. Quantified above; fix in the next version.
- **Small absolute sample**. 550 test cases and 103 held out is enough to separate most models and not enough to separate close ones, which is why every comparison in this paper carries an

interval.

9 What we release

Every artifact we produced is public, comprising the benchmark, the evaluation code, all 5,194 leaderboard responses together with the 426 from the ablation arms, every judge transcript, the preference dataset, and the post-trained model, with locations and licenses given in Appendix E. Re-running the baselines additionally requires paid access to the dated hosted endpoints listed in Table 1, which we cannot make public. We do not redistribute the embryo images, which remain with the source dataset [Kromp et al., 2023] under CC BY 4.0, and our release instead rebuilds every case from that source deterministically.

The study cost \$840 as recorded in those artifacts: \$432 for 51.5 hours of a two-H100 instance covering preference-data preparation, the hyperparameter search, training, and local inference, \$328 of API spend on the test split, \$53 on the held-out split, and \$27 for the image ablation of Section 5.5 across its inference and both rounds of judging. A further \$15 was spent re-running judge calls that the two defects in Section 4 had invalidated; those superseded calls, like the confounded first round of the ablation, are not counted in any reported figure.

References

- David K. Gardner and William B. Schoolcraft. In vitro culture of human blastocysts, 1999. Origin of the expansion/ICM/TE grading scheme.
- Ashleigh Storr, Christos A. Venetis, Simon Cooke, Suha Kilani, and William Ledger. Inter-observer and intra-observer agreement between embryologists during selection of a single Day 5 embryo for transfer: a multicenter study. *Human Reproduction*, 32(2):307–314, 2017. doi: 10.1093/humrep/dew330.
- Peter J. Illingworth, Christos Venetis, David K. Gardner, Scott M. Nelson, Jorgen Berntsen, Mark G. Larman, Franca Agresta, Saran Ahitan, Aisling Ahlstrom, Fleur Cattrall, Simon Cooke, Kirsten Demmers, Anette Gabrielsen, Johnny Hindkjaer, Ross L. Kelley, Charlotte Knight, Lynette Lee, Robert Lahoud, Manveen Mangat, Hannah Park, Anthony Price, Geoffrey Trew, Sean Troup, Paula Vercoe, Mandy Wilhelm, and Ellen Wood. Deep learning versus manual morphology-based embryo selection in IVF: a randomized, double-blind noninferiority trial. *Nature Medicine*, 30(11):3114–3120, 2024. doi: 10.1038/s41591-024-03166-5. 14 clinics, 1,066 patients; noninferiority of deep-learning selection was not demonstrated.
- Nicklas Neu, Thomas Ebner, Jasmin Primus, Bernhard Schenkenfelder, Raphael Zefferer, Mathias Brunbauer, and Florian Kromp. Expert-annotated embryo image dataset with natural language descriptions for evidence-based patient communication in IVF. *arXiv preprint arXiv:2604.16528*, 2026a.
- Nicklas Neu, Thomas Ebner, Jasmin Primus, Raphael Zefferer, Bernhard Schenkenfelder, Mathias Brunbauer, and Florian Kromp. InVitroVision: a multi-modal AI model for automated description of embryo development using natural language. *arXiv preprint arXiv:2604.21061*, 2026b.
- Rahul K. Arora, Jason Wei, Rebecca Soskin Hicks, Preston Bowman, Joaquin Quiñonero-Candela, Foivos Tsimpourlas, Michael Sharman, Meghan Shah, Andrea Vallone, Alex Beutel, Johannes Heidecke, and Karan Singhal. HealthBench: Evaluating large language models towards improved human health. *arXiv preprint arXiv:2505.08775*, 2025. doi: 10.48550/arXiv.2505.08775. 262 physicians, 5,000 conversations, 48,562 rubric criteria.
- Jiwoo Hong, Noah Lee, and James Thorne. ORPO: Monolithic preference optimization without reference model. *arXiv preprint arXiv:2403.07691*, 2024. doi: 10.48550/arXiv.2403.07691.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. doi: 10.48550/arXiv.2305.18290.
- Florian Kromp, Raphael Wagner, Basak Balaban, Victoria Cottin, Irene Cuevas-Saiz, Clara Schachner, Peter Fancsovits, Mohamed Fawzy, Leyla Fischer, Necati Findikli, Borut Kovacic, Dagmar Ley, Ines Marques, Marcos Meseguer, Debbie Montjean, Anders Nyboe Andersen, Laura Rienzi, Jose Cassio Rocha, Carmen Rubio, Elena Sanchez, Klaus Schoenauer, Greta Verheyen, and Thomas Ebner. An annotated human blastocyst dataset to benchmark deep learning architectures for in vitro fertilization. *Scientific Data*, 10(1):271, 2023. doi: 10.1038/s41597-023-02182-3. Dataset released under CC BY 4.0 at <https://doi.org/10.6084/m9.figshare.20123153.v3>.

- European Society of Human Reproduction and Embryology. ART in Europe, 2020: results generated from European registries. *Human Reproduction*, 2025. doi: 10.1093/humrep/deaf179. 1,440 clinics across 41 countries.
- Ji Hyun Yoo et al. Real-world effectiveness and safety of rhFSH in infertile women undergoing ART: a Korean nationwide cohort study. *Clinical Pharmacology and Therapeutics*, 2026. doi: 10.1002/cpt.70136. n = 10,684 cycles; GnRH antagonist protocol in 76.8%.
- Melanie Vander Borcht et al. Cumulative live birth rates after transfer of all embryos from one oocyte retrieval. *Human Reproduction*, 2025. n = 31,478 embryos from 11,463 women; cumulative LBR 51.1% after 3 transfers, 78.0% after 10.
- Katerina Jelinkova et al. Sociodemographic and medical correlates of fertility-related quality of life in primary infertile Czech couples. *Health Psychology Report*, 2026. doi: 10.5114/hpr/213967. n = 469 couples; male partners older by 2.4 years (SD 4.3), $r = 0.60$.
- World Health Organization. *WHO Laboratory Manual for the Examination and Processing of Human Semen*. World Health Organization, 6th edition, 2021.
- Laura E. Dodge et al. Lifestyle habits of 12,800 IVF patients. *Human Fertility*, 2015. n = 12,811.
- Elizabeth Sherwin et al. Habitual physical activity levels in women attending fertility treatment. *Human Fertility*, 2022.
- Audrey J. Gaskins et al. Dietary patterns and outcomes of assisted reproduction. *American Journal of Obstetrics and Gynecology*, 220(6):567.e1–567.e18, 2019.

A Case prompt template

Every model receives this prompt together with the embryo image. The example is case IVF-BENCH-0001; laboratory and patient values change per case, the structure does not.

```
You are an expert reproductive medicine specialist reviewing an IVF case.

## Embryo Image
[IMAGE ATTACHED]

## Laboratory Data
- Gardner Score: 1DD (Expansion: blastocyst, blastocoel at least half the embryo, ICM:
  degenerative or absent, TE: degenerative or absent)
- COCs retrieved: 8
- MII oocytes: 6
- Transfer day: Day 4

## Patient Profile
- Female age: 39 | BMI: 28.1
- AMH: 2.0 ng/mL | FSH: 5.8 IU/L
- Diagnosis: Tubal Factor
- Stimulation protocol: Long Agonist
- Previous IVF cycles: 3 (no_pregnancy, clinical_miscarriage, biochemical_pregnancy)
- Partner age: 37
- Sperm: 88.2 M/mL, 78.2% motile
- Endometrial thickness: 7.0 mm
- Lifestyle: never smoker; moderate drinker (4-6/wk); very active (daily exercise);
  standard diet; moderate stress

## Task
Provide a comprehensive clinical assessment including:
1. Morphological analysis of the blastocyst image
2. Integration of patient factors with embryo quality
3. Risk factors and favorable indicators for this case
4. Estimated implantation probability range with reasoning
5. Recommendations for this transfer and future cycle planning
```

B Rubric definitions

The judge returns a score and a one-line justification for each rubric, plus the numeric probability it extracted from the response. The text below is what the judge sees, verbatim.

Morphological Accuracy How accurately does the response describe the embryo’s morphological features as visible in the image? Consider: expansion stage assessment, ICM description, TE description, zona pellucida observations, overall blastocyst appearance.

- **1:** Major errors or fabricated features not visible in the image
- **2:** Several inaccuracies in morphological description
- **3:** Mostly accurate with some minor errors or omissions
- **4:** Accurate description with good detail
- **5:** Precise, thorough morphological analysis matching the image

Clinical Integration How well does the response integrate patient clinical factors (age, AMH, BMI, diagnosis, previous outcomes, sperm parameters) with the embryo assessment? Does it consider how these factors interact with embryo quality?

- 1: No integration of clinical factors with embryo assessment
- 2: Mentions clinical factors but doesn't connect them to embryo quality
- 3: Some integration but misses key interactions
- 4: Good integration of most relevant clinical factors
- 5: Comprehensive integration showing how clinical factors affect prognosis

Reasoning Coherence Is the clinical reasoning logical, consistent, and free of contradictions? Does the probability estimate follow from the evidence presented? Are conclusions supported by the observations?

- 1: Contradictory or illogical reasoning
- 2: Significant logical gaps or inconsistencies
- 3: Generally coherent with minor logical issues
- 4: Well-structured reasoning with clear logic
- 5: Exemplary reasoning chain with all conclusions well-supported

Guideline Alignment Does the response align with established IVF clinical guidelines (ESHRE, ASRM, Gardner grading criteria)? Are the recommendations consistent with evidence-based reproductive medicine?

- 1: Recommendations contradict established guidelines
- 2: Several recommendations not aligned with guidelines
- 3: Mostly aligned with some deviations
- 4: Well-aligned with current clinical guidelines
- 5: Fully aligned, demonstrates deep knowledge of current guidelines

Actionability Are the recommendations specific, practical, and useful for a clinician? Does the response provide clear next steps for this transfer and future cycle planning? Are recommendations appropriately nuanced?

- 1: No actionable recommendations or only generic advice
- 2: Vague recommendations with little practical value
- 3: Some useful recommendations but lacking specificity
- 4: Clear, specific recommendations for this case
- 5: Highly specific, nuanced recommendations with alternatives considered

C Generated patient-context distributions

These are the fields that no public dataset carries alongside embryo images and outcomes, and that we therefore generate. Each is drawn from the distribution shown, seeded deterministically from the case identifier; basal FSH and partner age are conditioned on the patient's real age and the rest are drawn independently, as Section 3.3 sets out. Sources are the nearest published population estimate we could find for an IVF-treated cohort; where registries disagree by geography we chose a Western-representative central value.

Field	Distribution	Source
BMI (kg/m ²)	Truncated normal, mean 25.0, SD 5.0, range [17, 45]	European Society of Human Reproduction and Embryology [2025]
Basal FSH (IU/L)	Truncated normal, mean 6.0 at age 30, +0.15 per year	European Society of Human Reproduction and Embryology [2025]
Diagnosis	Categorical: tubal 0.25, male 0.25, unexplained 0.15, PCOS 0.12, endometriosis 0.10, DOR 0.05, uterine 0.03, other 0.05	European Society of Human Reproduction and Embryology [2025]
Stimulation protocol	Categorical: antagonist 0.70, long agonist 0.20, short agonist 0.05, natural 0.03, other 0.02	Yoo et al. [2026]
Previous cycles	Categorical: 0 at 0.40, then 0.25, 0.15, 0.10, 0.05, 0.05	Vander Borgh et al. [2025]
Previous outcomes	Categorical per cycle: no pregnancy 0.45, biochemical 0.20, miscarriage 0.15, live birth 0.15, ectopic 0.05	Vander Borgh et al. [2025]
Partner age (years)	Female age + Normal(2.4, 4.3), clipped to [20, 65]	Jelinkova et al. [2026]
Sperm concentration (M/mL)	Truncated normal, mean 50.0, SD 25.0, range [5, 200]	World Health Organization [2021]
Sperm motility (%)	Truncated normal, mean 55.0, SD 15.0, range [10, 95]	World Health Organization [2021]
Smoking	Categorical: never 0.65, former 0.25, current 0.10	Dodge et al. [2015]
Alcohol	Categorical: none 0.40, light 0.35, moderate 0.20, heavy 0.05	Dodge et al. [2015]
Physical activity	Categorical: sedentary 0.30, light 0.25, moderate 0.25, active 0.15, very active 0.05	Sherwin et al. [2022]
Diet	Categorical: standard 0.50, health-conscious 0.25, Mediterranean 0.15, vegetarian 0.05, restricted 0.05	Gaskins et al. [2019]

Table 6: Generated patient-context fields. None is sampled with reference to the recorded outcome. Basal FSH and partner age are conditioned on the patient’s real age and therefore act as weak age proxies; the remainder are drawn independently of one another, so genuine inter-field clinical correlations are absent.

D Two evaluation defects

Two evaluation defects and their correction. We report both because each is easy to reproduce inadvertently and neither is visible in the resulting scores.

The first concerns failed judge calls: when a call errored, the pipeline persisted a score record containing five zeros and continued, and because subsequent runs skip cases for which a score record already exists, those failures became permanent. In our initial pass this silently invalidated 231 of the test-split scores, 211 of which belonged to a single model, so that the model’s reported row was computed from 309 of 550 cases while the accompanying table indicated 520. The judge now declines to persist a failed score, leaving the case pending for a subsequent run.

The second concerns how reasoning traces are delivered. Our post-trained model was served through vLLM without a reasoning parser, and because Qwen chat templates pre-fill `<think>` in

the generation prompt, the model emits its reasoning, a closing `</think>`, and then its answer within a single field, whereas every hosted API returns reasoning in a separate field. Our model was consequently graded on approximately 4,000 characters of unfiltered reasoning prepended to its answer while all other systems were graded on the answer alone; correcting this raised its test-split score from 3.81 to 4.17 and moved it from third position to second. The general point is that comparisons between locally served reasoning models and hosted APIs require verifying the contents of the string being graded.

All results reported in this paper follow both corrections: every score in the study is produced by GPT-5.4, and no score record contains a judge failure.

E Code and data availability

The benchmark, the evaluation code, every model response, every judge transcript, and the analysis that produced each interval reported here are available at <https://github.com/The-Fertility-Plan/ivf-bench>. The post-trained model is at <https://huggingface.co/thefertilityplan/ivf-bench-qwen9b-vlm-orpo> and the preference dataset at <https://huggingface.co/datasets/thefertilityplan/ivf-bench-orpo-qwen9b-clipped>. Code is released under Apache 2.0.

We do not redistribute the embryo images. They belong to the Kromp blastocyst dataset [Kromp et al., 2023], are available under CC BY 4.0 at <https://doi.org/10.6084/m9.figshare.20123153.v3>, and our release rebuilds every case from that source deterministically.

To cite this work:

```
@article{correa2026ivfbench,
  author = {Correa, Andrew G. A. and Yoon, Brittany},
  title = {{IVF-Bench}: A Rubric-Based Standard for Evaluating
    Vision-Language Models on {IVF} Clinical Reasoning},
  journal = {arXiv preprint},
  year = {2026}
}
```