

IVF-Bench: A Rubric-Based Standard for Evaluating Vision-Language Models on IVF Clinical Reasoning

Andrew G. A. Correa
Monostate
andrew@monostate.ai

Brittany Yoon
The Fertility Plan
b@thefertilityplan.com

August 2026

Abstract

Embryo selection in IVF still rests on morphology, and the systems built to standardise it rank blastocysts from images alone, without the patient context clinicians weigh. We present IVF-Bench: 753 blastocyst cases from the public Kromp dataset, each pairing a real embryo image and its Gardner annotation with that patient’s cycle data and recorded outcome, plus patient-history fields sampled from published distributions and labelled as generated. Models write an open-ended assessment, scored on five clinical rubrics by a judge shown the same embryo and on the implantation probability they state. Across eight systems, clinical integration is uniformly strong and outcome discrimination is not: AUROC never exceeds 0.562, which a logistic regression on the measured fields alone matches, placing the ceiling in the data rather than the models. Post-training Qwen 3.5-9B with ORPO on 500 benchmark-derived pairs raises it 24.6% over its own base, a gain a second judge puts at 15.5%; the second place it buys, ahead of Claude Opus 4.6, holds under one judge and not the other, because judges favour their own lineage. We release the benchmark, the model, and all 5,194 responses with transcripts from both judges.

1 Introduction

Few decisions in IVF carry more weight than the choice of which embryo to transfer, and in most clinics that choice still rests on visual assessment: an embryologist examines the blastocyst on day 5 and assigns a Gardner grade capturing the degree of expansion, the organization of the inner cell mass, and the cohesion of the trophoctoderm [Gardner and Schoolcraft, 1999]. The grade is clinically useful, but it is also subjective, and when embryologists at different centers are shown the same day-5 embryos and asked to select one for transfer, their agreement falls well short of what the confidence of the decision would suggest [Storr et al., 2017].

That variability has motivated a decade of machine learning work, nearly all of it framed as a scoring problem in which an image or a time-lapse sequence is mapped to a scalar and embryos are ranked by that scalar. The largest randomized evaluation of this paradigm, a double-blind trial across 14 clinics and 1,066 patients, compared a deep learning ranker against trained embryologists and did not demonstrate noninferiority [Illingworth et al., 2024], which suggests that further refinement of image-only ranking is unlikely to be the most productive direction.

Figure 1 contrasts that regime with the one this paper proposes.

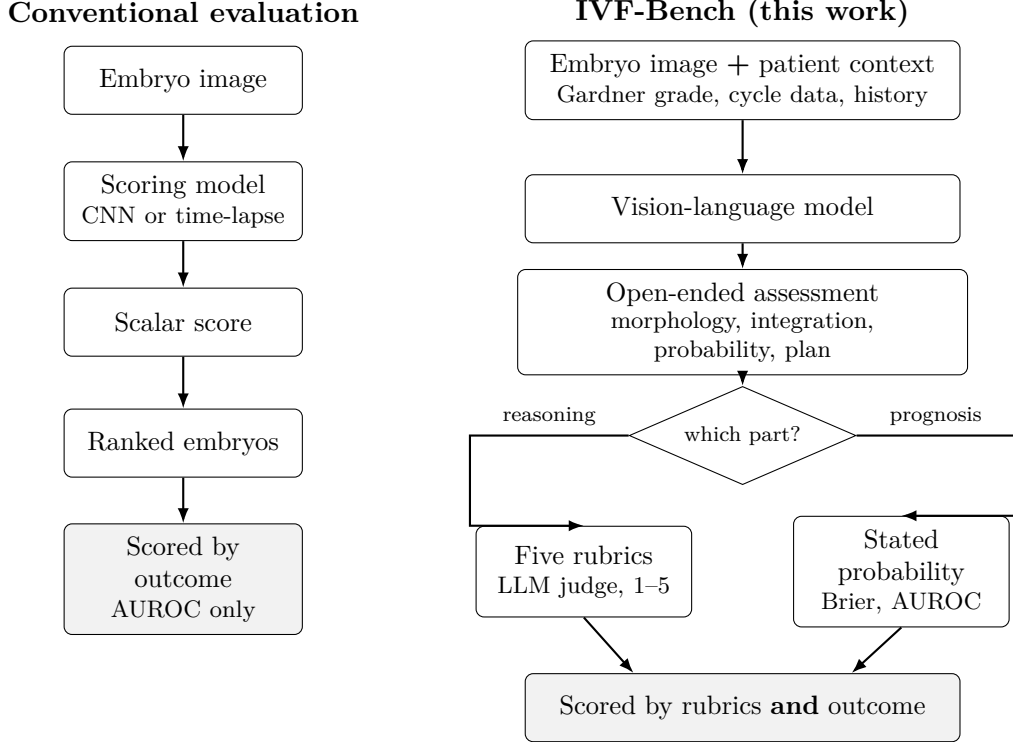


Figure 1: Conventional embryo-selection evaluation against IVF-Bench. Prior work maps an image to a scalar and is scored only by how well that scalar ranks outcomes, so a system that reasons well about a patient and one that does not are indistinguishable. IVF-Bench supplies the patient context alongside the image, elicits an open-ended assessment, and scores the reasoning against five clinical rubrics while separately scoring the stated probability against the recorded outcome.

We argue the limitation lies in the framing rather than the architecture. The image captures only part of what determines whether a transfer succeeds; the rest is patient-level, comprising ovarian reserve, endometrial receptivity, body mass index and lifestyle, previous cycles, and the andrology profile. Most of that resides with the treating physician and rarely reaches the embryologist at the microscope, still less the imaging model, so a system operating on pixels alone is not failing at prediction so much as being asked to predict without the covariates that govern the outcome.

Vision-language models can in principle consume both modalities, but the claim has never been testable, because embryo images are sensitive clinical records, outcome-linked patient context more sensitive still, and the review required to assemble the two is stringent enough that essentially every substantial dataset in this field stays private. That, rather than model capacity, is the binding constraint, and it motivates an instrument for measuring whether a model can use patient context at all.

IVF-Bench comprises 753 blastocyst cases, each imaged on the day the embryo reached the blastocyst stage and was transferred, 641 on day 5 and 112 on day 4, and each pairing a real embryo image and its silver-standard Gardner annotation with the cycle data and recorded outcomes of the same patient, together with the patient-history fields that no public dataset supplies and that we therefore generate from published population distributions, labeling each as generated and defending the choice in Section 3.3. A model is asked to describe the embryo, integrate the patient factors, estimate an implantation probability, and recommend next steps, and its answer is scored

on five clinical rubrics while the stated probability is compared against the recorded outcome. The generated fields are sampled without reference to those outcomes and add no prognostic information beyond the measured covariates, as Section 3.3 quantifies, so every outcome-prediction result reported here is bounded by the data before any model is involved.

We evaluate seven frontier and open-weight systems and then post-train a 9B open model on preference pairs derived from the benchmark, obtaining the following results:

1. **Five hundred preference pairs raise a 9B open model 24.6% over its own base on the held-out split**, and a judge from a different family independently puts the same gain at 15.5%. This is the paper’s central training result, a within-model comparison no leaderboard convention can distort, and it says the reasoning half of embryo assessment is reachable far below frontier scale. The gain is also enough to place the model second of eight ahead of Claude Opus 4.6 at roughly one seventh of the marginal inference cost, but that ranking is GPT-5.4’s and reverses under Sonnet 4.6, so we report it as a consequence rather than as the claim.
2. The improvement spreads across all five rubrics rather than concentrating in one, which separates a procedure that raises the assessment from one that optimizes a reported quantity.
3. Outcome discrimination stays weak for every system, and we quantify the deficit against a baseline that ignores its inputs entirely, placing the ceiling in the data rather than in model capacity.
4. Morphology grounding is the weakest of the five rubrics, roughly 1.4 points below clinical integration, and putting the judge in front of the embryo is what revealed it: the same responses scored half a point higher under a judge that could not check them.

Building the instrument surfaced four properties of rubric-based judging that affect any benchmark of this shape, one of which withdraws a quantitative claim the earlier release carried. They are incidental to the argument above and are collected in Section 8.

The practical implication is that progress in this area depends less on model development than on the construction of a public dataset linking embryo images to measured patient context and recorded outcomes, and IVF-Bench provides the instrument with which the value of such a dataset can be quantified.

2 Related work

Embryo selection models. Most published systems predict a label from pixels, whether by grading blastocysts automatically, ranking embryos within a cohort, or estimating implantation from time-lapse sequences, and the commercial products deployed in clinics follow the same pattern, positioned as adjunctive scoring tools rather than autonomous decision makers; the strongest randomized evidence for any of them is the trial discussed above [Illingworth et al., 2024]. None of this work evaluates open-ended clinical reasoning, for the simple reason that none of it produces language.

Language about embryos. The group that released the dataset we build on has recently moved in this direction, publishing an expert-annotated set of embryo images paired with natural-language morphological descriptions [Neu et al., 2026a] together with a fine-tuned PaliGemma-2 model that generates such descriptions [Neu et al., 2026b]. That work and ours are complementary but differ in what they ask of a model: they evaluate whether a model can describe an embryo, whereas we evaluate whether it can reason about the patient carrying that embryo, which additionally requires the cycle data, the history, a calibrated probability, and a recommendation. Their descriptions are the morphology ground truth our evaluation most lacks, as we note in Section 9.

Rubric-graded evaluation of medical language models. The practice of scoring open-ended clinical answers against written criteria, with a language model performing the scoring, was established at scale by HealthBench, for which 262 physicians authored 48,562 rubric criteria across 5,000 conversations [Arora et al., 2025]. Our five rubrics are considerably narrower, written for a single decision rather than for medicine in general, but the methodological inheritance is direct, and we adopt the same principle of grading against criteria rather than against a reference answer.

Preference optimization. We post-train with ORPO [Hong et al., 2024], which folds the preference objective into the supervised loss and removes the need for a separate reference model, in the family of methods opened up by DPO [Rafailov et al., 2023].

3 The benchmark

3.1 Where the data comes from

Open embryo data is rare, because embryo images are sensitive clinical records and most published systems are trained on private single-clinic collections. We build on the Kromp blastocyst dataset [Kromp et al., 2023], which is public under CC BY 4.0 and links blastocyst images to Gardner grades, selected cycle variables, and pregnancy outcomes. Culture ran to the blastocyst stage and transfer followed on day 4 where blastocysts were already available and on day 5 otherwise, so each image is taken on its own case’s transfer day rather than on a fixed day for every case; the dataset records that day and we pass it to the model. The clinical annotation file contains 754 records spanning 732 patients, one of which references an image absent from the distributed archive, leaving 753 usable cases from 731 patients.

Preparing it took more correction than we expected, and we document that because anyone reusing the dataset will meet the same issues. The annotation file is semicolon-separated, Latin-1 encoded, and had at some point been opened in a German-locale spreadsheet, which silently turned 501 AMH values and 144 endometrial thickness values into dates, so that 1.26 appears as *Jän. 26*; we map the month abbreviations back. Oocyte counts sometimes appear additively, as *7+1*, which we sum, and missing values stay missing, shown to models as “not available” rather than imputed. One record carries a live birth without the clinical pregnancy that must precede it, and we leave it unaltered, since silently repairing a source dataset is less defensible than reporting the inconsistency.

3.2 What a case contains

Each case combines measured fields drawn from Kromp with generated patient context: the measured fields are the embryo image, the Gardner grades, patient age, AMH, endometrial thickness, oocytes retrieved, mature oocytes, transfer day, and the three pregnancy outcomes, while the generated fields are body mass index, basal FSH, diagnosis, stimulation protocol, previous cycles and their outcomes, partner age, semen parameters, and a lifestyle summary.

3.3 Why the patient context is generated, and what that costs

An embryo image accompanied by an age does not constitute a case: a clinician reasoning about a transfer draws on the patient’s history, and a benchmark that omits that history cannot determine whether a model uses one. No public dataset, however, carries body mass index, lifestyle, stimulation protocol, or cycle history alongside embryo images and outcomes. Such data exist in clinics,

largely in physicians’ notes and frequently only in their recollection, and they do not circulate: they seldom reach the embryologist at the microscope and have never reached a public research corpus, because assembling images together with outcome-linked patient records is precisely the combination that regulatory and privacy review is designed to constrain.

We therefore generate these fields, sampling each from a published population distribution, with every parameter and its source given in Appendix C. Generation is deterministic per case, seeded from a hash of the case identifier, and each case record enumerates its generated fields explicitly, so that no result can depend on generated values being mistaken for measured ones. Identifiers are assigned positionally over the sorted corpus, so regeneration is exact for a fixed corpus, while changing its size or the split proportions reassigns identifiers and therefore resamples the profiles that depend on them.

This procedure yields a case-level reasoning task that can be constructed and reproduced entirely from public sources, at two costs that bear directly on the interpretation of our results. First, the generated fields are sampled without reference to the recorded outcomes. Two of them are nonetheless conditioned on the patient’s real age, namely basal FSH and partner age, which correlate with it at 0.32 and 0.73 respectively, and each therefore functions as a weak age proxy: taken alone, and read in the direction that makes them predictive at all, with higher values indicating a poorer prognosis, they reach AUROC 0.527 and 0.532 against clinical pregnancy. Because age is itself supplied as a measured field, these fields add no information a model did not already have, but the stronger claim that the generated context is entirely uninformative is not one we can make. The outcome metrics in Section 5 should be read as a floor that quantifies what is missing rather than as a verdict on what vision-language models can achieve given measured context. Second, apart from those two dependencies and the conditioning of previous outcomes on previous cycle count, the fields are sampled independently of one another, so genuine clinical correlations, such as that between polycystic ovary syndrome and body mass index, are absent, and a model that has internalized those correlations receives no credit for them here. Neither limitation can be remedied by a more sophisticated generator; both are remedied by a real dataset, which is precisely the argument of this paper.

3.4 Ethics and data use

This work is a secondary analysis of a publicly released, de-identified dataset and required no additional review. The underlying embryo images and clinical records were collected under approval from the Ethics Committee of the Faculty of Medicine at Johannes Kepler University Linz (Nr. 1238/2021) with informed consent obtained from participants, and were released by the original investigators under CC BY 4.0 [Kromp et al., 2023]; we redistribute no images and our release regenerates every case from that source. The patient-history fields we add are sampled from published population distributions and correspond to no real individual.

The model released with this benchmark is a research artifact and is not a medical device. It has no regulatory clearance, has not been evaluated in a clinical trial, and must not be used to inform the care of any patient. We regard the risk of misuse as material rather than hypothetical, because the model produces fluent, confident, guideline-shaped counseling text whose surface quality substantially exceeds its demonstrated prognostic validity, which is the combination most likely to induce unwarranted confidence in a reader. The strongest randomized evidence in this area found that a deep learning system did not outperform trained embryologists [Illingworth et al., 2024], and nothing in this paper meets a lower bar than that.

3.5 Splits

The 753 cases are partitioned deterministically into 550 test, 100 validation, and 103 held out, with the test split carrying the main leaderboard. The validation split was reserved for judge and threshold calibration and, in the end, was not used: no system was run against it, and we release it unused so that future work has a split untouched by anything reported here. The held-out split remained untouched through all training, hyperparameter search, and judge calibration, and exists to answer a single question: whether the test-split ordering survives on cases that nothing was optimized against.

One property of these splits should be stated plainly, since it is a defect: they were drawn per image rather than per patient, and because twenty-two patients contributed two embryos each, for six of those patients the two embryos fell into different splits, so that four of the 103 held-out cases share a patient with a test-split case. We quantify the effect in Section 7, where it changes no ranking, but a subsequent version should partition on patient.

3.6 The prompt

Every model receives the embryo image together with a structured case description containing the Gardner grade with plain-language descriptors, the laboratory fields, and the patient profile, and is asked for five components: a morphology description, an integration of the patient factors, the risks and favorable features, a numeric implantation probability, and recommendations for the present transfer and for future cycles. The full template appears in Appendix A.

3.7 The five rubrics

A judge model reads the case and the response and returns a 1 to 5 score with a short justification for each of five rubrics.

- **Morphological accuracy.** Does the description of the embryo match the image and the Gardner annotation?
- **Clinical integration.** Does the response connect the patient factors to this embryo and this prognosis, rather than listing them?
- **Reasoning coherence.** Is the argument internally consistent, with uncertainty where uncertainty belongs?
- **Guideline alignment.** Is the advice consistent with evidence-based reproductive medicine?
- **Actionability.** Could a clinician act on this, or is it generic?

Full rubric text and the 1 to 5 anchors for each appear in Appendix B.

4 Evaluation setup

We evaluate seven models through hosted endpoints plus our own post-trained model served locally, and every response on the leaderboard is graded by the same judge; Section 7 re-grades the held-out split with a second judge from a different model family.

Model	Served by	Size	Reasoning	Budget
GPT-5.4 (2026-03-05)	OpenAI	not disclosed	effort: high	12,000
Claude Opus 4.6	Bedrock	not disclosed	8K thinking	12,000
Claude Sonnet 4.6	Bedrock	not disclosed	8K thinking	12,000
Qwen 3.5-397B-A17B	OpenRouter	397B, 17B active	native	4,096
Kimi K2.5	OpenRouter	1T, 32B active	native	4,096
Gemini 2.5 Flash	OpenRouter	not disclosed	native	4,096
Qwen 3.5-9B	OpenRouter	9B	native	4,096
IVF-Bench-Qwen9B-ORPO (ours)	local vLLM, 2×H100	9B	native	4,096

Table 1: The eight systems evaluated. Baselines run at temperature 0 with reasoning enabled. Our model uses the sampling settings recommended on the Qwen 3.5 card (temperature 1.0, top-p 0.95, top-k 20, repetition penalty 1.05), because greedy decoding traps it in a repetition loop. The last column is the output-token budget, which was set per backend and is not equal across systems; Section 7 measures what that cost the five on the smaller allowance.

The judge. GPT-5.4 grades every response against the five rubrics in a single call and additionally extracts the numeric probability, and it is given exactly what the model was given: the same case text, the embryo image itself, and the Gardner grade. One refinement matters once an experiment starts withholding inputs, and Section 5.5 depends on it. The judge’s copy of the prompt always states which inputs the model actually received, so a model is never marked down for declining to use something it was denied, while the judge’s own view of the embryo is held constant across arms, because a grader whose eyesight changes between conditions cannot be used to compare them.

How the systems were served. The three commercial systems ran on Bedrock and the OpenAI API, our own model on a local vLLM instance, and the four remaining baselines through OpenRouter, which selects a third-party host per call. Two consequences of that arrangement bear on how the leaderboard should be read, and both are quantified in Section 7: the output-token budget in Table 1 was set per backend and is not equal across systems, and the OpenRouter rows are mixtures of several deployments rather than single ones.

Corrections applied. Three defects in our own pipeline invalidated earlier versions of these results and are fixed in everything reported below: the pipeline used to persist failed judge calls as all-zero scores, our locally served model was graded on its chain of thought, and the judge was once shown inputs the model had been denied. Appendix D gives all three in full. Every score in this paper is produced by the same GPT-5.4 judge with the embryo in front of it, and no score record contains a judge failure.

5 Results

5.1 Reading the two outcome metrics

Brier score (lower is better) is the mean squared error between the stated probability and the observed outcome, and it rewards honesty about the odds; always predicting 50% yields 0.25, which is the comparison most papers adopt and the wrong one, since the sharper reference is a constant set to the cohort’s own pregnancy rate, against which we report in Table 3. **AUROC** (higher is better, with 0.5 denoting chance) is the probability that a randomly chosen success is ranked above a randomly chosen failure, and it rewards discrimination between embryos. Counseling a patient depends on the first quantity and selecting an embryo for transfer on the second, and a system can be respectable on one while remaining useless on the other.

5.2 The leaderboard

Model	Rubrics (1–5)						Outcome	
	Overall	Morph	Clin	Reas	Guide	Rec	Brier↓	AUROC↑
<i>Test split, 550 cases</i>								
GPT-5.4	4.44	3.71	4.99	4.48	4.12	4.92	0.245	0.553
Qwen9B-ORPO (ours)	4.04	3.20	4.71	3.95	3.95	4.37	0.249	0.531
Opus 4.6	3.83	3.00	4.88	3.91	3.14	4.23	0.245	0.541
Qwen 397B	3.56	2.75	4.07	3.77	3.22	3.98	0.260	0.539
Sonnet 4.6	3.47	2.79	4.27	3.52	2.72	4.02	0.241	0.544
Kimi K2.5	3.38	2.74	4.08	3.49	2.92	3.68	0.243	0.548
Qwen 9B (base)	3.24	2.63	3.90	3.32	2.77	3.55	0.255	0.556
Gemini 2.5 Flash	3.22	2.79	3.71	3.54	3.42	2.66	0.267	0.542
<i>Held-out split, 103 cases</i>								
GPT-5.4	4.44	3.74	5.00	4.49	4.10	4.88	0.246	0.562
Qwen9B-ORPO (ours)	3.97	3.14	4.65	3.91	3.90	4.23	0.245	0.541
Opus 4.6	3.82	3.02	4.76	3.95	3.15	4.22	0.247	0.551
Gemini 2.5 Flash	3.69	2.95	4.17	3.91	3.47	3.97	0.289	0.504
Qwen 397B	3.61	2.85	4.05	3.85	3.32	3.97	0.265	0.551
Sonnet 4.6	3.54	2.92	4.33	3.61	2.81	4.02	0.242	0.535
Kimi K2.5	3.47	2.77	4.17	3.58	2.99	3.85	0.255	0.516
Qwen 9B (base)	3.18	2.64	3.87	3.08	2.78	3.54	0.283	0.456

Table 2: IVF-Bench leaderboard on both splits, ordered within each split by overall score. Rubrics are morphology grounding, clinical integration, reasoning coherence, guideline alignment, and recommendation usefulness. All systems ran with reasoning enabled and were graded by GPT-5.4 with the embryo image attached. Qwen 9B base completed 520 of 550 test cases, the remaining 30 having exhausted their token budget without ever emitting an answer; every system answered all 103 held-out cases. The generation budget was not equal across backends, and the five systems that drew the smaller one had answers cut off on some cases while the other three never did, which Section 7 quantifies and which affects these rows unevenly.

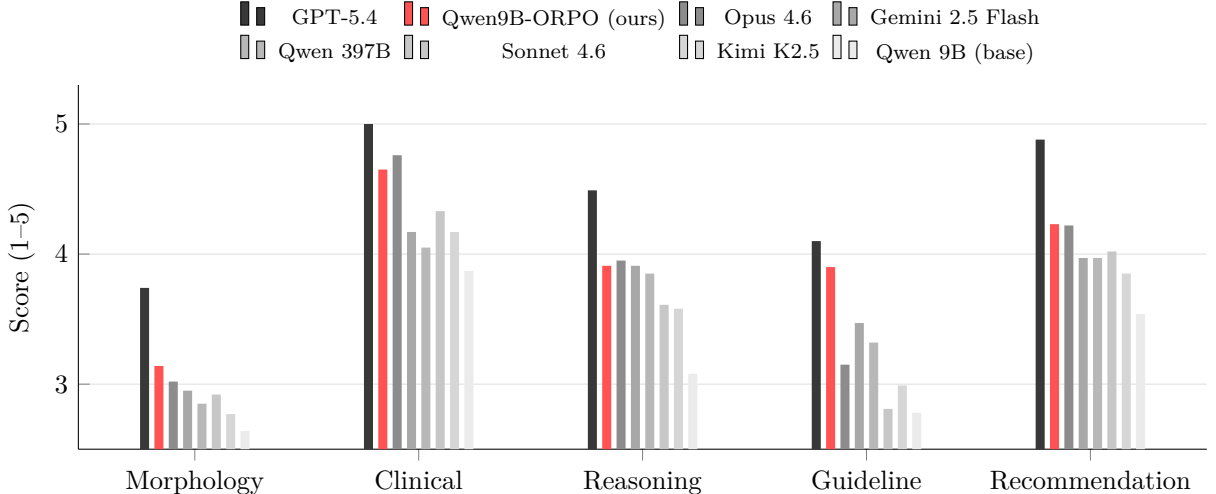


Figure 2: Per-rubric scores on the held-out split, graded by a judge that sees the embryo. Clinical integration is the strongest rubric for every system and morphology grounding the weakest for seven of eight, the two separated by roughly 1.4 points on average, a pattern that holds across three orders of magnitude in model size. No rubric is degenerate: each spreads the eight systems across between 1.1 and 1.4 points, so all five carry information about which system is which even though they correlate. Our post-trained 9B model tracks the frontier systems on every rubric and comes closest to GPT-5.4 on guideline alignment, where it trails by 0.19 points.

5.3 Which gaps are real

A leaderboard reported without intervals invites readers to treat a difference of 0.02 as meaningful, so we resample cases with replacement 10,000 times and, for each adjacent pair of systems, bootstrap the paired per-case difference over the cases both answered.

On the test split every adjacent gap is separable at the 95% level except the last, where the base Qwen 9B leads Gemini 2.5 Flash by 0.013 across all the cases each answered but trails it by 0.006 across the 520 they both answered (95% CI $[-0.062, +0.050]$, $p=0.83$). The ordering in Table 2 therefore rests entirely on the 30 cases only Gemini answered, where it averages 2.90 against 3.24 elsewhere, so the pair should be read as a tie for seventh rather than as a ranking; on the held-out split, with 103 cases rather than 550, the pair that closes instead is Sonnet 4.6 over Kimi K2.5 (+0.064, CI $[-0.019, +0.153]$, $p=0.15$). The two comparisons that carry the paper’s argument survive on both splits: GPT-5.4 over our model (+0.474 held out, CI $[+0.414, +0.538]$) and our model over Opus 4.6 (+0.146 held out, CI $[+0.078, +0.214]$; +0.205 on test, CI $[+0.172, +0.237]$). Surviving both splits is not the same as surviving a second grader, and the second does not (Section 7).

5.4 What the numbers say

1. Case explanation is uniformly strong. Clinical integration is the highest-scoring rubric for every system, with GPT-5.4 reaching a maximal 5.00 on both splits. Models reliably fold age, AMH, endometrial thickness and prior cycle history into a coherent account of the prognosis, so if the task were confined to the counseling narrative it would be close to solved.

2. Outcome prediction sits at a floor. AUROC spans 0.456 to 0.562 against 0.5 for chance,

so the best value obtained ranks a conceiving embryo above a non-conceiving one on 56% of such pairs. The Brier scores look more favorable than they are: they span 0.241 to 0.289, straddling the 0.25 of always predicting 50%, which nine of the sixteen model-split combinations improve on. Even that is the wrong reference. The clinical pregnancy rate here is 0.350, so a constant returning 35% for every case, ignoring the embryo and the patient entirely, scores 0.2274, and every language model does worse (Figure 3).

Predictor	Brier (test)	Brier (held out)
Constant, the cohort base rate of 0.35	0.2278	0.2274
Constant, 0.50	0.2500	0.2500
GPT-5.4	0.2449	0.2463
Qwen9B-ORPO (ours)	0.2491	0.2452
Qwen 9B (base)	0.2549	0.2827

Table 3: Brier score against a predictor that ignores its inputs. No language model beats the cohort base rate on either split; a fitted tabular baseline does on one of the two (Section 5.6). Model rows use the cases where a probability could be extracted.

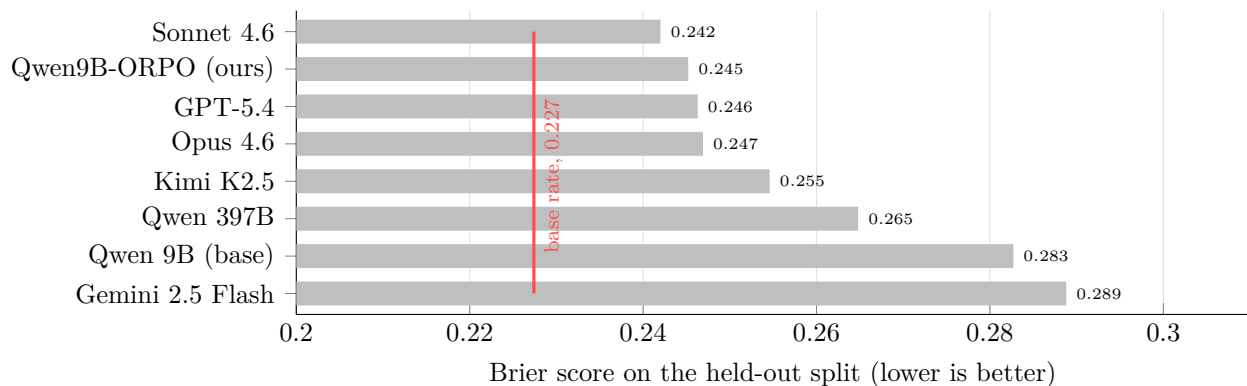


Figure 3: Brier score of every evaluated system against a constant predictor that returns the cohort’s clinical pregnancy rate of 0.350 for every case, ignoring the embryo, the image, and the patient. No system reaches the constant, shown as the vertical line. We attribute this to the absence of outcome-linked patient context in the available data rather than to model capacity, for the reason given in Section 3.3.

This is the result we most want retained, and it is not a verdict on the models. The generated context adds no prognostic information beyond the measured covariates, and what remains is age, AMH, endometrial thickness, oocyte counts and one morphology grade from one frame. Predicting clinical pregnancy from that appears to approach the limit of what public data support, since a logistic regression on the same fields reaches a cross-validated AUROC of 0.538 (Section 5.6), inside the range the language models span. What would move the number is embryo genetics, longitudinal development rather than a single frame, uterine and endometrial context, and the history that never leaves the physician’s notes. IVF-Bench is built so those fields can be swapped from generated to measured as they become available.

The same reasoning reframes our own calibration result: a held-out Brier of 0.245 is second of eight, behind Sonnet 4.6 at 0.242, and all eight fall short of the constant. What post-training

achieved is stated probabilities moving back toward the population rate, correcting the base model’s overconfidence, which on these data is the correct behavior and is not predictive skill.

3. Morphology grounding is the weakest rubric, and putting the judge in front of the image is what revealed it. Averaged across systems it is lowest on both splits (2.95 test, 3.00 held out), guideline alignment next (3.28 and 3.31), clinical integration highest (4.33 and 4.38); no system reaches 3.75 on morphology on either split, and it is the single weakest rubric for six of eight systems on test and seven of eight held out. Under the blind judge the same responses scored 3.39 and 3.44 and morphology was weakest for only two systems on test and three held out: a judge with no image to check against was accepting descriptions a sighted judge marks down. Every system loses ground on this rubric when the judge can see, by 0.13 to 0.65 points and 0.44 on average, while the largest drop on any other rubric is 0.29 and the average across the other four is below 0.09, which is what one expects if the correction is specific to image reading rather than a general increase in severity. Figure 2 shows the shape on held out, where clinical integration is the tallest bar for all eight systems and morphology the shortest for seven. The conclusion is unchanged in direction and sharper in degree: models reason far better about structured text than about the image, and the 1.4-point gap between clinical integration and morphology grounding is the largest separation between any two rubrics in the study.

4. Cost and quality are only loosely coupled. Opus 4.6 is the most expensive system at \$170.43 of inference over the 550 test cases, or \$0.310 per case, and finishes third of eight, while GPT-5.4 finishes first at \$0.090 per case. Within the Anthropic pair the relation is conventional, Opus at 3.83 against Sonnet at 3.47 for \$0.049 per case, so price tracks quality inside a family and stops tracking it across families. We exclude Gemini 2.5 Flash, since four fifths of its answers were cut off by a budget a third the size of the frontier systems’, and our own model, since it ran on hardware we already owned; Section 6 makes that comparison on a basis that holds.

5.5 What the embryo image contributes, and why we cannot say

Because each prompt supplies the Gardner grade in text alongside the image, a system could score well on morphology grounding without consulting the image at all, which would make the vision component of this benchmark decorative. We set out to measure that by subtraction, running four systems through the full two-by-two on the same 100 test cases, withholding the image, the grade, both, or neither, with the judge shown the embryo in every arm and told which inputs the model received. The experiment does not answer the question, for a reason that is a property of the rubric rather than of the models.

Model	n	Overall score, and morphology grounding below it			
		image + grade	grade only	image only	neither
GPT-5.4	100	4.46	4.49	4.45	4.33
		<i>3.83</i>	<i>3.67</i>	<i>3.96</i>	<i>3.44</i>
Opus 4.6	100	3.80	3.68	3.40	3.62
		<i>3.01</i>	<i>2.73</i>	<i>2.41</i>	<i>3.13</i>
Qwen 397B	87	3.56	3.66	3.47	3.79
		<i>2.85</i>	<i>2.98</i>	<i>2.61</i>	<i>3.37</i>
Gemini 2.5 Flash	100	3.16	3.64	3.48	3.80
		<i>2.82</i>	<i>2.88</i>	<i>2.48</i>	<i>3.83</i>

Table 4: The four arms on the cases each system answered in all four, with the judge shown the embryo throughout. Overall score first, morphology grounding italicised beneath it. The arm with no inputs at all is the lowest on overall score for only one of the four systems, and on morphology grounding it is the *highest* for three of them, which is the result that invalidates the design.

The arm with nothing in it is not a floor. A model handed neither input says it cannot describe an embryo it was not shown, and our rubric scores that refusal in the middle of the range: the judge’s own words are that the model “appropriately stated that no image was available and did not fabricate embryo morphology”, followed by a 3 or a 4. Morphology grounding as we wrote it asks whether a response is accurate, and a response that asserts nothing is not inaccurate. Three of four systems therefore score higher with nothing than with both, Gemini by 1.01 points, and no difference between two arms can be read as the information the missing input carried.

What survives. One edge never involves a refusal, because the model holds the image in both of its arms: image and grade against image alone. There the expert summary does measurable work, adding 0.60 points of morphology grounding for Opus 4.6 (95% CI [+0.43, +0.77]), 0.34 for Gemini 2.5 Flash ([+0.19, +0.49]) and 0.23 for Qwen 397B ([+0.03, +0.42]), while costing GPT-5.4 0.13 ([−0.21, −0.05]). Each is paired over the cases that pair of arms shares, 100 everywhere except Qwen 397B at 92, so subtracting columns of Table 4, which uses the 87 common to all four, reproduces them only to within 0.01. For three of four systems a human reading of the embryo, compressed into three ordinal values, improves the model’s own reading of it.

Separately, GPT-5.4 scores 4.46, 4.49, 4.45 and 4.33 across the four arms: removing the image and the grade together costs the strongest system in the study 0.13 points of overall score (95% CI [+0.07, +0.19]), so its rubric total is carried by the patient context almost entirely.

The released benchmark previously carried a figure of 0.07 to 0.23 points for the image’s contribution. That figure was computed under a judge that could not see the embryo either, and it is withdrawn: this design supports no quantitative claim in either direction. The defensible statement is narrower: this benchmark cannot measure image comprehension by subtraction, because its rubrics score a response against the inputs that produced it rather than against the embryo. Measuring it needs a reference the judge can compare against, which is what Neu et al. [2026a] provide. The paper’s broader claim, that the headroom is in the data rather than in image-only modelling, never rested on this experiment: it rests on the randomized trial [Illingworth et al., 2024] and on the tabular baseline of Section 5.6.

5.6 Two controls on the headline claims

Two objections bear directly on the results above and we address both with additional analysis rather than argument.

Is the ceiling really the data? Our claim that the outcome ceiling reflects the available data rather than model capacity rests, so far, on the observation that the generated fields add nothing beyond the measured covariates, which says nothing about what those measured covariates themselves support. We therefore fit logistic regression to the measured fields alone, namely age, AMH, endometrial thickness, oocytes retrieved, mature oocytes, transfer day, and the three Gardner components, with missing values imputed at the column median. Cross-validated within the 550-case split it reaches AUROC 0.538 (95% CI [0.487, 0.586]), and fit on those 550 cases and evaluated on the 103 held out it reaches 0.608 (95% CI [0.484, 0.725]), an interval wide enough to include chance. The better-powered estimate, 0.538, sits squarely inside the 0.456 to 0.562 range spanned by the vision-language systems, which is the result that matters: a linear model given the same measured covariates extracts about as much prognostic signal as the frontier systems do, so those systems are operating near the limit of what these covariates support rather than failing to use them.

One qualification follows from the same experiment and cuts against us. On the held-out split the tabular model attains a Brier score of 0.2197, which does beat the constant predictor at 0.2274, so the claim that nothing in this study beats the base rate holds for the language models and not for a fitted tabular model. The margin is small, the sample is 103 cases, and the cross-validated Brier on the larger split is 0.2297, which does not beat the constant; we report the result as it stands rather than choose the split that suits us.

Is the post-training margin an artifact of verbosity? The judge rewards length, as Section 7 quantifies, and our model was trained toward a teacher whose responses are long, so the comparison against Opus 4.6 could plausibly be measuring output length. It is not. On the held-out split our model’s responses average 9,485 characters against Opus 4.6’s 11,933, so our model is the shorter of the two, and regressing score on length within each system and comparing at a common length of 10,709 characters widens the margin rather than narrowing it, from +0.146 raw to +0.256 adjusted. The verbosity confound runs against our result, not for it.

6 Post-training a small model

The natural question raised by the gap between a 9B open model and a frontier system is whether that gap reflects a capability ceiling or a deficit of domain-specific training data, and we tested this directly.

6.1 Building preference pairs from the benchmark

For each of the 550 test-split cases we already had scored responses from the seven baseline systems, or from six on the 30 cases the base 9B model failed to complete, and we took the highest-scoring as **chosen** and the lowest-scoring as **rejected**, giving 550 pairs with a mean score gap of 1.49 points, of which 500 were used for training and 50 held for evaluation during the run. We then fine-tuned Qwen 3.5-9B with ORPO [Hong et al., 2024], LoRA rank 8 and alpha 36 applied to all linear layers including the vision tower, three epochs on two H100s, with the learning rate and the preference

weight chosen by an eight-trial search of one epoch each: it settled on a learning rate of 7.58×10^{-4} and $\beta = 0.222$, and the released configuration file carries both.

Three properties of this dataset bear on the interpretation of the result. The pairs are drawn from the test split, so the trained model is in-domain on the 550-case leaderboard and the held-out split provides the unbiased measurement. The chosen responses approach a monoculture, since GPT-5.4 authored 460 of the 500 chosen sides in the training split, or 92%, which means the student is largely distilling a single teacher that also serves as the judge. And the pairs were selected by the blind judge, because they were built before we put the judge in front of the embryo, so which response counts as chosen, the 1.49 gap, and the 92% all reflect that earlier configuration; the evaluation of the resulting model, like every score in this paper, uses the sighted judge.

6.2 What it bought

Rubric	Base 9B	After ORPO	Change
Overall	3.18	3.97	+24.6%
Morphology grounding	2.64	3.14	+18.7%
Clinical integration	3.87	4.65	+20.1%
Reasoning coherence	3.08	3.91	+27.1%
Guideline alignment	2.78	3.90	+40.6%
Recommendation usefulness	3.54	4.23	+19.5%
Brier score ↓	0.283	0.245	−0.037
AUROC ↑	0.456	0.541	+0.085

Table 5: Base Qwen 3.5-9B against the same model after ORPO on 500 training pairs, measured on the 103-case held-out split. Every rubric improves, guideline alignment most of all. Rubric changes are given as percentages of the base score; Brier and AUROC are given as absolute differences, since neither has zero as its reference point.

Table 5 gives the result. Five hundred training pairs raised the model 24.6% over the base it was fine-tuned from, and the gain is spread across all five rubrics rather than concentrated in one, which is the result worth emphasizing: the procedure raises the assessment as a whole instead of optimizing a single reported quantity, and it is reproducible by anyone with the released dataset and two GPUs. This comparison is the one we would defend hardest, because it is made between two versions of the same model on the same cases, so it depends on no convention about how systems from different laboratories should be ranked against each other, and Section 7 confirms it holds at 15.5% under a judge from a different model family.

Two things differ between the arms besides training, and we held neither fixed. The base model was decoded greedily like every other baseline, while ours uses the sampling the Qwen 3.5 card recommends, since greedy decoding traps it in a repetition loop; greedy decoding does the base no favours either, and on 30 test cases it spent the whole budget without emitting an answer. And ours ran on a vLLM instance we controlled while the base was reached through OpenRouter, served across its 623 calls by Together on 414, Venice on 117 and DeepInfra on 28, with no host named on the remaining 64, so that arm is a mixture of three deployments compared against a single one of ours. Neither difference can be separated from the training effect after the fact, so some unknown part of the 24.6% belongs to them. The clean experiment is to decode both identically on one serving stack; we did not run it.

The same gain moves the model from last on the held-out split to second, ahead of Claude Opus 4.6. We report that because it is what the leaderboard says, subject to the two qualifications Section 7 establishes: the second place is GPT-5.4’s verdict and becomes fifth under Sonnet 4.6, and our model was truncated on 12 held-out cases where Opus was not.

The Brier improvement in that table should be read alongside Table 3, which puts every system behind a constant predictor. What the fine-tune fixed is not predictive skill but overconfidence: the base model’s mean stated probability was 0.451 against a true rate of 0.350, and the trained model’s is 0.396. Whether the same recipe yields real predictive skill when the context fields are measured rather than generated is the open question this benchmark exists to make answerable.

The base model’s AUROC differs sharply between splits, 0.556 on test against 0.456 on held out, but with roughly 36 positive cases in the held-out split the standard error on that statistic is near 0.06, so the difference is not distinguishable from sampling noise and we draw no inference from it.

The cost comparison deferred from Section 5 belongs here, because the two systems are not billed on the same basis: Opus 4.6 costs \$0.310 per case through its API, whereas our model was served on a two-GPU instance we already operated, so its marginal cost is GPU time rather than a per-token price. At 19 seconds per case on the \$8.38 per hour instance used throughout this study, that is \$0.044 per case, roughly one seventh of the Opus figure, and it falls further under batching. We report both bases rather than the single ratio, since the seven-fold figure is the defensible one and a comparison against our recorded \$8.40, which is entirely judge cost, would not be.

7 What the benchmark itself gets wrong

A benchmark paper should attempt to falsify its own instrument. We report seven checks, six of which reuse the collected responses and cost nothing. The first two concern experimental conditions that were not equalised, and they bear on how every row of Table 2 should be read.

Were the systems served comparably? No. The four baselines reached through OpenRouter were served by whichever third-party host the router picked: 15 distinct providers across the 653 Kimi K2.5 calls, 11 across the 653 for Qwen 3.5-397B, and 3 across the 559 named of 623 for the base Qwen 3.5-9B. Gemini 2.5 Flash named a host on only 103 of its 653, so for that row we cannot say how mixed it was. Providers differ in quantisation, sampling implementation and chat templating, so those rows are weighted mixtures of deployments rather than single systems measured repeatedly. The Bedrock, OpenAI and local vLLM rows are not. We release the per-case provider manifest.

Did every system get to finish? No, and the cause is our harness rather than the models. The generation budget was set per backend and the three settings were not equal: Bedrock and OpenAI allowed 12,000 output tokens, the OpenRouter path 4,096. The three systems that never hit their ceiling, GPT-5.4, Opus 4.6 and Sonnet 4.6, are exactly the three on the larger budget, and all five on the smaller one were cut off mid-answer on some cases. Gemini is extreme for a second reason: its hidden reasoning counts inside the 4,096, consuming roughly 3,000 tokens and leaving about 1,100 for an answer the rubric then scored as incomplete. Table 6 bounds what that cost each system.

Model (test split)	cut off	score if cut	score if not	reported
Gemini 2.5 Flash	440 / 550	3.10	3.73	3.22
Kimi K2.5	197 / 550	3.24	3.46	3.38
Qwen 9B (base)	94 / 520	2.88	3.31	3.24
Qwen9B-ORPO (ours)	74 / 550	3.88	4.06	4.04
Qwen 397B	12 / 550	3.23	3.57	3.56

Table 6: Responses terminated by the token budget. The three systems absent were never cut off. Had nothing been truncated, each score would sit near the “if not” column.

The budget runs along the same line as the leaderboard, since the three systems on 12,000 tokens finish first, third and fifth on test. Gemini’s test row is therefore not a fair measurement of that system, and its rise to fourth on held out is not a property of the split either: the manifest names no host on any of its 550 test calls and Google on all 103 held-out ones, so the two runs were not collected the same way. The confound also runs against our own headline comparison, since our model was cut off on 74 test and 12 held-out cases where Opus 4.6 never was. We report the leaderboard as collected; the fix is one budget large enough that nothing reaches it.

Do the five rubrics measure five distinct constructs? Only partly. The mean correlation between distinct rubrics is 0.48 and the first principal component takes 59% of the variance across 4,370 judgments, so there is a substantial general quality factor. It is not degenerate: recommendation usefulness correlates with clinical integration at 0.70 but with guideline alignment at 0.30, which justifies reporting the five separately while cautioning against reading their mean as five independent measurements.

Does the judge reward verbosity? Unevenly. Pooled across systems the Spearman correlation between length and overall score is 0.63; per system it runs from -0.02 for Opus 4.6 to $+0.78$ for Gemini 2.5 Flash, whose extreme value has a mundane cause, since four fifths of its answers were cut off and length there is largely a proxy for finishing. The pooled figure overstates the within-system effect because it also absorbs stronger systems writing more, and for five of eight systems the correlation is below 0.25.

Does patient-level leakage affect the results? No. Twenty-two patients contributed two embryos each, and keeping one per patient removes 16 test cases without changing any ranking or moving any score by more than 0.01.

How much did showing the judge the image change the answer? Our first configuration had the judge blind, so morphology grounding could only measure consistency with the Gardner grade in text and a fluent description of an embryo that was not there would have passed unremarked. Every score here comes from the sighted configuration instead, and we hold the blind scores for the same 5,194 responses. Absolute scores fall, concentrated in morphology grounding, while the ordering barely moves: Spearman correlation between the rankings is 0.95 on test and 0.98 on held out, and the top four are identical on both splits. Of three single-place swaps below that, two are between pairs the bootstrap cannot separate. The third is a genuine disagreement: on test the blind judge puts Kimi above Sonnet by 0.052 and the sighted judge puts Sonnet above Kimi by 0.083, both intervals excluding zero. Our own margin over Opus 4.6 is wider under the sighted judge, $+0.205$ against $+0.161$ on test and $+0.146$ against $+0.103$ held out, so the correction that most threatened our headline comparison strengthened it. We regard the sighted configuration as correct on principle rather than on that outcome: a rubric asking whether a description matches the embryo cannot be scored by a grader who has not seen it.

Does judge self-preference inflate our result? It does. We re-scored all 824 held-out judgements with Claude Sonnet 4.6, a judge from a different family that wrote none of the training data, giving it the same embryo image so that the comparison isolates the judge rather than its eyesight. The two agree at the ends and disagree in the middle: GPT-5.4 is first and the base Qwen 9B last under both, but the rank correlation is 0.55 ($p=0.16$) and our model moves from second to fifth. The disagreement is structured. Sonnet scores every system higher by 0.50 on average, but the two Anthropic systems gain most, 0.90 and 0.79, while the two systems in the GPT-5.4 lineage gain least, 0.18 and 0.16; those four take the extremes of a ranking by gain, and verbosity does not explain it, since gain and mean response length correlate at -0.14 . Our headline comparison sits on the seam: we lead Opus 4.6 by $+0.146$ (95% CI $[+0.078, +0.214]$) under GPT-5.4 and trail it by -0.485 ($[-0.575, -0.404]$) under Sonnet 4.6. Table 7 ranks the systems by how much the second judge adds, which is where the family pattern reads most clearly.

Held-out split	GPT-5.4 judge	Sonnet 4.6 judge	gain
Sonnet 4.6	3.54	4.43	+0.90
Opus 4.6	3.82	4.61	+0.79
Kimi K2.5	3.47	4.24	+0.77
Qwen 397B	3.61	4.12	+0.51
Qwen 9B (base)	3.18	3.57	+0.39
Gemini 2.5 Flash	3.69	3.95	+0.26
GPT-5.4	4.44	4.62	+0.18
Qwen9B-ORPO (ours)	3.97	4.13	+0.16

Table 7: The same 824 held-out judgements under two judges, ordered by how much the second adds. The two Anthropic systems take the top two places and the two in the GPT-5.4 lineage the bottom two, which is what family self-preference looks like when it is measured rather than assumed.

What survives both judges is the comparison that does not cross a family boundary: our model against the base it was trained from, up 24.6% under GPT-5.4 and 15.5% under Sonnet 4.6, both intervals excluding zero by a wide margin. We therefore separate the claims. That 500 preference pairs substantially improve a 9B model is judge-independent. That this places it second of eight is GPT-5.4’s verdict and not Sonnet’s, and should be read that way. We report the GPT-5.4 leaderboard as primary because it is the judge the whole study ran under, and release both sets of transcripts.

8 Four things we learned about grading with a language model

Two of these are the pipeline defects of Section 4; the other two are properties of rubric-based judging that careful implementation does not remove. Each affected a result in this study before it was caught, and each will recur in any benchmark of this shape.

Tell the judge what the model was given, and change nothing else about the judge. Break the first half and the judge penalises a model for correctly declining to use an input it never received. Obey only the first half and the judge goes blind in exactly the arms where the model did, which makes the arms incomparable.

A rubric conditioned on the response cannot measure the input. A model that declines to describe an embryo it was not given is not inaccurate, so subtractive ablation is impossible on

such a rubric. Measuring what an input contributes needs a reference to compare against, not the absence of the input.

Judges favour their own family, symmetrically. Neither ordering is neutral. A leaderboard built on one judge should say whose leaderboard it is.

Set the generation budget once, in one place, and check it. Ours was configured per backend, the settings disagreed, and nothing in the scores revealed it. What reads as a capability gap can be an accounting one.

9 Limitations

- **The judge has no reference description to compare the embryo against**, so morphology grounding weighs one model’s reading against another’s. The expert descriptions of Neu et al. [2026a] are the remedy.
- **One judge, and it is also a contestant.** GPT-5.4 grades a leaderboard it appears on and wrote 92% of our training targets; Section 7 shows a second judge reorders the middle. A third would establish which ordering is closer to consensus.
- **The generation budget was not equal across systems**, and the OpenRouter rows are provider mixtures. Both are quantified in Section 7 and both favour the three commercial systems.
- **The base and trained models differ in decoding and serving stack** as well as in training, so part of the 24.6% may be either (Section 6).
- **The prompt asks for implantation probability and we score against clinical pregnancy.** Treat the outcome metrics as a stress test rather than a matched forecast.
- **Part of the patient context is generated**, which caps what any outcome metric here can show and omits real inter-field correlations (Section 3.3).
- **One clinic, one scanner, one population**, splits drawn per image rather than per patient, and 550 test cases against 103 held out. Enough to separate most models, not close ones, which is why every comparison carries an interval.

10 What we release

Everything needed to recompute a number here is public: the benchmark, the evaluation code, all 5,194 leaderboard responses and the 1,231 from the ablation arms, every judge transcript from both judges and each superseded configuration, the preference dataset, and the post-trained model, with locations and licenses in Appendix E. We hold back only the raw API envelopes, 125 MB whose one load-bearing field ships as a manifest, and the embryo images, which remain with the source dataset [Kromp et al., 2023] under CC BY 4.0; our release rebuilds every case from that source deterministically.

The study cost \$1,079, summed from the stored records rather than from an invoice. \$1,040.39 backs a reported number: \$431.57 for 51.5 hours of a two-H100 instance, \$300.18 of API inference across both splits, \$81.64 for the twelve ablation arms, and \$227.00 of judging, of which \$94.69 is the sighted GPT-5.4 judge behind every reported score, \$97.55 the earlier blind pass, and \$34.76 the two cross-judge passes. A further \$39.00 backs nothing: \$11.81 re-judging chain-of-thought, \$10.84 and \$6.03 on the two confounded ablation rounds, \$5.36 on a mixed-judge pass and \$4.96 on

quarantined runs. We report that line separately rather than netting it out, since the ratio between the two indicates how much of the study was spent on superseded work.

References

- David K. Gardner and William B. Schoolcraft. In vitro culture of human blastocysts, 1999. Origin of the expansion/ICM/TE grading scheme.
- Ashleigh Storr, Christos A. Venetis, Simon Cooke, Suha Kilani, and William Ledger. Inter-observer and intra-observer agreement between embryologists during selection of a single Day 5 embryo for transfer: a multicenter study. *Human Reproduction*, 32(2):307–314, 2017. doi: 10.1093/humrep/dew330.
- Peter J. Illingworth, Christos Venetis, David K. Gardner, Scott M. Nelson, Jorgen Berntsen, Mark G. Larman, Franca Agresta, Saran Ahitan, Aisling Ahlstrom, Fleur Cattrall, Simon Cooke, Kirsten Demmers, Anette Gabrielsen, Johnny Hindkjaer, Ross L. Kelley, Charlotte Knight, Lynette Lee, Robert Lahoud, Manveen Mangat, Hannah Park, Anthony Price, Geoffrey Trew, Sean Troup, Paula Vercoe, Mandy Wilhelm, and Ellen Wood. Deep learning versus manual morphology-based embryo selection in IVF: a randomized, double-blind noninferiority trial. *Nature Medicine*, 30(11):3114–3120, 2024. doi: 10.1038/s41591-024-03166-5. 14 clinics, 1,066 patients; noninferiority of deep-learning selection was not demonstrated.
- Nicklas Neu, Thomas Ebner, Jasmin Primus, Bernhard Schenkenfelder, Raphael Zefferer, Mathias Brunbauer, and Florian Kromp. Expert-annotated embryo image dataset with natural language descriptions for evidence-based patient communication in IVF. *arXiv preprint arXiv:2604.16528*, 2026a.
- Nicklas Neu, Thomas Ebner, Jasmin Primus, Raphael Zefferer, Bernhard Schenkenfelder, Mathias Brunbauer, and Florian Kromp. InVitroVision: a multi-modal AI model for automated description of embryo development using natural language. *arXiv preprint arXiv:2604.21061*, 2026b.
- Rahul K. Arora, Jason Wei, Rebecca Soskin Hicks, Preston Bowman, Joaquin Quiñonero-Candela, Foivos Tsimpourlas, Michael Sharman, Meghan Shah, Andrea Vallone, Alex Beutel, Johannes Heidecke, and Karan Singhal. HealthBench: Evaluating large language models towards improved human health. *arXiv preprint arXiv:2505.08775*, 2025. doi: 10.48550/arXiv.2505.08775. 262 physicians, 5,000 conversations, 48,562 rubric criteria.
- Jiwoo Hong, Noah Lee, and James Thorne. ORPO: Monolithic preference optimization without reference model. *arXiv preprint arXiv:2403.07691*, 2024. doi: 10.48550/arXiv.2403.07691.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. doi: 10.48550/arXiv.2305.18290.
- Florian Kromp, Raphael Wagner, Basak Balaban, Victoria Cottin, Irene Cuevas-Saiz, Clara Schachner, Peter Fancsovits, Mohamed Fawzy, Leyla Fischer, Necati Findikli, Borut Kovacic, Dagmar Ley, Ines Marques, Marcos Meseguer, Debbie Montjean, Anders Nyboe Andersen, Laura Rienzi, Jose Cassio Rocha, Carmen Rubio, Elena Sanchez, Klaus Schoenauer, Greta Verheyen, and Thomas Ebner. An annotated human blastocyst dataset to benchmark

deep learning architectures for in vitro fertilization. *Scientific Data*, 10(1):271, 2023. doi: 10.1038/s41597-023-02182-3. Dataset released under CC BY 4.0 at <https://doi.org/10.6084/m9.figshare.20123153.v3>.

European Society of Human Reproduction and Embryology. ART in Europe, 2020: results generated from European registries. *Human Reproduction*, 2025. doi: 10.1093/humrep/deaf179. 1,440 clinics across 41 countries.

Ji Hyun Yoo et al. Real-world effectiveness and safety of rhFSH in infertile women undergoing ART: a Korean nationwide cohort study. *Clinical Pharmacology and Therapeutics*, 2026. doi: 10.1002/cpt.70136. n = 10,684 cycles; GnRH antagonist protocol in 76.8%.

Melanie Vander Borgh et al. Cumulative live birth rates after transfer of all embryos from one oocyte retrieval. *Human Reproduction*, 2025. n = 31,478 embryos from 11,463 women; cumulative LBR 51.1% after 3 transfers, 78.0% after 10.

Katerina Jelinkova et al. Sociodemographic and medical correlates of fertility-related quality of life in primary infertile Czech couples. *Health Psychology Report*, 2026. doi: 10.5114/hpr/213967. n = 469 couples; male partners older by 2.4 years (SD 4.3), r = 0.60.

World Health Organization. *WHO Laboratory Manual for the Examination and Processing of Human Semen*. World Health Organization, 6th edition, 2021.

Laura E. Dodge et al. Lifestyle habits of 12,800 IVF patients. *Human Fertility*, 2015. n = 12,811.

Elizabeth Sherwin et al. Habitual physical activity levels in women attending fertility treatment. *Human Fertility*, 2022.

Audrey J. Gaskins et al. Dietary patterns and outcomes of assisted reproduction. *American Journal of Obstetrics and Gynecology*, 220(6):567.e1–567.e18, 2019.

A Case prompt template

Every model receives this prompt together with the embryo image. The example is case IVF-BENCH-0001; laboratory and patient values change per case, the structure does not.

```
You are an expert reproductive medicine specialist reviewing an IVF case.

## Embryo Image
[IMAGE ATTACHED]

## Laboratory Data
- Gardner Score: 1DD (Expansion: blastocyst, blastocoel at least half the embryo, ICM:
  degenerative or absent, TE: degenerative or absent)
- COCs retrieved: 8
- MII oocytes: 6
- Transfer day: Day 4

## Patient Profile
- Female age: 39 | BMI: 28.1
- AMH: 2.0 ng/mL | FSH: 5.8 IU/L
- Diagnosis: Tubal Factor
```

```

- Stimulation protocol: Long Agonist
- Previous IVF cycles: 3 (no_pregnancy, clinical_miscarriage, biochemical_pregnancy)
- Partner age: 37
- Sperm: 88.2 M/mL, 78.2% motile
- Endometrial thickness: 7.0 mm
- Lifestyle: never smoker; moderate drinker (4-6/wk); very active (daily exercise);
  standard diet; moderate stress

```

```
## Task
```

```
Provide a comprehensive clinical assessment including:
```

1. Morphological analysis of the blastocyst image
2. Integration of patient factors with embryo quality
3. Risk factors and favorable indicators for this case
4. Estimated implantation probability range with reasoning
5. Recommendations for this transfer and future cycle planning

B Rubric definitions

The judge returns a score and a one-line justification for each rubric, plus the numeric probability it extracted from the response. The text below is what the judge sees, verbatim.

Morphological Accuracy How accurately does the response describe the embryo’s morphological features as visible in the image? Consider: expansion stage assessment, ICM description, TE description, zona pellucida observations, overall blastocyst appearance.

- 1: Major errors or fabricated features not visible in the image
- 2: Several inaccuracies in morphological description
- 3: Mostly accurate with some minor errors or omissions
- 4: Accurate description with good detail
- 5: Precise, thorough morphological analysis matching the image

Clinical Integration How well does the response integrate patient clinical factors (age, AMH, BMI, diagnosis, previous outcomes, sperm parameters) with the embryo assessment? Does it consider how these factors interact with embryo quality?

- 1: No integration of clinical factors with embryo assessment
- 2: Mentions clinical factors but doesn’t connect them to embryo quality
- 3: Some integration but misses key interactions
- 4: Good integration of most relevant clinical factors
- 5: Comprehensive integration showing how clinical factors affect prognosis

Reasoning Coherence Is the clinical reasoning logical, consistent, and free of contradictions? Does the probability estimate follow from the evidence presented? Are conclusions supported by the observations?

- 1: Contradictory or illogical reasoning
- 2: Significant logical gaps or inconsistencies
- 3: Generally coherent with minor logical issues
- 4: Well-structured reasoning with clear logic

- **5:** Exemplary reasoning chain with all conclusions well-supported

Guideline Alignment Does the response align with established IVF clinical guidelines (ESHRE, ASRM, Gardner grading criteria)? Are the recommendations consistent with evidence-based reproductive medicine?

- **1:** Recommendations contradict established guidelines
- **2:** Several recommendations not aligned with guidelines
- **3:** Mostly aligned with some deviations
- **4:** Well-aligned with current clinical guidelines
- **5:** Fully aligned, demonstrates deep knowledge of current guidelines

Actionability Are the recommendations specific, practical, and useful for a clinician? Does the response provide clear next steps for this transfer and future cycle planning? Are recommendations appropriately nuanced?

- **1:** No actionable recommendations or only generic advice
- **2:** Vague recommendations with little practical value
- **3:** Some useful recommendations but lacking specificity
- **4:** Clear, specific recommendations for this case
- **5:** Highly specific, nuanced recommendations with alternatives considered

C Generated patient-context distributions

These are the fields that no public dataset carries alongside embryo images and outcomes, and that we therefore generate. Each is drawn from the distribution shown, seeded deterministically from the case identifier; basal FSH and partner age are conditioned on the patient’s real age and the rest are drawn independently, as Section 3.3 sets out. Sources are the nearest published population estimate we could find for an IVF-treated cohort; where registries disagree by geography we chose a Western-representative central value.

Field	Distribution	Source
BMI (kg/m ²)	Truncated normal, mean 25.0, SD 5.0, range [17, 45]	European Society of Human Reproduction and Embryology [2025]
Basal FSH (IU/L)	Truncated normal, mean 6.0 at age 30, +0.15 per year	European Society of Human Reproduction and Embryology [2025]
Diagnosis	Categorical: tubal 0.25, male 0.25, unexplained 0.15, PCOS 0.12, endometriosis 0.10, DOR 0.05, uterine 0.03, other 0.05	European Society of Human Reproduction and Embryology [2025]
Stimulation protocol	Categorical: antagonist 0.70, long agonist 0.20, short agonist 0.05, natural 0.03, other 0.02	Yoo et al. [2026]
Previous cycles	Categorical: 0 at 0.40, then 0.25, 0.15, 0.10, 0.05, 0.05	Vander Borgh et al. [2025]
Previous outcomes	Categorical per cycle: no pregnancy 0.45, biochemical 0.20, miscarriage 0.15, live birth 0.15, ectopic 0.05	Vander Borgh et al. [2025]
Partner age (years)	Female age + Normal(2.4, 4.3), clipped to [20, 65]	Jelinkova et al. [2026]
Sperm concentration (M/mL)	Truncated normal, mean 50.0, SD 25.0, range [5, 200]	World Health Organization [2021]
Sperm motility (%)	Truncated normal, mean 55.0, SD 15.0, range [10, 95]	World Health Organization [2021]
Smoking	Categorical: never 0.65, former 0.25, current 0.10	Dodge et al. [2015]
Alcohol	Categorical: none 0.40, light 0.35, moderate 0.20, heavy 0.05	Dodge et al. [2015]
Physical activity	Categorical: sedentary 0.30, light 0.25, moderate 0.25, active 0.15, very active 0.05	Sherwin et al. [2022]
Diet	Categorical: standard 0.50, health-conscious 0.25, Mediterranean 0.15, vegetarian 0.05, restricted 0.05	Gaskins et al. [2019]

Table 8: Generated patient-context fields. None is sampled with reference to the recorded outcome. Basal FSH and partner age are conditioned on the patient’s real age and therefore act as weak age proxies; the remainder are drawn independently of one another, so genuine inter-field clinical correlations are absent.

D Three evaluation defects

We report all three because each is easy to reproduce inadvertently, none is visible in the resulting scores, and the third produced a published-looking result that was entirely an artifact.

Failed judge calls were persisted. When a call errored the pipeline wrote a score record of five zeros and continued, and because later runs skip cases that already have a record, those failures became permanent. In our initial pass this silently invalidated 231 test-split scores, 211 of them on a single model, so that model’s row was computed from 309 of 550 cases while the table said 520. The judge now declines to persist a failed score.

Reasoning was graded as answer. Our model was served through vLLM without a reasoning parser, and because Qwen chat templates pre-fill `<think>` the model emits its reasoning, a closing `</think>` and then its answer in one field, whereas hosted APIs return reasoning separately. Ours was graded on roughly 4,000 characters of unfiltered reasoning prepended to its answer while every other system was graded on the answer alone; correcting this raised its test score by 0.36 points and moved it from third to second. Comparisons between locally served reasoning models and hosted APIs require checking what is actually in the string being graded.

The judge saw inputs the model had been denied. This occurred twice, on two different fields. We first ran the image ablation with the judge reading the stored prompt, which still said `[IMAGE ATTACHED]`, while the model in the withheld arm had been told otherwise. The models behaved correctly and said they could not describe an embryo they had not seen; the judge, believing an image was attached, marked that down. GPT-5.4’s morphology score appeared to fall from 3.94 to 1.98, and 35 of 40 sampled justifications cited the missing description as the reason. Read at face value it was a striking demonstration that the vision channel carries substantial information. It was an artifact of our own prompt handling. Having fixed the image marker we ran the two-by-two and reproduced the same mistake on the Gardner grade: arms that withheld the grade from the model still showed it to the judge, whose justifications then objected that a description “conflicts with the provided lab grade of 1DD” about a grade the model never received. On one representative case morphology grounding moved from 2 to 4 once the judge’s copy matched the model’s.

Both were fixed in one place. The judge now derives its copy of the prompt from the run metadata recording what the model was given. Fixing only the text would have introduced a third asymmetry, this time in the judge, since a judge denied the image in one arm and given it in another is a different instrument in each; in the ablation arms the embryo is therefore still attached to the judge call even when the model was denied it, together with an instruction that the model could not see it and must not be penalised for declining to describe it.

All results in this paper follow all three corrections: every score is produced by GPT-5.4 with the embryo in front of it, no score record contains a judge failure, and in every arm the judge was told exactly what the model had been given. The confounded score sets ship alongside the corrected ones, under directory names identifying the confound.

E Code and data availability

The benchmark, the evaluation code, every response and judge transcript, and the analysis behind each interval are at <https://github.com/The-Fertility-Plan/ivf-bench>. The post-trained model is at <https://huggingface.co/thefertilityplan/ivf-bench-qwen9b-vlm-orpo> and the preference dataset at <https://huggingface.co/datasets/thefertilityplan/ivf-bench-orpo-qwen9b-clipped>. Code is released under Apache 2.0.

Judge transcripts are grouped by the condition the judge was in, so any comparison here can be recomputed and any claim about a confound checked. `scores_sighted` holds the scores reported throughout, produced by a judge shown the embryo; `scores` holds the earlier blind judge, which Section 7 compares against; `scores_sonnet_sighted` holds the cross-judge pass; and the directories named for a confound hold the superseded runs described in Appendix D. `provider_manifest.json` records which third-party host served each call, so the provider mixture noted in Section 4 can be recomputed. We do not ship the full raw API envelopes, which run to 125 MB and add nothing the response and manifest files do not already carry.

We do not redistribute the embryo images. They belong to the Kromp blastocyst dataset [Kromp et al., 2023], are available under CC BY 4.0 at <https://doi.org/10.6084/m9.figshare.20123153.v3>, and our release rebuilds every case from that source deterministically.

To cite:

```
@article{correa2026ivfbench,  
  author = {Correa, Andrew G. A. and Yoon, Brittany},  
  title   = {{IVF-Bench}: Evaluating Vision-Language Models on IVF Reasoning},  
  journal = {arXiv preprint},  
  year    = {2026}  
}
```