


Functional Connectivity Reconfiguration in N-back Working-Memory

By: Arefeh Lali Dehaghi, Goutham Arcod, Jaime Pineda, Kerem Akyurt, Valeria Moraga
Ifrit Ras el Hanout – The Gammas

Meet our team!



Arefeh Lali Dehaghi
Actor




Goutham Arcod
Doctor



Jaime Pineda
Chef



Kerem Akyurt
Accountant



Valeria Moraga
Journalist

Introduction


Key words

- Functional Connectivity (FC)
- Working-Memory (WM)
-

Does functional connectivity reconfigure between low and high working-memory load, and can that reconfiguration predict individual working-memory performance?


Hypothesis

Methods

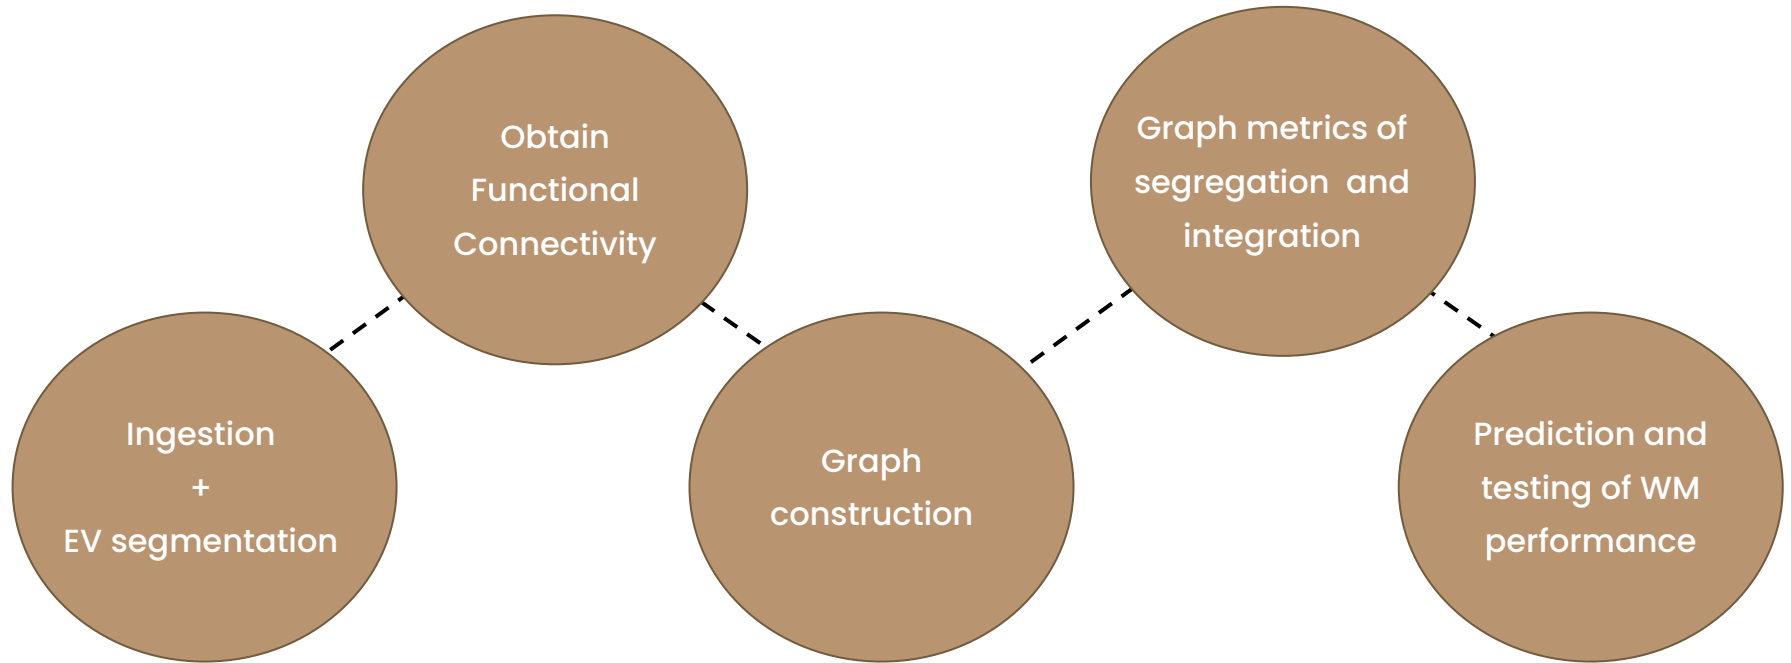

Analysis

FC Reconfiguration

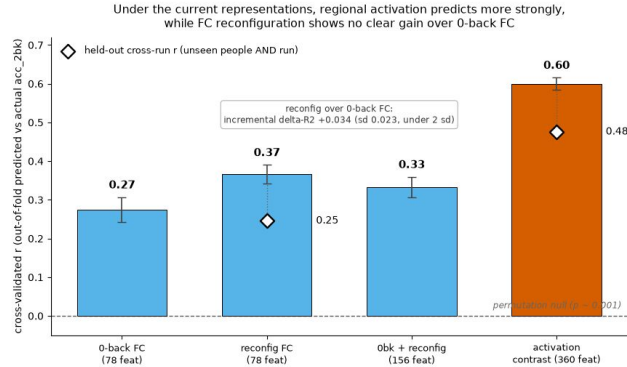

Explanation


Point 1

Our study aims to...

Point 2

....

Actual vs out-of-fold predicted working-memory performance
same target, folds and estimator

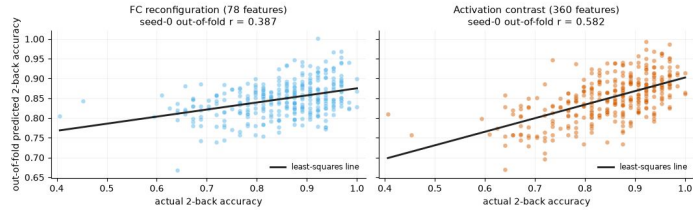

Illustrative seed-0 partition; headline values are means across 20 partitions. Representations are not count-matched (78 vs 360 features).

Unexpected Finding

Activation predicts performance better, and FC does not clearly add unique predictive information

So... What does this mean?

- Conclusion 1
- Conclusion 2
- etc

Limitations:

- L1
- L2

IMPORTANT CONCEPTS

FC reconfiguration still predicts performance and the result generalizes to a held-out cohort. However, it substantially changes our conclusion because reconfiguration does not clearly add unique information beyond single-condition FC, and task activation predicts performance even better

References

1. Shine JM, Bissett PG, Bell PT, Koyejo O, Balsters JH, Gorgolewski KJ, Moodie CA, Poldrack RA. The Dynamics of Functional Brain Networks: Integrated Network States during Cognitive Task Performance. *Neuron*. 2016 Oct 19;92(2):544–554. doi: 10.1016/j.neuron.2016.09.018. Epub 2016 Sep 29. PMID: 27693256; PMCID: PMC5073034.
2. Finc K, Bonna K, He X, Lydon-Staley DM, Kühn S, Duch W, Bassett DS. Dynamic reconfiguration of functional brain networks during working memory training. *Nat Commun*. 2020 May 15;11(1):2435. doi: 10.1038/s41467-020-15631-z. Erratum in: *Nat Commun*. 2020 Jul 30;11(1):3891. doi: 10.1038/s41467-020-17747-8. PMID: 32415206; PMCID: PMC7229188.
3. Zhang H, Meng C, Di X, Wu X, Biswal B. Static and dynamic functional connectome reveals reconfiguration profiles of whole-brain network across cognitive states. *Netw Neurosci*. 2023 Oct 1;7(3):1034–1050. doi: 10.1162/netn_a_00314. PMID: 37781145; PMCID: PMC10473282.
4. Shen X, Finn ES, Scheinost D, Rosenberg MD, Chun MM, Papademetris X, Constable RT. Using connectome-based predictive modeling to predict individual behavior from brain connectivity. *Nat Protoc*. 2017 Mar;12(3):506–518. doi: 10.1038/nprot.2016.178. Epub 2017 Feb 9. PMID: 28182017; PMCID: PMC5526681.
5. Ray KL, Ragland JD, MacDonald AW, Gold JM, Silverstein SM, Barch DM, Carter CS. Dynamic reorganization of the frontal parietal network during cognitive control and episodic memory. *Cogn Affect Behav Neurosci*. 2020 Feb;20(1):76–90. doi: 10.3758/s13415-019-00753-9. PMID: 31811557; PMCID: PMC7018593.

Functional Connectivity Reconfiguration in N-back Working-Memory

By: Arefeh Lali Dehaghi, Goutham Arcod, Jaime Pineda, Kerem Akyurt, Valeria Moraga
Ifrit Ras el Hanout – The Gammas

Complementary Slides



neuromatch
academy

Complementary Slides

