

Create a shipment with a non-partnered carrier

GET STARTED

- Welcome to SP-API Documentation
- What is the Selling Partner API?
- Selling Partner API Onboarding Overview



Create a shipment with a non-partnered carrier

Learn how to inbound small parcel deliveries or pallets with non-partnered carriers.

Learn how to inbound Small Parcel Deliveries (SPD) or pallets (LTL/FTL) with a non-partnered carrier using the Fulfillment Inbound API.

Note


Amazon-partnered carrier shipments are available only in the contiguous United States. For shipments outside this region, you must use your own carrier (non-partnered). For more information, refer to [Send shipments to Amazon FBA](#).

- Terminology
- Frequently Asked Questions



CHANGELOG

- SP-API Release Notes
- SP-API Deprecation Schedule

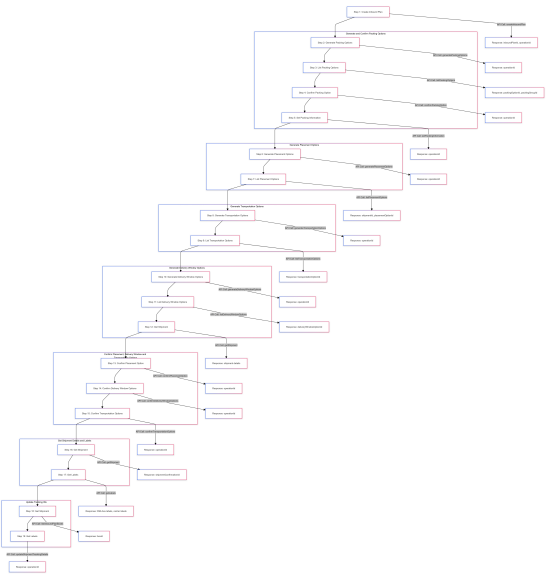

As a supplement to this guide, the [FBA Inbound Sample Solution Code App](#) provides all required resources to deploy a fully functional SP-API

DIRECTORIES

SP-API Models

SP-API Seller Use Cases

SP-API Vendor Use Cases

Seller Central URLs

Vendor Central URLs

REGISTRATION

SP-API Registration Overview >

Developer Registration Request Status

Third-Party Provider Registration >

Service Provider Registration and Role Approval Process Overview

Website Guidelines for Public Developers and Service Providers

User Permissions for Service Providers

Register your Application

Update your Application Information

Rotate your Application's LWA Credentials >

View your Application Information and Credentials

Learn How Sellers Authorize Service Providers

Selling Partner API Roles >

Policies and Agreements

About Facial Data

AUTHORIZATION

Authorize Applications >

Renew Authorizations

Revoke Authorizations

Authorization Limits

Create a shipment with a non-partnered carrier

application that implements the new Fulfillment Inbound API v2024-03-20.

Step 1. Create an inbound plan

Operation

- `createInboundPlan`

Parameters

- `destinationMarketplaces` : List of marketplaces where the items are sent.
- `sourceAddress` : The address from which the items are shipped.
- `items` : A list of items to include in the inbound plan. Each item should have the following attributes:
 - `prepOwner` : The one responsible for prepping the item.
 - `labelOwner` : The one responsible for the labeling process.
 - `msku` : The Merchant Stock Keeping Unit (SKU) for the item.
 - `quantity` : The quantity of items to ship.

Response

- `operationId` : An ID that you can use to check the status of the inbound plan creation.
- `inboundPlanId` : An ID that uniquely identifies the inbound plan.

**Create Inbound Plan**
Open Recipe >**Note**

POST operations are asynchronous. Check the status of a POST operation by passing its `operationId` to `getInboundOperationStatus`.

**Get Inbound operation status**
Open Recipe >

Step 2. Generate packing options

Special Authorization Types

>

Operation

- [generatePackingOptions](#)

Parameters

- **inboundPlanId** : Use the inbound plan ID created in Step 1.

Response

- **operationId** : An ID that you can use to check the status of packing options generation.



Generate packing options
Open Recipe >

Step 3. List packing options

Operation

- [listPackingOptions](#)

Parameters

- **inboundPlanId** : The inbound plan ID.

Response

- Includes available **packingOptions**. Each **packingOption** has a **packingOptionId**.
- Each packing option contains one or more **packingGroups**, identified by **packingGroupId**. Each packing group includes a list of SKUs that should be packed together.

To view SKU items per **packingGroupId**, call [listPackingGroupItems](#).



Note

Choose only one packing option (**packingOptionId**).



List packing options
Open Recipe >

Step 4. Confirm packing option

Operation

- [confirmPackingOption](#)

INTEGRATION

Building Robust Amazon SP-API Applications

SP-API SDKs

>

Delete an Application From Your Developer Account

CALLING THE SP-API

Configuration Details

>

Call Structure

>

Development Tools

>

Performance Management

>

SOLUTION PROVIDER PORTAL

Manage Users in Solution Provider Portal

Manage Your Business And Contact information in Solution Provider Portal

Update Your Developer Profile in Solution Provider Portal

Unify Your Developer Accounts

Verify Your Identity in Solution Provider Portal

API Usage Metrics in Solution Provider Portal

TUTORIALS

Tutorial: Subscribe to the ORDER_CHANGE Notification

Tutorial: Test Selling Partner API Endpoints

Tutorial: Automate your SP-API Calls Using a C# SDK

Tutorial: Automate your SP-API Calls Using a Java SDK

Tutorial: Automate your SP-API Calls Using a JavaScript SDK for Node.js

Tutorial: Automate your SP-API Calls Using a Python SDK

Tutorial: Automate your SP-API Calls using a prebuilt C# SDK

Tutorial: Automate your SP-API Calls using prebuilt Java SDK

Tutorial: Automate your SP-API Calls using a prebuilt JavaScript SDK

Tutorial: Automate your SP-API Calls using prebuilt PHP SDK

Tutorial: Automate your SP-API calls using a prebuilt Python SDK

Tutorial: Authorize Multiple Vendor Central Accounts with a Single SP-API Application

Tutorial: Retrieve Merchant Shipping Templates

Tutorial: Grant the SP-API Permission to an Amazon SQS Queue

Tutorial: Retrieve and Pass a Purchase Order Number to a Carrier

TROUBLESHOOTING

Troubleshoot SP-API Errors

URL Encoding

Resolve Common HTTP and Authorization Error Codes

External Fulfillment Errors [↗](#)

Listings Items API Issues Troubleshooting [↗](#)

SELLING PARTNER APPSTORE

What is the Selling Partner Appstore?

List Your App on the Selling Partner Appstore

Create a shipment with a non-partnered carrier

Parameters

- `inboundPlanId` : The ID of the inbound plan.
- `packingOptionId` : The chosen packing option ID. You can only confirm one option per inbound plan.

Response

- `operationId` : An ID that you can use to check the status of the packing confirmation.



Confirm packing option
Open Recipe >

Step 5. Set packing information**Operation**

- `setPackingInformation`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `packingGroupId` : ID for each packing group within the chosen packing option.
- `boxes` : Includes box contents source, box dimensions (weight and quantity), items with prep info, and item quantities that match the inbound plan.

Response

- `operationId` : An ID that you can use to check the status of the API call.



Set Packing Information
Open Recipe >

Step 6. Generate placement options**Operation**

- `generatePlacementOptions`

Parameters

- `inboundPlanId` : ID of the inbound plan.

Response

- `operationId` : An ID that you can use to check the status of placement options

Edit Your Appstore Listing

Check Listing Status

Appstore Ratings and Reviews

Press Releases and Promotions

SERVICE PROVIDER NETWORK

List Your Service

SECURITY AND COMPLIANCE

SP-API Security and Compliance Overview

Amazon Selling Partner API Guard Implementation Guide

Create a shipment with a non-partnered carrier generation.



Generate placement options
Open Recipe >

Step 7. List placement options Operation

- `listPlacementOptions`

Parameters

- `inboundPlanId` : ID of the inbound plan.

Response

- Includes available `placementOptions`, each represented by a `placementOptionId`.
- Each `placementOptionId` includes one or more `shipmentIds` and details on fees or discounts.



Note

Choose only one placement option (`placementOptionId`).

Response example

JSON

```
"placementOptions": [
  {
    "fees": [
      {
        "description": "Placement
service fee represents service to
inbound with minimal shipment splits
and destinations of skus",
        "type": "FEE",
        "value": {
          "amount": 1.10,
          "code": "USD"
        },
        "target": "Placement Services"
      }
    ],
    "shipmentIds": [
      "shxxxxxxxxxxxxxxxx"
    ],
    "discounts": [],
    "expiration": "yyyy-mm-
ddT00:00:00.00Z",
    "placementOptionId":
    "plxxxxxxxxxxxxxxxx",
    "status": "OFFERED"
  }
]
```

VAT Calculation Service

Amazon Seller Data Access

Best Practices

```
}  
]
```

A+ CONTENT API

A+ Content API

A+ Content Examples

AMAZON WAREHOUSING AND DISTRIBUTION API

Amazon Warehousing and Distribution API

Amazon Warehousing and Distribution API v2024-05-09 Reference

APP INTEGRATIONS API

App Integrations API

APPLICATION MANAGEMENT API

Application Management API

CATALOG ITEMS API

Catalog Items API

Catalog Items API Rate Limits

Catalog Items API v2022-04-01 Reference

CUSTOMER FEEDBACK API

Customer Feedback API

Customer Feedback API Rate Limits

The following code sample shows how to calculate and choose the least expensive `placementOption` . You can modify the code to have your own selection criteria.



List placement options
[Open Recipe >](#)

Step 8. Generate transportation options

Operation

- `generateTransportationOptions`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `placementOptionId` : Chosen placement option ID.
- `shipmentTransportationConfigurations` : Configuration details, which include:
 - `shipmentId` : Each shipment ID within the chosen placement option. Include all shipment IDs within the selected placement option.
 - `readyToShipWindow` : Start date for when shipments are ready for delivery.
 - `freightInformation` (only if you want to ship pallets): Declared value and freight class.
 - `pallets` (only if you want to ship pallets): Information about the shipped pallets, including quantity, dimensions, weight, and stackability.

Response

- `operationId` : An ID that you can use to check the status of transportation options generation.

Request example for small parcel delivery

JSON

```
{  
  "placementOptionId":  
    "pLxxxxxxxxxxxxxxxxxxxxxx",
```

DATA KIOSK

Data Kiosk API

Data Kiosk Schema Explorer User Guide

Data Kiosk Query Processing Finished Notification

Building Data Kiosk workflows guide

Vendor Analytics Dataset Use Case Guide

Schedule Data Kiosk Queries

DELIVERY BY AMAZON API

Delivery by Amazon API

EASY SHIP API

Easy Ship API

EXTERNAL FULFILLMENT

External Fulfillment Inventory API

External Fulfillment Returns API

External Fulfillment Shipping API

External Fulfillment Errors

External Fulfillment APIs Rate Limits

FULFILLMENT BY AMAZON (FBA)

FBA Inventory API

FBA Inventory Dynamic Sandbox Guide

FEEDS API

Create a shipment with a non-partnered carrier

```
"shipmentTransportationConfigurations":
[
  {
    "readyToShipWindow": {
      "start": "yyyy-mm-ddT00:00:00Z"
    },
    "shipmentId":
    "shxxxxxxxxxxxxxxxxxxxx",
    "contactInformation": {
      "name": "xxxxxxx",
      "phoneNumber": "1234567890",
      "email": "test@email.com"
    }
  }
]
```

Request example for pallet delivery

JSON

```
{
  "placementOptionId":
  "plxxxxxxxxxxxxxxxxxxxx",
  "shipmentTransportationConfigurations":
  [
    {
      "readyToShipWindow": {
        "start": "yyyy-mm-ddT00:00:00Z"
      },
      "shipmentId":
      "shxxxxxxxxxxxxxxxxxxxx",
      "contactInformation": {
        "name": "TestName",
        "phoneNumber": "1234567890",
        "email": "test@email.com"
      },
      "freightInformation": {
        "declaredValue": {
          "amount": 200,
          "code": "USD"
        },
        "freightClass": "FC_XX"
      },
      "pallets": [
        {
          "quantity": 1,
          "dimensions": {
            "height": 48,
            "length": 48,
            "unitOfMeasurement": "IN",
            "width": 40
          },
          "stackability": "STACKABLE",
          "weight": {
            "unit": "LB",
            "value": 600
          }
        }
      ]
    }
  ]
}
```

Feeds API

Feed Type Values

Feeds JSON Schemas

Feeds API Best Practices

Feeds API FAQ

Feeds API Rate Limits

FINANCES

Finances API

Transfers API

FULFILLMENT INBOUND API

Fulfillment Inbound API

Create an inbound shipment

Create a shipment with an Amazon-partnered carrier (PCP)

Create a shipment with a non-partnered carrier

Inbound Shipments with the Pack Later workflow

Ship Inventory to Amazon Fulfillment Centers in India

Additional Functionality

Fulfillment Inbound API FAQ

Migrating Fulfillment Inbound workflows

Fulfillment Inbound API Rate Limits

FULFILLMENT OUTBOUND API

Fulfillment Outbound Dynamic Sandbox Guide

Fulfillment Outbound API

Create a shipment with a non-partnered carrier

```

1
}

```

**Generate Transportation Options**[Open Recipe >](#)

Step 9. List transportation options

Operation

- `listTransportationOptions`



Note

If you have multiple `shipmentIds` from `listPlacementOptions`, choose a `transportationOptionId` for each `shipmentId`.

Parameters

- `inboundPlanId` : The ID of the inbound plan.
- `placementOptionId` : The ID of the chosen placement option.

Response

- Includes different available `transportationOptions`, each represented by `transportationOptionId` per `shipmentId`. Each transportation option contains details about:
 - `carrier` : The carrier.
 - `shippingMode` : The shipment type (for example, Small Parcel Delivery vs. pallets).
 - `shippingSolution` : The shipping solution. Identifies whether the carrier is Amazon Partnered or your own transportation carrier.
 - `preconditions` : Conditions that must be met to provide the delivery window. Only applicable to your own carrier options.



Note

Create a shipment with a non-partnered carrier

For more information, refer to [Review shipment splits and transportation options](#).

To ship using a non-partnered carrier, you must select the `transportationOption` based on your shipment type:

- For small parcel deliveries, choose the option where `shippingMode` is `GROUND_SMALL_PARCEL`.
- For pallet shipments, choose the option where `shippingMode` is `FREIGHT_LTL`.
- In both cases, ensure that `shippingSolution` is `USE_YOUR_OWN_CARRIER`.
- `preconditions` lists the requirements for confirming the delivery windows. You must generate, list, and confirm a delivery window for each shipment that you send using your own carrier. Follow the tutorial for detailed steps.

Response example for small parcel delivery

JSON

```
"transportationOptions": [
  {
    "carrier": {
      "name": "United States Postal Service",
      "alphaCode": "USPS"
    },
    "preconditions": [
      "CONFIRMED_DELIVERY_WINDOW"
    ],
    "shipmentId": "shxxxxxxxxxxxxxx",
    "shippingMode": "GROUND_SMALL_PARCEL",
    "transportationOptionId": "toxxxxxxxxxxxxxx",
    "shippingSolution": "USE_YOUR_OWN_CARRIER"
  },
  {
    "carrier": {
      "name": "UPS",
      "alphaCode": "UPSN"
    },
    "quote": {
      "cost": {
        "amount": 19.6,
        "code": "USD"
      }
    },
    "preconditions": [],

```

Fulfillment Outbound API Rate Limits

MCF Best Practices

INVOICING

Invoices API

Invoices API FAQ

LISTINGS

Listings Items API

Listings Items API Rate Limits

Listings Restrictions API

Listings Restrictions API Rate Limits

Manage Product Listings with the Selling Partner API

Building Listings Management Workflows Guide

Understanding Amazon listing status and seller-fulfilled inventory management

Listings Management Workflow Migration

Manage Amazon Haul, Advanced Multiple-Offer, and Multiple-Fulfillment Use Cases

Listings APIs FAQ

Product Type Definitions API

Product Type Definitions API Rate Limits

MERCHANT FULFILLMENT API

Merchant Fulfillment API

MESSAGING API

Messaging API

Create a shipment with a non-partnered carrier

```

{
  "shipmentId": "shxxxxxxxxxxxxxx",
  "shippingMode":
    "GROUND_SMALL_PARCEL",
  "transportationOptionId":
    "toxxxxxxxxxxxxxx",
  "shippingSolution":
    "AMAZON_PARTNERED_CARRIER"
}
]

```

Response example for pallet delivery

JSON

```

{
  "carrier": {
    "name": "XXXX",
    "alphaCode": "ABCD"
  },
  "preconditions": [
    "CONFIRMED_DELIVERY_WINDOW"
  ],
  "shipmentId": "shxxxxxxxxxxxxxx",
  "shippingMode": "FREIGHT_LTL",
  "transportationOptionId":
    "toxxxxxxxxxxxxxx",
  "shippingSolution":
    "USE_YOUR_OWN_CARRIER"
}

```



List transportation options (non-PCP)

Open Recipe >

Step 10. Generate delivery window options

Operation

- `generateDeliveryWindowOptions`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `shipmentId` : ID of the specific shipment for which to generate delivery windows.

Response

- `operationId` : An ID that you can use to check the status of the delivery window options generation.



Note

NOTIFICATIONS API

Notifications API >

Notification Type Values

Tutorial: Subscribe to the ORDER_CHANGE Notification ↗

ORDERS API

Orders API >

Tutorial: Retrieve and Pass a Purchase Order Number to a Carrier ↗

Orders API Migration Guide

Orders API Rate Limits

PRODUCT FEES API

Product Fees API >

PRODUCT PRICING API

Product Pricing API >

Product Pricing API and Notifications FAQ

Create a shipment with a non-partnered carrier

You must generate delivery windows for all `shipmentId` s within the inbound plan.



Generate delivery window options

Open Recipe >

Step 11. List Delivery Window Options

Operation

- `listDeliveryWindowOptions`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `shipmentId` : ID of the specific shipment for which to retrieve delivery window options.

Response

- Includes a list of available `deliveryWindowOptions` , each represented by a `deliveryWindowOptionId` .
- Each option includes `startDate` and `endDate` that indicate the time frame during which the shipment must arrive.

Note

You must schedule your shipment delivery within **45 days** for domestic shipments and **75 days** for international shipments. These time frames are reflected in the available delivery window options `endDate` . For non-partnered carriers, sellers must specify a delivery window of **7 days** for domestic shipments or **14 days** for international shipments.

The following code sample shows how to choose the delivery window option with the latest `endDate` . You can modify the code to have your own selection criteria.



List delivery window options

Open Recipe >

Step 12. Get shipment

Operation

- `getShipment`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `shipmentId` : ID of the specific shipment for which to retrieve details.

Response

- Includes the details related to the contents of the specified shipment, including:
 - **Source address:** The address from which the shipment originates.
 - **Destination warehouse address:** The address of the chosen destination warehouse.
 - **Status:** The current status of the shipment.



Note

Before you confirm the placement and transportation options, call `getShipment` for each `shipmentId` to ensure all details are satisfactory. If you are not satisfied with your chosen options, you have the option to re-generate and select another placement option or transportation option.



Get shipment details
Open Recipe >

Step 13. Confirm placement option

Operation

- `confirmPlacementOption`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `placementOptionId` : The chosen placement option ID to confirm.

Response

- `operationId` : An ID that you can use to check the status of the placement

Price Adjustment Automation Workflows Guide
Manage automated pricing rules with SP-API

REPLENISHMENT API

Replenishment API

REPORTS API

Reports API

Report Type Values

Reports JSON Schemas

Reports API FAQ

SALES API

Sales API

SELLER WALLET API

Seller Wallet API

Create a shipment with a non-partnered carrier confirmation.



Note

You can only confirm one placement option per inbound plan.



Confirm placement option
Open Recipe >

Step 14. Confirm delivery window options

Operation

- `confirmDeliveryWindowOptions`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `shipmentId` : ID of the specific shipment for which the delivery window option is being confirmed.
- `deliveryWindowOptionId` : ID of the chosen delivery window option.

Response

- `operationId` : An ID that you can use to check the status of the delivery window confirmation.



Note

You must confirm delivery windows for every `shipmentId` in the inbound plan. You can only confirm one delivery window option per shipment for the inbound plan.



Confirm delivery window options
Open Recipe >

Step 15. Confirm transportation options

Operation

- `confirmTransportationOptions`

Parameters

Seller Wallet API Rate Limits

SELLERS API

Sellers API

SERVICES API

Services API

SHIPMENT INVOICING API

Shipment Invoicing API

SHIPPING API

Shipping API v2 Resources

Shipping API v1 Reference

SOLICITATIONS API

Solicitations API

SUPPLY SOURCES API

Supply Sources API

Multi-Location Inventory Integration Guide

Supply Sources API Rate Limits

TOKENS API

Tokens API >

Create a shipment with a non-partnered carrier

- `inboundPlanId` : ID of the inbound plan.
- `transportationSelections` : A list of selected transportation options for each shipment, including:
 - `shipmentId` : The ID of the shipment.
 - `transportationOptionId` : The chosen transportation option ID for that shipment.

Response

- `operationId` : An ID that you can use to check the status of the transportation confirmation.



Confirm transportation option
[Open Recipe >](#)

UPLOADS API

Uploads API >

VEHICLES API

Vehicles API >

Vehicles API Rate Limits

VENDOR DIRECT FULFILLMENT APIS

Vendor Direct Fulfillment Dynamic Sandbox Guide

Vendor Direct Fulfillment Workflow Guide

SP-API Bill-to-Party Addresses

VENDOR DIRECT FULFILLMENT TRANSACTION STATUS API

Vendor Direct Fulfillment Transaction Status API >

VENDOR DIRECT FULFILLMENT INVENTORY API

Vendor Direct Fulfillment Inventory API >

VENDOR DIRECT FULFILLMENT ORDERS API

Vendor Direct Fulfillment Orders API >

VENDOR DIRECT FULFILLMENT SHIPPING API

Vendor Direct Fulfillment Shipping API >

Step 16. Get shipment

Operation

- `getShipment`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `shipmentId` : The ID of the shipment.

Response

- Includes the details of shipment, including:
 - `sourceAddress` : The origin address of the shipment.
 - `destinationWarehouseAddress` : The address of the destination warehouse.
 - `amazonReferenceId` : Amazon's reference ID for the shipment.
 - `selectedTransportationOptionId` : The chosen transportation option ID.
 - `placementOptionId` : The ID of the chosen placement option.
 - `shipmentConfirmationId` : The ID that confirms the shipment.
 - `trackingDetails` : Information regarding the shipment tracking.
 - `status` : The current status of the shipment.



Note

Create a shipment with a non-partnered carrier

If your inbound plan includes multiple shipment IDs, call [getShipment](#) for each shipment ID.



Get shipment details
Open Recipe >

VENDOR DIRECT FULFILLMENT PAYMENTS API

Vendor Direct Fulfillment Payments API >

VENDOR RETAIL PROCUREMENT INVOICES API

Vendor Retail Procurement Invoices API >

VENDOR RETAIL PROCUREMENT ORDERS API

Vendor Retail Procurement Orders API >

VENDOR RETAIL PROCUREMENT SHIPMENTS API

Vendor Retail Procurement Shipments API >

VENDOR RETAIL PROCUREMENT TRANSACTION STATUS API

Vendor Retail Procurement Transaction Status API >

Powered
by



Step 17. Get labels

Operation

- [getLabels](#)

Parameters

- `shipmentConfirmationId` : The ID confirming the shipment, retrieved from the `getShipment` response.
- `PageType` : Specifies the type of page for the labels.
- `LabelType` : Specifies the type of label to retrieve.

For Pallet Shipments:

- `NumberOfPallets` : The total number of pallets included in the shipment.
- `PageSize` : Specifies the size of the label pages to retrieve.

Response

- Includes a URL that you can use to download the labels associated with each shipment ID within your inbound plan.



Note

Call `getLabels` for each shipment ID and provide the necessary parameters based on whether the shipment is a small parcel delivery or involves pallets.



Get labels to print
Open Recipe >

Step 18. List inbound plan boxes

Operation

- [listInboundPlanBoxes](#)

Parameters

- `inboundPlanId` : ID of the inbound plan.

Response

- Includes a list of box package-level information for the specified inbound plan, including box-level information including box IDs, package IDs, box weights, quantities, dimensions, items etc.



List Inbound plan boxes
Open Recipe >

Step 19. [Only for pallet shipments] List inbound plan pallets

Call `listInboundPlanPallets` to retrieve the list of pallet packages per inbound plan. Input should include the `inboundPlanId` and the response includes all the pallet level information including packageId, dimensions, stackability, etc.

Operation

- `listInboundPlanPallets`

Parameters

- `inboundPlanId` : ID of the inbound plan.

Response

- Includes a list of pallet package information for the specified inbound plan, including the package ID, dimensions, stackability, etc.

Step 20. Update shipment tracking details

Operation

- `updateShipmentTrackingDetails`

Parameters

- `inboundPlanId` : ID of the inbound plan.
- `shipmentId` : ID of the shipment.
- `trackingDetails` : Details for updating tracking information based on shipment type.
 - **For Small Parcel Delivery (SPD):**
 - `spdTrackingItems` : A list that includes:

Create a shipment with a non-partnered carrier

- `boxId` : The unique identifier for each box obtained from the [ListInboundPlanBoxes](#) API.
- `trackingId` : The tracking ID provided by your carrier for each box.
- You must update the tracking IDs for all of the boxes within your inbound plan.
- **For pallet (LTL/FTL) delivery:**
 - `ltlTrackingDetail` : Details that include the `freightBillNumber` that your carrier provides for the pallet shipment.

Response

- `operationId` : An ID that you can use to check the status of the tracking details update.

Request example for small parcel delivery

JSON

```
{
  "trackingDetails": {
    "spdTrackingDetail": {
      "spdTrackingItems": [
        {
          "boxId":
            "FBAxxxxxxxxxxxxxxxx",
          "trackingId": "
            {{trackingId}}"
        }
      ]
    }
  }
}
```

Request example for pallet delivery

JSON

```
{
  "trackingDetails": {
    "ltlTrackingDetail": {
      "freightBillNumber": [
        "{{freightBillNumber}}"
      ]
    }
  }
}
```



Update shipment tracking details
[Open Recipe >](#)

This tutorial creates an inbound plan and sends your SKUs as individual boxes (small parcel delivery) or pallets (LTL/FTL) using your own transportation carrier. You can verify this inbound plan on Seller Central with Send to Amazon.

 Updated 19 days ago

[← Create a shipment with an Amazon-partnered carrier \(PCP\)](#)

[Inbound Shipments with the Pack Later workflow →](#)

Did this page help you? [👍 Yes](#) [👎 No](#)