Monkey Engine Editor Guide

by Monkey Stackers

Members

CHEW Shee Yang | Product Manager | Programmer | Graphics Champion

CHENG Ming Xian | Technical Lead | Programmer | Engine Champion

ANG Ryan An Kiat | Programmer | Programmer | Resources Champion

HOW Hong Chin Ryan | Programmer | Programmer | Architecture Champion

ONG Zi Ming | Programmer | Programmer | Tools Champion

Introduction

Press F1 to toggle ImGui windows on/off

Press F2 to toggle between normal viewport mode and ImGui viewport mode

Press F3 to toggle debug layer visibility

Press P to toggle pause/play

Press] to step forward one frame when paused


Ctrl + Click and drag to enter free camera mode (detach from active camera)

Ctrl + Scroll to zoom the camera in/out

NOTE: Demo states can be accessed under the ImGui window "State Chooser"


Get Started

When you first run the engine, you should be greeted with this screen

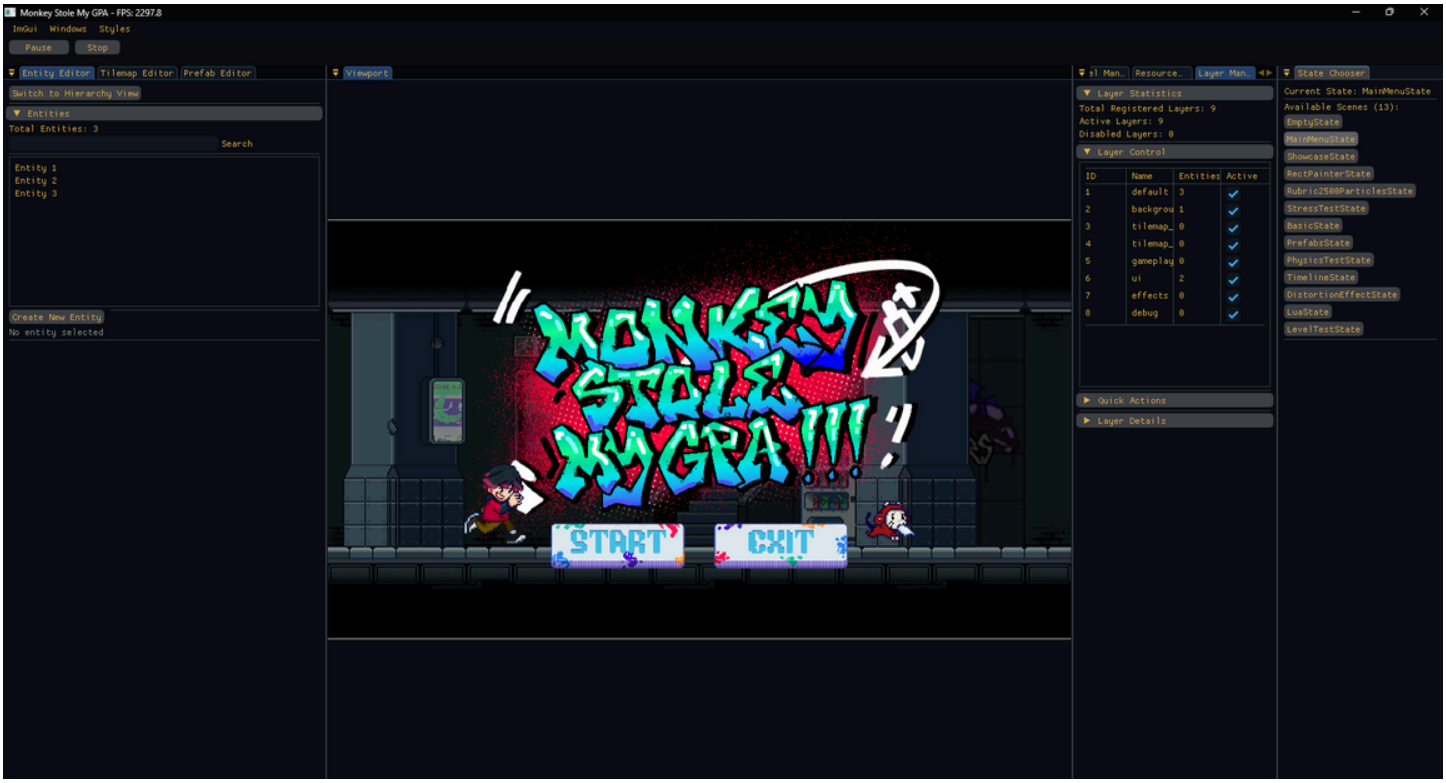


Instantiate a Rect Prefab


Under State Chooser, select EmptyState (This works in other states as well, but to prevent confusion, let's do it in EmptyState)

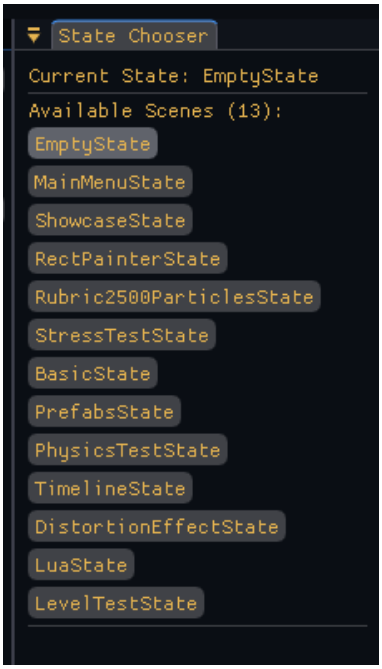


The scene should now be empty

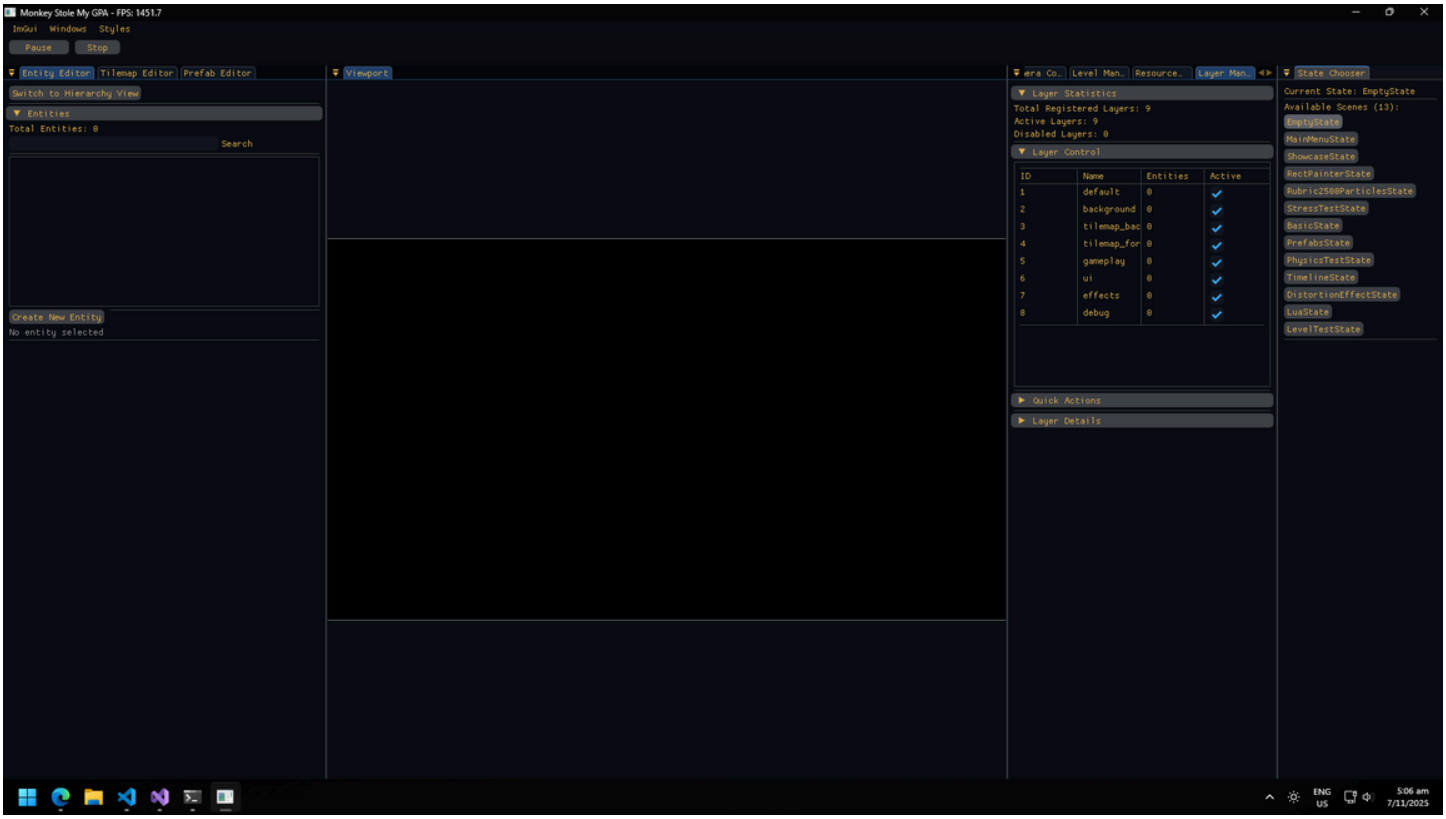


Open the Prefab Editor Panel

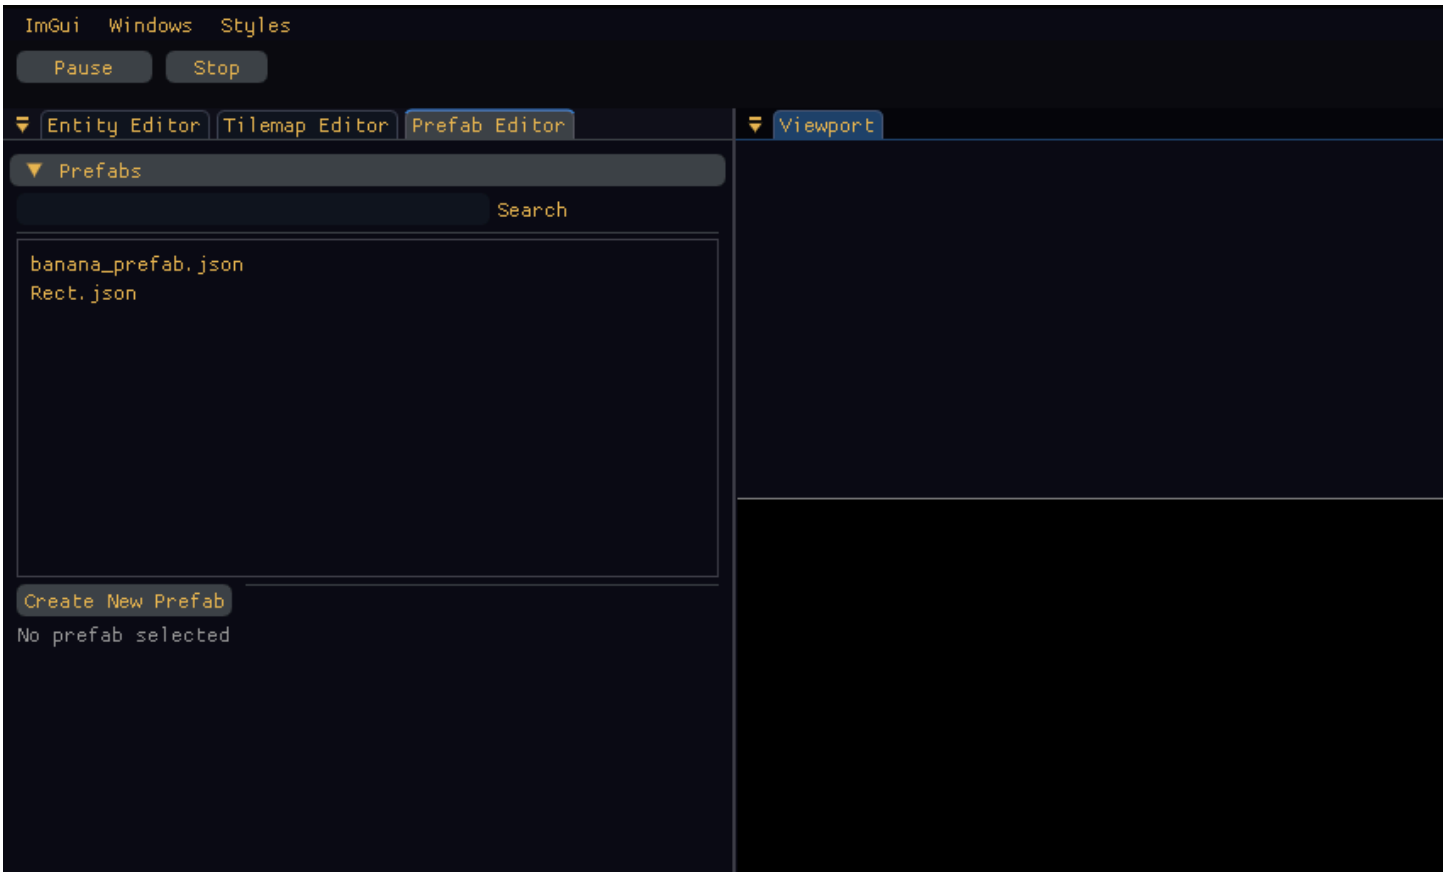


Select Rect.json

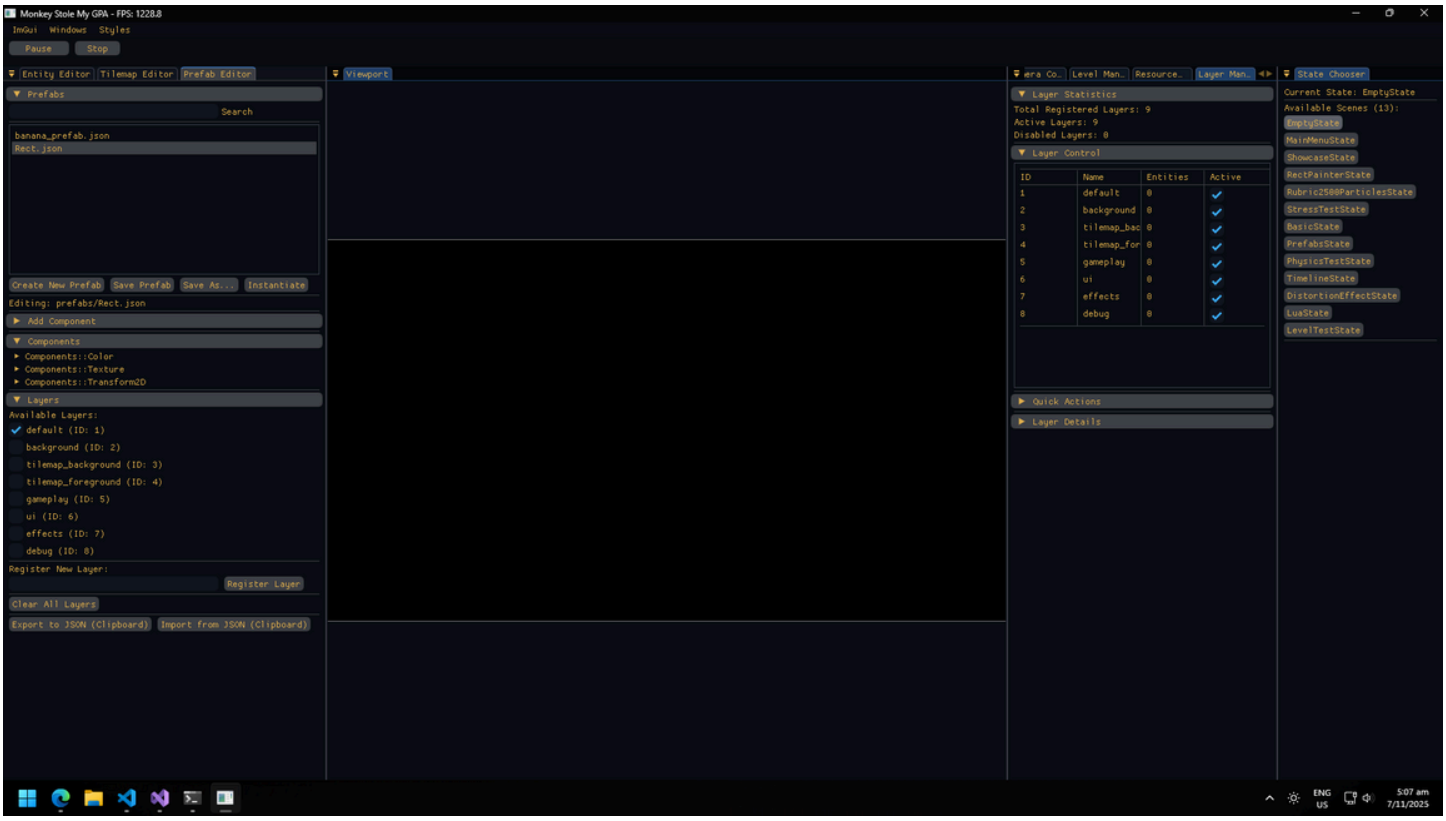

You can change the properties of the prefabs, including their components and layers

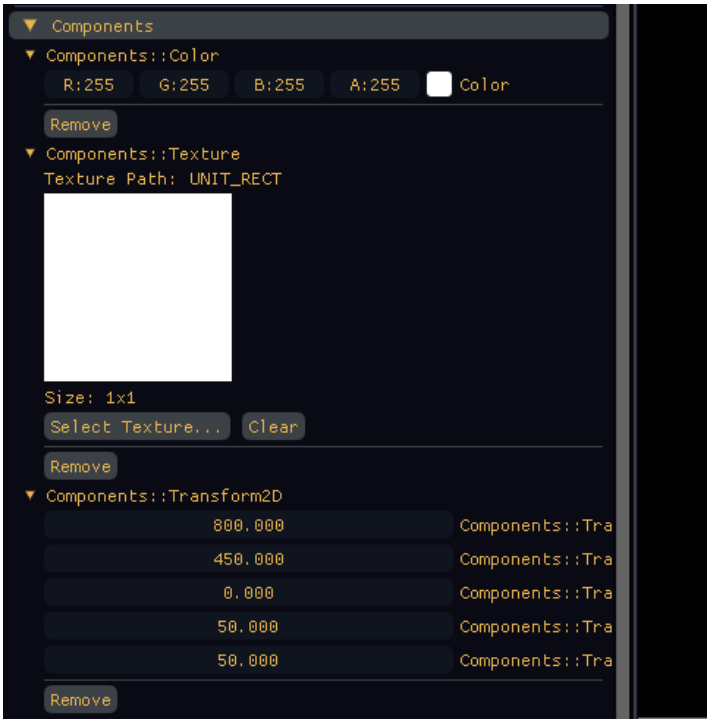




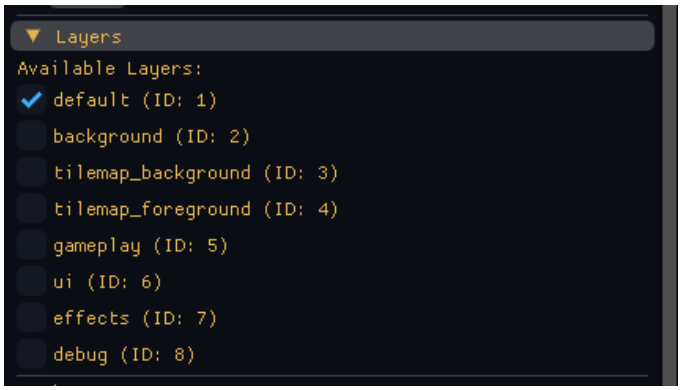


If you've made any changes, you can save them here



Otherwise, press Instantiate to add the entity to the world

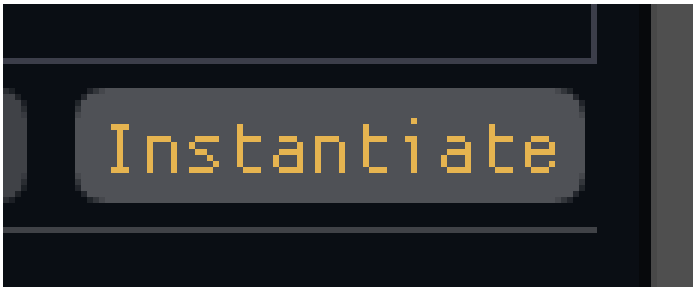

You should now see a White Square in your Scene

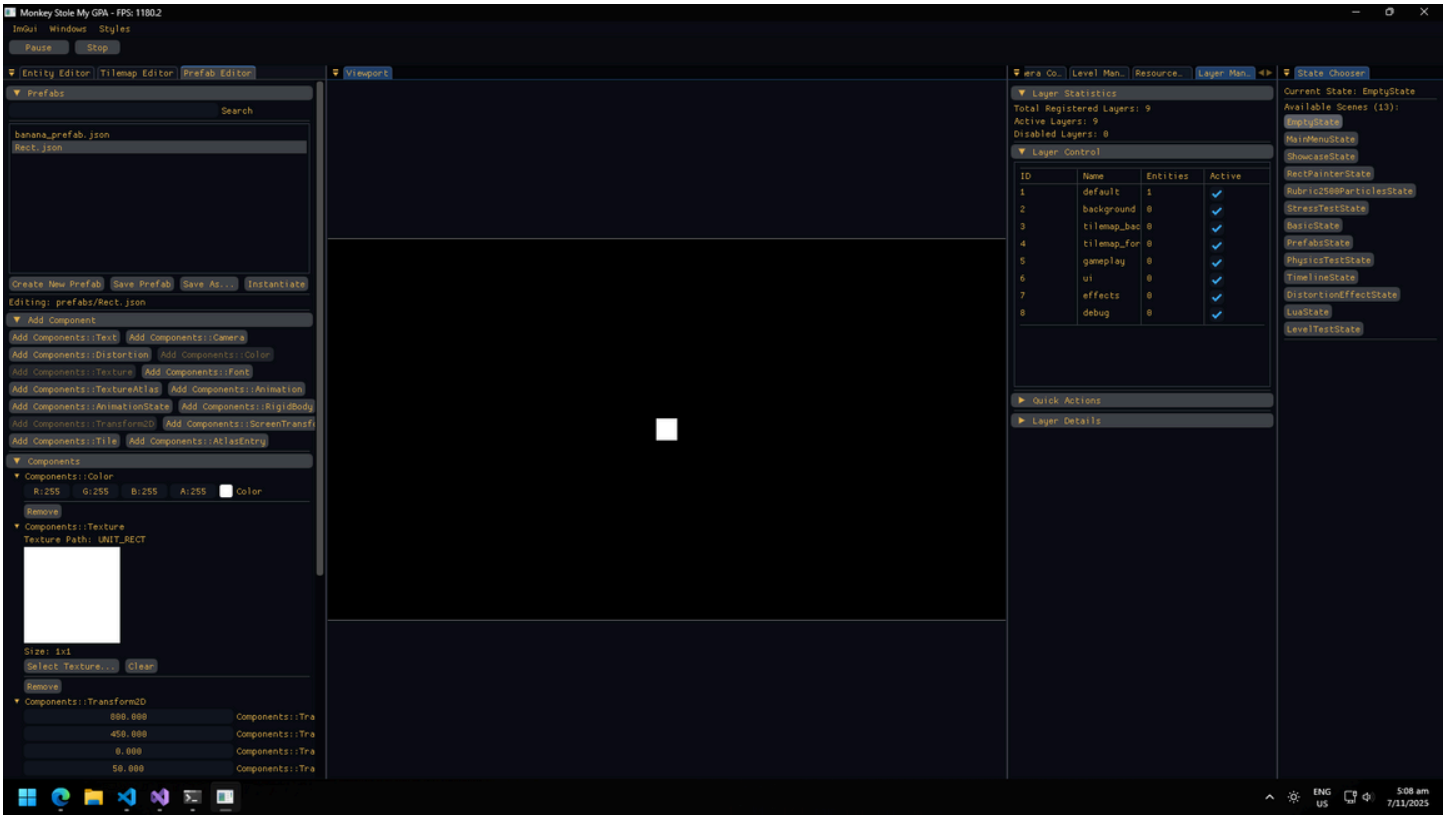

NOTE: if you are doing this in another state, and you don’t see the White Square, it might be obscured by another entity in a higher layer, move your entity into a higher layer to reveal it (explained in a later section)

Changing entity's properties

Go to Entity Editor



You should see the entity you just instantiated from the Prefab




Select the Entity (You may click it in the viewport to select it as well)

Just like for Prefabs, you can modify your instantiated entities as well




Play around with the values, you should see the changes reflect in real time in the viewport

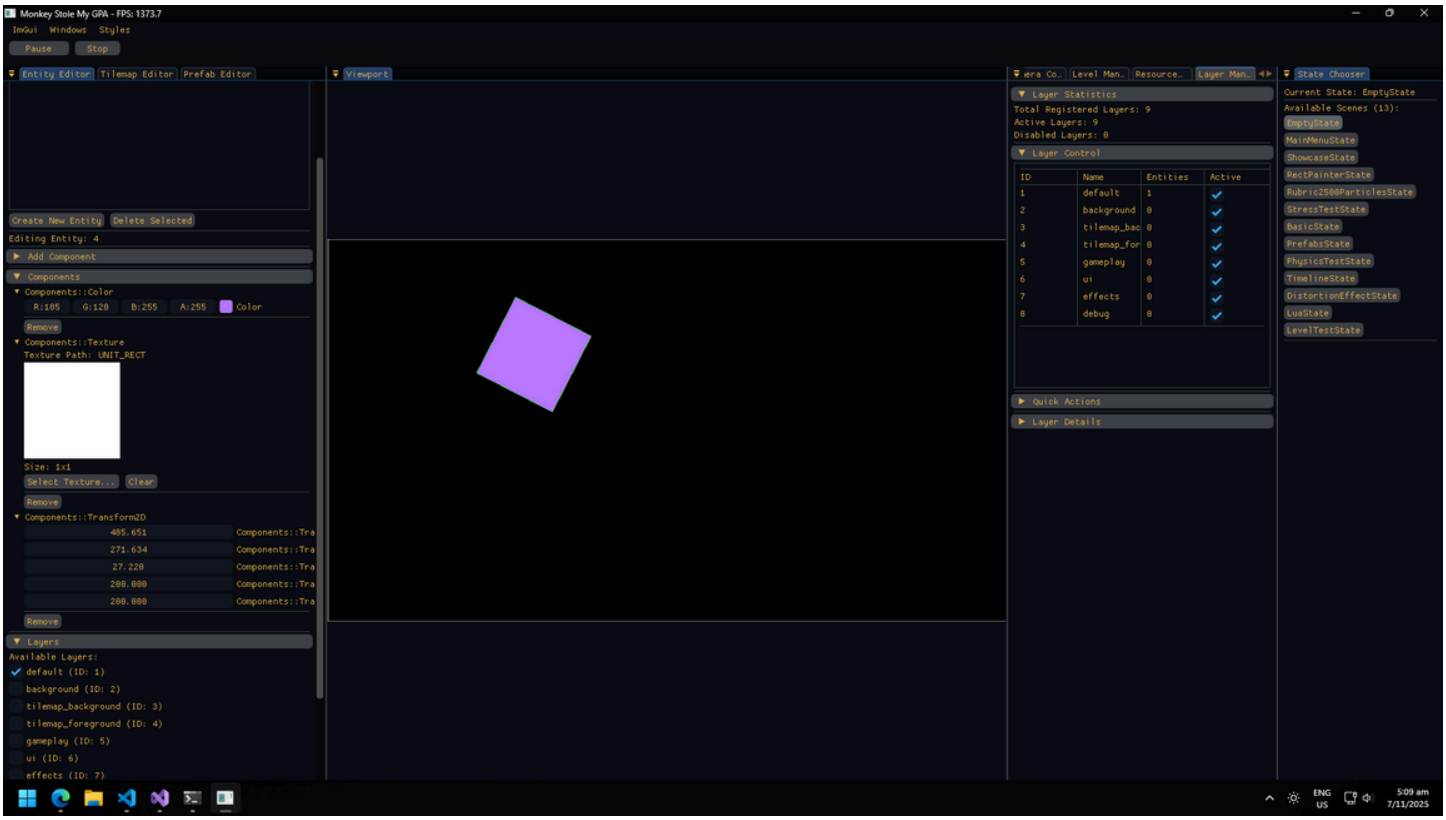


Enable and disable layers

Go to Rubric2500particlesState

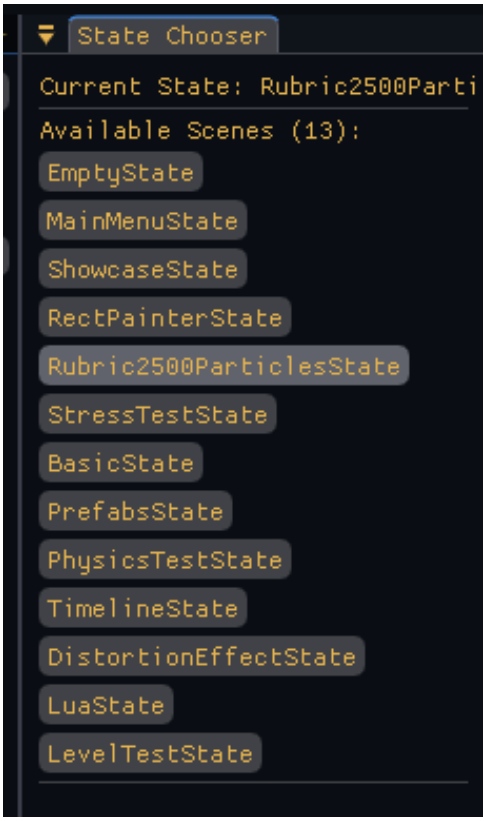


You can see the quad tree visualization here used for debugging purposes

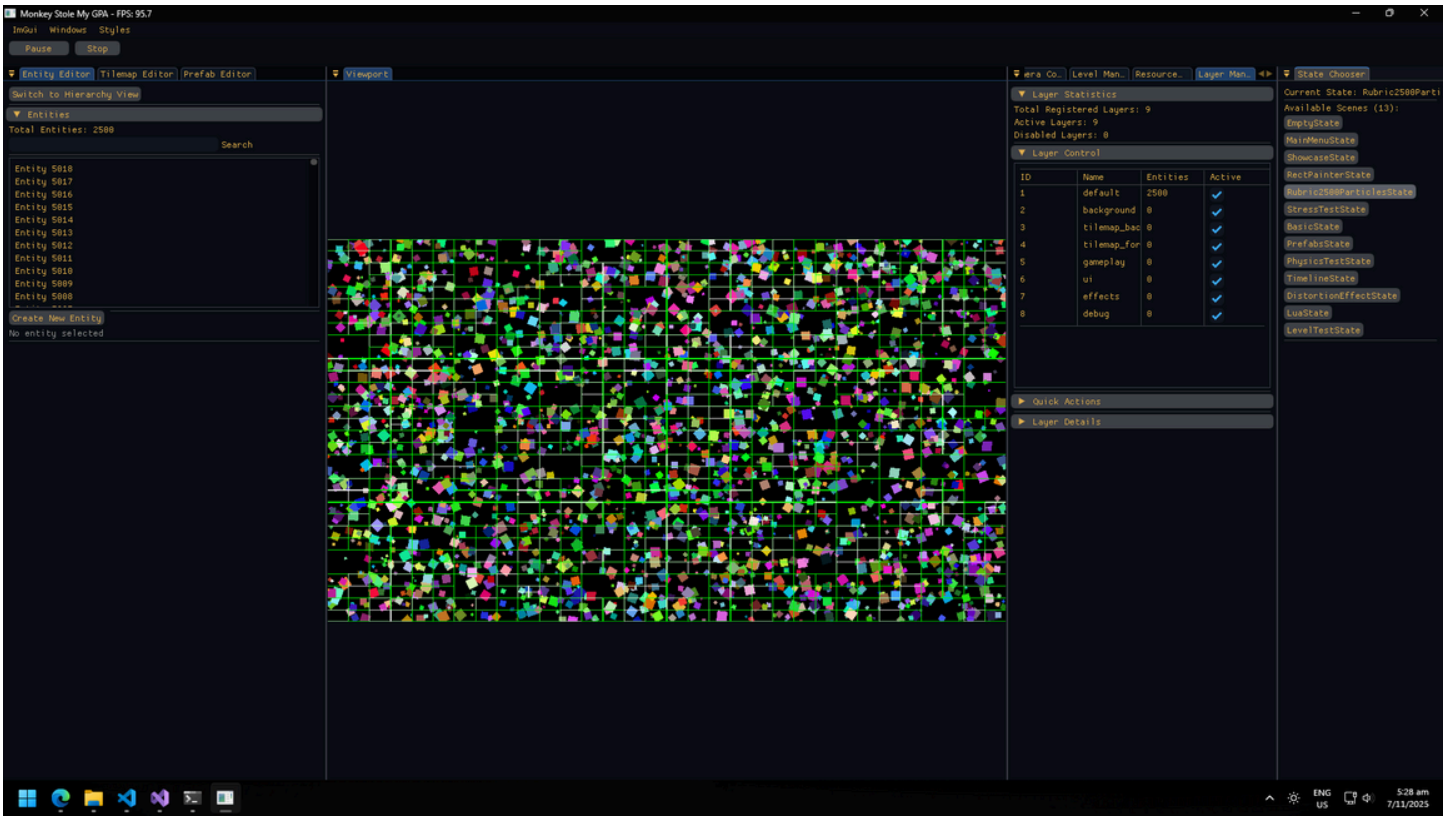

In the Layer Manager panel, unselect the debug layer




Now the quad tree is visualization disabled

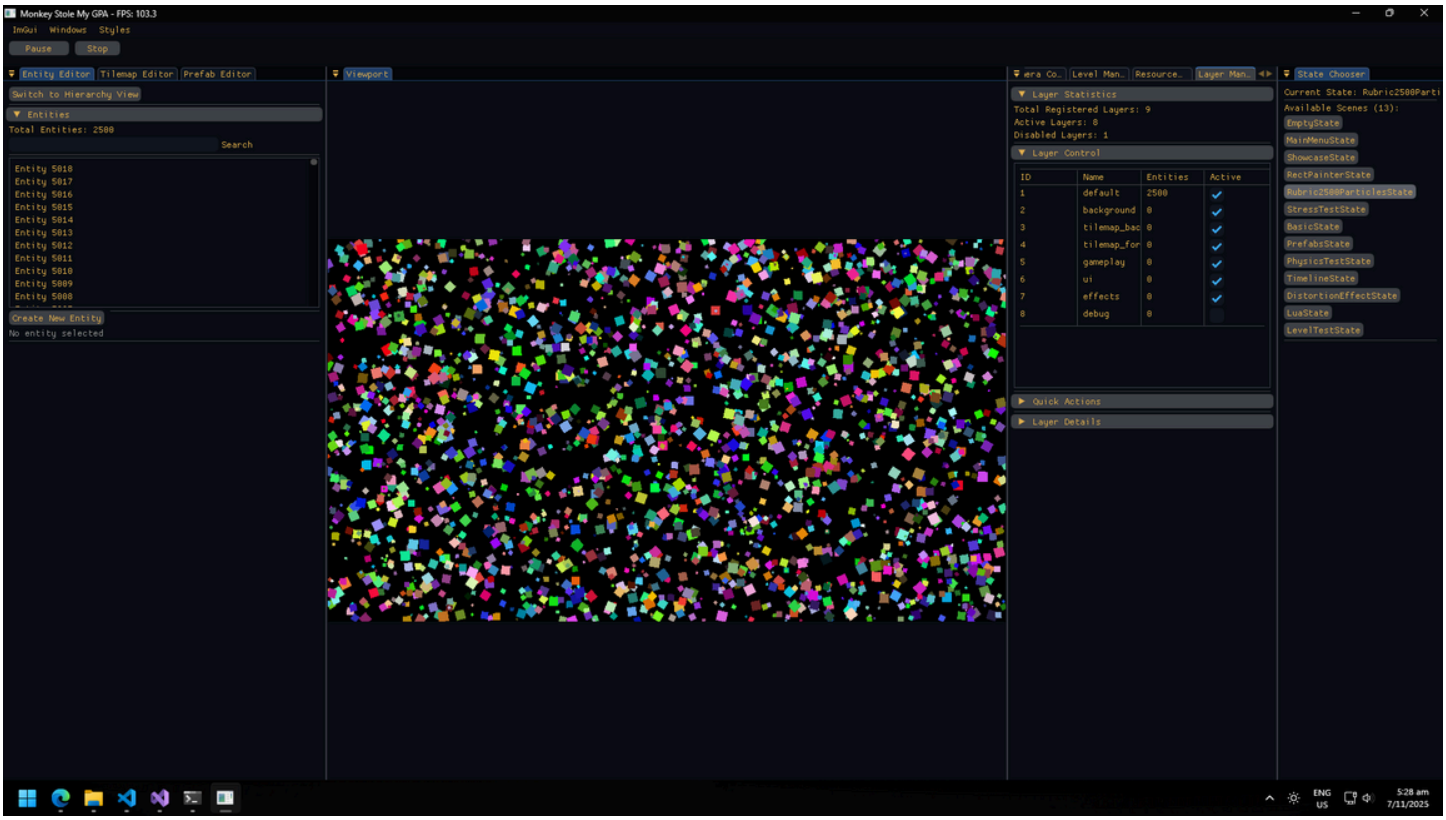

NOTE: for the debug layer specifically, you can press F3 to toggle it

Camera

Go to ShowcaseState

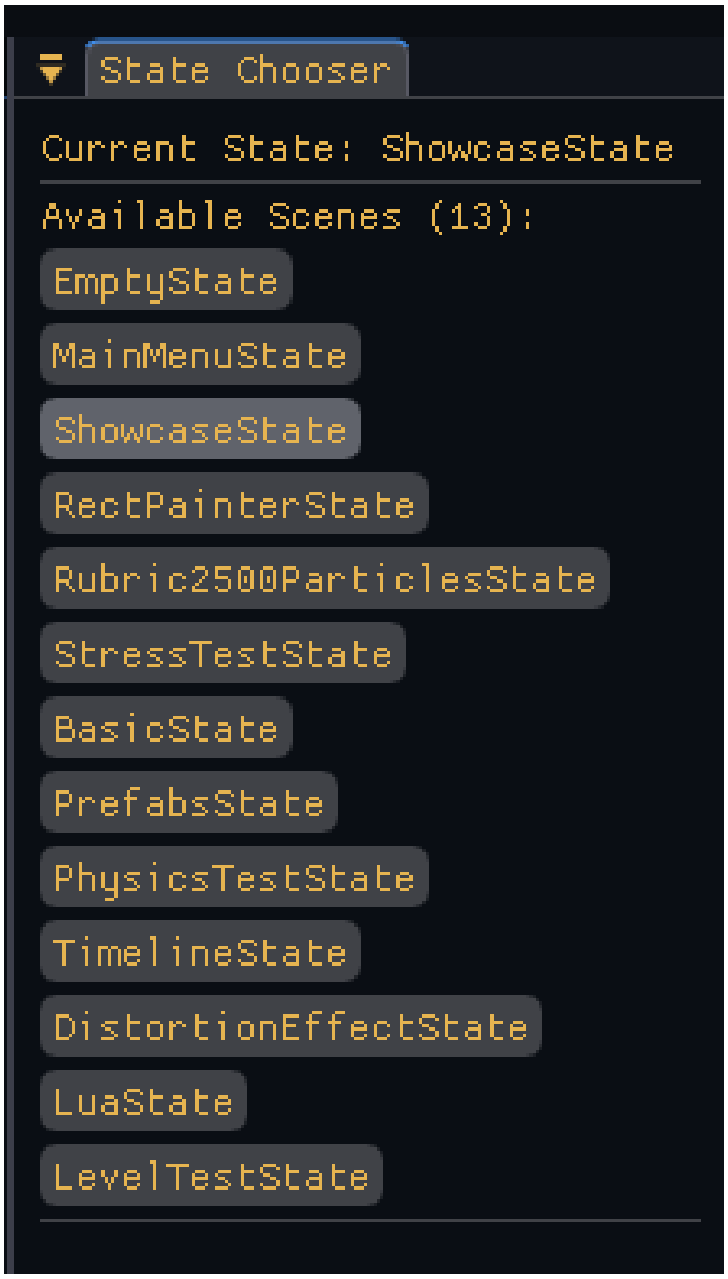

This is what the scene should look like



Press A/D to move left/right, you camera the camera should follow the player

(if this doesn't work, the player is probably dead, just press ShowcaseState on State Chooser again to reset the state)



Go to Camera Control, you can see the camera used to follow the player



Here you can adjust the camera’s attribute directly



Free cam mode

When the engine is running (not paused), you can ctrl+click and drag the viewport to move the free camera (not the active camera).

When a camera is active, doing so will deactivate that camera

You can also ctrl+scroll to zoom in and out

Misc


You can Play, Pause and Stop (reset scene and pause) in the toolbar



Modes you can toggle



Show/hide panels

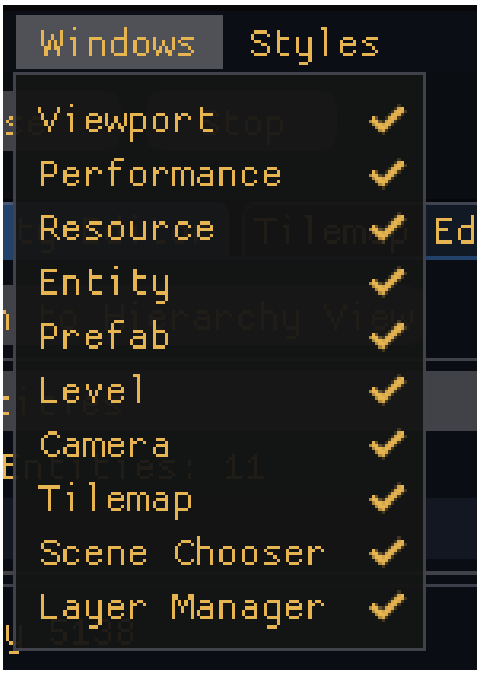

Change the theme of the engine



End of guide

Thank you 🙂