

From Source to Execution: A Statically-Typed Interpreted Language with Type Inference

by

Aye Khin Khin Hpone (Yolanda Lim), st125970

Applegate T. Tun Oo, st126690

Win Htut Naing, st126687

AT70.07 — Programming Languages and Compilers

Assignment 2

Instructor: Prof. Phan Minh Dung

Teaching Assistant: Akaradet Sinsamersuk

Asian Institute of Technology

School of Engineering and Technology

Thailand

April 2026

ABSTRACT

This report presents the design and implementation of a statically-typed programming language developed for a programming languages and compilers assignment. The language supports four primitive types — Integer, Float, Boolean, and String — with type inference, arithmetic and boolean expressions, assignment statements, if-then-else and while-loop control flow, function abstraction with value parameter passing, and a built-in `print()` function. The implementation follows a classical compiler pipeline consisting of lexical analysis, recursive-descent parsing, abstract syntax tree construction, static type checking, and tree-walking interpretation. A command-line runner and a desktop user interface are provided so that script files can be loaded, executed, and inspected. The report describes the language grammar, the type inference algorithm, the implementation structure, and the testing used to validate the system.

CONTENTS

ABSTRACT	ii
1 INTRODUCTION	1
1.1 Report Structure	1
2 LANGUAGE DESIGN AND GRAMMAR	3
2.1 Types	3
2.1.1 Integer	3
2.1.2 Float	3
2.1.3 Boolean	3
2.1.4 String	3
2.1.5 Void (internal only)	4
2.2 Static Typing	4
2.3 Token Specification	4
2.4 Context-Free Grammar	5
2.4.1 Program Structure	5
2.4.2 Arithmetic Expressions	5
2.4.3 Boolean Expressions	5
2.4.4 Statements	6
2.4.5 Function Definitions and Calls	6
2.5 Operator Precedence and Associativity	6
3 LEXICAL ANALYSIS AND SYMBOL TABLE	7
3.1 Token representation	7
3.2 Lexer implementation	8

3.3	Symbol table and semantic structure	10
3.4	Role of the symbol table in the pipeline	11
4	RECURSIVE-DESCENT PARSING AND THE ABSTRACT SYNTAX TREE	13
4.1	Abstract syntax tree representation	13
4.1.1	Expressions	14
4.1.2	Statements	14
4.2	Parser implementation	15
4.2.1	Statement parsing	15
4.2.2	Expression parsing and precedence	16
4.2.3	Helper functions and lookahead	17
4.3	AST printing	17
4.4	Parser and type checker boundary	18
5	TYPE INFERENCE ALGORITHM	19
5.1	Overview	19
5.2	Type Environment	19
5.3	Inference Rules	19
5.3.1	Literals	19
5.3.2	No Operator Overloading	20
5.3.3	Arithmetic Expressions	20
5.3.4	Boolean Expressions	21
5.3.5	Assignment Statement	21
5.3.6	If-Then-Else	21
5.3.7	While-Loop	21
5.3.8	Function Definition and Call	21
5.4	Type Error Reporting	22
5.5	Example Type Inference Traces	22

6	SYSTEM ARCHITECTURE AND IMPLEMENTATION	24
6.1	Compiler pipeline	24
6.1.1	Entry points and shared pipeline	25
6.2	Project structure	25
6.3	Technology stack	25
6.4	Type checker	26
6.4.1	Scope of the implemented type system	26
6.5	Interpreter	26
6.5.1	Scope of the implemented runtime	27
6.6	Graphical user interface	27
7	TESTING AND VERIFICATION	29
7.1	Test Cases	29
7.1.1	Lexer and Symbol Table	29
7.1.2	Parser and AST	30
7.1.3	Arithmetic Expressions	31
7.1.4	Boolean Expressions	31
7.1.5	Assignment Statements	31
7.1.6	If-Then-Else	31
7.1.7	While-Loop	31
7.1.8	Functions	31
7.1.9	Print	31
7.1.10	Unary Minus	32
7.2	Type Error Detection	32
7.3	Automated Test Suite	32
7.4	Error Handling	33
8	CONCLUSION	34

REFERENCES	36
APPENDIX A: SOURCE CODE	37
APPENDIX B: TEAM MEMBERS AND CONTRIBUTIONS	81

CHAPTER 1

INTRODUCTION

Programming languages define the formal contract between a programmer’s intent and machine execution. Building a language processor from source text through to evaluated output requires a coherent pipeline of components, each of which must correctly transform its input before passing it downstream. Lexical analysis identifies atomic tokens; parsing imposes hierarchical structure; static type checking validates semantic correctness before execution; and interpretation evaluates the validated program. When these stages are connected cleanly, errors are caught at the earliest possible point, and the overall system remains tractable to reason about, test, and extend.

This report presents the design and implementation of a small statically-typed interpreted language that realises this pipeline in full. The language supports four primitive types — Integer, Float, Boolean, and String — and provides arithmetic and equality expressions, assignment, conditional and iterative control flow, user-defined functions with value parameter passing, and a built-in `print()` statement. Types are inferred from program context rather than declared explicitly, combining the safety of static typing with the conciseness of a declaration-free syntax. The implementation spans three principal components developed in pipeline order: the lexer and symbol table, the recursive-descent parser and abstract syntax tree, and the type checker with interpreter. Each component was completed before the next was begun, since each stage consumes the structured output of its predecessor.

The implemented system can be invoked from the command line or through an interactive desktop interface, both of which surface the four pipeline stages — tokens, AST, inferred type table, and execution output — for inspection. An automated regression suite of 54 tests verifies correctness across all stages and language features.

1.1 Report Structure

Chapter 2 presents the language design, token specification, grammar, and operator precedence rules. Chapters 3 and 4 cover the front-end implementation in pipeline order: lexical analysis and the symbol table, then recursive-descent parsing and the AST. Chapter 5 explains the type

inference algorithm and the semantic rules used by the checker. Chapter 6 presents system architecture and implementation, including the end-to-end pipeline, project layout, and technology stack. Chapter 7 discusses testing and verification, and Chapter 8 concludes the report.

CHAPTER 2

LANGUAGE DESIGN AND GRAMMAR

2.1 Types

The language supports four primitive types. These types are sufficient to cover the assignment requirements while keeping the semantics simple and predictable.

2.1.1 *Integer*

The Integer type represents whole numbers such as 0, 7, and 42. Integer literals are written as one or more decimal digits without quotation marks or a decimal point.

2.1.2 *Float*

The Float type represents real-valued numbers written with a decimal point, such as 3.14 or 20.5. Float values are used in arithmetic expressions and also arise as the result of any division. Division always produces a Float even when both operands are Integer: for example, `10 / 2` evaluates to `5.0 : Float`. This is an explicit design rule enforced in the type checker.

2.1.3 *Boolean*

The Boolean type represents logical truth values. The two Boolean literals are `true` and `false`. Boolean values are used in conditions and as results of comparison expressions.

2.1.4 *String*

The String type represents sequences of characters enclosed in double quotes, for example `"hello"`. Strings can be assigned to variables and printed through the built-in `print()` function. The surrounding quotes are stripped by the parser when the `Literal` node is created, so the value stored internally is the bare character sequence without surrounding quotes. At run-time, the built-in `print()` function re-adds double quotes around string values, so `print("plc")` outputs `"plc" : String`.

2.1.5 Void (internal only)

Void is not a programmer-visible type. The language has exactly four primitive types: Integer, Float, Boolean, and String. Void exists solely as an internal sentinel inside the `LanguageType` enum so that the symbol table can record a well-defined return type for functions that contain no return statement. Programmers cannot write Void in source code.

2.2 Static Typing

The language uses static typing, which means type errors are detected before execution rather than during program execution. No explicit variable type declarations are required. Instead, the type checker infers types from literals, assignments, operations, function calls, and return statements. Once a variable type is established, later assignments must remain consistent with that type. For example, the following program is rejected at the type-checking stage before any execution occurs:

```
1 x = 5;
2 x = "hello";    (* TypeError: Cannot assign String to variable 'x' of
   type Integer *)
```

This contrasts with dynamically-typed languages, where the same program would run without error until (or unless) a type-dependent operation was attempted.

2.3 Token Specification

Table 2.1 summarises the major token classes used by the language.

Table 2.1. Token Specification

Token Category	Example Lexemes
INT_LITERAL	0, 10, 42
FLOAT_LITERAL	3.14, 20.5
BOOL_LITERAL	true, false
STRING_LITERAL	"hello"
IDENTIFIER	variable and function names such as x, add
Arithmetic operators	+, -, *, /
Comparison operators	==, !=
Assignment operator	=
Keywords	if, else, while, def, return, print
Delimiters	() { } , ;

2.4 Context-Free Grammar

The language grammar can be described by the context-free grammar $G = (V_N, V_T, P, S)$, where V_N is the set of non-terminals, V_T is the set of terminals, P is the set of production rules, and S is the start symbol program. The grammar is implemented through recursive-descent parsing functions.

2.4.1 Program Structure

```
1 program    -> statement* EOF
2 statement  -> assignment
3           | if_stmt
4           | while_stmt
5           | func_def
6           | print_stmt
7           | return_stmt
8           | expr ';' ;
```

2.4.2 Arithmetic Expressions

```
1 expr       -> term (('+' | '-' ) term)*
2 term       -> factor (('*' | '/' ) factor)*
3 factor     -> '-' factor
4           | INT_LITERAL
5           | FLOAT_LITERAL
6           | STRING_LITERAL
7           | BOOL_LITERAL
8           | IDENTIFIER
9           | IDENTIFIER '(' args? ') '
10          | '(' expr ') ' ;
```

The unary minus production allows negative literals such as -5 and negated variable references such as -x. It is implemented as a right-recursive descent into factor and is desugared internally to `0 - factor`, so all existing type rules for arithmetic apply without modification.

2.4.3 Boolean Expressions

```
1 bool_expr  -> expr '==' expr
2           | expr '!=' expr
3           | BOOL_LITERAL
4           | expr (* fallback: type checker enforces Boolean *)
```

Boolean expressions are only parsed as conditions inside if and while statements. Comparison results are not storable in variables directly; the grammar does not include `bool_expr` in the factor rule. This is consistent with the assignment specification, which describes Boolean

expressions primarily as conditions.

If `bool_expr` parses an expression and finds no following `==` or `!=` operator, the expression is returned as-is and the type checker verifies that its inferred type is `Boolean`.

2.4.4 Statements

```
1 assignment -> IDENTIFIER '=' expr ';'
2 if_stmt    -> 'if' '(' bool_expr ')' block ('else' block)?
3 while_stmt -> 'while' '(' bool_expr ')' block
4 print_stmt -> 'print' '(' expr ')' ';'
5 return_stmt -> 'return' expr ';'
6 block      -> '{' statement* '}'
```

2.4.5 Function Definitions and Calls

```
1 func_def -> 'def' IDENTIFIER '(' params? ')' block
2 params   -> IDENTIFIER (',' IDENTIFIER)*
3 args     -> expr (',' expr)*
```

Function calls use value parameter passing. This means the argument values are evaluated before the call and copied into the function's local environment.

2.5 Operator Precedence and Associativity

Operator precedence is encoded structurally in the recursive-descent parser. Comparison is lowest, addition and subtraction are next, and multiplication and division have the highest precedence among binary operators. Arithmetic operators are left-associative.

Table 2.2. Operator Precedence (1 = lowest, 3 = highest) and Associativity

Precedence	Operators	Associativity
1 (lowest)	<code>==</code> , <code>!=</code>	non-associative (condition use only)
2	<code>+</code> , <code>-</code>	left-associative
3 (highest)	<code>*</code> , <code>/</code>	left-associative

CHAPTER 3

LEXICAL ANALYSIS AND SYMBOL TABLE

This chapter covers the responsibilities related to lexical and early semantic foundations of the language. It includes defining token structures and categories (such as keywords, operators, identifiers, and literals), implementing the lexer to transform source characters into tokens, and establishing the symbol table to manage variable and function storage along with their associated types. Together, these components ensure that raw source input is systematically organised into meaningful structures that can be used reliably by later stages of the compiler.

3.1 Token representation

The token system, written in `components/tokens.py`, establishes the vocabulary and structure of all lexical elements in the language. It specifies both the types of tokens that can exist and the structure each token must follow. This serves as a canonical contract between the lexer and the parser, ensuring consistency across all stages of the compiler.

Table 3.1 summarises the main categories, example lexemes, and typical `TokenType` values.

Table 3.1. Token categories and representative `TokenType` values

Category	Example lexemes	Representative <code>TokenType</code>
Literals	42, 3.14, true, "hello"	INT_LITERAL, FLOAT_LITERAL, BOOL_LITERAL, STRING_LITERAL
Identifiers	x, counter, add	IDENTIFIER
Keywords	if, else, while, def, return, print	keyword-specific token variants
Operators	+, -, *, /, =, ==, !=	PLUS, MINUS, STAR, SLASH, ASSIGN, EQUAL_EQUAL, BANG_EQUAL
Delimiters	Parentheses, braces, comma, and semicolon (see lexer delimiter tokens)	delimiter token variants
End marker	end of source input	EOF

Token types (from class `TokenType`) are defined using an Enum with `auto()` to automatically assign unique values. This avoids reliance on raw strings and ensures safer comparisons during parsing. The token categories include literals, identifiers, keywords, operators, delimiters, and a special end-of-file (EOF) token. The EOF token is appended after all input is processed,

allowing the parser to detect the end of input explicitly rather than encountering an unexpected termination.

Each token is represented as an immutable dataclass (`frozen=True`), meaning its fields cannot be modified after creation. Each token contains four key pieces of information: its kind (`token_type`), its lexeme (the exact substring from the source code), and its source position (`line`, `column`). This structured representation allows later stages to process the program in terms of syntax and errors without handling raw text directly. Immutability improves reliability by preventing accidental modification during later processing.

```
1 @dataclass(frozen=True)
2 class Token:
3     token_type: TokenType
4     lexeme: str
5     line: int
6     column: int
```

3.2 Lexer implementation

The lexer, implemented in `components/lexica.py`, is a hand-written scanner that converts raw source text into a sequence of tokens. Unlike generated lexers (for example SLY lexer mode, or Lex and Flex), this implementation uses explicit control flow (`if` and `while`) to process input.

The lexer maintains internal state including the source string, current position, start of the current token, line number, and column index. The column index is tracked per line and resets upon encountering a newline, while a separate `token_column` records the starting position of each token for accurate error reporting.

The main function, `tokenize`, iterates through the source code, repeatedly invoking `_scan_token` to identify the next token. Tokens are appended to a list, and an EOF token is added at the end. Whitespace is skipped, while invalid input results in a `LexerError`.

```
1 def tokenize(self) -> list[Token]:
2     tokens: list[Token] = []
3     while not self._is_at_end():
4         self.start = self.current
5         self.token_column = self.column
6         token = self._scan_token()
7         if token is not None:
8             tokens.append(token)
9     tokens.append(Token(TokenType.EOF, "", self.line, self.column))
10    return tokens
```

Token recognition follows a structured approach. Single-character tokens are mapped using a lookup table. Multi-character operators such as `==` and `!=` are handled using lookahead via `_match`. String literals are processed by `_string`, which reads characters until a closing quotation mark or the end of input is reached, with error handling for unterminated strings. Numeric literals are handled by `_number`, which distinguishes integers and floating-point values based on the presence of a decimal point followed by digits. Identifiers are processed greedily, consuming alphanumeric characters and underscores, and then checked against the `KEYWORDS` map to determine whether they are reserved words or user-defined names. Notably, `true` and `false` are also entries in this map, mapping to `TokenType.BOOL_LITERAL` rather than a keyword-specific type. This means boolean literals are recognised through the same keyword-fallback mechanism as reserved words, preventing them from being scanned as user-defined identifiers.

```
1 KEYWORDS: dict[str, TokenType] = {
2     "if": TokenType.IF,
3     "else": TokenType.ELSE,
4     "while": TokenType.WHILE,
5     # ...
6     "true": TokenType.BOOL_LITERAL,
7     "false": TokenType.BOOL_LITERAL,
8 }
```

```
1 SINGLE_CHAR_TOKENS: dict[str, TokenType] = {
2     "+": TokenType.PLUS,
3     "-": TokenType.MINUS,
4     "*": TokenType.STAR,
5     "/": TokenType.SLASH,
6     # ...
7 }
```

Helper functions such as `_advance`, `_peek`, and `_peek_next` manage character consumption and lookahead, while `_is_at_end` determines when input has been fully processed. Error messages include precise line and column information, aiding debugging and diagnostics.

Table 3.2 lists the main functions and data structures in `components/lexica.py` and their roles.

Table 3.2. Key functions and data in `lexica.py`

Function / data	Responsibility	Output / effect
<code>tokenize()</code>	Iterates through source, scans tokens, appends EOF	ordered token list
<code>_scan_token()</code>	Dispatches recognition based on character and lookahead	next token or skip
<code>_number()</code>	Parses numeric sequences, distinguishes int vs float	numeric literal token
<code>_string()</code>	Parses quoted text, checks termination	string token or error
<code>_identifier()</code>	Parses identifiers, resolves keyword vs user-defined	keyword or identifier token
KEYWORDS map	Maps reserved words to token types	token type selection
SINGLE_CHAR_TOKENS map	Maps single-character symbols	token type selection
<code>_advance()</code> , <code>_peek()</code> , <code>_match()</code>	Character consumption and lookahead	scanner state update

3.3 Symbol table and semantic structure

The symbol table, defined in `components/symbol_table.py`, operates at a higher level than the lexer. While the lexer processes raw text into tokens, the symbol table manages semantic information such as variable and function names, their types, and their scope.

The symbol table is implemented as a scoped structure, where each scope maintains its own dictionary of symbols and optionally references a parent scope. This enables proper handling of nested blocks and variable shadowing. Symbols are introduced through definition functions and retrieved through lookup operations, which search recursively through parent scopes if needed.

```

1 def lookup(self, name: str) -> Symbol:
2     symbol = self._symbols.get(name)
3     if symbol is not None:
4         return symbol
5     if self.parent is not None:
6         return self.parent.lookup(name)
7     raise SymbolTableError(f"Undefined symbol: {name}")

```

The type system is represented using a `LanguageType` enumeration, which includes fundamental types such as Integer, Float, Boolean, String, and Void. Symbols are modelled using an inheritance hierarchy: the base `Symbol` class stores a name and type, while subclasses such as `VariableSymbol` and `FunctionSymbol` include additional attributes. Variables track initialization state, while functions store parameter lists and return types. Table 3.3 summarises the main building blocks.

Table 3.3. Symbol table components and roles

Component	Stored information	Role in semantic analysis
Scoped symbol table	Symbols in current and parent scope	Supports nesting and shadowing via recursive lookup
LanguageType enum	Integer, Float, Boolean, String, Void	Defines the type system
Symbol (base)	Name and declared or inferred type	Base abstraction for entries
VariableSymbol	Variable metadata (including initialization state)	Tracks correct usage before assignment
FunctionSymbol	Parameters and return type	Validates calls and return consistency
lookup(name)	Recursive scope search	Resolves identifiers or reports undefined
SymbolTableError	Semantic error details	Reports duplicates, undefined symbols, invalid operations

Errors related to semantic violations are handled via `SymbolTableError`. These include duplicate declarations within the same scope, references to undefined symbols, and invalid operations such as attempting to mark a non-variable symbol as initialized.

3.4 Role of the symbol table in the pipeline

The symbol table is constructed during the type-checking phase rather than during lexical analysis. This guideline is followed in the implementation. The type checker initialises a global symbol table and populates it while traversing the AST, including defining variables and functions, managing nested scopes, and validating type correctness.

```

1 def run_pipeline(source_code: str) -> PipelineResult:
2     tokens = Lexer(source_code).tokenize()
3     tree = Parser(tokens).parse()
4     ast_text = ASTPrinter().print(tree)
5     checked_scope = TypeChecker().check(tree)
6     outputs: list[str] = []
7     Interpreter(output_callback=outputs.append).execute(tree)
8     return PipelineResult(
9         tokens=tokens,
10        ast_text=ast_text,
11        checked_scope=checked_scope,
12        outputs=outputs,
13    )

```

Once type checking is complete, the populated symbol table is returned as part of the pipeline result (`checked_scope`). The checker creates child scopes for blocks and functions during analysis, but the displayed `checked_scope` table represents the global scope entries returned

by the pipeline. It can then be displayed or used for further analysis.

This separation of concerns keeps lexical analysis focused on tokenization, while semantic meaning is enforced during type checking. For user-defined functions, definitions are first registered in the global scope with placeholder parameter and return types. These are inferred from the first valid call and refined through body checking; subsequent calls must match the inferred parameter types.

CHAPTER 4

RECURSIVE-DESCENT PARSING AND THE ABSTRACT SYNTAX TREE

This chapter presents the implementation of the recursive-descent parser and the associated abstract syntax tree (AST) model. Starting from lexer-produced tokens, the parser constructs a hierarchical Program AST that represents expressions, statements, and control-flow structure in a form suitable for downstream semantic analysis and execution. Implemented syntax coverage includes arithmetic expressions, assignments, if-then-else, while, function definitions, function calls, return, and built-in `print(...)` statements. Equality operators (`==`, `!=`) are parsed in condition contexts (if/while) through the parser’s boolean-expression path.

4.1 Abstract syntax tree representation

The AST is defined as a collection of Python dataclasses representing the structural elements of the programming language. It serves as an intermediate representation between parsing and later stages such as type checking and interpretation.

A key distinction exists between tokens and AST nodes. Tokens are flat and describe individual lexical elements such as operators or identifiers. In contrast, the AST is hierarchical. For example, while a token may represent the symbol `+`, a `BinaryOp` node represents an entire addition operation, including its left and right operands as subtrees.

All AST nodes inherit from a common base class, allowing them to store positional metadata (line, column). This ensures that errors detected in later stages can still reference precise locations in the original source code.

```
1 @dataclass
2 class ASTNode:
3     """Base class for every AST node. Carries source location for
4         diagnostics."""
5     line: int = field(default=0, kw_only=True)
6     column: int = field(default=0, kw_only=True)
```

4.1.1 Expressions

Expressions represent computations or values within the program. A `Literal` node stores values known at parse time, including integers, floating-point numbers, booleans, and strings. String literals are stored without surrounding quotation marks, as these are removed during parsing.

```
1 if tok.token_type == TokenType.STRING_LITERAL:
2     self._advance()
3     return Literal(value=tok.lexeme[1:-1], line=tok.line, column=tok.
        column)
```

An `Identifier` node represents the use of a variable name within an expression, indicating evaluation rather than declaration. A `BinaryOp` node models arithmetic and comparison operations such as addition, subtraction, multiplication, division, and equality checks, storing the operator along with references to left and right operands. A `FunctionCall` node represents function invocation, consisting of the function name and a list of argument expressions.

```
1 @dataclass
2 class BinaryOp(ASTNode):
3     """An arithmetic or comparison binary operation.
4
5     op is one of: '+', '-', '*', '/', '==', '!=,'
6     Example:  a + b    x == 0
7     """
8     op: str
9     left: ASTNode
10    right: ASTNode
```

4.1.2 Statements

Statements represent actions or control flow within the program. An `Assign` node models variable assignment, pairing a variable name with a value expression, while `Print` and `Return` nodes each store a single expression and represent output and function return operations respectively. A `Block` node groups multiple statements within braces, representing a scoped execution sequence.

Control flow is handled via `If` and `While` nodes. The `If` node stores a condition, a then-block, and an optional else-block, while `While` stores a loop condition and body block. Function definitions are represented by `FunctionDef` nodes, which include the function name, a list of parameter names, and a body block. Parameter types are intentionally not assigned at parse time, as type inference is handled later by the type checker. Finally, `Program` serves as the

AST root, containing all top-level statements.

4.2 Parser implementation

The parser consumes the list of tokens generated by the lexer and produces a single Program AST node. It is implemented as a hand-written recursive-descent parser based on the project grammar. This avoids parser generators and instead relies on explicit functions for each grammar rule.

The parser maintains internal state consisting of the token list and a position index (`self._pos`) indicating the current token. Tokens are accessed via helper methods such as `_peek` and `_advance`. Parsing errors are reported using a custom `ParseError` exception with line and column information consistent with lexer diagnostics.

```
1 def parse(self) -> Program:
2     """Parse the full token stream and return the root Program node."""
3     line, col = self._peek().line, self._peek().column
4     statements: list[ASTNode] = []
5     while not self._is_at_end():
6         statements.append(self._statement())
7     return Program(statements=statements, line=line, column=col)
```

In addition to the main `parse()` entry point, the parser's statement dispatcher (`_statement`) implements a deterministic decision order over token patterns: function definition, conditional, loop, return, print, assignment, then expression statement fallback. This design is important because it prevents ambiguity between syntactically similar forms. In particular, assignments are recognized using one-token lookahead (`IDENTIFIER` followed by `=`), while identifier-led expressions that are not assignments are parsed as expression statements and must still end with a semicolon. This gives the parser full coverage of both declarative-style and expression-driven top-level statements without requiring a parser generator.

4.2.1 Statement parsing

The main parsing loop repeatedly processes statements until EOF, with the statement type determined via dispatch on the current token. Function definitions, conditionals, loops, returns, and prints each have dedicated parsing methods. Assignments are detected using one-token lookahead (`IDENTIFIER` followed by `ASSIGN`), preventing misclassification of function calls as assignments. If no specific statement pattern matches, the parser falls back to an expression statement and enforces a terminating semicolon.

```

1 # assignment: IDENTIFIER "=" expr ";"
2 if (
3     tok.token_type == TokenType.IDENTIFIER
4     and self._peek_next().token_type == TokenType.ASSIGN
5 ):
6     return self._assignment()
7 # fallback: bare expression statement expr ";"
8 node = self._expr()
9 self._expect(TokenType.SEMICOLON, "Expected ';' after expression")

```

4.2.2 Expression parsing and precedence

Expressions are parsed in layered precedence levels: `_expr` handles `+` and `-`, `_term` handles `*` and `/`, and `_factor` handles literals, identifiers and function calls, and parenthesized expressions. Boolean conditions for `if` and `while` are parsed by `_bool_expr`, which recognises `==` and `!=` after parsing the left-hand arithmetic expression. As a result, equality parsing is condition-focused in the current grammar implementation rather than a general infix operator available in every expression position. Function calls are recognised when an identifier is followed by `(`, with argument lists parsed as comma-separated expressions. Parenthesized expressions are supported to override precedence. Unary negation (`-x`, `-5`) is also handled at the `_factor` level: a leading `-` token causes the parser to recursively parse the operand and return `BinaryOp(0 - operand)`, so the existing type rules for subtraction cover negation without any additional inference code.

```

1 def _expr(self) -> ASTNode: # +, -
2     ...
3 def _term(self) -> ASTNode: # *, /
4     ...
5 def _factor(self) -> ASTNode: # unary -, literals, identifiers/calls,
6     grouped expr

```

Figure 4.1 shows the AST produced for the statement `z = x + y * 2;`. Because `_term` handles `*` before `_expr` handles `+`, the multiplication sub-tree is nested one level deeper, encoding the higher precedence of `*` over `+` without any explicit priority table at runtime.

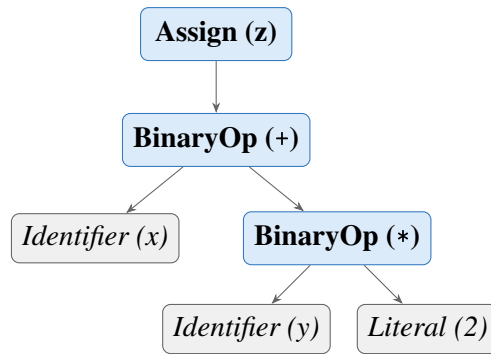


Figure 4.1. AST for $z = x + y * 2$; . Multiplication is a deeper sub-tree than addition, encoding higher precedence through tree structure rather than a runtime priority table.

Expression parsing is intentionally split into layered methods to enforce precedence and associativity in a transparent way. Parenthesized expressions are parsed explicitly and re-enter `_expr`, allowing precedence override where required by source syntax. Boolean conditions for `if` and `while` are parsed through `_bool_expr`, which accepts equality and inequality comparisons but can also return a non-comparison expression node; semantic enforcement that a condition is truly Boolean is deferred to the type checker.

4.2.3 *Helper functions and lookahead*

As described above, the parser uses `_check`, `_expect`, `_peek`, `_peek_next`, `_advance`, and `_is_at_end` for token navigation and validation. Lookahead is central for ambiguity resolution: assignment versus function call is resolved by inspecting the next token; comparison operators are recognised after parsing the left expression in `_bool_expr`. Parser errors follow a consistent diagnostic format: `[line X, col Y] ParseError: <message>`.

The parser also includes dedicated list parsers for formal parameters (`_params`) and call arguments (`_args`), both implemented as comma-separated sequences with optional emptiness. This ensures consistent handling of signatures such as `def f()` and `def f(a, b)` as well as invocations like `f()` and `f(x, y+1)`.

4.3 AST printing

For debugging and reporting, an AST printer converts the tree into a readable indented string, integrated into the pipeline output. The printer uses visitor-style dynamic dispatch, mapping node class names to methods such as `_visit_If` and `_visit_BinaryOp`, with output built as multi-line text where indentation reflects tree depth. Node formatting emphasises structure:

Program and Block include statement counts, BinaryOp explicitly shows left and right subtrees, and FunctionCall prints each argument by index. Literal includes both value and runtime Python type names for clarity.

4.4 Parser and type checker boundary

A deliberate architectural boundary is maintained between syntax construction and semantic validation. The parser is responsible for producing a structurally valid AST with accurate source locations, while type correctness and semantic constraints are checked later by the type checker. For example, `_bool_expr` may syntactically accept a non-Boolean expression as a condition node, but rejection of non-Boolean control-flow conditions is handled during semantic analysis. This separation keeps parser logic focused on grammar conformance and allows a clear responsibility split across team member contributions.

CHAPTER 5

TYPE INFERENCE ALGORITHM

5.1 Overview

Type inference in this project means that the programmer does not write explicit type declarations for variables or functions. Instead, the compiler infers types from assignments, literals, operations, function calls, and return statements. This keeps the language simple while still preserving static type safety.

The type checker runs after parsing. It receives the AST and validates the program before execution. Any inconsistent use of types is reported as a type error, and execution is stopped.

The interpreter stage does not repeat this validation: it walks the same AST with ordinary Python representations of values. Static type information remains in the symbol table produced by the checker; run-time values are not separately labelled with `LanguageType`, except that `print()` formats output by inspecting the value's Python type.

5.2 Type Environment

The type environment is represented by the symbol table. Conceptually, it is a mapping

$$\Gamma : \text{Identifier} \rightarrow \text{Type}$$

The environment grows as the checker visits the AST. On first assignment, a variable name is inserted with its inferred type. When a new block or a function call is entered, a child environment is created so that nested scopes can be checked independently while still accessing outer bindings when needed.

5.3 Inference Rules

5.3.1 Literals

Literal nodes have direct types:

$$\begin{aligned}\Gamma \vdash 42 &: \text{Integer} \\ \Gamma \vdash 3.14 &: \text{Float} \\ \Gamma \vdash \text{true} &: \text{Boolean} \\ \Gamma \vdash \text{"hi"} &: \text{String}\end{aligned}$$

5.3.2 No Operator Overloading

The language does not support operator overloading. Every operator has a single, fixed meaning determined solely by the operator symbol. Specifically:

- The `+` operator is not overloaded for string concatenation. Applying `+` to a `String` operand is a type error.
- The comparison operators `==` and `!=` are not overloaded for string or boolean equality. Both operands must be arithmetic.
- No mixed Boolean or String arithmetic is permitted.

Because operators have unambiguous types, the compiler can always infer expression types without requiring explicit type declarations from the programmer.

5.3.3 Arithmetic Expressions

The arithmetic operators `+`, `-`, `*`, and `/` accept only numeric operands. If both operands are `Integer`, the result is `Integer`, except for division, which always produces `Float` regardless of the operand types. If at least one operand is `Float` for `+`, `-`, or `*`, the result is `Float` — this is numeric promotion, not operator overloading, because `+` retains a single numeric meaning throughout. Any non-numeric operand causes a type error.

Table 5.1. Arithmetic result types by operand combination

Left operand	Operator	Right operand	Result type
Integer	<code>+</code> , <code>-</code> , <code>*</code>	Integer	Integer
Integer	<code>/</code>	Integer	Float
Float	<code>+</code> , <code>-</code> , <code>*</code> , <code>/</code>	Integer	Float
Integer	<code>+</code> , <code>-</code> , <code>*</code> , <code>/</code>	Float	Float
Float	<code>+</code> , <code>-</code> , <code>*</code> , <code>/</code>	Float	Float
Any	any	String or Boolean	TypeError

Unary negation

Unary minus ($-x$) is desugared by the parser into $0 - x$. The type checker therefore applies the standard binary subtraction rule: if x is `Integer`, the result is `Integer`; if x is `Float`, the result is `Float`.

5.3.4 Boolean Expressions

The comparison operators `==` and `!=` always produce `Boolean`. Following the language specification, both operators require two arithmetic (`Integer` or `Float`) operands. Comparisons involving `Boolean` or `String` operands are rejected by the type checker.

5.3.5 Assignment Statement

Assignments define variable types on first use. If a variable does not yet exist in the type environment, the checker infers the type of the right-hand side and inserts the variable into the environment. If the variable already exists, the new value must have the same type.

$$\text{If } x \notin \Gamma \text{ and } \Gamma \vdash e : T, \text{ then } \Gamma, x : T \vdash x = e$$
$$\text{If } x : T \in \Gamma \text{ and } \Gamma \vdash e : T, \text{ then } \Gamma \vdash x = e$$

5.3.6 If-Then-Else

The condition of an `if` statement must be `Boolean`. The `then`-block and `else`-block are checked in child scopes so that local operations can be validated cleanly.

$$\Gamma \vdash c : \text{Boolean} \quad \Gamma' \vdash B_{\text{then}} \quad \Gamma'' \vdash B_{\text{else}} \quad \Longrightarrow \quad \Gamma \vdash \text{if}(c) B_{\text{then}} \text{ else } B_{\text{else}}$$

5.3.7 While-Loop

The condition of a `while` loop must also be `Boolean`. The loop body is checked in a child scope and must not violate the types of variables already introduced in the surrounding environment.

$$\Gamma \vdash c : \text{Boolean} \quad \Gamma' \vdash B \quad \Longrightarrow \quad \Gamma \vdash \text{while}(c) B$$

5.3.8 Function Definition and Call

Function parameter types are inferred from the first call to the function. After that first call, subsequent calls must use arguments of the same types. The return type is inferred from the

return statements in the function body. If the function returns inconsistent types, the checker reports an error.

For functions that are defined but never called, the type checker performs a post-pass after all top-level statements have been processed. It infers parameter types by scanning the body for arithmetic and comparison usage, then checks the full body with those inferred types. This ensures that type errors inside never-called function bodies are still detected before execution.

Recursive calls are intentionally rejected in this implementation because they were not required by the assignment and would require additional inference and control-flow analysis.

5.4 Type Error Reporting

Type errors are reported with source positions so that the user can locate the problem quickly. The format used by the system is:

```
[line X, col Y] TypeError: message
```

Examples include assigning a `String` to an `Integer` variable, using a non-Boolean condition in an `if` statement, or supplying the wrong argument type to a function.

5.5 Example Type Inference Traces

Consider the following program fragment:

```
1 x = 10;  
2 y = 20.5;  
3 z = x + y;  
4 print(z);
```

The checker infers:

- `x`: `Integer`
- `y`: `Float`
- `x + y`: `Float`
- `z`: `Float`

For a function example:

```
1 def add(a, b) {  
2     return a + b;  
3 }  
4  
5 result = add(2, 3.5);
```

The first function call infers `a`: `Integer` and `b`: `Float`. The expression `a + b` is therefore `Float`, so the function return type is inferred as `Float`. The variable `result` is also inferred as `Float`.

CHAPTER 6

SYSTEM ARCHITECTURE AND IMPLEMENTATION

This chapter describes how the implementation is organised: the end-to-end processing flow, repository layout, technology choices, and the main components that realise static analysis and execution (type checker, interpreter, and user interfaces). Detailed treatment of lexical analysis, the symbol table, and parsing appears in Chapters 3 and 4; Chapter 5 presents the type-inference rules that the type checker implements.

6.1 Compiler pipeline

The system follows a four-stage pipeline. Lexical and syntactic processing are kept separate from semantic analysis and execution, which simplifies testing and localises errors to the appropriate stage.

The overall flow of data through the system is shown in Figure 6.1.

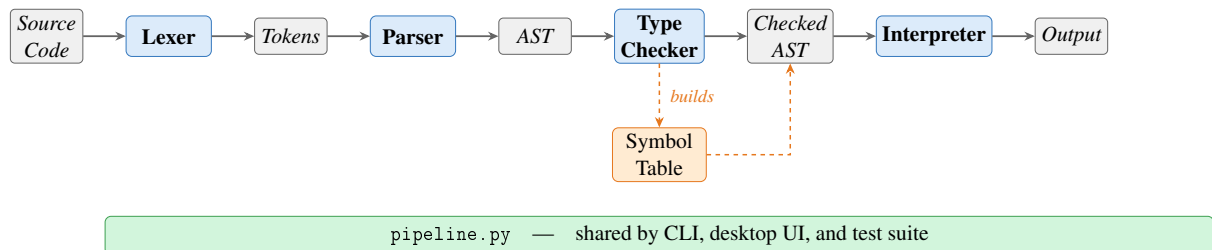


Figure 6.1. Compiler pipeline overview.

Source characters are scanned by the lexer into a token stream. The parser consumes tokens and builds an AST that reflects program structure (expressions, statements, and control flow). The type checker then walks the AST, populates and uses the symbol table, infers types, and validates scope and type rules. Only programs that pass the type checker proceed to interpretation. The interpreter evaluates the checked tree using ordinary Python values; it does not re-run the type rules, since correctness at runtime is guaranteed by the prior static pass. All four stages are orchestrated through `pipeline.py`, which is shared by the command-line runner, the desktop UI, and the test suite.

6.1.1 Entry points and shared pipeline

All stages are orchestrated by `components/pipeline.py`, which is shared by the command-line runner, the desktop UI, and the test suite. From the project root, `python3 main.py` runs a script (or built-in sample) and prints the stages in order: tokens, AST text, type table, and execution output. `python3 ui.py` runs the Tkinter workbench: the same pipeline is used internally, with each stage shown in a separate tab so the user can inspect results without altering the underlying flow.

6.2 Project structure

The main source files and their responsibilities are summarised in Table 6.1.

Table 6.1. Main source files

File	Responsibility
<code>main.py</code>	Command-line runner for sample code or a script file
<code>ui.py</code>	Desktop UI for editing and running a script
<code>components/tokens.py</code>	Token classes and token categories
<code>components/lexica.py</code>	Lexical analysis
<code>components/ast_nodes.py</code>	AST node definitions
<code>components/parser.py</code>	Recursive-descent parser
<code>components/ast_printer.py</code>	AST renderer for debugging and reporting
<code>components/symbol_table.py</code>	Scoped symbol table and semantic types
<code>components/type_checker.py</code>	Static type checker and inference
<code>components/interpreter.py</code>	Tree-walking interpreter
<code>components/pipeline.py</code>	Shared pipeline for CLI, UI, and tests

6.3 Technology stack

The project uses Python and standard-library tools only (Table 6.2).

Table 6.2. Technology stack

Tool	Purpose
Python 3.10+	Core implementation language
<code>dataclasses</code>	AST and runtime helper structures
<code>tkinter</code>	Desktop graphical interface
<code>unittest</code>	Automated testing

6.4 Type checker

The `TypeChecker` class implements the inference and checking rules described in Chapter 5. It traverses the AST before execution, uses the symbol table to record variable and function information, infers types on first assignment, validates arithmetic and comparison expressions, enforces Boolean conditions for control flow, infers function parameter types from the first call (or from body usage for uncalled functions), and infers function return types from `return` statements. Programs that fail these rules are rejected before interpretation.

6.4.1 Scope of the implemented type system

In scope terms, this component turns a syntactically valid AST into a semantically valid program:

- static typing rules for arithmetic, comparison, assignment, control flow, and functions,
- type checking for expressions and statements,
- variable type inference from first assignment,
- function parameter inference from the first call (or from body usage for uncalled functions),
- function return type inference from `return` statements,
- source-positioned type errors when a program violates a typing rule.

6.5 Interpreter

The interpreter is a tree-walking evaluator over the checked AST. It maintains nested runtime environments for variables and function calls. Assignments write through the current or nearest enclosing scope; `if` selects a branch; `while` repeats until its condition becomes false; function calls bind arguments by value and return through an internal return mechanism.

The built-in `print()` function outputs both value and runtime type. All four types are supported:

```
1 print(42);           (* 42 : Integer      *)
2 print(3.14);         (* 3.14 : Float       *)
3 print(true);         (* true : Boolean     *)
4 print("plc");        (* "plc" : String    *)
```


6.5.1 Scope of the implemented runtime

The runtime stage provides observable behaviour and integrates with the shared pipeline:

- assignment execution,
- if execution,
- while execution,
- function execution with value parameter passing,
- `print()` execution with immediate output,
- execution behind the same `run_pipeline` path used by the CLI, UI, and tests.

6.6 Graphical user interface

The desktop workbench (`ui.py`) is implemented with Python's `tkinter` standard library and requires no additional dependencies. The window is titled *125970-126690-126687-Assignment2-PLC-presentation* and opens at 1200×760 pixels in a horizontal split layout.

Toolbar. A top toolbar provides three buttons — *Open Script*, *Run*, and *Clear Output* — and a right-aligned status label that reports *Ready*, a loaded filename, or *Run failed*.

Left panel (source editor). A monospaced `Text` widget with both horizontal and vertical scrollbars allows the user to enter or paste arbitrary source code. The *Open Script* button populates the editor from a file. The editor is pre-loaded with the built-in sample program on first launch.

Right panel (output tabs). A `Notebook` widget presents four tabs, each backed by a scrollable read-only `Text` widget with both horizontal and vertical scrollbars:

- *Execution Output* — the `print()` values produced by stage 4, formatted as `value : Type`;
- *Tokens* — the token stream from stage 1, one token per line with type, lexeme, and source position;
- *AST* — the indented tree text from stage 2;

- *Type Table* — the symbol table from stage 3 showing each name, kind, inferred type, initialisation state, and parameter list.

Error handling. If any pipeline stage raises an exception, the error message is written to the *Execution Output* tab as ERROR: <message>. No modal dialogs are used, so the user can edit and rerun without dismissing a popup.

Keyboard shortcuts. F5 and Ctrl+Enter are both bound to the *Run* action, allowing rapid edit-run cycles without reaching for the mouse.

CHAPTER 7

TESTING AND VERIFICATION

7.1 Test Cases

Testing was performed through both manual execution and automated regression tests. Manual runs were used to inspect the full pipeline from source code to output, while automated tests were added for the semantic and runtime behaviour of the implemented type checker and interpreter.

Table 7.1. Representative Test Cases

Category	Program Behaviour	Expected Result
Arithmetic	Evaluate mixed numeric expressions	Correct value and inferred type
If-then-else	Choose one branch from a Boolean condition	Only matching branch runs
While-loop	Print during repeated execution	One output line per iteration
Functions	Infer parameters and return type	Valid call and correct return value
Type mismatch	Reassign incompatible type	Type error before runtime

7.1.1 *Lexer and Symbol Table*

The lexer was verified manually by running the full pipeline and inspecting Stage 1 token output for programs that exercise every token category: integer and float literals, Boolean literals, string literals, all six keywords, two-character comparison operators (`==`, `!=`), single-character operators, and delimiters. Identifier scanning with keyword fallback was confirmed by checking that `true`, `false`, and reserved words are emitted with their keyword token types while non-keyword names produce `IDENTIFIER` tokens. For example, the source fragment `x = 10;` produces the token sequence:

```

1 IDENTIFIER  'x'      line=1 col=1
2 ASSIGN      '='      line=1 col=3
3 INT_LITERAL '10'     line=1 col=5
4 SEMICOLON   ';'      line=1 col=7

```

Error paths were also checked: supplying a bare `!` character raises a `LexerError` with a source position and a message suggesting `!=`, and an unterminated string literal raises a `LexerError` citing the opening line.

The symbol table was verified through the type checker and the Stage 3 output. Duplicate variable definitions were confirmed to raise a `SymbolTableError` before execution. Scope isolation was verified with nested blocks: a variable defined inside an `if` or `while` body is not visible in the outer scope after the block ends. The `format_table()` output was checked against the expected column layout (name, kind, type, initialisation status, parameters) for both variable and function symbols.

7.1.2 *Parser and AST*

The parser was verified manually by running the full pipeline and inspecting Stage 2 AST output. The following cases were checked:

- arithmetic expressions with mixed precedence (e.g. `x + y * 2`) produce a tree where multiplication is a deeper sub-tree than addition, confirming the `_expr/_term/_factor` precedence encoding,
- assignment versus expression statement dispatch: `x = 5`; produces an `Assign` node while `add(1,2)`; produces a `FunctionCall` node at the statement level, confirming the `IDENTIFIER+ASSIGN` lookahead,
- `if` with and without an `else` clause: the resulting `If` node has a non-null `else_block` only when the clause is present,
- function definitions store only parameter names in the `FunctionDef` node; the AST printer output was inspected to confirm no type annotations are present at this stage,
- string literals in `Literal` nodes have their surrounding double-quotes stripped; `print("hello")` prints `"hello" : String` at runtime (the interpreter re-adds the quotes when formatting string output),
- parse errors: missing semicolons, unmatched parentheses, and unexpected tokens all produce `[line X, col Y] ParseError`: messages with correct source positions.

7.1.3 Arithmetic Expressions

Arithmetic expressions were tested using both integer-only and mixed integer-float programs. These tests verified precedence and numeric promotion. Expressions such as `x + y * 2` confirmed that multiplication is applied before addition.

7.1.4 Boolean Expressions

Boolean expressions were tested inside `if` and `while` conditions. The type checker enforces that both operands of `==` and `!=` are arithmetic (Integer or Float); supplying a Boolean or String operand raises a `TypeCheckError`. The interpreter used the resulting Boolean values for control flow.

7.1.5 Assignment Statements

Assignments were tested for both first-use inference and reassignment checks. For example, a variable assigned 5 and later assigned "hello" correctly triggers a type error.

7.1.6 If-Then-Else

Conditional programs were used to verify that exactly one branch is executed and that non-Boolean conditions are rejected before runtime.

7.1.7 While-Loop

While-loops were tested with a countdown example. This confirmed that the loop body executes repeatedly and that `print()` emits output progressively on each iteration rather than only once at the end.

7.1.8 Functions

Function tests covered parameter passing, local execution, and return values. The implementation infers parameter types from the first call and then enforces that signature for later calls.

7.1.9 Print

The built-in `print()` function was tested with all supported runtime types. The output includes the printed value together with its type, such as `29.5 : Float` and `"plc" : String`.

7.1.10 Unary Minus

The unary minus operator was verified for integer literals ($x = -5$), float literals ($y = -3.14$), negated variable references ($y = -x$), and negation inside a larger expression ($x = 3 + -2$). In each case the type checker assigned the correct type and the interpreter produced the expected value.

7.2 Type Error Detection

The checker was verified with invalid programs involving incompatible assignment, invalid arithmetic operands, wrong function arguments, and non-Boolean conditions. In each case the system stopped before execution and reported a source-positioned type error. Representative error messages are shown below.

```
1 # Assignment type mismatch
2 [line 2, col 1] TypeError: Cannot assign String to variable 'x' of type
   Integer
3
4 # Non-Boolean if condition
5 [line 1, col 4] TypeError: If condition must have type Boolean
6
7 # Wrong argument type for function
8 [line 5, col 9] TypeError: Argument 1 of 'add' must be Integer, got
   String
```

7.3 Automated Test Suite

The automated regression suite is located in `tests/test_pipeline.py` and uses Python's built-in `unittest` framework. The tests are organised into five classes, each targeting a distinct compiler stage.

Table 7.2. Automated test coverage by class

Test class	Stage covered	Tests
LexerTests	Tokenisation (<code>lexica.py</code>)	10
SymbolTableTests	Scoped symbol table (<code>symbol_table.py</code>)	7
ParserTests	Parsing and precedence (<code>parser.py</code>)	5
TypeCheckerTests	Static type inference (<code>type_checker.py</code>)	15
IntegrationTests	Full pipeline execution	17
Total		54

LexerTests verify that each token category (integer, float, Boolean, string, keywords, identi-

fiers, two-character operators) is produced correctly, that source line numbers are tracked across newlines, and that illegal characters and unterminated strings raise `LexerError`.

SymbolTableTests exercise the symbol table directly, without going through the full pipeline. They cover variable definition and lookup, duplicate definition raising `SymbolTableError` for both variables and functions, parent-scope lookup through `child_scope()`, undefined-symbol lookup error, and the `format_table()` output for both variable and function symbol rows.

TypeCheckerTests verify static type inference and error detection. The 15 tests cover integer and float arithmetic, division producing `Float`, numeric promotion, string and boolean type inference, assignment type mismatch, non-Boolean conditions, undefined variables, wrong argument count and type, and two tests for uncalled-function body checking: one confirms that a type error inside a never-called function body is detected, and another confirms that a valid uncalled function raises no error.

IntegrationTests run programs through all four pipeline stages and verify the final output. Cases include unary negation on all numeric types, both branches of `if/else`, while-loop countdown, `print()` with every type, value-parameter isolation, nested function calls, variable reassignment, and scope isolation (variables declared inside an `if` block are not visible outside it).

The tests can be run with:

```
python3 -m unittest discover -s tests -v
```

All 54 tests pass.

7.4 Error Handling

The language system reports errors at three main stages:

- lexical errors for malformed characters or unterminated strings,
- parse errors for invalid syntax such as missing semicolons,
- type errors for programs that violate static typing rules.

Runtime errors are also reported with source positions whenever execution reaches an invalid state such as an undefined variable reference.

CHAPTER 8

CONCLUSION

This project delivered a working statically-typed programming language with the required primitive types: Integer, Float, Boolean, and String. The language supports arithmetic expressions (including unary negation), equality and inequality checks, assignments, if-then-else statements, while-loops, function abstraction with value parameter passing, return statements, and the built-in `print()` function.

The final system follows a clean compiler-style architecture. The lexer creates tokens, the parser builds the AST, the type checker performs static inference and validation, and the interpreter executes the program. This staged design made it easier to isolate syntax errors, type errors, and runtime behaviour.

One of the main outcomes of the project is the successful implementation of static typing without explicit declarations. Variable types are inferred from assignments, and function signatures are inferred from calls and return statements. Invalid programs are rejected before runtime. In addition, the system includes both a command-line runner and a desktop UI so that scripts can be entered, loaded, executed, and inspected conveniently.

The 54 automated tests cover all five test classes — lexical analysis, symbol table, parsing, static type checking, and full pipeline execution — and confirm correct behaviour for all language features including scope isolation, duplicate symbol detection, unary negation, division type rules, and error detection. These checks provide a baseline for future extensions.

One design consideration in the type checker is that function bodies are checked on demand. For functions that are called, the body is checked at the first call site using the inferred argument types. For functions that are defined but never called, the type checker performs a post-pass after all top-level statements have been processed: it infers parameter types from how they are used inside the body (for example, a parameter used in an arithmetic expression is inferred as Integer or Float), then runs the full body check with those inferred types. This ensures that type errors in never-called function bodies are still detected before execution.

Future work could include recursive functions, richer data structures, additional operators, and

code generation to a lower-level target. The current implementation demonstrates all core compiler-construction concepts covered in the course — lexical analysis, parsing, static type inference, and tree-walking interpretation — in a complete, tested, and working system.

REFERENCES

- Alfred V. Aho, Monica S. Lam, Ravi Sethi, and Jeffrey D. Ullman. *Compilers: Principles, Techniques, and Tools*. Addison-Wesley, Boston, MA, 2nd edition, 2006.
- Robert Nystrom. *Crafting Interpreters*. Genever Benning, Seattle, WA, 2021.
- Python Software Foundation. Python documentation: dataclasses — data classes. <https://docs.python.org/3/library/dataclasses.html>, 2026a. Accessed: April 2026.
- Python Software Foundation. Python documentation: Tkinter — python interface to tcl/tk. <https://docs.python.org/3/library/tkinter.html>, 2026b. Accessed: April 2026.
- Python Software Foundation. Python documentation: unittest — unit testing framework. <https://docs.python.org/3/library/unittest.html>, 2026c. Accessed: April 2026.

APPENDIX A: SOURCE CODE

The complete source code is available on GitHub:

<https://github.com/The-Token-Trio/125970-126690-126687-Assignment2-PLC>

The project can be run from the command line or the desktop UI:

```
1 python3 main.py
2 python3 ui.py
3 python3 -m unittest discover -s tests -v
```

No external Python dependencies are required.

A.1 Entry Points

```
1 from __future__ import annotations
2
3 import argparse
4 from pathlib import Path
5
6 from components.pipeline import format_stage_output, run_pipeline
7
8
9 DEFAULT_SOURCE = """
10 def add(a, b) {
11     result = a + b;
12     print(result);
13     return result;
14 }
15
16 x = 10;
17 y = 20.5;
18 name = "plc";
19 flag = true;
20
21 if (x != 0) {
22     print(name);
23 } else {
24     print(x);
25 }
26
27 i = 3;
28 while (i != 0) {
29     print(i);
30     i = i - 1;
31 }
```

```

32
33 z = add(x, y);
34 print(z);
35 """
36
37
38 def run_source(source_code: str) -> None:
39     result = run_pipeline(source_code)
40     print(format_stage_output(result))
41
42
43 def _parse_args() -> argparse.Namespace:
44     parser = argparse.ArgumentParser(description="Run the programming
45         language pipeline.")
46     parser.add_argument("script", nargs="?", help="Optional path to a
47         source file to run")
48     return parser.parse_args()
49
50 def main() -> None:
51     args = _parse_args()
52     if args.script:
53         source_code = Path(args.script).read_text(encoding="utf-8")
54     else:
55         source_code = DEFAULT_SOURCE
56     run_source(source_code)
57
58 if __name__ == "__main__":
59     main()

```

Listing 8.1: main.py — command-line entry point

```

1 from __future__ import annotations
2
3 import tkinter as tk
4 from pathlib import Path
5 from tkinter import filedialog, ttk
6
7 from components.pipeline import format_tokens, run_pipeline
8
9
10 DEFAULT_SOURCE = """def add(a, b) {
11     result = a + b;
12     print(result);
13     return result;
14 }
15
16 x = 10;
17 y = 20.5;
18 name = \"plc\";
19 flag = true;
20

```

```

21 if (x != 0) {
22     print(name);
23 } else {
24     print(x);
25 }
26
27 i = 3;
28 while (i != 0) {
29     print(i);
30     i = i - 1;
31 }
32
33 z = add(x, y);
34 print(z);
35 """
36
37
38 class LanguageWorkbench:
39     def __init__(self) -> None:
40         self.root = tk.Tk()
41         self.root.title("125970-126690-126687-Assignment2-PLC-
42             presentation")
43         self.root.geometry("1200x760")
44         self.current_file: Path | None = None
45
46         self._build_layout()
47         self.source_text.insert("1.0", DEFAULT_SOURCE)
48         self.root.bind("<F5>", lambda _e: self._run_source())
49         self.root.bind("<Control-Return>", lambda _e: self._run_source
50             ())
51
52     def _build_layout(self) -> None:
53         toolbar = ttk.Frame(self.root, padding=10)
54         toolbar.pack(fill=tk.X)
55
56         ttk.Button(toolbar, text="Open Script", command=self.
57             _open_script).pack(side=tk.LEFT)
58         ttk.Button(toolbar, text="Run", command=self._run_source).pack(
59             side=tk.LEFT, padx=(8, 0))
60         ttk.Button(toolbar, text="Clear Output", command=self.
61             _clear_output).pack(side=tk.LEFT, padx=(8, 0))
62
63         self.status_var = tk.StringVar(value="Ready")
64         ttk.Label(toolbar, textvariable=self.status_var).pack(side=tk.
65             RIGHT)
66
67         body = ttk.Panedwindow(self.root, orient=tk.HORIZONTAL)
68         body.pack(fill=tk.BOTH, expand=True, padx=10, pady=(0, 10))
69
70         left_panel = ttk.Frame(body, padding=8)
71         right_panel = ttk.Frame(body, padding=8)
72         body.add(left_panel, weight=1)
73         body.add(right_panel, weight=1)

```

```

68     ttk.Label(left_panel, text="Input Script").pack(anchor=tk.W)
69     src_frame = ttk.Frame(left_panel)
70     src_frame.pack(fill=tk.BOTH, expand=True, pady=(6, 0))
71     self.source_text = tk.Text(src_frame, wrap=tk.NONE, font=(
72         "Consolas", 11))
73     src_vsb = ttk.Scrollbar(src_frame, orient=tk.VERTICAL, command=
74         self.source_text.yview)
75     src_hsb = ttk.Scrollbar(src_frame, orient=tk.HORIZONTAL,
76         command=self.source_text.xview)
77     self.source_text.configure(yscrollcommand=src_vsb.set,
78         xscrollcommand=src_hsb.set)
79     src_vsb.pack(side=tk.RIGHT, fill=tk.Y)
80     src_hsb.pack(side=tk.BOTTOM, fill=tk.X)
81     self.source_text.pack(side=tk.LEFT, fill=tk.BOTH, expand=True)
82
83     notebook = ttk.Notebook(right_panel)
84     notebook.pack(fill=tk.BOTH, expand=True)
85
86     self.output_text = self._make_output_tab(notebook, "Execution
87         Output")
88     self.tokens_text = self._make_output_tab(notebook, "Tokens")
89     self.ast_text = self._make_output_tab(notebook, "AST")
90     self.types_text = self._make_output_tab(notebook, "Type Table")
91
92     def _make_output_tab(self, notebook: ttk.Notebook, title: str) ->
93         tk.Text:
94         frame = ttk.Frame(notebook, padding=8)
95         notebook.add(frame, text=title)
96         text = tk.Text(frame, wrap=tk.NONE, font=("Consolas", 11),
97             state=tk.DISABLED)
98         vsb = ttk.Scrollbar(frame, orient=tk.VERTICAL, command=text.
99             yview)
100         hsb = ttk.Scrollbar(frame, orient=tk.HORIZONTAL, command=text.
101             xview)
102         text.configure(yscrollcommand=vsb.set, xscrollcommand=hsb.set)
103         vsb.pack(side=tk.RIGHT, fill=tk.Y)
104         hsb.pack(side=tk.BOTTOM, fill=tk.X)
105         text.pack(side=tk.LEFT, fill=tk.BOTH, expand=True)
106         return text
107
108     def _open_script(self) -> None:
109         file_path = filedialog.askopenfilename(
110             title="Open Script File",
111             filetypes=[("Text Files", "*.txt *.pl *.src"), ("All Files"
112                 , ".*")],
113         )
114         if not file_path:
115             return
116
117         path = Path(file_path)
118         self.current_file = path
119         self.source_text.delete("1.0", tk.END)

```

```

111         self.source_text.insert("1.0", path.read_text(encoding="utf-8")
112         )
113         self.status_var.set(f"Loaded {path.name}")
114
115     def _run_source(self) -> None:
116         source = self.source_text.get("1.0", tk.END)
117         try:
118             result = run_pipeline(source)
119         except Exception as error:
120             self._write_text(self.output_text, f"ERROR: {error}")
121             self.status_var.set("Run failed")
122             return
123
124         self._write_text(self.output_text, "\n".join(result.outputs) if
125         result.outputs else "(no output)")
126         self._write_text(self.tokens_text, format_tokens(result.tokens)
127         )
128         self._write_text(self.ast_text, result.ast_text)
129         self._write_text(self.types_text, result.checked_scope.
130         format_table())
131
132         current_label = self.current_file.name if self.current_file is
133         not None else "editor contents"
134         self.status_var.set(f"Ran {current_label}")
135
136     def _clear_output(self) -> None:
137         self._write_text(self.output_text, "")
138         self._write_text(self.tokens_text, "")
139         self._write_text(self.ast_text, "")
140         self._write_text(self.types_text, "")
141         self.status_var.set("Output cleared")
142
143     @staticmethod
144     def _write_text(widget: tk.Text, content: str) -> None:
145         widget.config(state=tk.NORMAL)
146         widget.delete("1.0", tk.END)
147         widget.insert("1.0", content)
148         widget.config(state=tk.DISABLED)
149
150     def run(self) -> None:
151         self.root.mainloop()
152
153 if __name__ == "__main__":
154     LanguageWorkbench().run()

```

Listing 8.2: ui.py — Tkinter desktop workbench

A.2 Core Components

```

1 from __future__ import annotations
2

```

```

3 from dataclasses import dataclass
4 from enum import Enum, auto
5
6
7 class TokenType(Enum):
8     # Literals
9     INT_LITERAL = auto()
10    FLOAT_LITERAL = auto()
11    BOOL_LITERAL = auto()
12    STRING_LITERAL = auto()
13
14    # Identifier
15    IDENTIFIER = auto()
16
17    # Keywords
18    IF = auto()
19    ELSE = auto()
20    WHILE = auto()
21    DEF = auto()
22    RETURN = auto()
23    PRINT = auto()
24
25    # Operators
26    PLUS = auto()
27    MINUS = auto()
28    STAR = auto()
29    SLASH = auto()
30    EQUAL_EQUAL = auto()
31    BANG_EQUAL = auto()
32    ASSIGN = auto()
33
34    # Delimiters
35    LPAREN = auto()
36    RPAREN = auto()
37    LBRACE = auto()
38    RBRACE = auto()
39    COMMA = auto()
40    SEMICOLON = auto()
41
42    EOF = auto()
43
44
45 @dataclass(frozen=True)
46 class Token:
47     token_type: TokenType
48     lexeme: str
49     line: int
50     column: int

```

Listing 8.3: components/tokens.py — token type enumeration and Token dataclass

```

1 from __future__ import annotations
2

```



```

3 from typing import Iterator
4
5 from components.tokens import Token, TokenType
6
7
8 KEYWORDS: dict[str, TokenType] = {
9     "if": TokenType.IF,
10    "else": TokenType.ELSE,
11    "while": TokenType.WHILE,
12    "def": TokenType.DEF,
13    "return": TokenType.RETURN,
14    "print": TokenType.PRINT,
15    "true": TokenType.BOOL_LITERAL,
16    "false": TokenType.BOOL_LITERAL,
17 }
18
19
20 SINGLE_CHAR_TOKENS: dict[str, TokenType] = {
21     "+": TokenType.PLUS,
22     "-": TokenType.MINUS,
23     "*": TokenType.STAR,
24     "/": TokenType.SLASH,
25     "=": TokenType.ASSIGN,
26     "(": TokenType.LPAREN,
27     ")": TokenType.RPAREN,
28     "{": TokenType.LBRACE,
29     "}": TokenType.RBRACE,
30     ",": TokenType.COMMA,
31     ";": TokenType.SEMICOLON,
32 }
33
34
35 class LexerError(Exception):
36     pass
37
38
39 class Lexer:
40     def __init__(self, source: str) -> None:
41         self.source = source
42         self.start = 0
43         self.current = 0
44         self.line = 1
45         self.column = 1
46         self.token_column = 1
47
48     def tokenize(self) -> list[Token]:
49         tokens: list[Token] = []
50         while not self._is_at_end():
51             self.start = self.current
52             self.token_column = self.column
53             token = self._scan_token()
54             if token is not None:
55                 tokens.append(token)

```

```

56         tokens.append(Token(TokenType.EOF, "", self.line, self.column))
57         return tokens
58
59     def _scan_token(self) -> Token | None:
60         char = self._advance()
61
62         # Whitespace handling
63         if char in {" ", "\t", "\r"}:
64             return None
65         if char == "\n":
66             self.line += 1
67             self.column = 1
68             return None
69
70         # Two-char operators
71         if char == "=":
72             if self._match("="):
73                 return self._make_token(TokenType.EQUAL_EQUAL)
74             return self._make_token(TokenType.ASSIGN)
75         if char == "!":
76             if self._match("="):
77                 return self._make_token(TokenType.BANG_EQUAL)
78             raise LexerError(self._error_message("Unexpected '!' Did
              you mean '!='?"))
79
80         # Single-char operators/delimiters
81         single_char_token = SINGLE_CHAR_TOKENS.get(char)
82         if single_char_token is not None:
83             return self._make_token(single_char_token)
84
85         if char == "'":
86             return self._string()
87
88         if char.isdigit():
89             return self._number()
90
91         if self._is_identifier_start(char):
92             return self._identifier()
93
94         raise LexerError(self._error_message(f"Unexpected character: {
              char!r}"))
95
96     def _string(self) -> Token:
97         while self._peek() != "'" and not self._is_at_end():
98             if self._peek() == "\n":
99                 self.line += 1
100                 self.column = 1
101             self._advance()
102
103         if self._is_at_end():
104             raise LexerError(self._error_message("Unterminated string
              literal"))
105

```

```

106         # Closing quote
107         self._advance()
108         return self._make_token(TokenType.STRING_LITERAL)
109
110     def _number(self) -> Token:
111         while self._peek().isdigit():
112             self._advance()
113
114         is_float = False
115         if self._peek() == "." and self._peek_next().isdigit():
116             is_float = True
117             self._advance()
118             while self._peek().isdigit():
119                 self._advance()
120
121         if is_float:
122             return self._make_token(TokenType.FLOAT_LITERAL)
123         return self._make_token(TokenType.INT_LITERAL)
124
125     def _identifier(self) -> Token:
126         while self._is_identifier_part(self._peek()):
127             self._advance()
128
129         lexeme = self._current_lexeme()
130         token_type = KEYWORDS.get(lexeme, TokenType.IDENTIFIER)
131         return self._make_token(token_type)
132
133     def _current_lexeme(self) -> str:
134         return self.source[self.start : self.current]
135
136     def _make_token(self, token_type: TokenType) -> Token:
137         return Token(token_type, self._current_lexeme(), self.line,
138                     self.token_column)
139
140     def _advance(self) -> str:
141         char = self.source[self.current]
142         self.current += 1
143         self.column += 1
144         return char
145
146     def _match(self, expected: str) -> bool:
147         if self._is_at_end():
148             return False
149         if self.source[self.current] != expected:
150             return False
151
152         self.current += 1
153         self.column += 1
154         return True
155
156     def _peek(self) -> str:
157         if self._is_at_end():
158             return "\0"

```

```

158         return self.source[self.current]
159
160     def _peek_next(self) -> str:
161         if self.current + 1 >= len(self.source):
162             return "\0"
163         return self.source[self.current + 1]
164
165     def _is_at_end(self) -> bool:
166         return self.current >= len(self.source)
167
168     @staticmethod
169     def _is_identifier_start(char: str) -> bool:
170         return char.isalpha() or char == "_"
171
172     @staticmethod
173     def _is_identifier_part(char: str) -> bool:
174         return char.isalnum() or char == "_"
175
176     def _error_message(self, message: str) -> str:
177         return f"[line {self.line}, col {self.token_column}] {message}"
178
179
180 def iter_tokens(source: str) -> Iterator[Token]:
181     yield from Lexer(source).tokenize()

```

Listing 8.4: components/lexica.py — lexical analyser

```

1 from __future__ import annotations
2
3 from dataclasses import dataclass, field
4 from typing import Optional
5
6
7 #
8
9 # Base
10
11 @dataclass
12 class ASTNode:
13     """Base class for every AST node. Carries source location for
14     diagnostics."""
15     line: int = field(default=0, kw_only=True)
16     column: int = field(default=0, kw_only=True)
17
18 #
19
20 # Expressions

```

```

20 #
21
22 @dataclass
23 class Literal(ASTNode):
24     """An integer, float, boolean, or string literal.
25
26     Examples: 42    3.14    true    "hello"
27     """
28     value: int | float | bool | str
29
30
31 @dataclass
32 class Identifier(ASTNode):
33     """A variable or function name used as an expression.
34
35     Example: x
36     """
37     name: str
38
39
40 @dataclass
41 class BinaryOp(ASTNode):
42     """An arithmetic or comparison binary operation.
43
44     op is one of: '+' '-' '*' '/' '==' '!='
45     Example: a + b    x == 0
46     """
47     op: str
48     left: ASTNode
49     right: ASTNode
50
51
52 @dataclass
53 class FunctionCall(ASTNode):
54     """A call to a user-defined function.
55
56     Example: add(1, 2)
57     """
58     name: str
59     args: list[ASTNode] = field(default_factory=list)
60
61
62 #
63
64 # Statements
65
66 @dataclass

```

```

67 class Assign(ASTNode):
68     """Variable assignment (first use infers type; later uses must
69         match).
70
71     Example:  x = 10;
72     """
73     name: str
74     value: ASTNode
75
76 @dataclass
77 class Print(ASTNode):
78     """Built-in print statement.
79
80     Example:  print(x);
81     """
82     expr: ASTNode
83
84
85 @dataclass
86 class Return(ASTNode):
87     """Return statement inside a function body.
88
89     Example:  return result;
90     """
91     expr: ASTNode
92
93
94 @dataclass
95 class Block(ASTNode):
96     """A brace-enclosed sequence of statements.
97
98     Example:  { x = 1; print(x); }
99     """
100     statements: list[ASTNode] = field(default_factory=list)
101
102
103 @dataclass
104 class If(ASTNode):
105     """If / optional else control flow.
106
107     Example:  if (x != 0) { print(x); } else { print(0); }
108     """
109     condition: ASTNode
110     then_block: Block
111     else_block: Optional[Block]
112
113
114 @dataclass
115 class While(ASTNode):
116     """While loop.
117
118     Example:  while (x != 0) { x = x - 1; }

```

```

119     """
120     condition: ASTNode
121     body: Block
122
123
124 @dataclass
125 class FunctionDef(ASTNode):
126     """Function definition.
127
128     Example:  def add(a, b) { return a + b; }
129
130     Note: parameter types are unknown at parse time -- Member 3's type
131           checker
132           will infer them from usage. We store only the parameter names here.
133     """
134     name: str
135     params: list[str]
136     body: Block
137
138 #
139 # -----
140 # Top-level
141 # -----
142
143 @dataclass
144 class Program(ASTNode):
145     """Root node: the entire source file as a list of statements."""
146     statements: list[ASTNode] = field(default_factory=list)

```

Listing 8.5: components/ast_nodes.py — AST node definitions

```

1 from __future__ import annotations
2
3 from typing import Optional
4
5 from components.tokens import Token, TokenType
6 from components.ast_nodes import (
7     ASTNode,
8     Program,
9     Block,
10    Assign,
11    If,
12    While,
13    FunctionDef,
14    FunctionCall,
15    Print,
16    Return,
17    BinaryOp,
18    Literal,

```

```

19     Identifier,
20 )
21
22
23 #
24 -----
25
26 # Parser error
27 #
28 -----
29
30
31 #
32 -----
33
34 # Parser
35 #
36 -----
37
38
39 class ParseError(Exception):
40     pass
41
42
43 #
44 -----
45
46 # Parser
47 #
48 -----
49
50
51 class Parser:
52     """Recursive-descent parser.
53
54     Usage:
55         tokens = Lexer(source).tokenize()
56         tree   = Parser(tokens).parse()    # returns Program node
57     """
58
59     def __init__(self, tokens: list[Token]) -> None:
60         self._tokens = tokens
61         self._pos = 0
62
63     #
64     -----
65
66     # Public entry point
67     #
68     -----
69
70
71     def parse(self) -> Program:
72         """Parse the full token stream and return the root Program node
73         ."""
74
75         line, col = self._peek().line, self._peek().column
76         statements: list[ASTNode] = []
77         while not self._is_at_end():
78             statements.append(self._statement())
79         return Program(statements=statements, line=line, column=col)

```



```

59      #
60      -----
61      # Statements
62      #
63      -----
64
65      def _statement(self) -> ASTNode:
66          """Dispatch to the correct statement parser based on the
67             current token."""
68          tok = self._peek()
69
70          if tok.token_type == TokenType.DEF:
71              return self._func_def()
72
73          if tok.token_type == TokenType.IF:
74              return self._if_stmt()
75
76          if tok.token_type == TokenType.WHILE:
77              return self._while_stmt()
78
79          if tok.token_type == TokenType.RETURN:
80              return self._return_stmt()
81
82          if tok.token_type == TokenType.PRINT:
83              return self._print_stmt()
84
85          # assignment: IDENTIFIER "=" expr ";"
86          if (
87              tok.token_type == TokenType.IDENTIFIER
88              and self._peek_next().token_type == TokenType.ASSIGN
89          ):
90              return self._assignment()
91
92          # fallback: bare expression statement expr ";"
93          node = self._expr()
94          self._expect(TokenType.SEMICOLON, "Expected ';' after
95             expression")
96          return node
97
98      def _assignment(self) -> Assign:
99          """IDENTIFIER '=' expr ';'"""
100          name_tok = self._advance() #
101              IDENTIFIER
102          self._advance() # '='
103          value = self._expr()
104          self._expect(TokenType.SEMICOLON, "Expected ';' after
105             assignment")
106          return Assign(name=name_tok.lexeme, value=value,
107                        line=name_tok.line, column=name_tok.column)
108
109      def _if_stmt(self) -> If:

```

```

104     """'if' '(' bool_expr ')' block ( 'else' block )?"""
105     tok = self._advance() # 'if'
106     self._expect(TokenType.LPAREN, "Expected '(' after 'if'")
107     condition = self._bool_expr()
108     self._expect(TokenType.RPAREN, "Expected ')' after if condition")
109     then_block = self._block()
110     else_block: Optional[Block] = None
111     if self._check(TokenType.ELSE):
112         self._advance() # 'else'
113         else_block = self._block()
114     return If(condition=condition, then_block=then_block,
115             else_block=else_block,
116             line=tok.line, column=tok.column)
117
118 def _while_stmt(self) -> While:
119     """'while' '(' bool_expr ')' block"""
120     tok = self._advance() # 'while'
121     self._expect(TokenType.LPAREN, "Expected '(' after 'while'")
122     condition = self._bool_expr()
123     self._expect(TokenType.RPAREN, "Expected ')' after while condition")
124     body = self._block()
125     return While(condition=condition, body=body,
126                 line=tok.line, column=tok.column)
127
128 def _func_def(self) -> FunctionDef:
129     """'def' IDENTIFIER '(' params? ')' block"""
130     tok = self._advance() # 'def'
131     name_tok = self._expect(TokenType.IDENTIFIER, "Expected function name after 'def'")
132     self._expect(TokenType.LPAREN, "Expected '(' after function name")
133     params = self._params()
134     self._expect(TokenType.RPAREN, "Expected ')' after parameters")
135     body = self._block()
136     return FunctionDef(name=name_tok.lexeme, params=params, body=body,
137                       line=tok.line, column=tok.column)
138
139 def _print_stmt(self) -> Print:
140     """'print' '(' expr ')' ';'"""
141     tok = self._advance() # 'print'
142     self._expect(TokenType.LPAREN, "Expected '(' after 'print'")
143     expr = self._expr()
144     self._expect(TokenType.RPAREN, "Expected ')' after print expression")
145     self._expect(TokenType.SEMICOLON, "Expected ';' after print statement")
146     return Print(expr=expr, line=tok.line, column=tok.column)

```

```

146
147 def _return_stmt(self) -> Return:
148     """'return' expr ';'"""
149     tok = self._advance() # '
150     return'
151     expr = self._expr()
152     self._expect(TokenType.SEMICOLON, "Expected ';' after return
153         value")
154     return Return(expr=expr, line=tok.line, column=tok.column)
155
156 def _block(self) -> Block:
157     """'{', statement* '}'"""
158     tok = self._expect(TokenType.LBRACE, "Expected '{'")
159     statements: list[ASTNode] = []
160     while not self._check(TokenType.RBRACE) and not self._is_at_end
161         ():
162         statements.append(self._statement())
163     self._expect(TokenType.RBRACE, "Expected '}' to close block")
164     return Block(statements=statements, line=tok.line, column=tok.
165         column)
166
167 #
168
169 # Parameters (function definition)
170 #
171
172
173
174 def _params(self) -> list[str]:
175     """IDENTIFIER (',' IDENTIFIER)* -- returns list of param names.
176     """
177     params: list[str] = []
178     if self._check(TokenType.IDENTIFIER):
179         params.append(self._advance().lexeme)
180         while self._check(TokenType.COMMA):
181             self._advance() # ', '
182             tok = self._expect(TokenType.IDENTIFIER, "Expected
183                 parameter name after ','")
184             params.append(tok.lexeme)
185     return params
186
187 #
188
189 # Boolean expressions (lowest precedence, used in if/while
190     conditions)
191 #
192
193
194 def _bool_expr(self) -> ASTNode:
195     """expr ('==' | '!=') expr | BOOL_LITERAL"""

```

```

184     # bare boolean literal: true / false
185     if self._check(TokenType.BOOL_LITERAL):
186         tok = self._advance()
187         value = tok.lexeme == "true"
188         return Literal(value=value, line=tok.line, column=tok.
189             column)
189
190     left = self._expr()
191
192     if self._check(TokenType.EQUAL_EQUAL):
193         op_tok = self._advance()
194         right = self._expr()
195         return BinaryOp(op=="==", left=left, right=right,
196             line=op_tok.line, column=op_tok.column)
197
198     if self._check(TokenType.BANG_EQUAL):
199         op_tok = self._advance()
200         right = self._expr()
201         return BinaryOp(op=="!=", left=left, right=right,
202             line=op_tok.line, column=op_tok.column)
203
204     # no comparison operator found -- return the expr as-is
205     # (the type checker will validate it's Boolean)
206     return left
207
208     #
209     -----
210
211     # Arithmetic expressions (standard precedence)
212     #
213     -----
214
215     def _expr(self) -> ASTNode:
216         """term (('+' | '-') term)*"""
217         node = self._term()
218         while self._check(TokenType.PLUS) or self._check(TokenType.
219             MINUS):
220             op_tok = self._advance()
221             right = self._term()
222             node = BinaryOp(op=op_tok.lexeme, left=node, right=right,
223                 line=op_tok.line, column=op_tok.column)
224         return node
225
226     def _term(self) -> ASTNode:
227         """factor (('*' | '/') factor)*"""
228         node = self._factor()
229         while self._check(TokenType.STAR) or self._check(TokenType.
230             SLASH):
231             op_tok = self._advance()
232             right = self._factor()
233             node = BinaryOp(op=op_tok.lexeme, left=node, right=right,
234                 line=op_tok.line, column=op_tok.column)

```

```

230     return node
231
232 def _factor(self) -> ASTNode:
233     """
234     '-' factor (unary negation, desugared to 0 - factor)
235     | INT_LITERAL | FLOAT_LITERAL | STRING_LITERAL | BOOL_LITERAL
236     | IDENTIFIER ( '(' args? ')' )?
237     | '(' expr ')'
238     """
239     tok = self._peek()
240
241     # Unary minus '-' factor
242     if tok.token_type == TokenType.MINUS:
243         op_tok = self._advance()
244         operand = self._factor()
245         zero = Literal(value=0, line=op_tok.line, column=op_tok.
246             column)
247         return BinaryOp(op="-", left=zero, right=operand,
248             line=op_tok.line, column=op_tok.column)
249
250     # Integer literal
251     if tok.token_type == TokenType.INT_LITERAL:
252         self._advance()
253         return Literal(value=int(tok.lexeme), line=tok.line, column
254             =tok.column)
255
256     # Float literal
257     if tok.token_type == TokenType.FLOAT_LITERAL:
258         self._advance()
259         return Literal(value=float(tok.lexeme), line=tok.line,
260             column=tok.column)
261
262     # Boolean literal
263     if tok.token_type == TokenType.BOOL_LITERAL:
264         self._advance()
265         return Literal(value=(tok.lexeme == "true"), line=tok.line,
266             column=tok.column)
267
268     # String literal (keep the surrounding quotes stripped)
269     if tok.token_type == TokenType.STRING_LITERAL:
270         self._advance()
271         return Literal(value=tok.lexeme[1:-1], line=tok.line,
272             column=tok.column)
273
274     # Identifier -- could be a plain variable or a function call
275     if tok.token_type == TokenType.IDENTIFIER:
276         self._advance()
277         if self._check(TokenType.LPAREN):
278             # function call
279             self._advance() # '('
280             args = self._args()
281             self._expect(TokenType.RPAREN, "Expected ')' after
282                 function arguments")

```

```

277         return FunctionCall(name=tok.lexeme, args=args,
278                               line=tok.line, column=tok.column)
279     return Identifier(name=tok.lexeme, line=tok.line, column=
280                       tok.column)
281
282     # Grouped expression '(' expr ')'
283     if tok.token_type == TokenType.LPAREN:
284         self._advance() # '('
285         node = self._expr()
286         self._expect(TokenType.RPAREN, "Expected ')' to close
287                       grouped expression")
288         return node
289
290     raise ParseError(self._error_at(tok, f"Unexpected token: {tok.
291                                     lexeme!r}"))
292
293     #
294     -----
295
296     # Arguments (function call)
297     #
298     -----
299
300     def _args(self) -> list[ASTNode]:
301         """expr (',' expr)*"""
302         args: list[ASTNode] = []
303         if not self._check(TokenType.RPAREN):
304             args.append(self._expr())
305             while self._check(TokenType.COMMA):
306                 self._advance() # ','
307                 args.append(self._expr())
308             return args
309
310     #
311     -----
312
313     # Token navigation helpers
314     #
315     -----
316
317     def _peek(self) -> Token:
318         return self._tokens[self._pos]
319
320     def _peek_next(self) -> Token:
321         if self._pos + 1 < len(self._tokens):
322             return self._tokens[self._pos + 1]
323         return self._tokens[-1] # EOF
324
325     def _advance(self) -> Token:
326         tok = self._tokens[self._pos]
327         if not self._is_at_end():

```

```

319         self._pos += 1
320     return tok
321
322     def _check(self, token_type: TokenType) -> bool:
323         return self._peek().token_type == token_type
324
325     def _is_at_end(self) -> bool:
326         return self._peek().token_type == TokenType.EOF
327
328     def _expect(self, token_type: TokenType, message: str) -> Token:
329         if self._check(token_type):
330             return self._advance()
331         raise ParseError(self._error_at(self._peek(), message))
332
333     def _error_at(self, tok: Token, message: str) -> str:
334         return f"[line {tok.line}, col {tok.column}] ParseError: {
            message}"

```

Listing 8.6: components/parser.py — recursive-descent parser

```

1  from __future__ import annotations
2
3  from dataclasses import dataclass, field
4  from enum import Enum
5
6
7  class LanguageType(Enum):
8      INTEGER = "Integer"
9      FLOAT = "Float"
10     BOOLEAN = "Boolean"
11     STRING = "String"
12     VOID = "Void"
13
14
15     @dataclass
16     class Symbol:
17         name: str
18         symbol_type: LanguageType
19
20
21     @dataclass
22     class VariableSymbol(Symbol):
23         initialized: bool = False
24
25
26     @dataclass
27     class FunctionSymbol(Symbol):
28         parameters: list[tuple[str, LanguageType]] = field(default_factory=
            list)
29
30
31     class SymbolTableError(Exception):
32         pass

```

```

33
34
35 class SymbolTable:
36     def __init__(self, parent: SymbolTable | None = None) -> None:
37         self.parent = parent
38         self._symbols: dict[str, Symbol] = {}
39
40     def define_variable(self, name: str, symbol_type: LanguageType,
41         initialized: bool = False) -> VariableSymbol:
42         if name in self._symbols:
43             raise SymbolTableError(f"Symbol already defined in this
44                 scope: {name}")
45         symbol = VariableSymbol(name=name, symbol_type=symbol_type,
46             initialized=initialized)
47         self._symbols[name] = symbol
48         return symbol
49
50     def define_function(
51         self,
52         name: str,
53         return_type: LanguageType,
54         parameters: list[tuple[str, LanguageType]],
55     ) -> FunctionSymbol:
56         if name in self._symbols:
57             raise SymbolTableError(f"Symbol already defined in this
58                 scope: {name}")
59         symbol = FunctionSymbol(name=name, symbol_type=return_type,
60             parameters=parameters)
61         self._symbols[name] = symbol
62         return symbol
63
64     def lookup(self, name: str) -> Symbol:
65         symbol = self._symbols.get(name)
66         if symbol is not None:
67             return symbol
68         if self.parent is not None:
69             return self.parent.lookup(name)
70         raise SymbolTableError(f"Undefined symbol: {name}")
71
72     def exists_in_current_scope(self, name: str) -> bool:
73         return name in self._symbols
74
75     def child_scope(self) -> SymbolTable:
76         return SymbolTable(parent=self)
77
78     def set_initialized(self, name: str) -> None:
79         symbol = self.lookup(name)
80         if not isinstance(symbol, VariableSymbol):
81             raise SymbolTableError(f"Cannot initialize non-variable
82                 symbol: {name}")
83         symbol.initialized = True
84
85     def snapshot(self) -> dict[str, Symbol]:

```



```

80     return dict(self._symbols)
81
82     def format_table(self) -> str:
83         lines = [
84             f"{'Name':<12} {'Kind':<10} {'Type':<10} {'Initialized'
85               ':<12} Parameters",
86             "-" * 72,
87         ]
88
89         for name, symbol in self._symbols.items():
90             if isinstance(symbol, FunctionSymbol):
91                 params = ", ".join(f"{param_name}: {param_type.value}"
92                                   for param_name, param_type in symbol.parameters)
93                 lines.append(
94                     f"{name:<12} {'function':<10} {symbol.symbol_type.
95                       value:<10} {'-':<12} {params or '-'}"
96                 )
97             elif isinstance(symbol, VariableSymbol):
98                 initialized = "yes" if symbol.initialized else "no"
99                 lines.append(
100                     f"{name:<12} {'variable':<10} {symbol.symbol_type.
101                      value:<10} {initialized:<12} -"
102                 )
103             else:
104                 lines.append(f"{name:<12} {'symbol':<10} {symbol.
105                              symbol_type.value:<10} {'-':<12} -")
106
107         return "\n".join(lines)

```

Listing 8.7: components/symbol_table.py — scoped symbol table

```

1  from __future__ import annotations
2
3  from dataclasses import dataclass
4
5  from components.ast_nodes import (
6      ASTNode,
7      Assign,
8      BinaryOp,
9      Block,
10     FunctionCall,
11     FunctionDef,
12     Identifier,
13     If,
14     Literal,
15     Print,
16     Program,
17     Return,
18     While,
19 )
20 from components.symbol_table import FunctionSymbol, LanguageType,
21     SymbolTable, SymbolTableError, VariableSymbol

```

```

22
23 class TypeCheckError(Exception):
24     pass
25
26
27 @dataclass
28 class _FunctionState:
29     node: FunctionDef
30     body_checked: bool = False
31
32
33 @dataclass
34 class _FunctionContext:
35     name: str
36     return_type: LanguageType | None = None
37
38
39 class TypeChecker:
40     def __init__(self) -> None:
41         self.global_scope = SymbolTable()
42         self._functions: dict[str, _FunctionState] = {}
43         self._active_calls: list[str] = []
44
45     def check(self, program: Program) -> SymbolTable:
46         for statement in program.statements:
47             if isinstance(statement, FunctionDef):
48                 self._register_function(statement)
49
50         for statement in program.statements:
51             if isinstance(statement, FunctionDef):
52                 continue
53             self._check_statement(statement, self.global_scope, None)
54
55         self._check_uncalled_functions()
56         return self.global_scope
57
58     def _register_function(self, node: FunctionDef) -> None:
59         if node.name in self._functions:
60             raise TypeCheckError(self._error_at(node, f"Function '{node
61                 .name}' is already defined"))
62
63         placeholder_parameters = [(param_name, LanguageType.VOID) for
64             param_name in node.params]
65         try:
66             self.global_scope.define_function(node.name, LanguageType.
67                 VOID, placeholder_parameters)
68         except SymbolTableError as error:
69             raise TypeCheckError(self._error_at(node, str(error))) from
70             error
71         self._functions[node.name] = _FunctionState(node=node)
72
73     def _check_statement(
74         self,

```

```

71     node: ASTNode,
72     scope: SymbolTable,
73     function_context: _FunctionContext | None,
74 ) -> None:
75     if isinstance(node, Assign):
76         value_type = self._infer_expr_type(node.value, scope)
77         self._assign_variable_type(scope, node, value_type)
78         return
79
80     if isinstance(node, Print):
81         self._infer_expr_type(node.expr, scope)
82         return
83
84     if isinstance(node, Return):
85         if function_context is None:
86             raise TypeCheckError(self._error_at(node, "'return' is
87                                     only valid inside a function"))
88         expr_type = self._infer_expr_type(node.expr, scope)
89         if function_context.return_type is None:
90             function_context.return_type = expr_type
91         elif function_context.return_type != expr_type:
92             raise TypeCheckError(
93                 self._error_at(
94                     node,
95                     f"Function '{function_context.name}' returns
96                         both {function_context.return_type.value}
97                         and {expr_type.value}",
98                 )
99             )
100         return
101
102     if isinstance(node, If):
103         condition_type = self._infer_expr_type(node.condition,
104                                                 scope)
105         if condition_type != LanguageType.BOOLEAN:
106             raise TypeCheckError(self._error_at(node.condition, "If
107                                                         condition must have type Boolean"))
108         self._check_block(node.then_block, scope.child_scope(),
109                           function_context)
110         if node.else_block is not None:
111             self._check_block(node.else_block, scope.child_scope(),
112                               function_context)
113         return
114
115     if isinstance(node, While):
116         condition_type = self._infer_expr_type(node.condition,
117                                                 scope)
118         if condition_type != LanguageType.BOOLEAN:
119             raise TypeCheckError(self._error_at(node.condition, "
120                                                         While condition must have type Boolean"))
121         self._check_block(node.body, scope.child_scope(),
122                           function_context)
123         return

```

```

114         if isinstance(node, Block):
115             self._check_block(node, scope.child_scope(),
116                               function_context)
117             return
118
119         if isinstance(node, FunctionCall):
120             self._infer_function_call_type(node, scope)
121             return
122
123         raise TypeCheckError(self._error_at(node, f"Unsupported
124                               statement node: {type(node).__name__}"))
125
126     def _check_block(
127         self,
128         block: Block,
129         scope: SymbolTable,
130         function_context: _FunctionContext | None,
131     ) -> None:
132         for statement in block.statements:
133             self._check_statement(statement, scope, function_context)
134
135     def _infer_expr_type(self, node: ASTNode, scope: SymbolTable) ->
136         LanguageType:
137         if isinstance(node, Literal):
138             return self._literal_type(node)
139
140         if isinstance(node, Identifier):
141             try:
142                 symbol = scope.lookup(node.name)
143             except SymbolTableError as error:
144                 raise TypeCheckError(self._error_at(node, str(error)))
145                 from error
146             if not isinstance(symbol, VariableSymbol):
147                 raise TypeCheckError(self._error_at(node, f" '{node.name
148                 }' is not a variable"))
149             return symbol.symbol_type
150
151         if isinstance(node, FunctionCall):
152             return self._infer_function_call_type(node, scope)
153
154         if isinstance(node, BinaryOp):
155             left_type = self._infer_expr_type(node.left, scope)
156             right_type = self._infer_expr_type(node.right, scope)
157             return self._infer_binary_type(node, left_type, right_type)
158
159         raise TypeCheckError(self._error_at(node, f"Unsupported
160                               expression node: {type(node).__name__}"))
161
162     def _infer_function_call_type(self, node: FunctionCall, scope:
163         SymbolTable) -> LanguageType:
164         function_state = self._functions.get(node.name)
165         if function_state is None:

```

```

160         raise TypeError(self._error_at(node, f"Undefined
161             function: {node.name}"))
162     if node.name in self._active_calls:
163         raise TypeError(self._error_at(node, f"Recursive
164             function calls are not supported: {node.name}"))
165
166     argument_types = [self._infer_expr_type(argument, scope) for
167         argument in node.args]
168     function_symbol = self._lookup_function_symbol(node)
169
170     if len(argument_types) != len(function_symbol.parameters):
171         raise TypeError(
172             self._error_at(
173                 node,
174                 f"Function '{node.name}' expects {len(
175                     function_symbol.parameters)} argument(s), got {
176                     len(argument_types)}",
177             )
178         )
179
180     declared_parameter_types = [param_type for _, param_type in
181         function_symbol.parameters]
182     if all(param_type == LanguageType.VOID for param_type in
183         declared_parameter_types):
184         function_symbol.parameters = list(zip(function_state.node.
185             params, argument_types, strict=False))
186     else:
187         for index, ((_, expected_type), actual_type) in enumerate(
188             zip(function_symbol.parameters, argument_types, strict=
189                 False)):
190             if expected_type != actual_type:
191                 raise TypeError(
192                     self._error_at(
193                         node.args[index],
194                         f"Argument {index + 1} of '{node.name}'
195                             must be {expected_type.value}, got {
196                             actual_type.value}",
197                     )
198                 )
199
200     if not function_state.body_checked:
201         self._check_function_body(function_state, function_symbol)
202
203     return function_symbol.symbol_type
204
205 def _check_function_body(self, function_state: _FunctionState,
206     function_symbol: FunctionSymbol) -> None:
207     function_context = _FunctionContext(name=function_state.node.
208         name)
209     function_scope = self.global_scope.child_scope()
210     for parameter_name, parameter_type in function_symbol.
211         parameters:
212         function_scope.define_variable(parameter_name,

```

```

        parameter_type, initialized=True)

198
199 self._active_calls.append(function_state.node.name)
200
201 try:
202     self._check_block(function_state.node.body, function_scope,
203                       function_context)
204
205 finally:
206     self._active_calls.pop()
207
208 function_symbol.symbol_type = function_context.return_type or
209 LanguageType.VOID
210 function_state.body_checked = True
211
212 def _check_uncalled_functions(self) -> None:
213     """After all call-site checks, type-check any function whose
214     body was never visited."""
215     for name, state in self._functions.items():
216         if not state.body_checked:
217             try:
218                 function_symbol = self.global_scope.lookup(name)
219             except SymbolTableError:
220                 continue
221             if not isinstance(function_symbol, FunctionSymbol):
222                 continue
223             inferred_params = self._infer_param_types_from_body(
224                 state.node)
225             function_symbol.parameters = inferred_params
226             self._check_function_body(state, function_symbol)
227
228 def _infer_param_types_from_body(self, node: FunctionDef) -> list[
229 tuple[str, LanguageType]]:
230     """Infer parameter types by scanning the body for expression
231     contexts.
232
233     Any parameter used as an operand of an arithmetic or comparison
234     operator
235     is inferred as numeric (Float if the sibling operand is a float
236     literal,
237     Integer otherwise). Parameters whose usage gives no type hint
238     default to
239     Integer.
240     """
241     param_names = set(node.params)
242     inferred: dict[str, LanguageType] = {}
243
244     def scan_expr(n: ASTNode) -> None:
245         if isinstance(n, BinaryOp):
246             if n.op in {"+", "-", "*", "/", "=", "!="}:
247                 for operand, other in ((n.left, n.right), (n.right,
248                     n.left)):
249                     if isinstance(operand, Identifier) and operand.
250                         name in param_names:
251                         if isinstance(other, Literal) and

```

```

239         isinstance(other.value, float):
240             inferred.setdefault(operand.name,
241                                 LanguageType.FLOAT)
242         else:
243             inferred.setdefault(operand.name,
244                                 LanguageType.INTEGER)
245
246         scan_expr(n.left)
247         scan_expr(n.right)
248     elif isinstance(n, FunctionCall):
249         for arg in n.args:
250             scan_expr(arg)
251
252 def scan_stmt(n: ASTNode) -> None:
253     if isinstance(n, Assign):
254         scan_expr(n.value)
255     elif isinstance(n, Print):
256         scan_expr(n.expr)
257     elif isinstance(n, Return):
258         scan_expr(n.expr)
259     elif isinstance(n, If):
260         scan_expr(n.condition)
261         scan_block(n.then_block)
262         if n.else_block:
263             scan_block(n.else_block)
264     elif isinstance(n, While):
265         scan_expr(n.condition)
266         scan_block(n.body)
267     elif isinstance(n, Block):
268         scan_block(n)
269     elif isinstance(n, FunctionCall):
270         for arg in n.args:
271             scan_expr(arg)
272
273 def scan_block(block: Block) -> None:
274     for stmt in block.statements:
275         scan_stmt(stmt)
276
277 scan_block(node.body)
278 return [(param, inferred.get(param, LanguageType.INTEGER)) for
279         param in node.params]
280
281 def _assign_variable_type(self, scope: SymbolTable, node: Assign,
282 value_type: LanguageType) -> None:
283     try:
284         symbol = scope.lookup(node.name)
285     except SymbolTableError:
286         scope.define_variable(node.name, value_type, initialized=
287                               True)
288     return
289
290 if not isinstance(symbol, VariableSymbol):
291     raise TypeCheckError(self._error_at(node, f"'{node.name}'
292                                         is not a variable"))

```

```

285     if symbol.symbol_type != value_type:
286         raise TypeCheckError(
287             self._error_at(
288                 node,
289                 f"Cannot assign {value_type.value} to variable '{
                    node.name}' of type {symbol.symbol_type.value}",
290             )
291         )
292     symbol.initialized = True
293
294     def _infer_binary_type(
295         self,
296         node: BinaryOp,
297         left_type: LanguageType,
298         right_type: LanguageType,
299     ) -> LanguageType:
300         if node.op in {"+", "-", "*", "/"}:
301             if not self._is_numeric(left_type) or not self._is_numeric(
302                 right_type):
303                 raise TypeCheckError(self._error_at(node, f"Operator '{
                    node.op}' requires numeric operands"))
304             if node.op == "/":
305                 return LanguageType.FLOAT
306             if left_type == LanguageType.FLOAT or right_type ==
307                 LanguageType.FLOAT:
308                 return LanguageType.FLOAT
309             return LanguageType.INTEGER
310
311         if node.op in {"==", "!="}:
312             numeric_comparison = self._is_numeric(left_type) and self.
313                 _is_numeric(right_type)
314             if not numeric_comparison:
315                 raise TypeCheckError(
316                     self._error_at(
317                         node,
318                         f"Operator '{node.op}' requires two arithmetic
319                             operands",
320                     )
321                 )
322             return LanguageType.BOOLEAN
323
324         raise TypeCheckError(self._error_at(node, f"Unsupported
325             operator: {node.op}"))
326
327     def _lookup_function_symbol(self, node: FunctionCall) ->
328         FunctionSymbol:
329         try:
330             symbol = self.global_scope.lookup(node.name)
331         except SymbolTableError as error:
332             raise TypeCheckError(self._error_at(node, str(error))) from
333                 error
334         if not isinstance(symbol, FunctionSymbol):
335             raise TypeCheckError(self._error_at(node, f"'{node.name}'

```



```

329         is not a function"))
330     return symbol
331
332 @staticmethod
333 def _is_numeric(language_type: LanguageType) -> bool:
334     return language_type in {LanguageType.INTEGER, LanguageType.
335                             FLOAT}
336
337 @staticmethod
338 def _literal_type(node: Literal) -> LanguageType:
339     if isinstance(node.value, bool):
340         return LanguageType.BOOLEAN
341     if isinstance(node.value, int):
342         return LanguageType.INTEGER
343     if isinstance(node.value, float):
344         return LanguageType.FLOAT
345     if isinstance(node.value, str):
346         return LanguageType.STRING
347     raise TypeError(f"Unsupported literal value: {node.value!r}
348                     ")
349
350 @staticmethod
351 def _error_at(node: ASTNode, message: str) -> str:
352     return f"[line {node.line}, col {node.column}] TypeError: {
353             message}"

```

Listing 8.8: components/type_checker.py — static type checker with inference

```

1  from __future__ import annotations
2
3  from dataclasses import dataclass
4  from typing import Callable
5
6  from components.ast_nodes import (
7      ASTNode,
8      Assign,
9      BinaryOp,
10     Block,
11     FunctionCall,
12     FunctionDef,
13     Identifier,
14     If,
15     Literal,
16     Print,
17     Program,
18     Return,
19     While,
20 )
21 from components.symbol_table import LanguageType
22
23
24 class InterpreterError(Exception):
25     pass

```

```

26
27
28 class _ReturnSignal(Exception):
29     def __init__(self, value: object) -> None:
30         self.value = value
31
32
33 @dataclass
34 class _FunctionRuntime:
35     node: FunctionDef
36
37
38 class _Environment:
39     def __init__(self, parent: _Environment | None = None) -> None:
40         self.parent = parent
41         self.values: dict[str, object] = {}
42
43     def define(self, name: str, value: object) -> None:
44         self.values[name] = value
45
46     def get(self, name: str) -> object:
47         if name in self.values:
48             return self.values[name]
49         if self.parent is not None:
50             return self.parent.get(name)
51         raise InterpreterError(f"Undefined variable: {name}")
52
53     def assign(self, name: str, value: object) -> None:
54         if name in self.values:
55             self.values[name] = value
56             return
57         if self.parent is not None and self.parent.contains(name):
58             self.parent.assign(name, value)
59             return
60         self.values[name] = value
61
62     def contains(self, name: str) -> bool:
63         if name in self.values:
64             return True
65         if self.parent is not None:
66             return self.parent.contains(name)
67         return False
68
69
70 class Interpreter:
71     def __init__(self, output_callback: Callable[[str], None] | None =
None) -> None:
72         self._functions: dict[str, _FunctionRuntime] = {}
73         self._output_callback = output_callback or print
74
75     def execute(self, program: Program) -> None:
76         environment = _Environment()
77         for statement in program.statements:

```

```

78         if isinstance(statement, FunctionDef):
79             self._functions[statement.name] = _FunctionRuntime(node
80                 =statement)
81
82     for statement in program.statements:
83         if isinstance(statement, FunctionDef):
84             continue
85         self._execute_statement(statement, environment)
86
87     def _execute_statement(self, node: ASTNode, environment:
88         _Environment) -> None:
89         if isinstance(node, Assign):
90             value = self._evaluate(node.value, environment)
91             environment.assign(node.name, value)
92             return
93
94         if isinstance(node, Print):
95             value = self._evaluate(node.expr, environment)
96             self._output_callback(f"{self._format_value(value)} : {self
97                 ._runtime_type(value).value}")
98             return
99
100         if isinstance(node, Return):
101             raise _ReturnSignal(self._evaluate(node.expr, environment))
102
103         if isinstance(node, If):
104             condition = self._evaluate(node.condition, environment)
105             if not isinstance(condition, bool):
106                 raise InterpreterError(self._error_at(node.condition, "
107                     If condition must evaluate to Boolean"))
108             branch = node.then_block if condition else node.else_block
109             if branch is not None:
110                 self._execute_block(branch, _Environment(parent=
111                     environment))
112             return
113
114         if isinstance(node, While):
115             while True:
116                 condition = self._evaluate(node.condition, environment)
117                 if not isinstance(condition, bool):
118                     raise InterpreterError(self._error_at(node.
119                         condition, "While condition must evaluate to
120                         Boolean"))
121                 if not condition:
122                     break
123                 self._execute_block(node.body, _Environment(parent=
124                     environment))
125             return
126
127         if isinstance(node, Block):
128             self._execute_block(node, _Environment(parent=environment))
129             return

```

```

123     if isinstance(node, FunctionCall):
124         self._evaluate(node, environment)
125         return
126
127     raise InterpreterError(self._error_at(node, f"Unsupported
128         statement node: {type(node).__name__}"))
129
130 def _execute_block(self, block: Block, environment: _Environment)
131     -> None:
132     for statement in block.statements:
133         self._execute_statement(statement, environment)
134
135 def _evaluate(self, node: ASTNode, environment: _Environment) ->
136     object:
137     if isinstance(node, Literal):
138         return node.value
139
140     if isinstance(node, Identifier):
141         return environment.get(node.name)
142
143     if isinstance(node, BinaryOp):
144         left_value = self._evaluate(node.left, environment)
145         right_value = self._evaluate(node.right, environment)
146         return self._evaluate_binary(node, left_value, right_value)
147
148     if isinstance(node, FunctionCall):
149         return self._call_function(node, environment)
150
151     raise InterpreterError(self._error_at(node, f"Unsupported
152         expression node: {type(node).__name__}"))
153
154 def _call_function(self, node: FunctionCall, environment:
155     _Environment) -> object:
156     function_runtime = self._functions.get(node.name)
157     if function_runtime is None:
158         raise InterpreterError(self._error_at(node, f"Undefined
159             function: {node.name}"))
160
161     if len(node.args) != len(function_runtime.node.params):
162         raise InterpreterError(
163             self._error_at(
164                 node,
165                 f"Function '{node.name}' expects {len(
166                     function_runtime.node.params)} argument(s), got
167                     {len(node.args)}",
168             )
169         )
170
171     call_environment = _Environment(parent=environment)
172     argument_values = [self._evaluate(argument, environment) for
173         argument in node.args]
174     for parameter_name, argument_value in zip(function_runtime.node
175         .params, argument_values, strict=False):

```

```

166         call_environment.define(parameter_name, argument_value)
167
168     try:
169         self._execute_block(function_runtime.node.body,
170                             call_environment)
171     except _ReturnSignal as signal:
172         return signal.value
173     return None
174
175 def _evaluate_binary(self, node: BinaryOp, left_value: object,
176                     right_value: object) -> object:
177     if node.op == "+":
178         return left_value + right_value
179     if node.op == "-":
180         return left_value - right_value
181     if node.op == "*":
182         return left_value * right_value
183     if node.op == "/":
184         return left_value / right_value
185     if node.op == "==":
186         return left_value == right_value
187     if node.op == "!=":
188         return left_value != right_value
189     raise InterpreterError(self._error_at(node, f"Unsupported
190                                         operator: {node.op}"))
191
192 @staticmethod
193 def _format_value(value: object) -> str:
194     if isinstance(value, str):
195         return f'"{value}"'
196     if isinstance(value, bool):
197         return "true" if value else "false"
198     return str(value)
199
200 @staticmethod
201 def _runtime_type(value: object) -> LanguageType:
202     if isinstance(value, bool):
203         return LanguageType.BOOLEAN
204     if isinstance(value, int):
205         return LanguageType.INTEGER
206     if isinstance(value, float):
207         return LanguageType.FLOAT
208     if isinstance(value, str):
209         return LanguageType.STRING
210     return LanguageType.VOID
211
212 @staticmethod
213 def _error_at(node: ASTNode, message: str) -> str:
214     return f"[line {node.line}, col {node.column}] RuntimeError: {
215         message}"

```

Listing 8.9: components/interpreter.py — tree-walking interpreter

```

1 from __future__ import annotations
2
3 from dataclasses import dataclass
4
5 from components.ast_printer import ASTPrinter
6 from components.interpreter import Interpreter
7 from components.lexica import Lexer
8 from components.parser import Parser
9 from components.symbol_table import SymbolTable
10 from components.tokens import Token
11 from components.type_checker import TypeChecker
12
13
14 @dataclass
15 class PipelineResult:
16     tokens: list[Token]
17     ast_text: str
18     checked_scope: SymbolTable
19     outputs: list[str]
20
21
22 def run_pipeline(source_code: str) -> PipelineResult:
23     tokens = Lexer(source_code).tokenize()
24     tree = Parser(tokens).parse()
25     ast_text = ASTPrinter().print(tree)
26     checked_scope = TypeChecker().check(tree)
27
28     outputs: list[str] = []
29     Interpreter(output_callback=outputs.append).execute(tree)
30
31     return PipelineResult(
32         tokens=tokens,
33         ast_text=ast_text,
34         checked_scope=checked_scope,
35         outputs=outputs,
36     )
37
38
39 def format_tokens(tokens: list[Token]) -> str:
40     lines = []
41     for token in tokens:
42         lines.append(
43             f"    {token.token_type.name:<14} {token.lexeme!r:<12} line={
44                 token.line} col={token.column}"
45         )
46     return "\n".join(lines)
47
48
49 def format_stage_output(result: PipelineResult) -> str:
50     sections = [
51         "=" * 60,
52         "    STAGE 1 -- TOKENS",

```

```

52         "=" * 60,
53         format_tokens(result.tokens),
54         "",
55         "=" * 60,
56         "    STAGE 2 -- AST (parser output)",
57         "=" * 60,
58         result.ast_text,
59         "",
60         "=" * 60,
61         "    STAGE 3 -- TYPE CHECK",
62         "=" * 60,
63         result.checked_scope.format_table(),
64         "",
65         "=" * 60,
66         "    STAGE 4 -- EXECUTION",
67         "=" * 60,
68         "\n".join(result.outputs) if result.outputs else "(no output)",
69     ]
70     return "\n".join(sections)

```

Listing 8.10: components/pipeline.py — shared pipeline (CLI, UI, and tests)

A.3 Test Suite

```

1  from __future__ import annotations
2
3  import unittest
4
5  from components.lexica import Lexer, LexerError
6  from components.parser import Parser, ParseError
7  from components.pipeline import run_pipeline
8  from components.symbol_table import LanguageType, SymbolTable,
9      SymbolTableError
10 from components.tokens import TokenType
11 from components.type_checker import TypeCheckError
12
13 #
14 # -----
15 #
16
17 class LexerTests(unittest.TestCase):
18     """Tests for components/lexica.py -- lexical analysis and
19     tokenisation."""
20
21     def test_integer_literal_token(self) -> None:
22         tokens = Lexer("42").tokenize()
23         self.assertEqual(tokens[0].token_type, TokenType.INT_LITERAL)

```

```

23         self.assertEqual(tokens[0].lexeme, "42")
24
25     def test_float_literal_token(self) -> None:
26         tokens = Lexer("3.14").tokenize()
27         self.assertEqual(tokens[0].token_type, TokenType.FLOAT_LITERAL)
28         self.assertEqual(tokens[0].lexeme, "3.14")
29
30     def test_bool_literals_produce_bool_literal_tokens(self) -> None:
31         tokens = Lexer("true false").tokenize()
32         self.assertEqual(tokens[0].token_type, TokenType.BOOL_LITERAL)
33         self.assertEqual(tokens[0].lexeme, "true")
34         self.assertEqual(tokens[1].token_type, TokenType.BOOL_LITERAL)
35         self.assertEqual(tokens[1].lexeme, "false")
36
37     def test_keywords_produce_correct_token_types(self) -> None:
38         tokens = Lexer("if else while def return print").tokenize()
39         expected = [
40             TokenType.IF, TokenType.ELSE, TokenType.WHILE,
41             TokenType.DEF, TokenType.RETURN, TokenType.PRINT,
42         ]
43         actual = [t.token_type for t in tokens if t.token_type !=
44             TokenType.EOF]
45         self.assertEqual(actual, expected)
46
47     def test_identifier_not_confused_with_keyword(self) -> None:
48         tokens = Lexer("iffy whileloop").tokenize()
49         self.assertEqual(tokens[0].token_type, TokenType.IDENTIFIER)
50         self.assertEqual(tokens[1].token_type, TokenType.IDENTIFIER)
51
52     def test_two_character_operators(self) -> None:
53         tokens = Lexer("== !=").tokenize()
54         self.assertEqual(tokens[0].token_type, TokenType.EQUAL_EQUAL)
55         self.assertEqual(tokens[1].token_type, TokenType.BANG_EQUAL)
56
57     def test_source_position_tracked_across_lines(self) -> None:
58         tokens = Lexer("x\ny").tokenize()
59         self.assertEqual(tokens[0].line, 1)
60         self.assertEqual(tokens[1].line, 2)
61
62     def test_unexpected_character_raises_lexer_error(self) -> None:
63         with self.assertRaises(LexerError):
64             Lexer("@").tokenize()
65
66     def test_lone_exclamation_raises_lexer_error(self) -> None:
67         with self.assertRaises(LexerError):
68             Lexer("!5").tokenize()
69
70     def test_unterminated_string_raises_lexer_error(self) -> None:
71         with self.assertRaises(LexerError):
72             Lexer('"hello').tokenize()
73

```



```

74 #
75 # Symbol table
76 #
77
78 class SymbolTableTests(unittest.TestCase):
79     """Tests for components/symbol_table.py -- scoped symbol table and
80     semantic types."""
81
82     def test_define_variable_and_lookup(self) -> None:
83         table = SymbolTable()
84         table.define_variable("x", LanguageType.INTEGER, initialized=
85             True)
86         symbol = table.lookup("x")
87         self.assertEqual(symbol.symbol_type, LanguageType.INTEGER)
88
89     def test_duplicate_variable_definition_raises_error(self) -> None:
90         table = SymbolTable()
91         table.define_variable("x", LanguageType.INTEGER)
92         with self.assertRaises(SymbolTableError):
93             table.define_variable("x", LanguageType.FLOAT)
94
95     def test_duplicate_function_definition_raises_error(self) -> None:
96         table = SymbolTable()
97         table.define_function("f", LanguageType.INTEGER, [])
98         with self.assertRaises(SymbolTableError):
99             table.define_function("f", LanguageType.FLOAT, [])
100
101     def test_lookup_in_parent_scope(self) -> None:
102         parent = SymbolTable()
103         parent.define_variable("x", LanguageType.INTEGER, initialized=
104             True)
105         child = parent.child_scope()
106         symbol = child.lookup("x")
107         self.assertEqual(symbol.symbol_type, LanguageType.INTEGER)
108
109     def test_undefined_symbol_raises_error(self) -> None:
110         table = SymbolTable()
111         with self.assertRaises(SymbolTableError):
112             table.lookup("z")
113
114     def test_format_table_contains_variable_row(self) -> None:
115         table = SymbolTable()
116         table.define_variable("counter", LanguageType.INTEGER,
117             initialized=True)
118         output = table.format_table()
119         self.assertIn("counter", output)
120         self.assertIn("variable", output)
121         self.assertIn("Integer", output)

```

```

119     def test_format_table_contains_function_row(self) -> None:
120         table = SymbolTable()
121         table.define_function("add", LanguageType.INTEGER, [("a",
122             LanguageType.INTEGER)])
123         output = table.format_table()
124         self.assertIn("add", output)
125         self.assertIn("function", output)
126
127     #
128     -----
129
130     # Parser
131     #
132     -----
133
134     class ParserTests(unittest.TestCase):
135         """Tests for components/parser.py -- recursive-descent parsing."""
136
137         def _parse(self, source: str):
138             return Parser(Lexer(source).tokenize()).parse()
139
140         def test_missing_semicolon_raises_parse_error(self) -> None:
141             with self.assertRaises(ParseError):
142                 self._parse("x = 5")
143
144         def test_unclosed_brace_raises_parse_error(self) -> None:
145             with self.assertRaises(ParseError):
146                 self._parse("if (true) { x = 1;}")
147
148         def test_operator_precedence_mul_before_add(self) -> None:
149             # 2 + 3 * 4 must be 14, not 20
150             result = run_pipeline("x = 2 + 3 * 4; print(x);")
151             self.assertEqual(result.outputs, ["14 : Integer"])
152
153         def test_operator_left_associativity(self) -> None:
154             # 10 - 3 - 2 must be 5 (left-assoc), not 9
155             result = run_pipeline("x = 10 - 3 - 2; print(x);")
156             self.assertEqual(result.outputs, ["5 : Integer"])
157
158         def test_parentheses_override_precedence(self) -> None:
159             # (2 + 3) * 4 must be 20
160             result = run_pipeline("x = (2 + 3) * 4; print(x);")
161             self.assertEqual(result.outputs, ["20 : Integer"])
162
163     #
164     -----
165
166     # Type checker
167     #
168     -----

```

```

164
165 class TypeCheckerTests(unittest.TestCase):
166     """Tests for components/type_checker.py -- static type inference and
167         checking."""
168
169     def test_integer_arithmetic_stays_integer(self) -> None:
170         result = run_pipeline("x = 3 + 4; print(x);")
171         self.assertEqual(result.outputs, ["7 : Integer"])
172
173     def test_division_always_produces_float(self) -> None:
174         # integer / integer -> Float by design
175         result = run_pipeline("x = 10 / 2; print(x);")
176         self.assertEqual(result.outputs, ["5.0 : Float"])
177
178     def test_float_promotion_in_addition(self) -> None:
179         result = run_pipeline("x = 1 + 2.5; print(x);")
180         self.assertEqual(result.outputs, ["3.5 : Float"])
181
182     def test_string_variable_type_inferred(self) -> None:
183         result = run_pipeline('x = "hello"; print(x);')
184         self.assertEqual(result.outputs, ['"hello" : String'])
185
186     def test_boolean_literal_type_inferred(self) -> None:
187         result = run_pipeline("x = true; print(x);")
188         self.assertEqual(result.outputs, ["true : Boolean"])
189
190     def test_boolean_equality_raises_type_error(self) -> None:
191         # Boolean == Boolean is not allowed; == only accepts arithmetic
192         operands
193         with self.assertRaises(TypeError):
194             run_pipeline('x = true; if (x == false) { print("then"); }
195                 else { print("else"); }')
196
197     def test_arithmetic_on_string_raises_type_error(self) -> None:
198         with self.assertRaises(TypeError):
199             run_pipeline('x = "a" + 1;')
200
201     def test_if_non_boolean_condition_raises_type_error(self) -> None:
202         with self.assertRaises(TypeError):
203             run_pipeline("if (1) { x = 2; }")
204
205     def test_while_non_boolean_condition_raises_type_error(self) ->
206         None:
207         with self.assertRaises(TypeError):
208             run_pipeline("x = 0; while (x) { x = x + 1; }")
209
210     def test_assignment_type_mismatch_raises_type_error(self) -> None:
211         with self.assertRaises(TypeError):
212             run_pipeline('x = 5; x = "hello";')
213
214     def test_undefined_variable_raises_type_error(self) -> None:
215         with self.assertRaises(TypeError):

```

```

212         run_pipeline("print(z);")
213
214     def test_function_wrong_arg_count_raises_type_error(self) -> None:
215         with self.assertRaises(TypeError):
216             run_pipeline("def f(a) { return a; } f(1, 2);")
217
218     def test_function_arg_type_mismatch_raises_type_error(self) -> None:
219         :
220         # first call infers a: Integer; second call with String must
221         # fail
222         with self.assertRaises(TypeError):
223             run_pipeline('def f(a) { return a; } f(1); f("hello");')
224
225     def test_uncalled_function_body_type_error_is_caught(self) -> None:
226         # type error inside body must be detected even if function is
227         # never called
228         with self.assertRaises(TypeError):
229             run_pipeline('def bad() { y = "hello" + 1; }')
230
231     def test_valid_uncalled_function_does_not_raise(self) -> None:
232         # a well-typed but uncalled function should not raise
233         result = run_pipeline("def add(a, b) { return a + b; }")
234         self.assertEqual(result.outputs, [])
235
236 # -----
237
238 # Integration (full pipeline)
239 # -----
240
241 class IntegrationTests(unittest.TestCase):
242     """End-to-end tests through all four pipeline stages."""
243
244     # --- Unary minus ---
245
246     def test_unary_minus_integer(self) -> None:
247         result = run_pipeline("x = -5; print(x);")
248         self.assertEqual(result.outputs, ["-5 : Integer"])
249
250     def test_unary_minus_float(self) -> None:
251         result = run_pipeline("y = -3.14; print(y);")
252         self.assertEqual(result.outputs, ["-3.14 : Float"])
253
254     def test_unary_minus_variable(self) -> None:
255         result = run_pipeline("x = 10; y = -x; print(y);")
256         self.assertEqual(result.outputs, ["-10 : Integer"])
257
258     def test_unary_minus_inside_expression(self) -> None:
259         result = run_pipeline("x = 3 + -2; print(x);")
260         self.assertEqual(result.outputs, ["1 : Integer"])

```

```

258
259 # --- Control flow ---
260
261 def test_if_then_branch_executes(self) -> None:
262     result = run_pipeline(
263         'x = 5; if (x == 5) { print("yes"); } else { print("no"); }
264         ,
265     )
266     self.assertEqual(result.outputs, ['"yes" : String'])
267
268 def test_if_else_branch_executes_when_condition_false(self) -> None:
269     result = run_pipeline(
270         'x = 0; if (x == 5) { print("yes"); } else { print("no"); }
271         ,
272     )
273     self.assertEqual(result.outputs, ['"no" : String'])
274
275 def test_while_loop_executes_repeatedly(self) -> None:
276     result = run_pipeline("x = 3; while (x != 0) { print(x); x = x
277         - 1; }")
278     self.assertEqual(result.outputs, ["3 : Integer", "2 : Integer",
279         "1 : Integer"])
280
281 # --- Functions ---
282
283 def test_function_integer_return(self) -> None:
284     result = run_pipeline("def square(n) { return n * n; } print(
285         square(7));")
286     self.assertEqual(result.outputs, ["49 : Integer"])
287
288 def test_function_type_inference(self) -> None:
289     result = run_pipeline(
290         "def add(a, b) { return a + b; } result = add(2, 3.5);
291         print(result);"
292     )
293     self.assertEqual(result.outputs, ["5.5 : Float"])
294     self.assertIn("result          variable    Float", result.
295         checked_scope.format_table())
296
297 def test_function_value_parameter_passing(self) -> None:
298     # Modifying a parameter inside a function must not affect the
299     caller's variable
300     result = run_pipeline(
301         "def inc(a) { a = a + 1; return a; } x = 10; y = inc(x);
302         print(x); print(y);"
303     )
304     self.assertEqual(result.outputs, ["10 : Integer", "11 : Integer
305         "])
306
307 def test_nested_function_calls(self) -> None:
308     result = run_pipeline(
309         "def add(a, b) { return a + b; } print(add(add(1, 2), 3));"
310     )

```

```

300         )
301         self.assertEqual(result.outputs, ["6 : Integer"])
302
303     # --- print() with all four types ---
304
305     def test_print_integer(self) -> None:
306         result = run_pipeline("print(42);")
307         self.assertEqual(result.outputs, ["42 : Integer"])
308
309     def test_print_float(self) -> None:
310         result = run_pipeline("print(3.14);")
311         self.assertEqual(result.outputs, ["3.14 : Float"])
312
313     def test_print_boolean(self) -> None:
314         result = run_pipeline("print(true);")
315         self.assertEqual(result.outputs, ["true : Boolean"])
316
317     def test_print_string(self) -> None:
318         result = run_pipeline('print("plc");')
319         self.assertEqual(result.outputs, ['"plc" : String'])
320
321     # --- Reassignment ---
322
323     def test_variable_can_be_reassigned_same_type(self) -> None:
324         result = run_pipeline("x = 1; x = 2; x = 3; print(x);")
325         self.assertEqual(result.outputs, ["3 : Integer"])
326
327     def test_scope_isolation_if_block(self) -> None:
328         # Variable defined inside an if-block must not be visible
329         # outside it
330         with self.assertRaises(TypeError):
331             run_pipeline(
332                 "x = 1; if (x == 1) { inner = 99; } print(inner);"
333             )
334
335 if __name__ == "__main__":
336     unittest.main()

```

Listing 8.11: tests/test_pipeline.py — automated regression suite (54 tests)

APPENDIX B: TEAM MEMBERS AND CONTRIBUTIONS

Name	Student ID	Assignment Scope
Aye Khin Khin Hpone (Yolanda Lim)	st125970	Static typing rules; type checking; assignment execution; if execution; while execution; function execution; <code>print()</code> execution; unary minus type inference and execution; pipeline integration (<code>pipeline.py</code>); automated test suite (<code>test_pipeline.py</code> , 54 tests)
Applegate T. Tun Oo	st126690	Lexer implementation (character scanning, tokenisation, line/column tracking, error reporting); token definitions; keywords and operators; identifiers and literals; variable/function storage; type storage
Win Htut Naing	st126687	Arithmetic expressions; boolean expressions; assignment statements; if-then-else; while-loop; function definitions; function calls; <code>print()</code> syntax; unary minus parsing